




## CLIPPER® Roller Lacing Technology™

### Solutions for On-Site Installation of Clipper® Wire Hooks

Flexco defined quick, on-site mechanical belt fastener installation when they pioneered Roller Lacing Technology™. This time-proven technology allows the lacer head to be driven across the width of the lacer while the dual rollers simultaneously and gradually install the Clipper® wire hooks with ease and speed.



## What makes the Roller Lacer® ideal for on-site installation of Clipper® Wire Hooks?

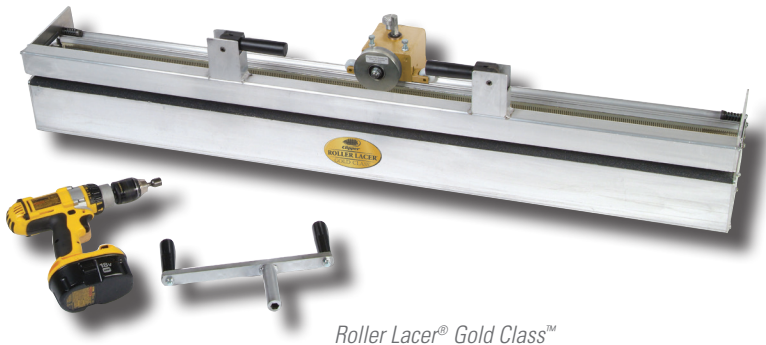

Roller Lacer® Gold Class™



Roller Lacer®



MicroLacer®

### Faster.

Reliable Clipper® splices are typically installed in less than 15 minutes, thanks to the wide lacer widths and the use of Roller Lacing Technology™. Quicker installation translates to less downtime, greater productivity, and increased profits.

### Easier.

- Portable - Made from aircraft aluminum, the lacer remains lightweight and can be easily transported directly to the jobsite for fastener installation.
- Easy Installation - Simple installation procedures, combined with the ability to clamp and secure the belt, make splicing a one-person job.

### Smarter.


With three different models to select from you are sure to find a lacer to best fit your needs.

- Roller Lacer® Gold Class™: Ideal for customers who either have a large number of belts in their facility or where minimizing downtime is crucial. This lacer offers maximum benefits for high speed installation and minimal operator effort through the use of a cordless drill to drive the lacer head and other features. Available in 24", 36", 48", and 60" widths (600, 900, 1200, 1500 mm).
- Roller Lacer®: A great choice for customers with wide belts who desire quick, on-site installation. Available in 24", 36", 48", 60" and 72" widths (600, 900, 1200, 1500, 1800 mm).
- MicroLacer®: This 14" (350 mm) lacer is ideal for users with narrow belts or for low volume users.

## Roller Lacer® features:


### Face Strip Design:

Face Strips have been redesigned with a solid bottom layer. This 3-layer design eliminates the need for locking levers and back-up bars necessary with previous models. This has removed installation steps and improved the reliability of the lacer by eliminating two common wear items.

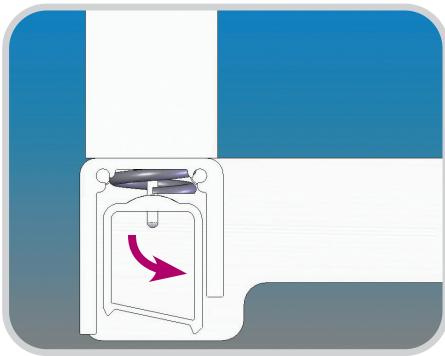


### Belt Clamp Design:

The inner clamp beam features a textured grip surface and when clamped it helps push the belt toward the Face Strip to allow proper hook reachback.

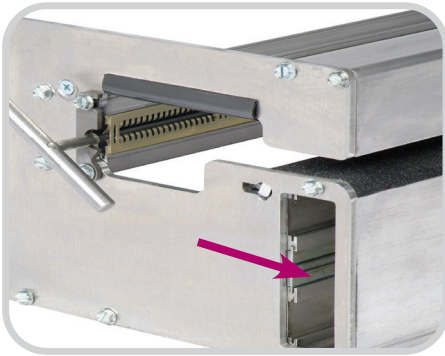

### Face Strip Storage:

Extruded slots in the lacer housing provide a secure yet easy to access storage location.

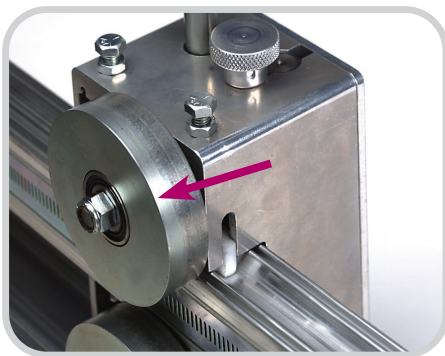


### Roller Shaft Diameter:

The larger diameter shaft provides the necessary support for the rollers to fully embed the hooks into the belt for a long-lasting splice.


## Exclusive Features of the Roller Lacer® Gold Class™



*Lacer head is driven with an 18 volt cordless drill for quicker installation and reduced operator fatigue. (Drill not included with sale of lacer)*

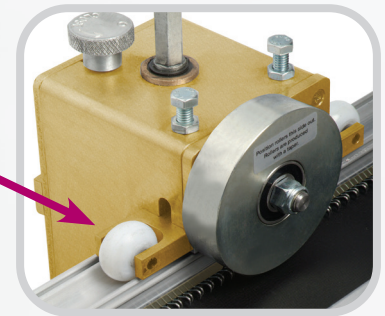

*The clevis bracket and guide rollers provide additional stability to the lacer head and allow it to transverse with ease across the width of the lacer. The guide rollers are made of UHMW polyethylene for long wear life.*

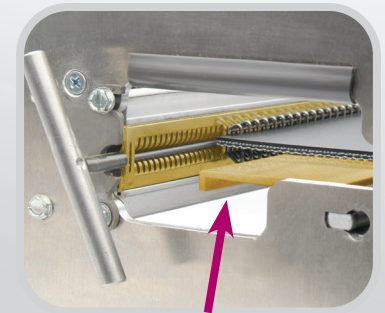

*Belt Support Shelf easily guides belt into hook points, reducing operator time and effort. Carrying Strap is included for easier transportation of the lacer to the jobsite.*

## Choosing the right lacer for your needs:

| Feature  | Roller Lacer®<br>Gold Class™ | Roller Lacer® | Microlacer® |
|--|------------------------------|---------------|-------------|
| Ability to Drive Head with Cordless Drill                          | ●                            |               |             |
| Clevis Bracket/Outboard Rollers for Increased Lacer Head Stability | ●                            |               |             |
| Belt Support Shelf   | ●                            |               |             |
| Carrying Strap   | ●                            |               |             |
| Improved Belt Clamp  | ●                            | ●             |             |
| Improved Face Strip Storage  | ●                            | ●             |             |
| New Face Strip Design  | ●                            | ●             | ●           |
| Elimination of Locking Lever and Back Up Bar Assembly              | ●                            | ●             | ●           |
| Increased Roller Shaft Diameter                                    | ●                            | ●             | ●           |
| Portable Lacer for On-Site Installation                            | ●                            | ●             | ●           |
| Available in 24", 36", 48", 60" & 72" Widths                       | Up to 60"                    | ●             | 14" Only    |
| Ability to Continuous Lace Belts Wider Than Lacer Width            | ●                            | ●             | ●           |

| Ordering Information – Microlacer® |                  |                 |           |
|------------------------------------|------------------|-----------------|-----------|
| Belt Width                         |                  | Microlacer®     |           |
| in                                 | mm               | Ordering Number | Item Code |
| 14                                 | 350              | MICROLACER      | 03368     |
| Ordering Information – Face Strips |                  |                 |           |
| Microlacer®                        |                  |                 |           |
| Hook Size                          | Ordering Number  | Item Code       |           |
| 36, UCM36                          | FSMAN36-MICRO    | 04019           |           |
| 1, UX-1                            | FSMAN1-MICRO     | 04014           |           |
| 2-4, U2SP-U3                       | FSMAN2-MICRO     | 04024           |           |
| 4-1/2-7, U4-U7                     | FSMAN4-1/2-MICRO | 04029           |           |

Face Strips sold separately.

| Ordering Information – Roller Lacer® |      |                              |           |                 |           |
|--------------------------------------|------|------------------------------|-----------|-----------------|-----------|
| Belt Width                           |      | Roller Lacer®<br>Gold Class™ |           | Roller Lacer®   |           |
| in                                   | mm   | Ordering Number              | Item Code | Ordering Number | Item Code |
| 24                                   | 600  | RL-G24                       | 03985     | RL-24           | 03370     |
| 36                                   | 900  | RL-G36                       | 03986     | RL-36           | 03371     |
| 48                                   | 1200 | RL-G48                       | 03987     | RL-48           | 03372     |
| 60                                   | 1500 | RL-G60                       | 03988     | RL-60           | 03375     |
| 72                                   | 1800 | N/A                          | N/A       | RL-72           | 04055     |

| Ordering Information – Face Strips |      |                              |           |                 |           |
|------------------------------------|------|------------------------------|-----------|-----------------|-----------|
| Belt Width                         |      | Roller Lacer®<br>Gold Class™ |           | Roller Lacer®   |           |
| in                                 | mm   | Ordering Number              | Item Code | Ordering Number | Item Code |
| Hook Size; 36, UCM36               |      |                              |           |                 |           |
| 24                                 | 600  | FSGOLD36-24                  | 04038     | FSMAN36-24      | 04020     |
| 36                                 | 900  | FSGOLD36-36                  | 04039     | FSMAN36-36      | 04021     |
| 48                                 | 1200 | FSGOLD36-48                  | 04040     | FSMAN36-48      | 04022     |
| 60                                 | 1500 | FSGOLD36-60                  | 04041     | FSMAN36-60      | 04023     |
| 72                                 | 1800 | N/A                          | N/A       | FSMAN36-72      | 04084     |
| Hook Size; 1, UX-1                 |      |                              |           |                 |           |
| 24                                 | 600  | FSGOLD1-24                   | 04034     | FSMAN1-24       | 04015     |
| 36                                 | 900  | FSGOLD1-36                   | 04035     | FSMAN1-36       | 04016     |
| 48                                 | 1200 | FSGOLD1-48                   | 04036     | FSMAN1-48       | 04017     |
| 60                                 | 1500 | FSGOLD1-60                   | 04037     | FSMAN1-60       | 04018     |
| 72                                 | 1800 | N/A                          | N/A       | FSMAN1-72       | 04085     |
| Hook Size; 2-4, U2SP-U3            |      |                              |           |                 |           |
| 24                                 | 600  | FSGOLD2-24                   | 04042     | FSMAN2-24       | 04025     |
| 36                                 | 900  | FSGOLD2-36                   | 04043     | FSMAN2-36       | 04026     |
| 48                                 | 1200 | FSGOLD2-48                   | 04044     | FSMAN2-48       | 04027     |
| 60                                 | 1500 | FSGOLD2-60                   | 04045     | FSMAN2-60       | 04028     |
| 72                                 | 1800 | N/A                          | N/A       | FSMAN2-72       | 04086     |
| Hook Size; 4½-7, U4-U7             |      |                              |           |                 |           |
| 24                                 | 600  | FSGOLD4-1/2-24               | 04046     | FSMAN4-1/2-24   | 04030     |
| 36                                 | 900  | FSGOLD4-1/2-36               | 04047     | FSMAN4-1/2-36   | 04031     |
| 48                                 | 1200 | FSGOLD4-1/2-48               | 04048     | FSMAN4-1/2-48   | 04032     |
| 60                                 | 1500 | FSGOLD4-1/2-60               | 04049     | FSMAN4-1/2-60   | 04033     |
| 72                                 | 1800 | N/A                          | N/A       | FSMAN4-1/2-72   | 04087     |

Face Strips sold separately.

Authorized Distributor:



2525 Wisconsin Avenue • Downers Grove, IL 60515-4200 • USA  
Tel: (630) 971-0150 • Fax: (630) 971-1180 • E-mail: info@flexco.com

Visit [www.flexco.com](http://www.flexco.com) for other Flexco locations and products.

