


R-TYPE® Secondary Belt Cleaner

Reversing Secondary Belt Cleaner

The Flexco R-Type® Secondary Belt Cleaner is recommended for reversing belts and is designed to be positioned just off the head pulley to remove carryback from the belt. Stand alone, or when used in conjunction with a precleaner, the R-Type cleaner is a reliable choice for maintaining a highly efficient cleaning system.

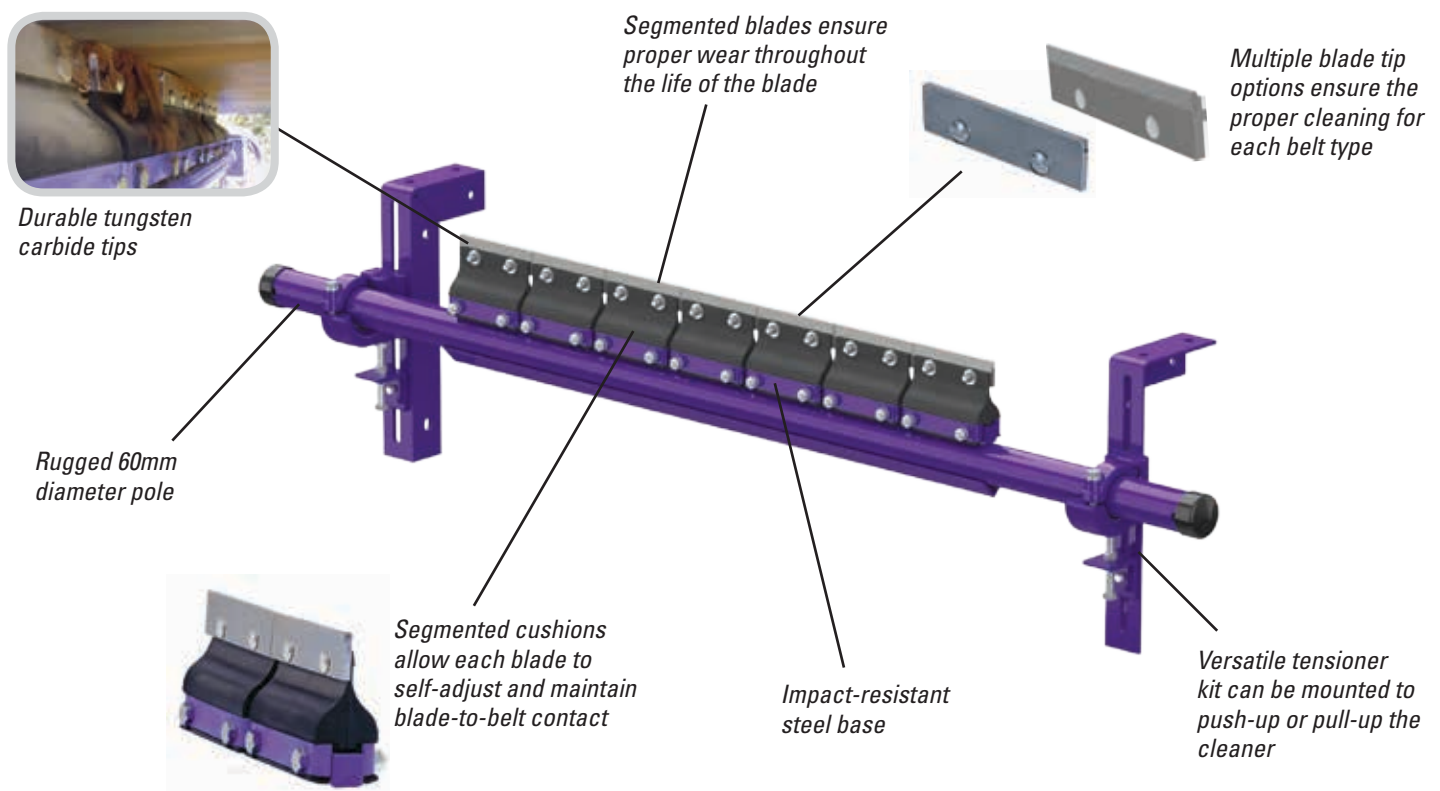

Features and Benefits

- **Cleaning efficiency of metal blades.** The thin, hard edges of the metal blades deliver high cleaning efficiency and long wear life.
- **Works with Flexco mechanical splices.** The C-Tip tungsten carbide blades are impact-resistant, and the spring cushion allows them to move away from a passing splice without damage and with minimal cleaning disruption. V-Tips can be used only on vulcanized belts.
- **A complete cleaning system.** When the R-Type is teamed with a precleaner the system provides maximum cleaning power for tough applications.
- **Fits most conveyor structures.** Available for belt widths from 450mm to 1800mm.

R-TYPE®

Secondary Belt Cleaner

Specifications and Guidelines

Maximum Belt Speed

5 M/sec

Temperature Rating

-35° C to 82° C

Usable Blade Wear Length


9mm

Blade Material

Impact resistant, long-lasting tungsten carbide (C-Tips for mechanical fasteners, V-Tips for vulcanized belts)

Available for Belt Widths

450 to 1800mm

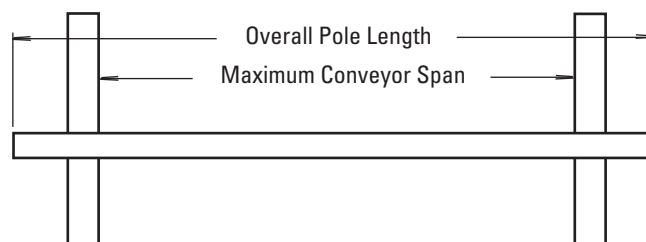

Pole Length

Cleaner size up to 1200mm + 750mm

Cleaner size 1350mm and up + 850mm

Maximum Conveyor Span

Cleaner size up to 1200mm + 625mm


Cleaner size 1350mm and up + 725mm

Horizontal Clearance Required

100mm

Vertical Clearance Required

200mm



Ordering Information

| R-Type® (Powder Coated) with V-Tips* | | |
|---|--------------------|--------------|
| Belt Width mm | Ordering Number | Item Code |
| 450 | RV450 | 74633 |
| 600 | RV600 | 74634 |
| 750 | RV750 | 74635 |
| 900 | RV900 | 74636 |
| 1050 | RV1050 | 74637 |
| 1200 | RV1200 | 74638 |
| 1350 | RV1350 | 74639 |
| 1500 | RV1500 | 74640 |
| 1800 | RV1800 | 74642 |

*NOTE: V-Tips can be used ONLY on vulcanized belts.
Additional sizes up to 3000mm available upon request.

| R-Type (Stainless Steel) with V-Tips* | | |
|--|--------------------|--------------|
| Belt Width mm | Ordering Number | Item Code |
| 450 | RV450-S/S | 75341 |
| 600 | RV600-S/S | 75342 |
| 750 | RV750-S/S | 75343 |
| 900 | RV900-S/S | 75344 |
| 1050 | RV1050-S/S | 75345 |
| 1200 | RV1200-S/S | 75356 |
| 1350 | RV1350-S/S | 75347 |
| 1500 | RV1500-S/S | 75348 |
| 1800 | RV1800-S/S | A1626 |

*NOTE: V-Tips can be used ONLY on vulcanized belts.
Additional sizes up to 3000mm available upon request.

| Replacement Tips | |
|--------------------|--------------|
| Ordering Number | Item Code |
| RSA150 | 73628 |

Lead time: 1 working day

| Tips Required per Cleaner Size | | | | | | | | | | |
|--------------------------------|-----|-----|-----|-----|------|------|------|------|------|--|
| mm | 450 | 600 | 750 | 900 | 1050 | 1200 | 1350 | 1500 | 1800 | |
| V-Tips Required | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 | |

Authorized Distributor:

Flexco (Aust.) Pty. Ltd • 10 Solent Circuit • Baulkham Hills NSW 2153 • Australia
Tel: 612-8818-2000 • Fax: 612-8824-6333 • E-mail: salesau@flexco.com

Visit www.flexco.com for other Flexco locations and products.
©2017 Flexible Steel Lacing Company. 02/20/17. For reorder: X2205

