


MHS Enhanced Service Advantage Cartridge HD Secondary Belt Cleaner with Bolt Tensioner

Superior Cleaning and Serviceability

The MHS Enhanced Service Advantage Cartridge Secondary Belt Cleaner joins our proven and patented PowerFlex™ cushion with a superior, service-friendly removal cartridge. The MHS ESAC Cleaner delivers the high-efficiency cleaning and long-lasting performance required for the most difficult cleaning environments. The new cartridge now gives you control over maintenance with three easy-to-use removal options, ensuring greater ease of maintenance.

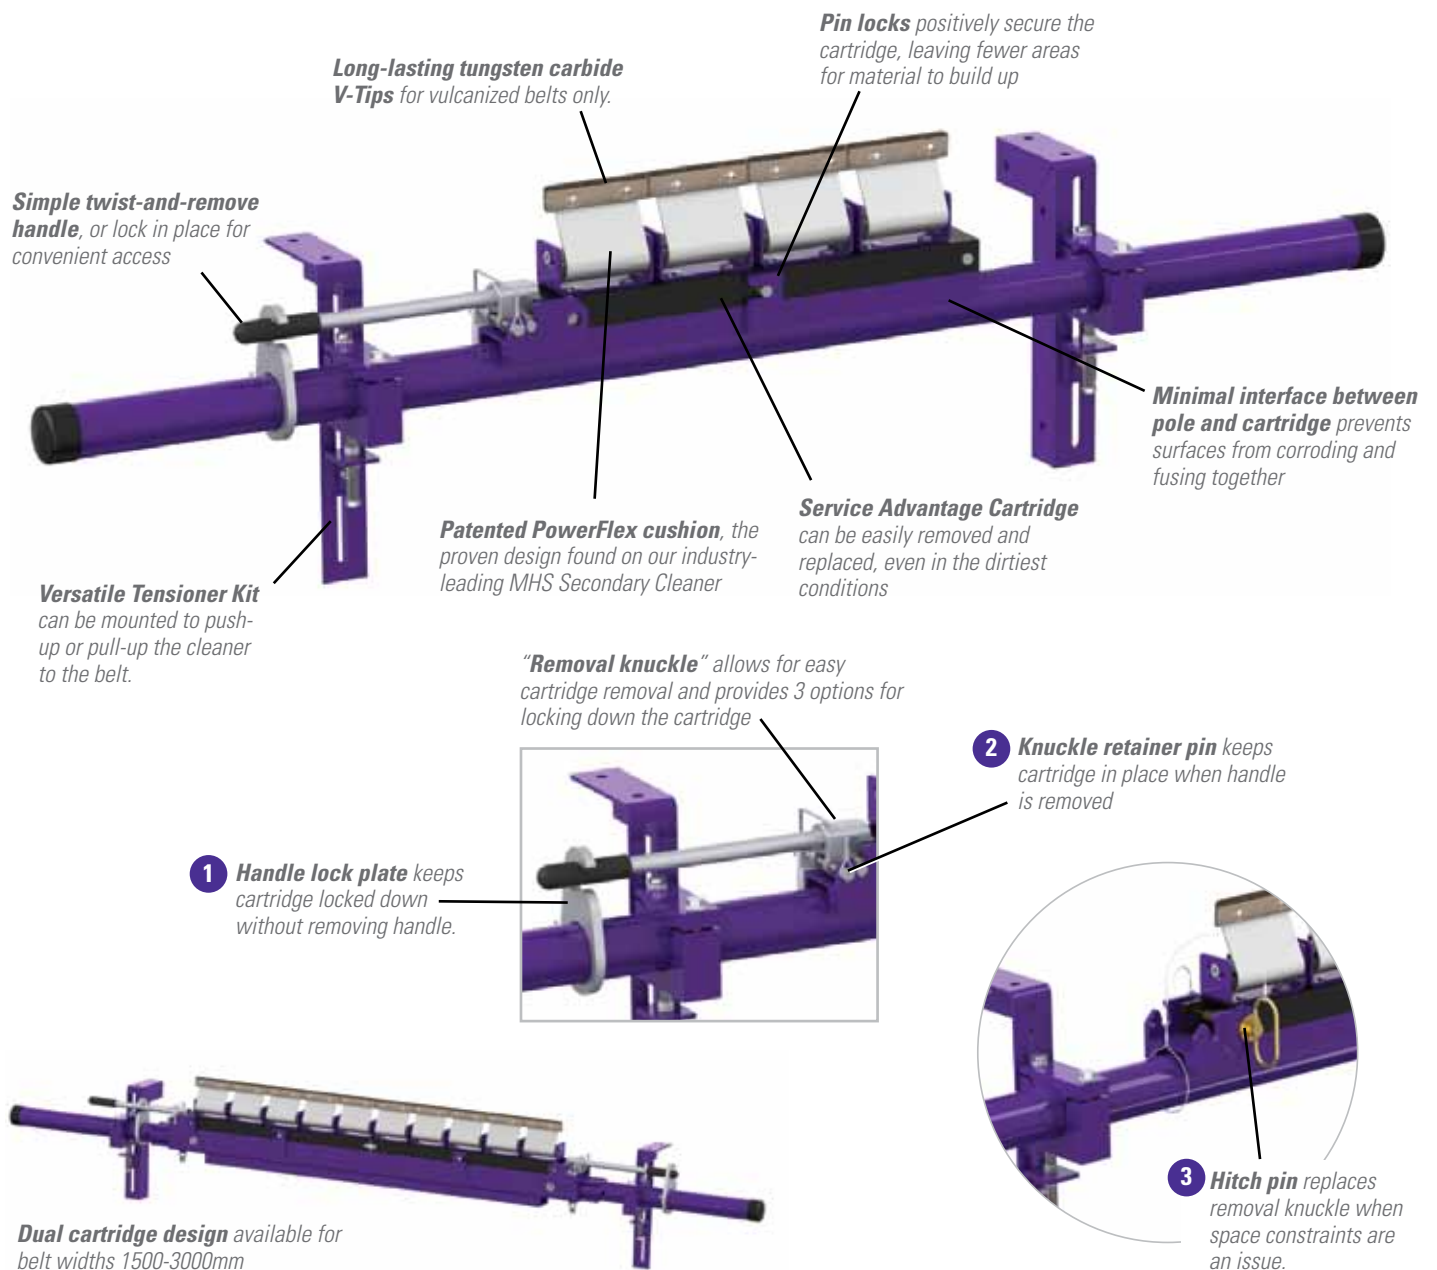

MHS with Enhanced Service Advantage Cartridge HD Secondary Belt Cleaner with Bolt Tensioner

Maximum Belt Speed

6 M/sec

Temperature Rating

-35° C to 82° C

Usable Blade Wear Length


9mm

Blade Material

Impact resistant, long-lasting tungsten carbide V-Tip for vulcanized belts

Available for Belt Widths

600 to 3000mm

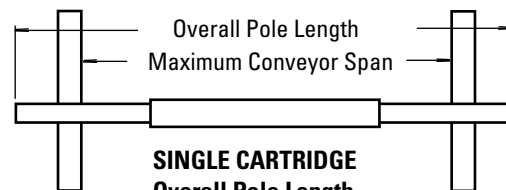

SINGLE CARTRIDGE

Overall Pole Length

Cleaner size + 1350 mm

Maximum Conveyor Span

Cleaner size + 1050 mm

DUAL CARTRIDGE

Overall Pole Length

Cleaner size + 1500 mm

Maximum Conveyor Span

Cleaner size + 1200 mm


Ordering Information

MHS SAC HD Secondary Cleaner V-Tips and Bolt Tensioner (BT)

Belt Width mm	Ordering Number	Item Code
600	MHS-600BTV-SAC	78007
750	MHS-750BTV-SAC	78008
900	MHS-900BTV-SAC	78009
1050	MHS-1050BTV-SAC	78010
1200	MHS-1200BTV-SAC	78011
1350	MHS-1350BTV-SAC	78012
1500	MHS-1500BTV-SAC	78013
1800	MHS-1800BTV-SAC	78014
1500	MHS-1500BTV-2SAC	78015
1800	MHS-1800BTV-2SAC	78016
2100	MHS-2100BTV-2SAC	78017
2400	MHS-2400BTV-2SAC	78018
3000	MHS-3000BTV-2SAC	78019

Contact Flexco for lead time

NOTE: For easy blade changeout, remove cartridge with worn blades and replace with new blade cartridge kit. New blades can then be installed in the old cartridge for the next changeout.



Horizontal Clearance Required

114 mm

Vertical Clearance Required

279 mm (Single Cartridge)

318 mm (Dual Cartridge)

Blade Cartridge Kits with V-Tips (Incl. blades, cartridge, and bolts)

Belt Width mm	Ordering Number	Item Code
600	MHS-CARK-V24/600	77937
750	MHS-CARK-V30/750	77938
900	MHS-CARK-V36/900	77939
1050	MHS-CARK-V42/1050	77940
1200	MHS-CARK-V48/1200	77941
1350	MHS-CARK-V54/1350	77942
1500	MHS-CARK-V60/1500	77943
1800	MHS-CARK-V72/1800	77944
1500	MHS-CARK2-V60/1500	77950
1800	MHS-CARK2-V72/1800	77951
2100	MHS-CARK2-V84/2100	77952
2400	MHS-CARK2-V96/2400	77953
3000	MHS-CARK2-V120/3000	77954

Contact Flexco for lead time

Replacement Tips

Ordering Number	Item Code
RSA150	73628

Lead time: 1 working day

Tips Required per Cleaner Size

mm	Tips Required
600	4
750	5
900	6
1050	7
1200	8
1350	9
1500	10
1800	12
2100	14
2400	16
3000	18

Flexco (Aust.) Pty. Ltd • 18-20 Brookhollow Ave. • Baulkham Hills NSW 2153
Tel: 612-9680-3322 • Fax: 612-9899-1237 • E-mail: sales@flexco.com.au • Web: www.flexco.com

China: 86-21-33528388 • England: 44-1274-600-942 • Germany: 49-7428-9406-0 • India: 91-44-4354-2091
Mexico: 52-55-5674-5326 • New Zealand: 021-908-019 or 021-762-285 • Singapore: 65-6281-7278
South Africa: 27-11-608-4180 • USA: 1-630-971-0150

©2011 Flexible Steel Lacing Company. 06/11. X2425

Authorized Distributor:

