




UNIBAR® Wire Hooks

Performance-Proven Clipper® Hooks for Simplified Installation.

Unibar® fasteners feature performance-proven Clipper® hooks welded to a common bar for easier installation with less downtime.

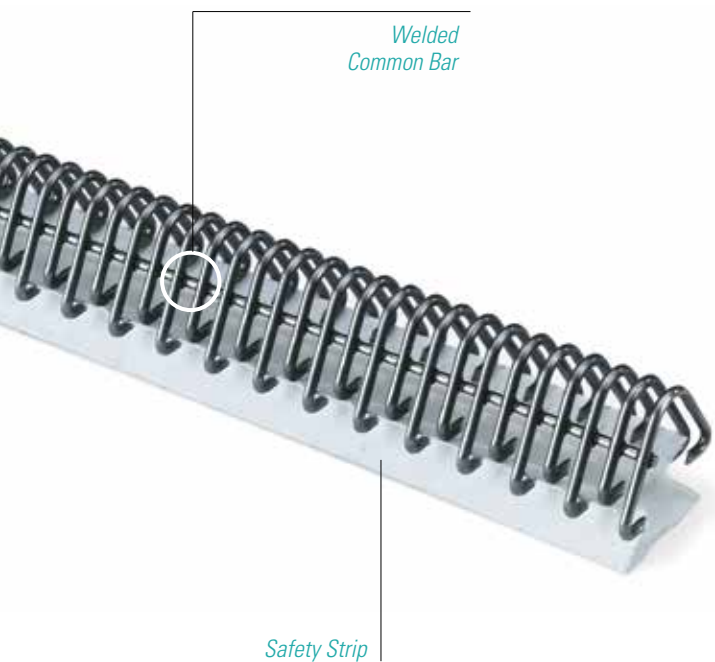

Faster.

- The welded common bar holds individual hook legs parallel during the installation process and creates a flat finished splice (no 'belt wave'). This combination eases the meshing of spliced belt ends and simplifies pin insertion.
- The Safety Strip can be quickly and easily removed either by sliding the paper off or gently pulling it off the hook points.
- Available in 12" and 24" (300 and 600 mm) lengths standard; custom lengths available up to 60" (1500 mm), saving both installation time and money.

Safer.

- The Safety Strip keeps hook points covered to protect the user's fingers during handling and eliminates the product from being tangled during transportation.
- The risk of a single hook dislodging from the strip is virtually eliminated.

Smarter.

Each of the easier installation and reduced downtime features make Unibar wire hooks the Smart choice for these and many other applications:

- Package and Parts Handling
- Food Processing
- General Manufacturing
- Agriculture
- Filter Media

UNIBAR® Wire Hooks

Specifications			Belt Thickness											
Min. Pulley Diameter	Wire Thickness	Connecting Pin Size	Up to 3/64" 1.2 mm	1/16" 1.6 mm	3/32" 2.4 mm	1/8" 3.2 mm	5/32" 4.0 mm	3/16" 4.8 mm	7/32" 5.6 mm	1/4" 6.4 mm	17/64" 6.7 mm	5/16" 7.9 mm	11/32" 9.0 mm	25/64" 10.0 mm
15/16" (24 mm)	.036 x .027"	.065"/1.7 mm	UCM36SL XSP											
	.036 x .027"	.065"/1.7 mm		UCM36SL SP										
2" (51 mm)	.036 x .027"	.065"/1.7 mm	UCM36 XSP											
	.036 x .027"	.065"/1.7 mm		UCM36 SP*										
	.036 x .027"	.065"/1.7 mm			UCM36*									
	.036 x .027"	.065"/1.7 mm				UCM36 LP								
	.040"	.065"/1.7 mm		UX1 SP*										
	.040"	.065"/1.7 mm				UX1*								
	.054"	.093"/2.4 mm				U2SP								
	.054"	.093"/2.4 mm					U2							
3" (76 mm)	.054"	.093"/2.4 mm					U3							
5" (127 mm)	.054"	.109"/2.8 mm						U4						
	.054"	.125"/3.2 mm							U5					
6" (152 mm)	.054"	.156"/4.0 mm								U6				
7" (175 mm)	.054"	.156"/4.0 mm										U7		

*Long Leg available; allow for 1" (25 mm) larger pulley. Contact customer service for ordering information

SL = Short Leg
XSP = Extra Short Point
SP = Short Point
LP = Long Point

Ordering Information									
UX1, U2-U7: 430 Stainless Steel									
Quantity - Length	UX1SP	UX1	U2SP	U2	U3	U4	U5	U6	U7
12 - 12" Strips	01184	01179	18851	18400	01255	01283	01305	18404	01294
10 - 24" Strips	01355	01356	18854	18477	18478	18479	01351	-	-

UCM36: 316 Stainless Steel						
Quantity - Length	UCM36SLXSP	UCM36SLSP	UCM36XSP	UCM36SP	UCM36	UCM36LP
12 - 12" Strips	01315	01313	01312	01314	01309	01317
12 - 24" Strips	01319	01320	01321	01322	01323	-

UX1, U2-U5: 316 Stainless Steel						
Quantity - Length	UX1SP	UX1	U2	U3	U4	U5
12 - 12" Strips	01194	01189	18427	01258	18429	18430
10 - 24" Strips	01354	01353	18507	18508	18509	-

Authorized Distributor:

2 Woodlands Sector 1 • #01-21 • Woodlands Spectrum I • Singapore 738068
 Tel: +65-6484-1533 • Fax: +65-6484-1531 • E-mail: asiasales@flexco.com

Visit www.flexco.com for other Flexco locations and products.

©2008 Flexible Steel Lacing Company. Clipper® and Unibar® are registered trademarks. 12-13. For Reorder: X0807

