


## P-TYPE® Secondary Belt Cleaner

### Reliable Secondary Belt Cleaner

The Flexco P-Type® Secondary Belt Cleaner is compact and designed to be positioned just off the head pulley to remove carryback from the belt. Stand alone, or when used in conjunction with a precleaner, the P-Type cleaner is a reliable choice for maintaining a highly efficient cleaning system.

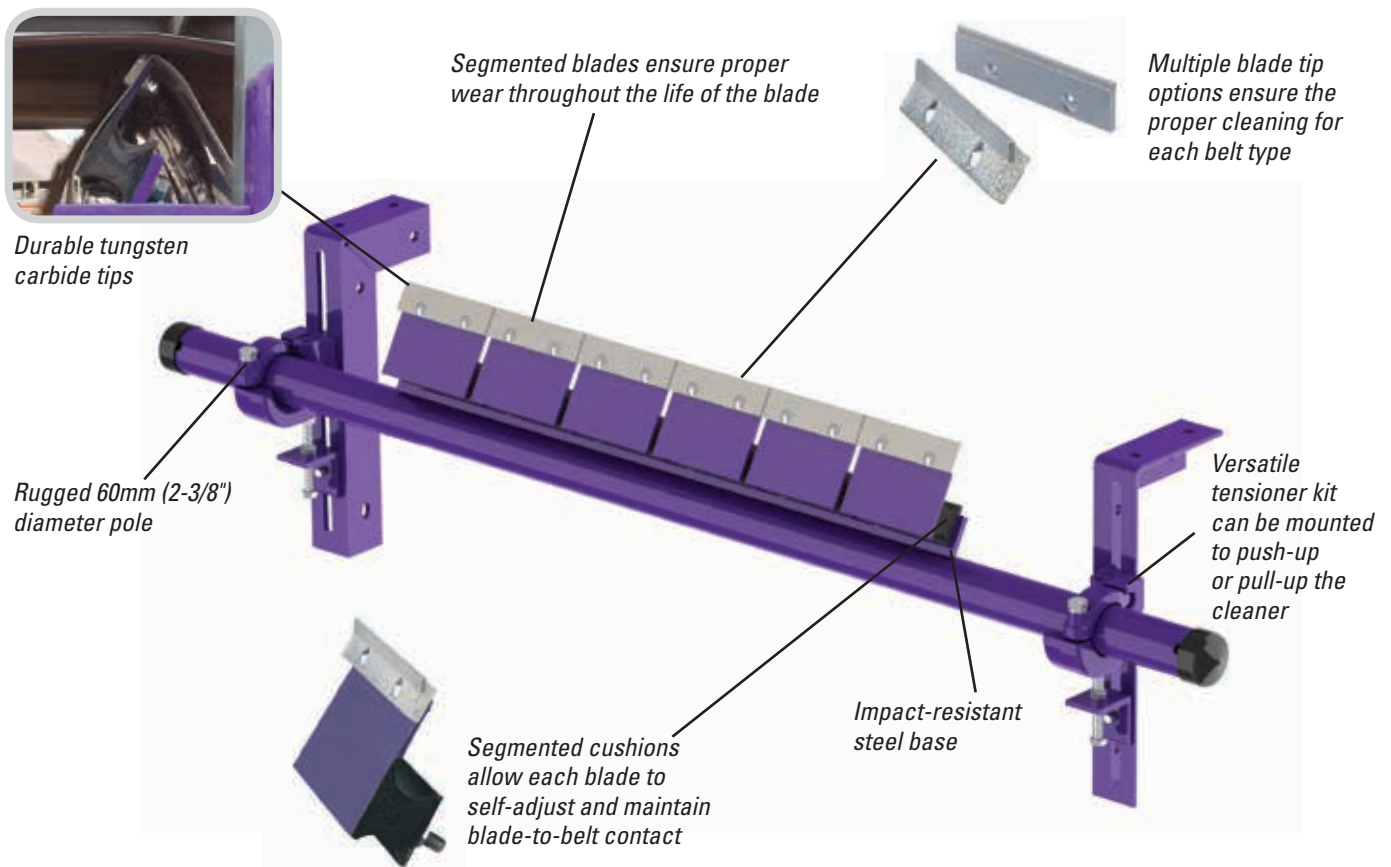

### Features and Benefits

- **Cleaning efficiency of metal blades.** The thin, hard edges of the metal blades deliver high cleaning efficiency and long wear life.
- **Works with Flexco mechanical splices.** The C-Tip tungsten carbide blades are impact-resistant, and the spring cushion allows them to move away from a passing splice without damage and with minimal cleaning disruption. V-Tip can be used only on vulcanized belts.
- **A complete cleaning system.** When the P-Type is teamed with a primary cleaner the system provides maximum cleaning power for tough applications.
- **Fits most conveyor structures.** Available for belt widths from 450mm to 1800mm (18" to 72").

# P-TYPE® Secondary Belt Cleaner

## Specifications and Guidelines

### Maximum Belt Speed

5 M/sec (1000 FPM)

### Temperature Rating

-35° C to 82° C (-30° F to 180° F)

### Usable Blade Wear Length



9 mm (3/8")

### Blade Material

Impact resistant, long-lasting tungsten carbide (C-Tip for mechanical fasteners, V-Tips for vulcanized belts)

### Available for Belt Widths

450 to 1800mm (18" to 72")

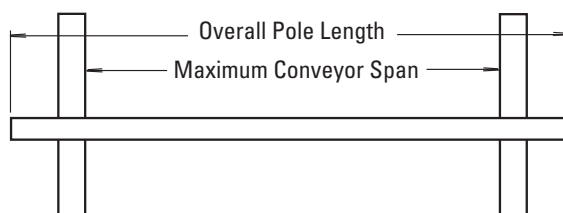

### Pole Length

Cleaner size up to 1200mm (48") + 750mm (30") / Cleaner size 1350mm (54") and up + 850mm (34")

### Maximum Conveyor Span

Cleaner size up to 1200mm (48") + 625mm (25") / Cleaner size 1350mm (54") and up + 725mm (29")

### Horizontal Clearance Required

100mm (4")

### Vertical Clearance Required

200mm (8")

## Ordering Information

### P-Type® Secondary with C-Tips\*

Belt Width		Ordering Number	Item Code
mm	in.		
450	18	PC18	74566
600	24	PC24	74567
750	30	PC30	74568
900	36	PC36	74569
1050	42	PC42	74570
1200	48	PC48	74571
1350	54	PC54	74572
1500	60	PC60	74573
1800	72	PC72	74574

\*NOTE: C-Tips can be used on mechanically spliced and vulcanized belts. P-Type cleaners come standard with Select Set™ Tensioners.

### P-Type® Secondary with V-Tips\*

Belt Width		Ordering Number	Item Code
mm	in.		
450	18	PV-18	78453
600	24	PV-24	78415
750	30	PV-30	78417
900	36	PV-36	78419
1050	42	PV-42	78421
1200	48	PV-48	78423
1350	54	PV-54	78454
1500	60	PV-60	78455
1800	72	PV72	73438

\*NOTE: V-Tips can be used ONLY on vulcanized belts. P-Type cleaners come standard with Select Set™ Tensioners.

### Replacement Tips

Ordering Number	Item Code
ICT6	74535
PSA150	73156

Lead time: 1 working day

### Tips Required per Cleaner Size

mm	450	600	750	900	1050	1200	1350	1500	1800
in.	18	24	30	36	42	48	54	60	72
C-Tips or V-Tips Required	3	4	5	6	7	8	9	10	12

## Additional Information

For size restricted applications, see the P-Type LS (Limited Space) Sell Sheet X2479.



Authorized Distributor:

2 Woodlands Sector 1 • #01-21 • Woodlands Spectrum I • Singapore 738068  
Tel: +65-6484-1533 • Fax: +65-6484-1531 • E-mail: [asiasales@flexco.com](mailto:asiasales@flexco.com)

Visit [www.flexco.com](http://www.flexco.com) for other Flexco locations and products.

©2015 Flexible Steel Lacing Company. 09/15. For reorder: X2802

