


R-TYPE® Enhanced Service Advantage Cartridge HD Secondary Belt Cleaner

Reversing Cleaner with Improved Serviceability

The R-Type® ESAC combines the reversing R-Type secondary cleaner with the Enhanced Service Advantage Cartridge. Not only simple to install using the versatile tensioner kit, the R-Type ESAC is also trouble-free to service, with the easy-to-use cartridge kit. The new cartridge now gives you control over maintenance with three easy-to-use removal options. The R-Type ESAC is the reliable choice for a great cleaner on reversing belts.

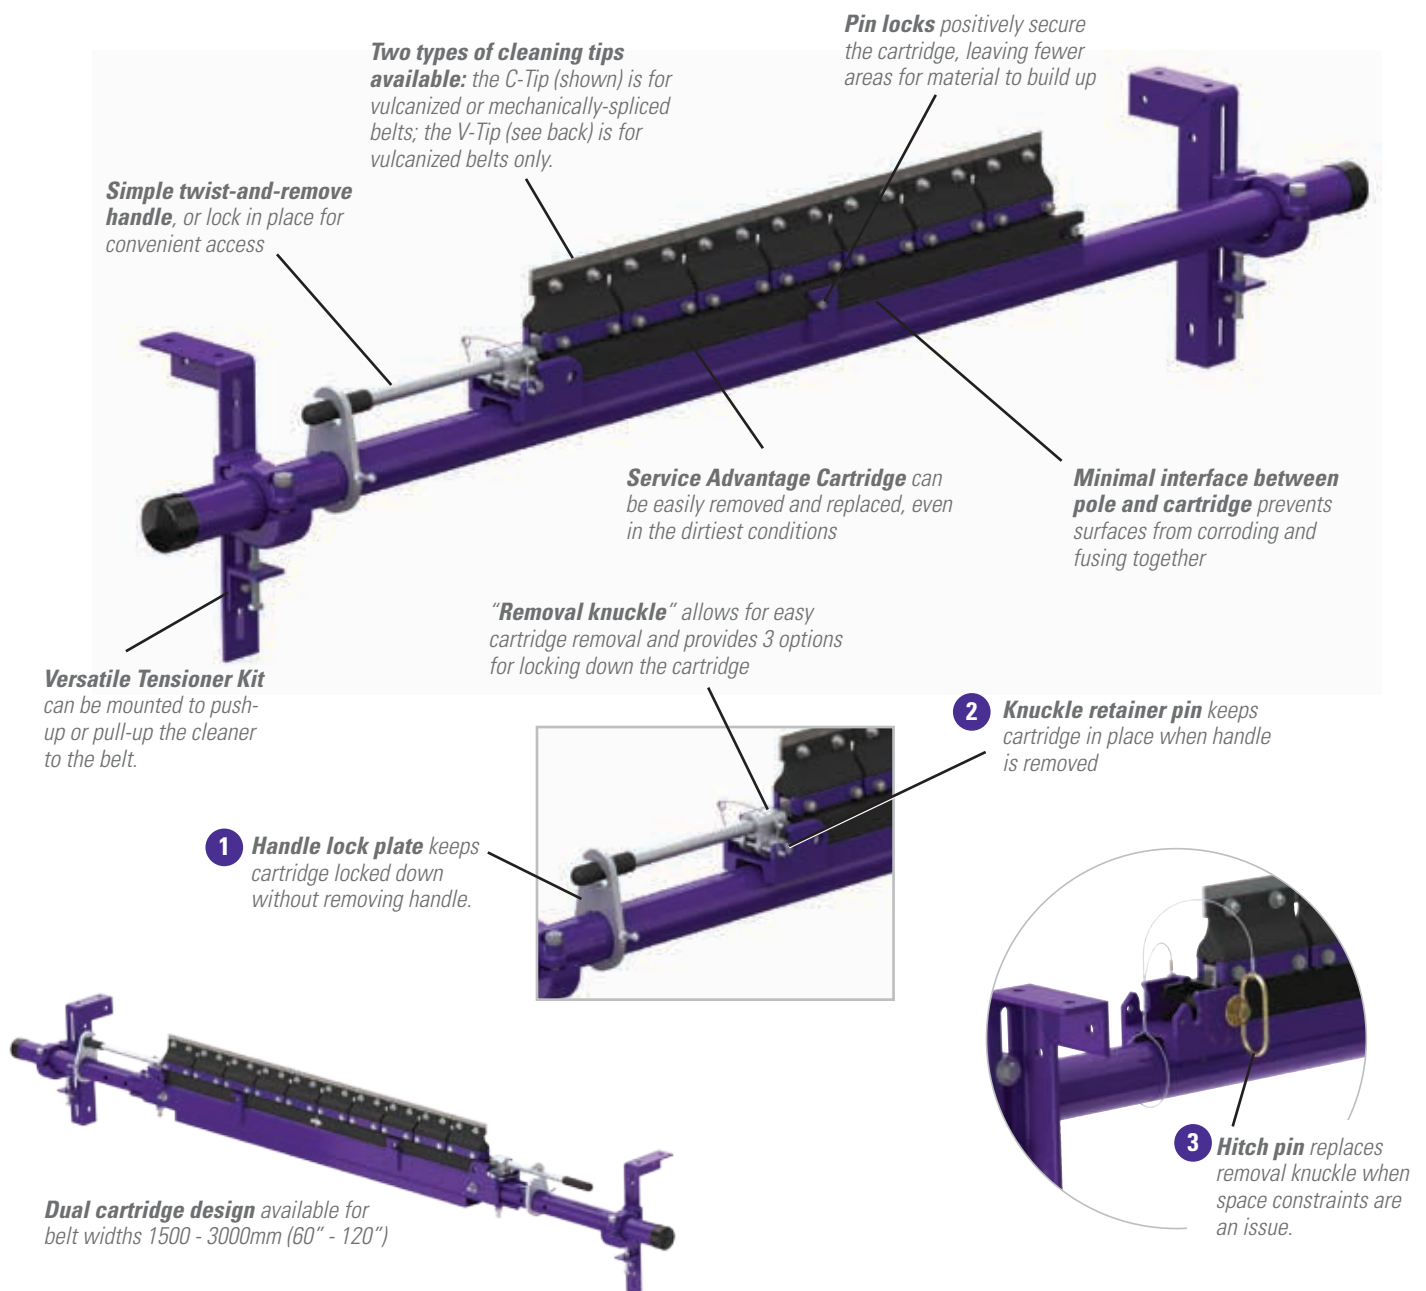

R-TYPE® with Enhanced Service Advantage

Cartridge Heavy-Duty Secondary Belt Cleaner

Maximum Belt Speed

5 M/sec (1000 FPM)

Temperature Rating

-35° C to 82° C (-30° F to 180° F)

Usable Blade Wear Length


9 mm (3/8")

Blade Material

Impact resistant, long-lasting tungsten carbide (C-Tip for mechanical fasteners, V-Tip for vulcanized belts)

Available for Belt Widths

600 to 3000 mm (24" to 120")

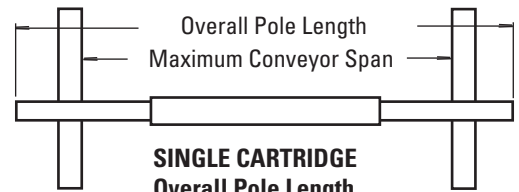

SINGLE CARTRIDGE

Overall Pole Length

Cleaner size + 1350 mm (54")

Maximum Conveyor Span

Cleaner size + 1050 mm (42")

Ordering Information

RC SAC HD Secondary Cleaner C-Tips and Bolt Tensioner

Belt Width		Ordering Number	Item Code
mm	in.		
600	24	RC600-SAC	78059
750	30	RC750-SAC	78060
900	36	RC900-SAC	78061
1050	42	RC1050-SAC	78062
1200	48	RC1200-SAC	78063
1350	54	RC1350-SAC	78064
1500	60	RC1500-SAC	78065
1800	72	RC1800-SAC	78066
1500	60	RC1500-2SAC	78067
1800	72	RC1800-2SAC	78068
2100	84	RC2100-2SAC	78069
2400	96	RC2400-2SAC	78070
3000	120	RC3000-2SAC	78071

Lead time: 1 working day

RV SAC HD Secondary Cleaner V-Tips and Bolt Tensioner

Belt Width		Ordering Number	Item Code
mm	in.		
600	24	RV600-SAC	78033
750	30	RV750-SAC	78034
900	36	RV900-SAC	78035
1050	42	RV1050-SAC	78036
1200	48	RV1200-SAC	78037
1350	54	RV1350-SAC	78038
1500	60	RV1500-SAC	78039
1800	72	RV1800-SAC	78040
1500	60	RV1500-2SAC	78041
1800	72	RV1800-2SAC	78042
2100	84	RV2100-2SAC	78043
2400	96	RV2400-2SAC	78044
3000	120	RV3000-2SAC	78045

Lead time: 1 working day

Lead time: 15 working days

NOTE: For easy blade changeout, remove cartridge with worn blades and replace with new blade cartridge kit. New blades can then be installed in the old cartridge for the next changeout.

Blade Cartridge Kits with C-Tips (Incl. blades, cartridge, and bolts)

Belt Width		Ordering Number	Item Code
mm	in.		
600	24	R-CARK-C24/600	78098
750	30	R-CARK-C30/750	78099
900	36	R-CARK-C36/900	78100
1050	42	R-CARK-C42/1050	78101
1200	48	R-CARK-C48/1200	78102
1350	54	R-CARK-C54/1350	78103
1500	60	R-CARK-C60/1500	78104
1800	72	R-CARK-C72/1800	78105
1500	60	R-CARK2-C60/1500	78114
1800	72	R-CARK2-C72/1800	78115
2100	84	R-CARK2-C84/2100	78116
2400	96	R-CARK2-C96/2400	78117
3000	120	R-CARK2-C120/3000	78118

Lead time: 1 working day

Blade Cartridge Kits with V-Tips (Incl. blades, cartridge, and bolts)

Belt Width		Ordering Number	Item Code
mm	in.		
600	24	R-CARK-V24/600	78106
750	30	R-CARK-V30/770	78107
900	36	R-CARK-V36/900	78108
1050	42	R-CARK-V42/1050	78109
1200	48	R-CARK-V48/1200	78110
1350	54	R-CARK-V54/1350	78111
1500	60	R-CARK-V60/1500	78112
1800	72	R-CARK-V72/1800	78113
1500	60	R-CARK2-V60/1500	78119
1800	72	R-CARK2-V72/1800	78120
2100	84	R-CARK2-V84/2100	78121
2400	96	R-CARK2-V96/2400	78122
3000	120	R-CARK2-V120/3000	78123

Lead time: 1 working day


Replacement Tips

Ordering Number	Item Code
ICT6	74535
RSA150	73628

Lead time: 1 working day

Tips Required per Cleaner Size

mm	in.	Tips Required
600	24	4
750	30	5
900	36	6
1050	42	7
1200	48	8
1350	54	9
1500	60	10
1800	72	12
2100	84	14
2400	96	16
3000	120	18

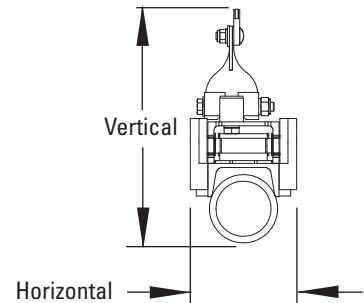

Horizontal Clearance Required

4-1/2" (114 mm)

Vertical Clearance Required

10" (254 mm) (Single Cartridge)

11-3/4" (298 mm) (Dual Cartridge)

Authorized Distributor:



2 Woodlands Sector 1 • #01-21 • Woodlands Spectrum I • Singapore 738068

Tel: +65-6484-1533 • Fax: +65-6484-1531 • E-mail: asiasales@flexco.com

Visit www.flexco.com for other Flexco locations and products.

©2015 Flexible Steel Lacing Company. 05/15. For reorder: X2811