


# EZP-LS Limited Space Precleaner

## Big Features in a Small Package

Many conveyors and portables have tight space configurations. That means a belt cleaner must be small and compact to fit. The new EZP-LS Precleaner delivers a big cleaning job in a compact cleaner.

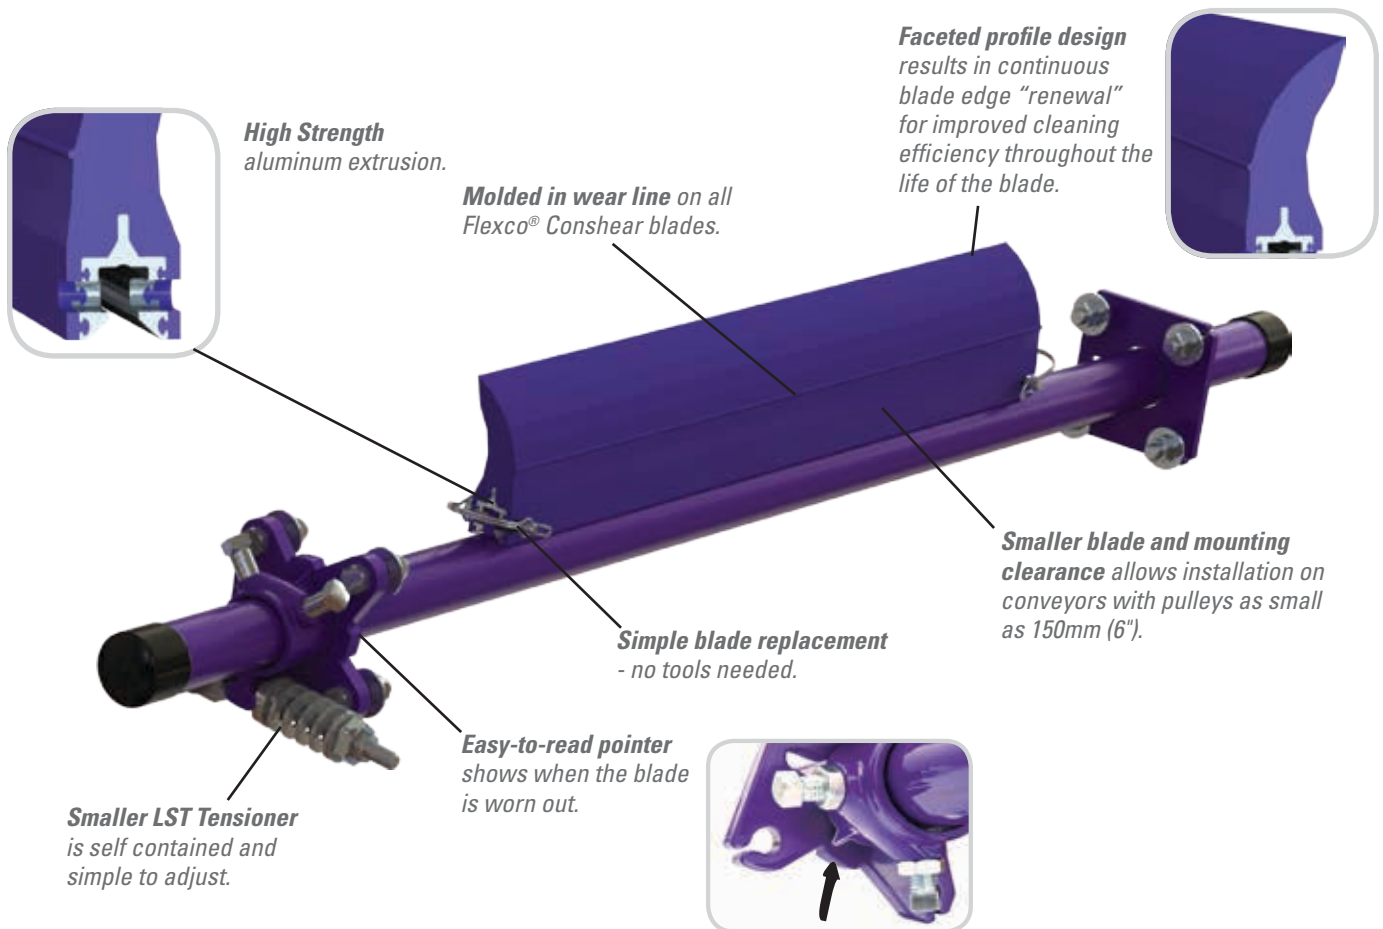

## Features and Benefits

- **Quick-change blade.** No tools are needed. Just pull one pin, remove the old blade, slide in the new one and replace the pin.
- **Can be used on reversing belts.** Installing cleaners on both pulleys gives superior cleaning results on belts that run in both directions.
- **Can be ordered for special configurations.** Special order options include: a stainless steel pole for corrosive applications or a high temp ConShear-LS Blade for applications with temperatures up to 135° C (275° F) with spikes to 163° C (325° F).
- **Blade can be used on other cleaners.** The ConShear-LS Blade can be used as a replacement blade on other OEM cleaners.




# EZP-LS

## Limited Space Precleaner

### Specifications and Guidelines

- **Maximum Belt Speed**  
2.5M/sec (500 FPM)
- **Blade Height**  
115mm (4-1/2")
- **Available for Belt Widths**  
300 to 1500mm (12" to 60")
- **Pole Length**  
Cleaner size up to 1050mm (42") + 750mm (30") / Cleaner size 1200mm (48") and up + 850mm (34")
- **Max Temperature Rating**  
-35° C to 82° C (-30° F to 180° F)
- **Usable Blade Wear Length**  
60mm (2-3/8")
- **Horizontal Clearance Required**  
75mm (3")
- **Maximum Conveyor Span**  
Cleaner size up to 1050mm (42") + 625mm (25") / Cleaner size 1200mm (48") and up + 725mm (29")
- **Minimum Pulley Diameter**  
150mm (6")
- **Blade Material**  
Urethane 83 durometer (proprietary blend for abrasion resistance and long wear)
- **Vertical Clearance Required**  
165mm (6-1/2")

#### Pole Location Specs

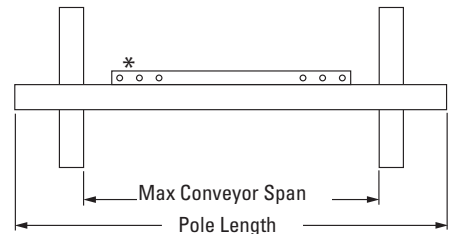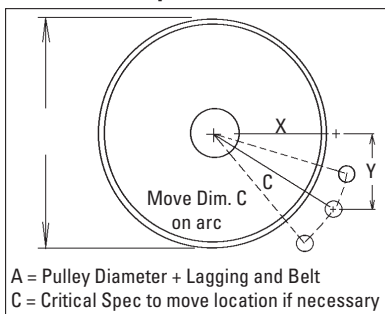

Pole Location Chart							
A	X	Y	C	A	X	Y	C
150	65	140	150	375	191	140	229
175	81	140	155	400	206	140	239
200	96	140	162	425	219	140	252
225	109	140	171	450	231	140	263
250	125	140	179	475	244	140	273
275	138	140	189	500	256	140	284
300	153	140	198	525	269	140	295
325	166	140	209	550	281	140	307
350	178	140	219				

### Ordering Information

EZP-LS Precleaner Belth Width Minus 2"					
Belt Width		Blade Width		Ordering Number	Item Code
mm	in.	mm	in.		
300	12	250	10	EZP-LS212	77127
450	18	400	16	EZP-LS218	77128
600	24	550	22	EZP-LS224	77129
750	30	700	28	EZP-LS230	77130
900	36	850	34	EZP-LS236	77131
1050	42	1000	40	EZP-LS242	77132
1200	48	1150	46	EZP-LS248	77133
1350	54	1300	52	EZP-LS254	77134
1500	60	1450	58	EZP-LS260	77135

Lead time: 1 working day

EZP-LS Precleaner Belth Width Minus 8"					
Belt Width		Blade Width		Ordering Number	Item Code
mm	in.	mm	in.		
450	18	250	10	EZP-LS818	77136
600	24	400	16	EZP-LS824	77137
750	30	550	22	EZP-LS830	77138
900	36	700	28	EZP-LS836	77139
1050	42	850	34	EZP-LS842	77140
1200	48	1000	40	EZP-LS848	77141
1350	54	1150	46	EZP-LS854	77142
1500	60	1300	52	EZP-LS860	77143

Lead time: 1 working day

ConShear-LS Replacement Blades			
Blade Width		Ordering Number	Item Code
mm	in.		
250	10	CRB-LS10	77088
400	16	CRB-LS16	77089
550	22	CRB-LS22	77090
700	28	CRB-LS28	77091
850	34	CRB-LS34	77092
1000	40	CRB-LS40	77093
1150	46	CRB-LS46	77094
1300	52	CRB-LS52	77095
1450	58	CRB-LS58	77096

Other blade sizes available upon request.  
Lead time: 1 working day

Authorized Distributor:

No: 1, Flexco Lane • Maduravoyil – Porur Service Road • Vanagaram Village • Chennai – 95 • India  
Tel: +91-44-6551-7771 • E-mail: info.india@flexco.com

Visit [www.flexco.com](http://www.flexco.com) for other Flexco locations and products.

©2015 Flexible Steel Lacing Company. 02/15. For reorder: X2956

