



## CLIPPER® G Series™ Lacing

# Flat, Low-Profile Splice Provides Strength and Durability

Clipper® G Series™ Lacing is precision stamped from 316L stainless steel and then machine-applied for consistent compression, resulting in a uniform and flat splice. G Series lacing features a staggered-leg design with four alternating leg lengths. These varying points of belt penetration provide additional strength and durability for the finished splice. Ideal for use in food manufacturing, package and parts handling, and filter media, the Clipper G Series is designed for use with PVC, PU, and PES belting.




**Flat, Low-Profile**  
splice is ideal for  
applications with  
slider beds



**Precision Stamping**  
ensures a consistent pitch over the  
entire length of the lacing for easier  
machine installation



**Machine-Application**  
results in a uniform, flat  
splice – even on belts prone  
to belt wave

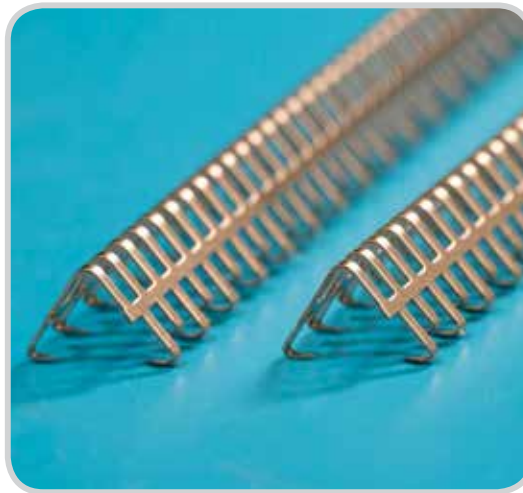

**Corrosion-Resistant**  
stainless steel for  
demanding applications



**Staggered Leg Geometry**  
increases the strength and  
durability of the splice

### Features and Benefits:

- Easy to install with proven Clipper maintenance and production lacers, G Series splices are uniform and extremely low profile.
- The staggered legs on G Series lacing provide for varying points of belt penetration which increases both the strength and durability of the splice.
- The flat, continuous top bar design eliminates belt wave and reduces the risk of dislodged fasteners.
- G Series lacing is joined with a corrugated stainless steel wire connecting pin that prevents pin migration during use.

# Clipper® G Series™ Lacing

## Recommended Applications:

- Food Manufacturing
- Filter Media
- Package and Parts Handling

## G Series can be installed with:

- Roller Lacer®
- Roller Lacer® Gold Class™
- Microlacer®
- Pro 600 Lacer
- Pro 6000 Lacer



Clipper® maintenance lacers — quick, on-site installation of G Series™ lacing with precision Roller Lacing Technology™



Clipper® production lacers — the quickest, most precise method for high-volume installation of G Series™ lacing

Minimum Pulley Diameter	Material Thickness		Connecting Pin Size		Belt Thickness					
	mm	in.	mm	in.	1.5 mm (.059")	2.0 mm (.078")	2.5 mm (.098")	3.0 mm (.118")	3.5 mm (.138")	5.0 mm (.197")
40 mm (1.6")	.50	.019	1.20	.047	G005A					
	.75	.029	1.40	.055		G005				
50 mm (2.0")	.50	.019	1.20	.047		G006A				
	.75	.029	1.40	.055			G006			
75 mm (3.0")	1.0	.039	2.00	.079				G008		

Size	Ordering Number	Item Code	Strips Per Box	Strip Length	
				mm	in.
G005A	G005A-SS-300W-12/BX	05492	12	300	12
	G005A-SS-600W-8/BX	05493	8	600	24
	G005A-SS-900W-8/BX	05494	8	900	36
	G005A-SS-1200W-8/BX	05495	8	1200	48
	G005A-SS-1500W-8/BX	05496	8	1500	60
G005	G005-SS-300W-12/BX	05497	12	300	12
	G005-SS-600W-8/BX	05498	8	600	24
	G005-SS-900W-8/BX	05499	8	900	36
	G005-SS-1200W-8/BX	05500	8	1200	48
	G005-SS-1500W-8/BX	05501	8	1500	60
G006A	G006A-SS-300W-12/BX	05502	12	300	12
	G006A-SS-600W-8/BX	05503	8	600	24
	G006A-SS-900W-8/BX	05504	8	900	36
	G006A-SS-1200W-8/BX	05505	8	1200	48
	G006A-SS-1500W-8/BX	05506	8	1500	60
G006	G006-SS-300W-12/BX	05507	12	300	12
	G006-SS-600W-8/BX	05508	8	600	24
	G006-SS-900W-8/BX	05509	8	900	36
	G006-SS-1200W-8/BX	05510	8	1200	48
	G006-SS-1500W-8/BX	05511	8	1500	60
G008	G008-SS-300W-12/BX	05544	12	300	12
	G008-SS-600W-8/BX	05545	8	600	24
	G008-SS-900W-8/BX	05546	8	900	36
	G008-SS-1200W-8/BX	05547	8	1200	48
	G008-SS-1500W-8/BX	05548	8	1500	60

For use with	Ordering Number	Item Code	Ordering Number	Item Code
<b>Roller Lacer® Gold Class™</b>	<b>Hook Size G005(A) – G006(A)</b>		<b>Hook Size G008</b>	
24" Face Strip	FSGOLDG-601	04363	FSGOLDGXL-601	04461
36" Face Strip	FSGOLDG-901	04364	FSGOLDGXL-901	04462
48" Face Strip	FSGOLDG-1201	04365	FSGOLDGXL-1201	04463
60" Face Strip	FSGOLDG-1501	04366	FSGOLDGXL-1501	04464
<b>Manual Roller Lacer®</b>	<b>Hook Size G005(A) – G006(A)</b>		<b>Hook Size G008</b>	
24" Face Strip	FSMANG-601	04359	FSMANGXL-601	04456
36" Face Strip	FSMANG-901	04360	FSMANGXL-901	04457
48" Face Strip	FSMANG-1201	04361	FSMANGXL-1201	04458
60" Face Strip	FSMANG-1501	04362	FSMANGXL-1501	04459
<b>Microlacer®</b>	<b>Hook Size G005(A) – G006(A)</b>		<b>Hook Size G008</b>	
Microlacer Face Strip	FSMANG-351-MICRO	04358	FSMANGXL-350-MICRO	04455
<b>Pro 600 or Pro 6000 Lacer</b>	<b>Hook Size G005(A) – G006(A)</b>		<b>Hook Size G008</b>	
24" Comb for Pro 600/6000	P6CLPRGM-601	04410	P6CLPRGXLM-601	00979
36" Comb for Pro 600/6000	P6CLPRGM-901	04411	P6CLPRGXLM-901	16755
48" Comb for Pro 600/6000	P6CLPRGM-1201	04412	P6CLPRGXLM-1201	16753
60" Comb for Pro 600/6000	P6CLPRGM-1501	04413	P6CLPRGXLM-1501	16754

Authorised Distributor:

New Door No. 51 • Anna Salai, Nagalkeni • Pammal Village • Chennai - 600 044 • Tamil Nadu • India  
Tel: +91-44-4856-6762 • E-mail: info.india@flexco.com

Visit [www.flexco.com](http://www.flexco.com) for other Flexco locations and products.

©2013 Flexible Steel Lacing Company. 02-18-19. For Reorder: X3440

