


## Superior Belt Washing for the Toughest Conveying Systems

The Flexco Wash Box is designed to deliver superior cleaning efficiency in applications where the conveyor must be very clean or when head-end cleaning is not enough. Mounted on the return side of the belt, Flexco Wash Boxes are available in stainless steel and are equipped with an adjustable hold down roller. Purchased separately from the Wash Box, two belt cleaners can be selected specifically for your application or your budget. The Flexco Wash Box system provides a high-efficiency customized belt cleaning solution for even the toughest applications.

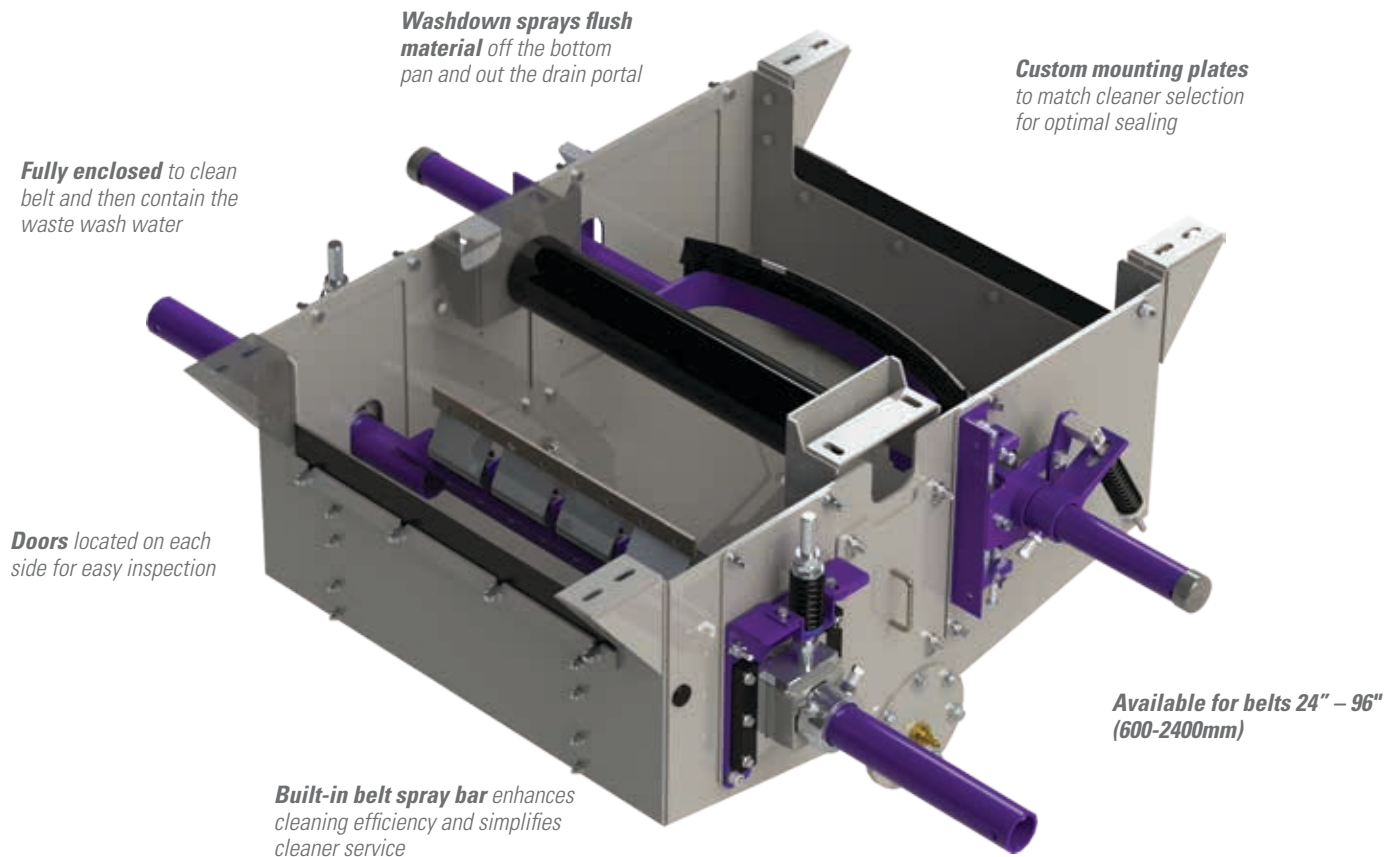


### Features and Benefits:

- **Mounts to existing stringers.** Drill and bolt fitment minimizes installation and downtime.
- **Versatile cleaner arrangements.** Configurable for two belt cleaners with custom mounting plates for various configurations.
- **Hold Down Roller.** The included hold down roller provides the proper tension for each cleaner.
- **Customizable.** Wash boxes can be custom engineered to fit the job requirements if standard offering does not suite your application.

# Wash Box

## Specifications

- **Maximum Belt Speed**  
1500 fpm (7.6 m/s)
- **Temperature Rating**  
30F to 180F (-35c to 82C)
- **Available for Belt Widths**  
24" to 96" (600 to 2400 mm)
- **Drain Options**  
Rear Drain (suitable for most applications)  
Center Drain (suitable for conveyors level to ground)
- **Construction Materials**  
304 Stainless
- **For Use With**  
Any Flexco Secondary Cleaner Combination

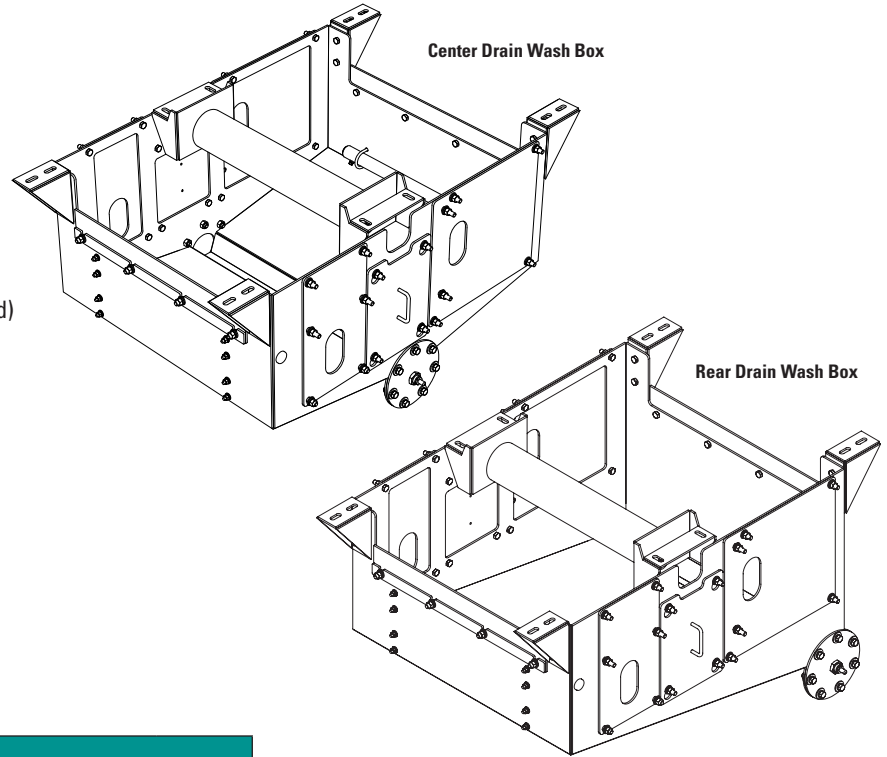

## Ordering Information

Wash Box							
Belt Width		Drain	Ordering Number	Item Code	Wt. Lbs.	Flush Holes Per Belt Width	Volume Cu. Ft.
in.	mm						
24	600	Rear	WB24-2-S/S	K2546	484.91	5	22.66
30	750	Rear	WB30-2-S/S	K2547	532.57	5	26.39
36	900	Rear	WB36-2-S/S	K2548	574.70	6	30.11
42	1050	Rear	WB42-2-S/S	K2549	616.83	6	33.84
48	1200	Rear	WB48-2-S/S	K2550	658.96	7	37.56
54	1350	Rear	WB54-2-S/S	K2551	701.09	7	41.29
60	1500	Rear	WB60-2-S/S	K2552	743.22	8	45.01
72	1800	Rear	WB72-2-S/S	K2553	827.48	9	52.46
84	2100	Rear	WB84-2-S/S	K2554	911.74	10	59.91
96	2400	Rear	WB96-2-S/S	K2555	996.00	11	67.36
24	600	Center	WB24C-2-S/S	K2686	462.72	9	20.71
30	750	Center	WB30C-2-S/S	K2687	504.00	9	24.12
36	900	Center	WB36C-2-S/S	K2688	544.17	11	27.52
42	1050	Center	WB42C-2-S/S	K2689	585.45	11	30.93
48	1200	Center	WB48C-2-S/S	K2690	626.73	13	34.33
54	1350	Center	WB54C-2-S/S	K2691	668.01	13	37.74
60	1500	Center	WB60C-2-S/S	K2692	709.29	15	41.14
72	1800	Center	WB72C-2-S/S	K2693	791.85	17	47.95
84	2100	Center	WB84C-2-S/S	K2694	874.41	19	54.76
96	2400	Center	WB96C-2-S/S	K2695	956.97	21	61.57

Lead-time 4-6 weeks

Authorized Distributor:


 2525 Wisconsin Avenue • Downers Grove, IL 60515-4200 • USA  
 Tel: (630) 971-0150 • Fax: (630) 971-1180 • E-mail: info@flexco.com

Visit [www.flexco.com](http://www.flexco.com) for other Flexco locations and products.

©2020 Flexible Steel Lacing Company. 05/27/20. For reorder: X3849

