

Enclosed Skirt System


Simple and Effective

Not all containment solutions should require complicated measuring and engineering. Standard skirting assemblies with adjustable mounting arrangements provide universal mounting and easy installation.



Features and Benefits:

- **Easy Installation.** Our skirt legs can be located anywhere along your stringer. With easy slip-on connectors, installing Standard Flexco Skirting Solutions is quick and easy.
- **Sealing Options.** Seal to your conveyor belt using one of two Flexco sealing options: vertical or tangential.
- **Rear Door Seal.** Provides easy access for wash down, inspection, and repairs.
- **Dust Curtains.** Control air flow throughout the system to keep dust levels low.
- **Easy Maintenance.** Liners are externally replaceable and adjustable.
- **Customizable.** If the standard offering does not suite your application, it can be custom engineered to fit the job requirements.

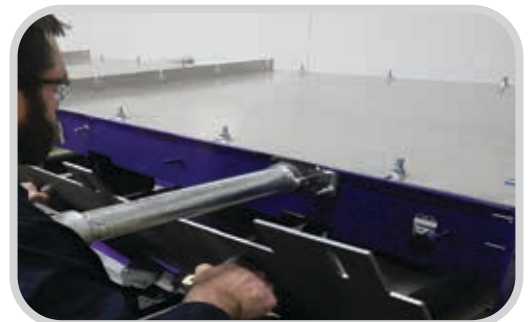

Enclosed Skirt System

Ordering Information

STANDARD BASE UNIT - 1.2 M (4')											
BELT WIDTH		BASE UNIT LENGTH		STANDARD, NO COVER		STANDARD, COVERED		TANGENTIAL, NO COVER		TANGENTIAL, COVERED	
mm	in.	mm	ft.	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE
600	24	1200	4	ES24-4-SN	91653	ES24-4-SF	91664				
750	30	1200	4	ES30-4-SN	91654	ES30-4-SF	91665				
900	36	1200	4	ES36-4-SN	91655	ES36-4-SF	91666				
1050	42	1200	4	ES42-4-SN	91656	ES42-4-SF	91667				
1200	48	1200	4	ES48-4-SN	91657	ES48-4-SF	91668	ES48-4-TN	91675	ES48-4-TF	91682
1350	54	1200	4	ES54-4-SN	91658	ES54-4-SF	91669	ES54-4-TN	91676	ES54-4-TF	91683
1500	60	1200	4	ES60-4-SN	91659	ES60-4-SF	91670	ES60-4-TN	91677	ES60-4-TF	91684
1650	66	1200	4	ES66-4-SN	91660	ES66-4-SF	91671	ES66-4-TN	91678	ES66-4-TF	91685
1800	72	1200	4	ES72-4-SN	91661	ES72-4-SF	91672	ES72-4-TN	91679	ES72-4-TF	91686
2100	84	1200	4	ES84-4-SN	91662	ES84-4-SF	91673	ES84-4-TN	91680	ES84-4-TF	91687
2400	96	1200	4	ES96-4-SN	91663	ES96-4-SF	91674	ES96-4-TN	91681	ES96-4-TF	91688

STANDARD BASE UNIT- 2.4 M (8')											
BELT WIDTH		BASE UNIT LENGTH		STANDARD, NO COVER		STANDARD, COVERED		TANGENTIAL, NO COVER		TANGENTIAL, COVERED	
mm	in.	mm	ft.	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE
600	24	2400	8	ES24-8-SN	91689	ES24-8-SF	91700				
750	30	2400	8	ES30-8-SN	91690	ES30-8-SF	91701				
900	36	2400	8	ES36-8-SN	91691	ES36-8-SF	91702				
1050	42	2400	8	ES42-8-SN	91692	ES42-8-SF	91703				
1200	48	2400	8	ES48-8-SN	91693	ES48-8-SF	91704	ES48-8-TN	91711	ES48-8-TF	91718
1350	54	2400	8	ES54-8-SN	91694	ES54-8-SF	91705	ES54-8-TN	91712	ES54-8-TF	91719
1500	60	2400	8	ES60-8-SN	91695	ES60-8-SF	91706	ES60-8-TN	91713	ES60-8-TF	91720
1650	66	2400	8	ES66-8-SN	91696	ES66-8-SF	91707	ES66-8-TN	91714	ES66-8-TF	91721
1800	72	2400	8	ES72-8-SN	91697	ES72-8-SF	91708	ES72-8-TN	91715	ES72-8-TF	91722
2100	84	2400	8	ES84-8-SN	91698	ES84-8-SF	91709	ES84-8-TN	91716	ES84-8-TF	91723
2400	96	2400	8	ES96-8-SN	91699	ES96-8-SF	91710	ES96-8-TN	91717	ES96-8-TF	91724

REAR SEAL			
BELT WIDTH		ORDERING NUMBER	ITEM CODE
mm	in.		
600	24	RS-24	91725
750	30	RS-30	91726
900	36	RS-36	91727
1050	42	RS-42	91728
1200	48	RS-48	91729
1350	54	RS-54	91730
1500	60	RS-60	91731
1650	66	RS-66	91732
1800	72	RS-72	91733
2100	84	RS-84	91734
2400	96	RS-96	91735

DUST CURTAIN			
BELT WIDTH		ORDERING NUMBER	ITEM CODE
mm	in.		
600	24	DC-24	91736
750	30	DC-30	91737
900	36	DC-36	91738
1050	42	DC-42	91739
1200	48	DC-48	91740
1350	54	DC-54	91741
1500	60	DC-60	91742
1650	66	DC-66	91743
1800	72	DC-72	91744
2100	84	DC-84	91745
2400	96	DC-96	91746

SPANNERS			
SPANNER WIDTH		ORDERING NUMBER	ITEM CODE
mm	in.		
600	24	SP-24	91747
750	30	SP-48	91748
900	36	SP-72	91749
1050	42	SP-96	91750

Authorised Distributor:

236 Albert Amon Rd • Meadowdale Ext. 7 • Germiston 1614 • South Africa
Tel: +27-11-608-4180 • Fax: +27-11-454-5821 • E-mail: flexco@flexco.co.za

Visit www.flexco.com for other Flexco locations and products.

©2020 Flexible Steel Lacing Company. 05/11/20. For Reorder: X3950

