


Enclosed Skirt System


Simple and Effective

Not all containment solutions should require complicated measuring and engineering. Standard skirting assemblies with adjustable mounting arrangements provide universal mounting and easy installation.

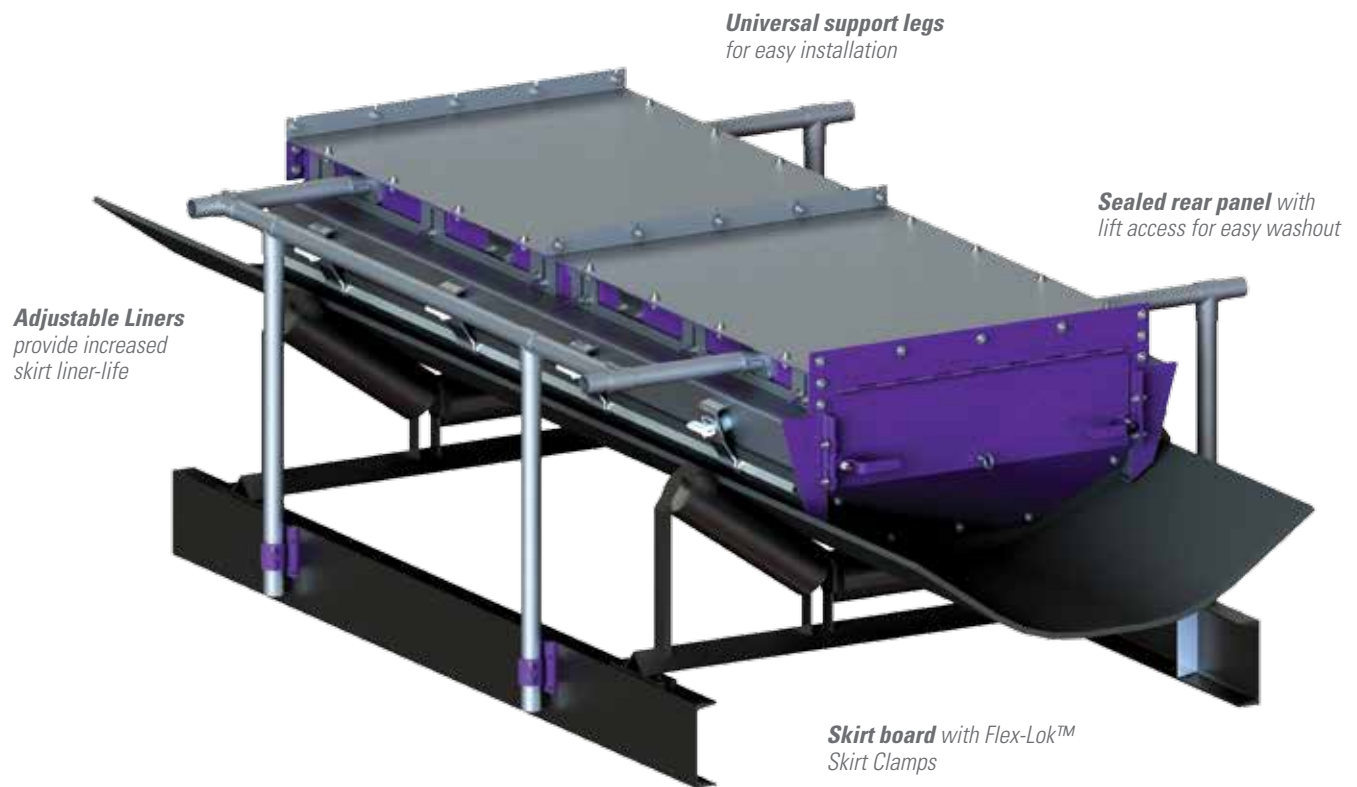

Features and Benefits:

- **Easy Installation.** Our skirt legs can be located anywhere along your stringer. With easy slip-on connectors, installing Standard Flexco Skirting Solutions is quick and easy.
- **Rubber Sealing Options.** Seal to your conveyor belt using one of two Flexco rubber sealing options: vertical or tangential.
- **Rear Door Seal.** Provides easy access for wash down, inspection, and repairs.
- **Dust Curtains.** Control air flow throughout the system to keep dust levels low.
- **Easy Maintenance.** Liners are externally replaceable and adjustable.
- **Customizable.** If the standard offering does not suite your application, it can be custom engineered to fit the job requirements.

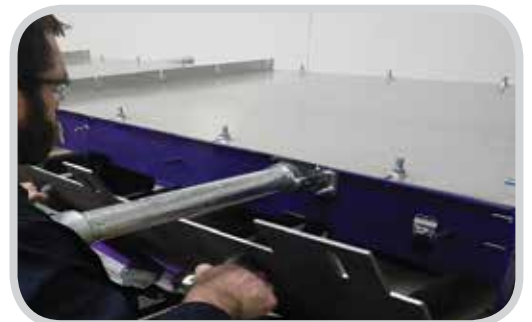

Externally replaceable liners for easy maintenance

Enclosed Skirt System

Ordering Information

SKIRT WALLS

Each skirt wall section comes with external adjustable and replaceable liners. Skirting sections do not include required skirt rubber; purchase from local Flexco distribution.

Skirt Wall Length		Straight Skirt Wall		Tangential Skirt Wall	
mm	in.	ORDERING NUMBER	WEIGHT KGS.	ORDERING NUMBER	WEIGHT KGS.
1219	48	4-X-15-4-S-1	30.0	4-X-15-4-T-1	41.0
2438	96	8-X-15-4-S-1	58.0	8-X-15-4-T-1	83.0

SUPPORT LEGS

Maximum span between support legs is 8' and are of sufficient length to be attached to the conveyor channel or truss. Sold as two legs with a cross bar support.

BELT WIDTH		ORDERING NUMBER	WEIGHT KGS.
mm	in.		
600	24	LA-24	14.0
750	30	LA-30	14.0
900	36	LA-36	15.0
1050	42	LA-42	16.0
1200	48	LA-48	17.0
1350	54	LA-54	17.0
1500	60	LA-60	19.0
1650	66	LA-66	19.0
1800	72	LA-72	20.0
2100	84	LA-84	21.0
2400	96	LA-96	23.0

4' SKIRT COVER

Skirt covers seal over between skirt walls.

BELT WIDTH		ORDERING NUMBER	WEIGHT KGS.
mm	in.		
600	24	SC-7-24	4.0
750	30	SC-7-30	5.0
900	36	SC-7-36	6.0
1050	42	SC-7-42	7.0
1200	48	SC-7-48	8.0
1350	54	SC-7-54	9.0
1500	60	SC-7-60	10.0
1650	66	SC-7-66	10.0
1800	72	SC-7-72	12.0
2100	84	SC-7-84	14.0
2400	96	SC-7-96	15.0

REAR SEAL

A rear seal can be used to enclose the rear of a skirting while providing access into the system.

BELT WIDTH		ORDERING NUMBER	WEIGHT KGS.
mm	in.		
600	24	RS-1-15-24-35	7.0
750	30	RS-1-15-30-35	9.0
900	36	RS-1-15-36-35	11.0
1050	42	RS-1-15-42-35	13.0
1200	48	RS-1-15-48-35	15.0
1350	54	RS-1-15-54-35	17.0
1500	60	RS-1-15-60-35	19.0
1650	66	RS-1-15-66-35	21.0
1800	72	RS-1-15-72-35	24.0
2100	84	RS-1-15-84-35	29.0
2400	96	RS-1-15-96-35	35.0

DUST CURTAIN

Dust curtains can be located every 2 ft, attaching to skirt wall.

BELT WIDTH		ORDERING NUMBER	WEIGHT KGS.
mm	in.		
600	24	DC-1-15-24-35	2.0
750	30	DC-1-15-30-35	2.0
900	36	DC-1-15-36-35	3.0
1050	42	DC-1-15-42-35	3.0
1200	48	DC-1-15-48-35	3.0
1350	54	DC-1-15-54-35	4.0
1500	60	DC-1-15-60-35	4.0
1650	66	DC-1-15-66-35	4.0
1800	72	DC-1-15-72-35	4.0
2100	84	DC-1-15-84-35	5.0
2400	96	DC-1-15-96-35	5.0

CROSS BRACE SPANNER

Spanners are optional for infinite adjustment along the stringer. To use spanners, disassemble leg assemblies and install spanners between cross bar support.

LENGTH		ORDERING NUMBER	WEIGHT KGS.
mm	in.		
609	24	SP-24	2.0
1219	30	SP-48	4.0
1829	36	SP-72	7.0
2438	42	SP-96	9.0

Authorised Distributor:

236 Albert Amon Rd • Meadowdale Ext. 7 • Germiston 1614 • South Africa
Tel: +27-11-608-4180 • Fax: +27-11-454-5821 • E-mail: flexco@flexco.co.za

Visit www.flexco.com for other Flexco locations and products.

©2016 Flexible Steel Lacing Company. 12-09-16. For Reorder: X3950

