


Y-Type™ Polyurethane and Carbide Secondary Cleaner

Simple, Effective Cleaning for Cement Operations Where Dust is Widespread

The Y-Type™ Secondary Cleaner should be installed throughout the cement process, especially in areas such as the materials storage and proportioning and finish mills, where dust is widespread. With easy, do-it-yourself installation and simple, serviceable blades, all at an affordable price, it makes for the ideal solution to facilitate the capture of usable materials.

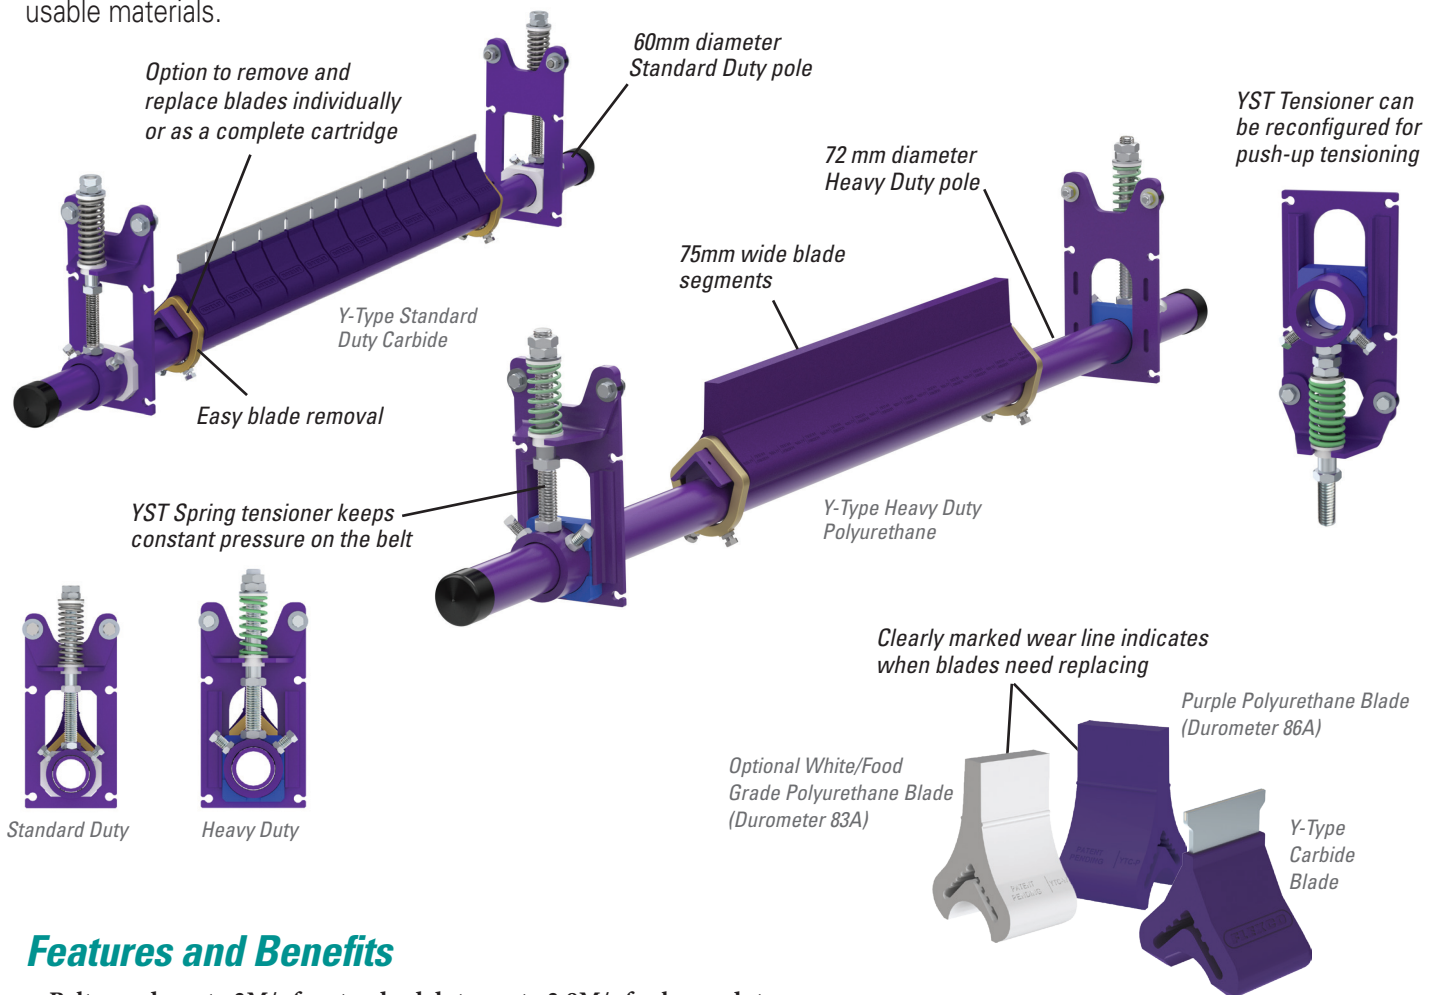

Features and Benefits

- Belt speeds up to 3M/s for standard duty, up to 3.8M/s for heavy duty.
- Works on reversing belts.
- Available in 450 - 1200mm for standard duty belts, 900 - 1800mm for heavy duty belts .
- 75mm wide blade segments. Conforms to worn or damaged belts.
- Blades available in carbide and purple or white/food grade polyurethane.
- **Easy maintenance.** Simple design makes changing the blades fast and easy. Blades can be removed and replaced individually, or all at once by replacing the cartridge.
- **Spring tensioner.** Utilizes the YST tensioner to maintain constant pressure on the belt. Standard duty YST for 60mm poles, heavy duty YST for 73mm poles.

Y-Type™ Polyurethane and Carbide Secondary Cleaner

Specifications and Guidelines

	Standard Duty	Heavy Duty
Maximum Belt Speed	3 M/sec	3.8 M/sec
Temperature Rating	-35° C to 82° C	
Usable Blade Wear Length	Polyurethane: 50 mm	Polyurethane: 75 mm
	Carbide: 6 mm	Carbide: 10 mm
Available for Belt Widths	450 to 1200 mm	900 to 1800 mm


Blade Material

Purple: Polyurethane (proprietary blend for abrasion resistance and long wear)

White: Polyurethane (chemical resistant/food grade)*

Carbide: Impact resistant tungsten carbide

*All ingredients used in polyurethane formulation comply with the relevant requirements of 21 CFR (FDA Code of Federal Regulations) for use in repeated bulk dry food applications.



Horizontal Clearance Required
Standard Duty: 110 mm
Heavy Duty: 135 mm


Vertical Clearance Required
Standard Duty:
 Polyurethane: 210 mm
 Carbide: 185mm
Heavy Duty:
 Polyurethane: 240 mm
 Carbide: 250 mm

Pole Length

SD Belt width + 762 mm
 HD Belt width + 1372 mm

Maximum Conveyor Span

SD Belt width + 559 mm
 HD Belt width + 1169 mm

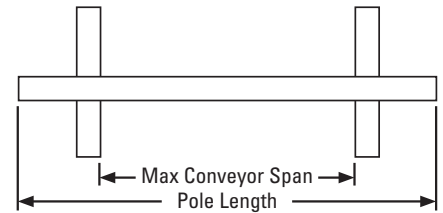

Ordering Information

Y-Type Secondary Cleaners - Standard Duty						
Belt Width	Carbide Blades		Purple Polyurethane Blades		White/Food Grade Polyurethane Blades	
	Ordering Number	Item Code	Ordering Number	Item Code	Ordering Number	Item Code
450	YT-TC-18S	79759	YT-18S	79765	YTW-18S	79771
600	YT-TC-24S	79760	YT-24S	79766	YTW-24S	79772
750	YT-TC-30S	79761	YT-30S	79767	YTW-30S	79773
900	YT-TC-36S	79762	YT-36S	79768	YTW-36S	79774
1050	YT-TC-42S	79763	YT-42S	79769	YTW-42S	79775
1200	YT-TC-48S	79764	YT-48S	79770	YTW-48S	79776

Lead time: 1 working day

Y-Type Secondary Cleaners - Heavy Duty						
Belt Width	Carbide Blades		Purple Polyurethane Blades		White/Food Grade Polyurethane Blades	
	Ordering Number	Item Code	Ordering Number	Item Code	Ordering Number	Item Code
900	YTHD-TC-36S	79777	YTHD-36S	79783	YTHDW-36S	79789
1050	YTHD-TC-42S	79778	YTHD-42S	79784	YTHDW-42S	79790
1200	YTHD-TC-48S	79779	YTHD-48S	79785	YTHDW-48S	79791
1350	YTHD-TC-54S	79780	YTHD-54S	79786	YTHDW-54S	79792
1500	YTHD-TC-60S	79781	YTHD-60S	79787	YTHDW-60S	79793
1800	YTHD-TC-72S	79782	YTHD-72S	79788	YTHDW-72S	79794

Lead time: 1 working day

Blades Required per Cleaner Size - Standard						
mm	450	600	750	900	1050	1200
Blades Required	6	8	10	12	14	16

Blades Required per Cleaner Size - HD						
mm	900	1050	1200	1350	1500	1800
Blades Required	12	14	16	18	20	24

Authorised Distributor: