

NOVITool® Aero® Splicing Tape




Splicing Made Easy for Industrial Baking Operations

Aero® Splicing Tape secures punched fingers together quickly and easily in preparation for the endless splicing process. Traditional finger tacking methods involve the use of a hot iron to tack the fingers; this is time consuming and has the ability to burn both the belt and the mechanic/technician fabricating the belt. And the deep mark left by the hot iron can lead to unsanitary pin holes in the finished splice.

Aero Splicing Tape eliminates the need for a hot iron and is safe for use when splicing food grade belting. It also reduces the potential for pin holes. This heat resistant tape is applied to the properly meshed fingers and is peeled away without any residue once the splice is completed. It is particularly beneficial when splicing thin single-ply or two-ply urethane belting often used in industrial baking applications.

In addition, Aero Splicing tape can be used to wrap prepared finger splices to protect the splice from contamination when pre-punched belts are stored in inventory or while punched belts are being strung onto the conveyor.

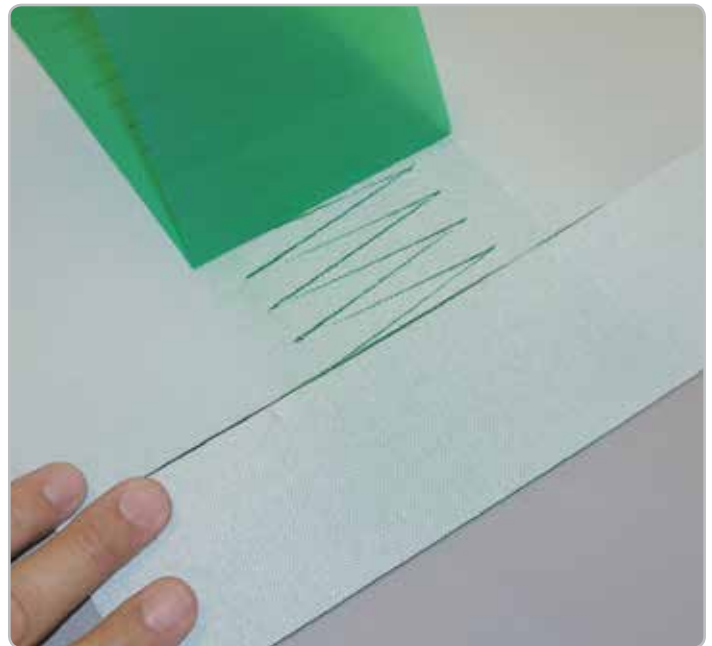

Splice Tape Benefits

- Eliminates the need of tacking splices with a hot iron
 - Eliminates possibility of burning the belt and/or belt technician during the tacking process
 - Eliminates belt technician exposure to fumes that commonly occur with hot iron tacking
- Reduces splice separation resulting from belt shrinkage during splicing
- Protects prepared fingers from contamination when stringing belts



Patent number: US 9,090,022 B1

Aero® Splice Tape Specifications	
Length x Width	215' x 4" (66 m x 100 mm)
Maximum Temperature	428°F (220°C)

Ordering Information – Aero® Splice Tape	
Ordering Number	Item Code
AERO-SPLICE-TAPE-66X101	08468

Authorized Distributor:

Flexco Europe GmbH • Leidringer Strasse 40-42 • D-72348 Rosenfeld • Deutschland
Tel: +49-7428-9406-0 • Fax: +49-7428-9406-260 • E-mail: europe@flexco.com

Visit www.flexco.com for other Flexco locations and products.

©2019 Flexible Steel Lacing Company. 02/27/19. X5644

