


# STANDARD POLYURETHANE SKIRTING

## Long Lasting Solution for Spillage and Dust Control

Standard Polyurethane Skirting provides a simple and effective solution to mitigate material spillage and dust control in the conveyor loading zone. When paired with one of Flexco's Skirting Systems the entire assembly reduces conveyor problems in or around the loading zone and saves on potential cleanup costs. The wear life is greatly extended versus conventional rubber products by using a proprietary polyurethane blend, meaning fewer adjustments and better sealing throughout the life of the skirting.

*25' (7.6m) roll size ensures easy transportation; 50' (15.2m) roll sizes easier to stock*

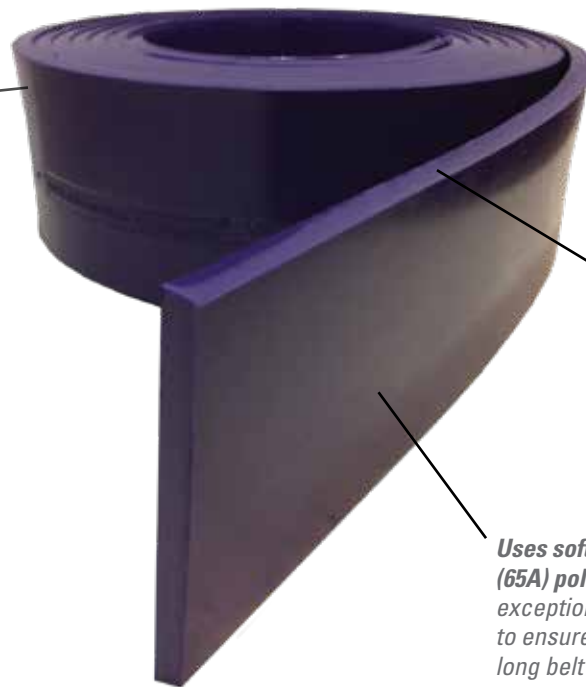

*35° chamfer eliminates the typical skirting break-in period*

*Uses soft durometer (65A) polyurethane with exceptional tear resistance to ensure a good seal and long belt life*

### Features and Benefits

- **Long service life.** Polyurethane skirting offers a more wear-resistant material than typical rubber, often providing as much as 3-4 times the wear life in similar applications. The lower coefficient of friction reduces strain on the system.
- **Compatible with all skirting systems.** Works with Flexco series of skirt clamps that offer simple serviceability: RMC1/PAL-Pak, Flex-Lok™, and Flex-Seal™.
- **Suitable for most applications.** Single direction or reversing belts, wet or dry conditions, old or new belts, vulcanized or mechanically-spliced systems.

# Standard Polyurethane Skirting

## Specifications and Guidelines

### Temperature Rating

-20°F to 180°F (-30°C to 82°C)

### Skirting Material

65A Polyurethane

### Available Lengths

25' (7.6m)

50' (15.2m)

### Available Thicknesses

3/8" (10 mm)

1/2" (12 mm)

5/8" (16 mm)

3/4" (19 mm)

1" (25 mm)

### Available Heights

4" (100 mm)

6" (150 mm)

8" (200 mm)

10" (250 mm)

12" (300 mm)

## Ordering Information

Standard Polyurethane Skirting with 35 Chamfer - 25' (7.6m)							
Height		Thickness		Length		Ordering Number	Item Code
in	mm	in	mm	ft	m		
4	100	3/8	10	25	7.6	SKPU-4X3/8X25	91288
4	100	1/2	12	25	7.6	SKPU-4X1/2X25	91289
4	100	5/8	16	25	7.6	SKPU-4X5/8X25	91290
4	100	3/4	19	25	7.6	SKPU-4X3/4X25	91291
4	100	1	25	25	7.6	SKPU-4X1X25	91292
6	150	3/8	10	25	7.6	SKPU-6X3/8X25	91298
6	150	1/2	12	25	7.6	SKPU-6X1/2X25	90283
6	150	5/8	16	25	7.6	SKPU-6X5/8X25	91299
6	150	3/4	19	25	7.6	SKPU-6X3/4X25	90284
6	150	1	25	25	7.6	SKPU-6X1X25	91300
8	200	3/8	10	25	7.6	SKPU-8X3/8X25	91304
8	200	1/2	12	25	7.6	SKPU-8X1/2X25	90285
8	200	5/8	16	25	7.6	SKPU-8X5/8X25	91305
8	200	3/4	19	25	7.6	SKPU-8X3/4X25	90286
8	200	1	25	25	7.6	SKPU-8X1X25	91306
10	250	3/8	10	25	7.6	SKPU-10X3/8X25	91310
10	250	1/2	12	25	7.6	SKPU-10X1/2X25	91311
10	250	5/8	16	25	7.6	SKPU-10X5/8X25	91312
10	250	3/4	19	25	7.6	SKPU-10X3/4X25	91313
10	250	1	25	25	7.6	SKPU-10X1X25	91314
12	300	3/8	10	25	7.6	SKPU-12X3/8X25	91320
12	300	1/2	12	25	7.6	SKPU-12X1/2X25	91321
12	300	5/8	16	25	7.6	SKPU-12X5/8X25	91322
12	300	3/4	19	25	7.6	SKPU-12X3/4X25	91323
12	300	1	25	25	7.6	SKPU-12X1X25	91324

Lead time: 1 working day.

Shaded items are made to order; 1-2 week lead time

Standard Polyurethane Skirting with 35 Chamfer - 50' (15.2m)							
Height		Thickness		Length		Ordering Number	Item Code
in	mm	in	mm	ft	m		
4	100	3/8	10	50	15.2	SKPU-4X3/8X50	91293
4	100	1/2	12	50	15.2	SKPU-4X1/2X50	91294
4	100	5/8	16	50	15.2	SKPU-4X5/8X50	91295
4	100	3/4	19	50	15.2	SKPU-4X3/4X50	91296
4	100	1	25	50	15.2	SKPU-4X1X50	91297
6	150	3/8	10	50	15.2	SKPU-6X3/8X50	91301
6	150	1/2	12	50	15.2	SKPU-6X1/2X50	91222
6	150	5/8	16	50	15.2	SKPU-6X5/8X50	91302
6	150	3/4	19	50	15.2	SKPU-6X3/4X50	91223
6	150	1	25	50	15.2	SKPU-6X1X50	91303
8	200	3/8	10	50	15.2	SKPU-8X3/8X50	91307
8	200	1/2	12	50	15.2	SKPU-8X1/2X50	91224
8	200	5/8	16	50	15.2	SKPU-8X5/8X50	91308
8	200	3/4	19	50	15.2	SKPU-8X3/4X50	91225
8	200	1	25	50	15.2	SKPU-8X1X50	91309
10	250	3/8	10	50	15.2	SKPU-10X3/8X50	91315
10	250	1/2	12	50	15.2	SKPU-10X1/2X50	91316
10	250	5/8	16	50	15.2	SKPU-10X5/8X50	91317
10	250	3/4	19	50	15.2	SKPU-10X3/4X50	91318
10	250	1	25	50	15.2	SKPU-10X1X50	91319
12	300	3/8	10	50	15.2	SKPU-12X3/8X50	91325
12	300	1/2	12	50	15.2	SKPU-12X1/2X50	91326
12	300	5/8	16	50	15.2	SKPU-12X5/8X50	91327
12	300	3/4	19	50	15.2	SKPU-12X3/4X50	91328
12	300	1	25	50	15.2	SKPU-12X1X50	91329

Lead time: 1 working day.

Shaded items are made to order; 1-2 week lead time

## Additional Information

Check out our other Skirting Systems, like the Flex-Seal™, Flex-Lok™ or RMC1.

Flex-Seal™



Flex-Lok™



RMC1



Authorized Distributor:



2525 Wisconsin Avenue • Downers Grove, IL 60515-4200 • USA  
Tel: (630) 971-0150 • Fax: (630) 971-1180 • E-mail: info@flexco.com

Visit [www.flexco.com](http://www.flexco.com) for other Flexco locations and products.

