


DUAL SEAL POLYURETHANE SKIRTING

Long Lasting Solution for Spillage and Dust Control

Dual Seal Polyurethane Skirting provides two contact points the entire length of the skirtboard to help prevent material spillage and manage dust emissions for any load zone. Designed to work with each one of Flexco's Skirting Systems our goal is to make sure skirting simple and easy to adjust which leads to long-term savings on clean-up and enables a worker to safely adjust the sealing solution. Our proprietary polyurethane blend provides a softer material to prevent damage to the belt but maintains a high tear resistance to ensure a long functional life no matter the severity of the application.

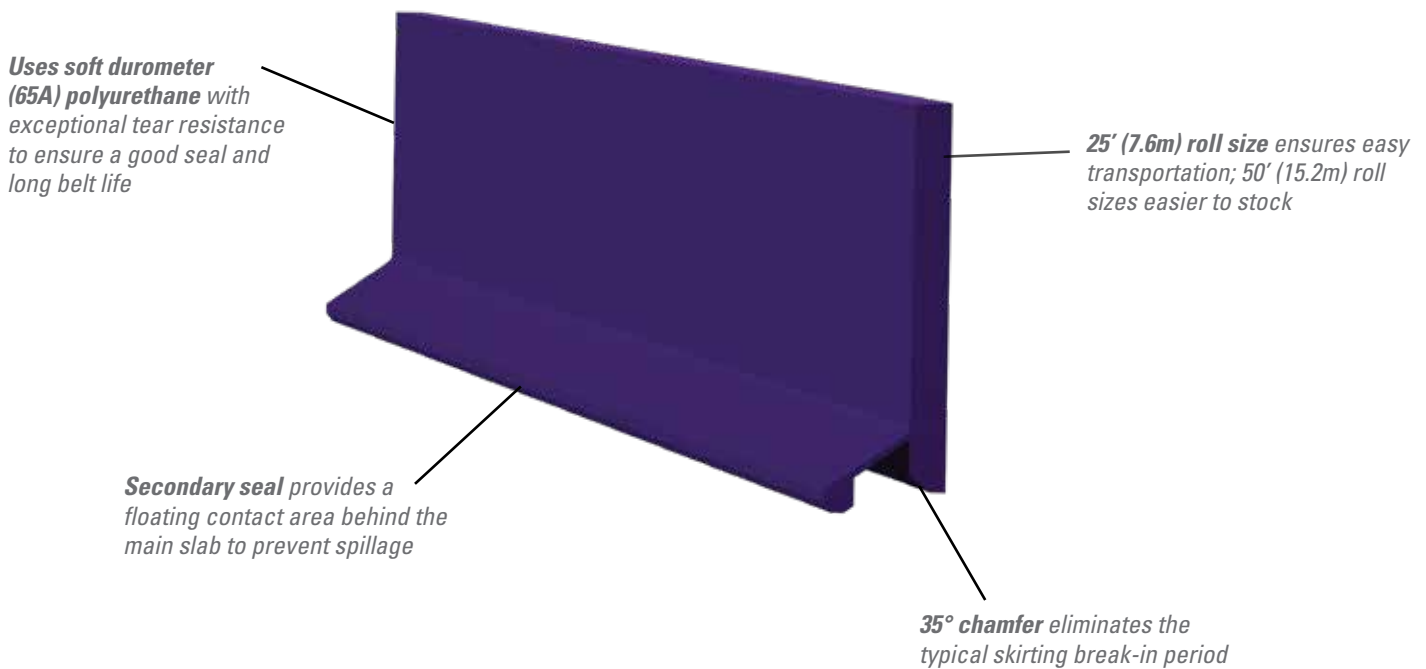

Features and Benefits

- **Long service life.** Polyurethane skirting offers a more wear-resistant material than typical rubber, often providing as much as 3-4 times the wear life in similar applications. The lower coefficient of friction reduces strain on the system.
- **Compatible with all skirting systems.** Works with Flexco series of skirt clamps that offer simple serviceability: RMC1/PAL-Pak, Flex-Lok™, and Flex-Seal™.
- **Suitable for most applications.** Single direction or reversing belts, wet or dry conditions, old or new belts, vulcanized or mechanically-spliced systems.

Standard Polyurethane Skirting

Specifications and Guidelines

Temperature Rating

-20°F to 180°F (-30°C to 82°C)

Skirting Material

65A Polyurethane

Available Lengths

25' (7.6m)

50' (15.2m)

Available Thicknesses

1/2" (12 mm)

3/4" (19 mm)

Available Heights

6" (150 mm)

8" (200 mm)

Ordering Information

Dual Seal Polyurethane Skirting with 35° Chamfer							
Height		Thickness		Length		Ordering Number	Item Code
in	mm	in	mm	ft	m		
6	150	1/2	12	25	7.6	SKPU-DUAL-6X1/2X25	91400
6	150	3/4	20			SKPU-DUAL-6X3/4X25	91401
8	200	1/2	12			SKPU-DUAL-8X1/2X25	91402
8	200	3/4	20			SKPU-DUAL-8X3/4X25	91403
6	150	1/2	12	50	15.2	SKPU-DUAL-6X1/2X50	91404
6	150	3/4	20			SKPU-DUAL-6X3/4X50	91405
8	200	1/2	12			SKPU-DUAL-8X1/2X50	91406
8	200	3/4	20			SKPU-DUAL-8X3/4X50	91407

Lead time: 1 working day.

Shaded items are made to order; 1-2 week lead time

Additional Information

Check out our other Skirting Systems, like the Flex-Seal™, Flex-Lok™ or RMC1.

Flex-Seal™



Flex-Lok™



RMC1



Authorized Distributor:



2525 Wisconsin Avenue • Downers Grove, IL 60515-4200 • USA
Tel: (630) 971-0150 • Fax: (630) 971-1180 • E-mail: info@flexco.com

Visit www.flexco.com for other Flexco locations and products.

©2019 Flexible Steel Lacing Company. 03/19/19. For Reorder: X5775

