

# ANKER® Spiral Lace Fastener System



## Low-Profile, Non-Metallic Splice for Industrial Baking Applications

For applications where a mechanical belt fastener is desired for ease of belt installation or quicker belt cleaning, but for one reason or another a metallic fastener cannot be used, consider Anker® Spiral Lace. Anker Spiral Lace is a low-profile splice that is fabricated into the belt through a variety of splicing techniques. Depending on the installation method it can operate over pulley diameters as small as 10 mm. It is available in white or blue polyester for applications demanding FDA-compliant materials, black polyester for general applications, or PEEK for high temperature applications.




## Spiral Lace Applications

Anker Spiral Lace is a non-metallic splice that is ideal for applications with metal detectors, food or pharmaceutical processing, x-ray equipment, or for applications with delicate product that is easily scratched that require non-marking/non-scratching splices.

## Advantages of a Hinged Splice

Anker Spiral Lace, like other Flexco mechanical splices, is constructed of two fastened belt ends that are joined by a hinge pin. This hinged splice makes installation on the conveyor structure simple as the belt can be fed into proper location, the belt ends meshed together, and the connecting pin inserted. For belts requiring frequent removal, such as regular sanitation for food applications, the hinged splice can save hours of downtime with each cleaning.

## Leader Pins Simplify Pin Insertion

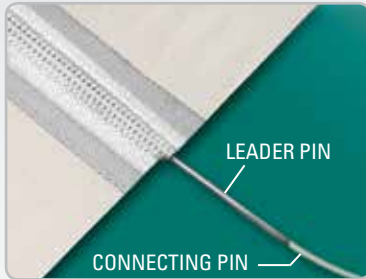

Connecting pin installation can be difficult, given both the small diameter of the pin and the flexibility of the material. To ease and speed this process we offer Leader Pins, which attach a smaller diameter, rigid lead pin to the larger diameter, flexible connecting pin. The lead pin is easily fed through the splice, allowing the actual connecting pin to be pulled through. The use of Leader Pins often reduces pin insertion time by more than 75%.

## ANKER® SPIRAL LACE Fastener System

### ANKER®-Spiral Lace Selection Chart

Fastener Size	Recommended Belt Thickness	Minimum Pulley Diameter	Material	Maximum Temperature	Recommended Diameter Hinge Pin
	mm	mm		°C	mm
50	1,6 - 3,2	10 - 15	Polyester	160	0,8
60 / 160	2,4 - 3,6	30	Polyester	160	0,9
90 / 190	3,2 - 4,6	50	Polyester	160	1,2
100	4,0 - 5,0	90	Polyester	160	1,5
PE-60 + P-80	2,4 - 3,6	30	PEEK	240	0,9 + 1,2

### ANKER®-Spiral Lace Ordering Information

Single Webbing			Double Webbing		
Ordering Number	Colour	Length (m)	Ordering Number	Colour	Length (m)
SE-50/3	white	3,00 m			
SE-50/10	white	10,00 m			
SE-50/30	white	30,00 m			
SEB-50/3	black	3,00 m			
SEB-50/10	black	10,00 m			
SEB-50/30	black	30,00 m			
SE-BLUE-50/3	blue	3,00 m			
SE-BLUE-50/10	blue	10,00 m			
SE-BLUE-50/30	blue	30,00 m			
SE-60/3	white	3,00 m	S-60/3	white	3,00 m
SE-60/10	white	10,00 m	S-60/10	white	10,00 m
SE-60/30	white	30,00 m	S-60/30	white	30,00 m
SEB-60/3	black	3,00 m	SB-60/3	black	3,00 m
SEB-60/10	black	10,00 m	SB-60/10	black	10,00 m
SEB-60/30	black	30,00 m	SB-60/30	black	30,00 m
SE-BLUE-60/3	blue	3,00 m			
SE-BLUE-60/10	blue	10,00 m			
SE-BLUE-60/30	blue	30,00 m			
SE-90/3	white	3,00 m	S-90/3	white	3,00 m
SE-90/10	white	10,00 m	S-90/10	white	10,00 m
SE-90/30	white	30,00 m	S-90/30	white	30,00 m
SEB-90/3	black	3,00 m	SB-90/3	black	3,00 m
SEB-90/10	black	10,00 m	SB-90/10	black	10,00 m
SEB-90/30	black	30,00 m	SB-90/30	black	30,00 m
SE-BLUE-90/3	blue	3,00 m			
SE-BLUE-90/10	blue	10,00 m			
SE-BLUE-90/30	blue	30,00 m			
			S-100/3	white	3,00 m
			S-100/10	white	10,00 m
			S-100/30	white	30,00 m
SE-160/3	white	3,00 m			
SE-160/10	white	10,00 m			
SE-160/30	white	30,00 m			
SE-190/3	white	3,00 m			
SE-190/10	white	10,00 m			
SE-190/30	white	30,00 m			
<b>PEEK - Single Webbing</b>			<b>PEEK - Double Webbing</b>		
Ordering Number	Colour	Length (m)	Ordering Number	Colour	Length (m)
PE-60/3	brown	3,00 m	P-80/3	brown	3,00 m
PE-60/10	brown	10,00 m	P-80/10	brown	10,00 m
PE-60/30	brown	30,00 m	P-80/30	brown	30,00 m

### ANKER® - Hinge Material Polyester

Ordering Number	Colour	Length (m)	Diameter (mm)	Recommended Pin (mm)
Poly 0,80 FDA	white	30,00 m	0,80	1,2 - 1,5 mm
Poly 0,90 FDA	white	30,00 m	0,90	1,2 - 1,5 mm
Poly 1,00 FDA	white	30,00 m	1,00	1,2 - 1,5 mm
Poly 1,20 FDA	white	30,00 m	1,20	1,2 - 1,5 mm
Poly 1,50 FDA	white	30,00 m	1,50	1,8 - 2,0 mm
Poly 0,80 FDA-BLACK	black	30,00 m	0,80	1,2 - 1,5 mm
Poly 1,00 FDA-BLACK	black	30,00 m	1,00	1,2 - 1,5 mm
Poly 1,20 FDA-BLACK	black	30,00 m	1,20	1,2 - 1,5 mm

### ANKER® - Special Pintle Wires

On demand

Authorised Distributor: