


Splice Times as Low as 18 Minutes

The Novitool® Aero® 325 Splice Press and narrow belt templates are the newest time-savers in Flexco's belt splicing lineup. With splice times as quick as 18 minutes, the Aero 325 can repair a live roller or transport belt, as well as other thermoplastic PVC or PU belting, in a third of the time of traditional splice presses. The Aero is easy to use, portable, and produces consistent, higher-quality splices than what you are using today.

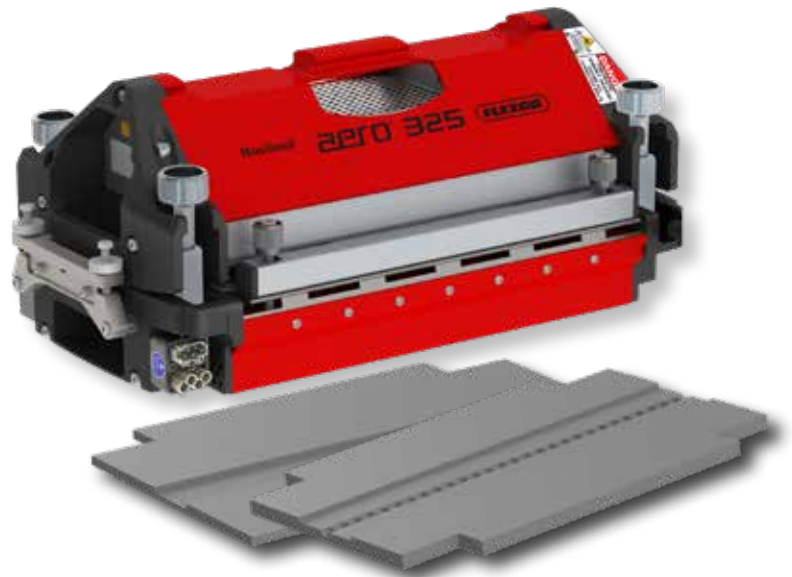

Ideal for various types of belts that drive live rollers and transport totes.

Quick Cycle Time

- Cycle times of 18-20 minutes for live roller and transport belts and 8-12 minutes for standard thermoplastic belting
- Portability, easy setup, and short splice time allows for on-site splicing with little downtime

Easy to Program

- Intuitive, easy to navigate controls
- Over 1,000 splice recipes can be stored on the press

High Quality Splices

- Flexco has designed and constructed the press with the latest technology to ensure the finished splice is the highest quality for splice longevity
- Storage and retrieval of splice recipes ensures consistency from operator to operator, and from tool to tool, for any specified splice parameter

NOVITool® AERO® 325 Splice Press for Live Roller and Transport Tote Applications

Aero® Tool Specifications	
Specifications	Aero® 325
Effective splice length	12.8" / 325 mm
Effective splice width	6" / 150 mm
Upper weight	25.0 lbs (11.5 kg)
Lower weight	29.0 lbs (13.0 kg)
Total weight	54.0 lbs (24.5 kg)
Length	20.5" / 521 mm
Height upper part	6.3" / 160 mm
Height lower part	3.3" / 85 mm
Overall height	9.6" / 245 mm
Max. pressure	28 psi / 2 bar
Max. temperature	392 °F / 200 °C
Max. splice stack-up	0.6" / 15 mm
Temperature ratings	-20C to +40C Operating -25C to +50C Storage
Transport dimensions	35.4" x 16" x 25" 900 mm x 405 mm x 635 mm



Aero® Power Compatibility and Power Cord Specifications			
Power	Plug End	Ordering Number	Item Code
1ph 110V, 15A		AERO-G3-CBL-110V1PH-N5-15	09006
1ph 110V, 20A		AERO-G3-CBL-110V1PH-N5-20	09007
1ph 110V, 20A	N/A	AERO-G3-CBL-110V1PH	09364
1ph 230V, 30A	N/A	AERO-G3-CBL-230V1PH	09365
1ph 230V, 30A		AERO-G3-CBL-230V1PH-NL6-30	09010
3ph 230V, 20A		AERO-G3-CBL-230V3PH-NL15-20	09011
3ph 230V, 30A		AERO-G3-CBL-230V3PH-L15-30	09020
3ph 230V, 16A	N/A	AERO-G3-CBL-230V3PH	09366

Ordering Information - Aero® 325 Splice Press and Belt Templates		
Description	Ordering Number	Item Code
Aero 325 Splice Press	AERO-325	09552
Aero 325 Splice Press with End Belt Clamps	AERO-325-END-BELT-CLAMP	09600
77mm Wide with Notched V-Guide	AERO-325-77MM-VNOTCHED-TMPLT	09593
45mm Wide Gates TPU F160, Habasit TF102-T, Nitta CFTG	AERO-325-45MM-PWRTRANS-TMPLT	09594

Contact Flexco to learn about other belt template offerings.

Authorized Distributor:

2525 Wisconsin Avenue • Downers Grove, IL 60515-4200 • USA
Tel: (630) 971-0150 • Fax: (630) 971-1180 • E-mail: info@flexco.com

Visit www.flexco.com for other Flexco locations and products.

©2020 Flexible Steel Lacing Company, 04-16-20. For reorder: X6164

