


300 Series Belt Cutter

Instructions

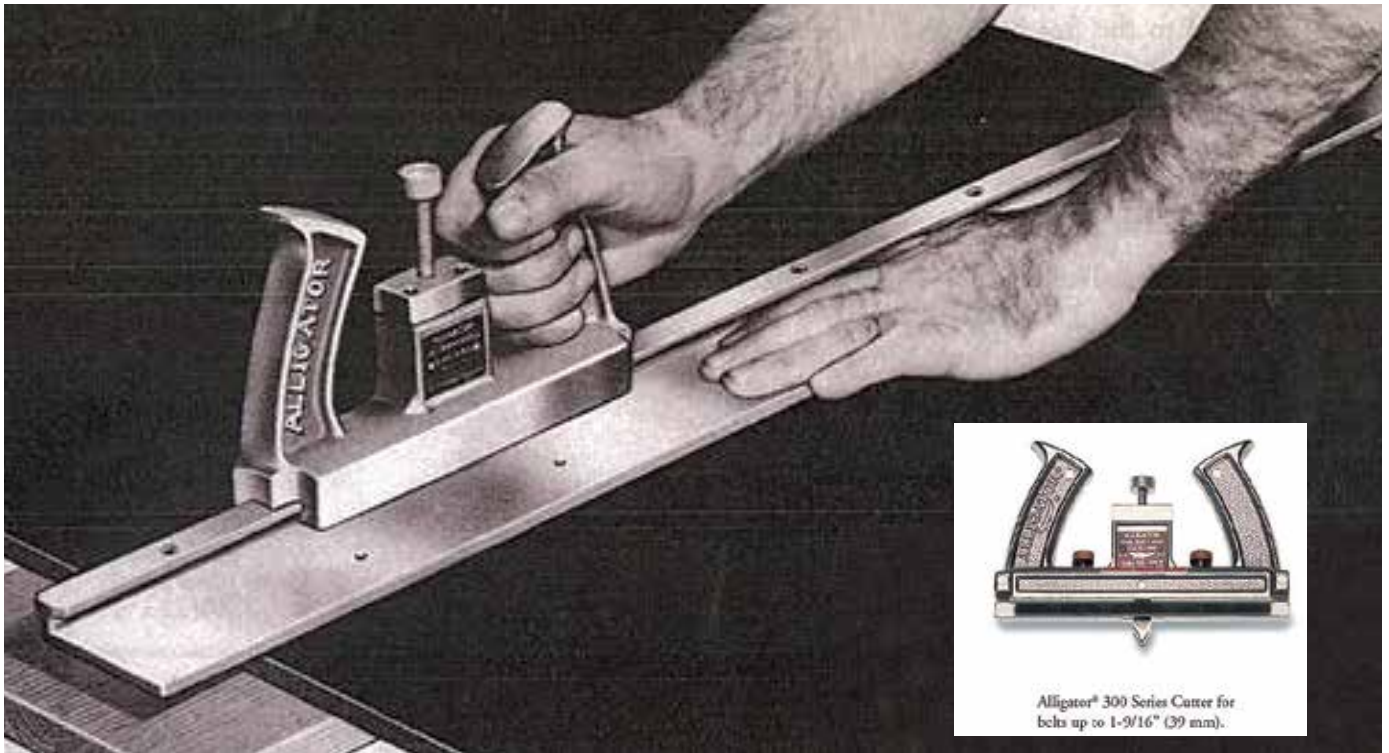

⚠ WARNING: Keep fingers and hands away from razor sharp blade.

1. Square belt using center line method and mark cut line.
2. Support the section of the belt which is to be cut on a wood board. Place the base square on the belt and align with marked cut line. Nail the cutter base to the belt and board.
3. Set the point of the cutting blade flush with the belt cover and give the blade adjustment screw about a quarter turn. Push and pull the cutting head across the belt with the other person.
4. After each stroke give the blade adjustment screw about a quarter turn to lower the blade. Just a few rapid strokes and the cut is complete.
5. Turn blade adjustment screw in opposite direction until blade is fully enclosed in the cutter head.

New Door No. 51 • Anna Salai, Nagalkeni • Pammal Village • Chennai - 600 044 • Tamil Nadu • India
Tel: +91-44-4856-6762 • E-mail: info.india@flexco.com

Visit www.flexco.com for other Flexco locations and products.

©2020 Flexible Steel Lacing Company. 07-14-20. For Reorder: W1033

