


FXC™ Steel Cord Belt Fastening System

Uptime When It Matters Most

Don't let downtime on critical steel cord belts drain valuable time and money. The FXC™ Steel Cord Belt Fastening System (FXC™) from Flexco® can be installed immediately when faced with significant belt damage or when pulling a belt onto the conveyor system. While waiting for a vulcanized splice to be scheduled, this mechanical fastener can be installed with minimal downtime to get the belt up and running quickly.

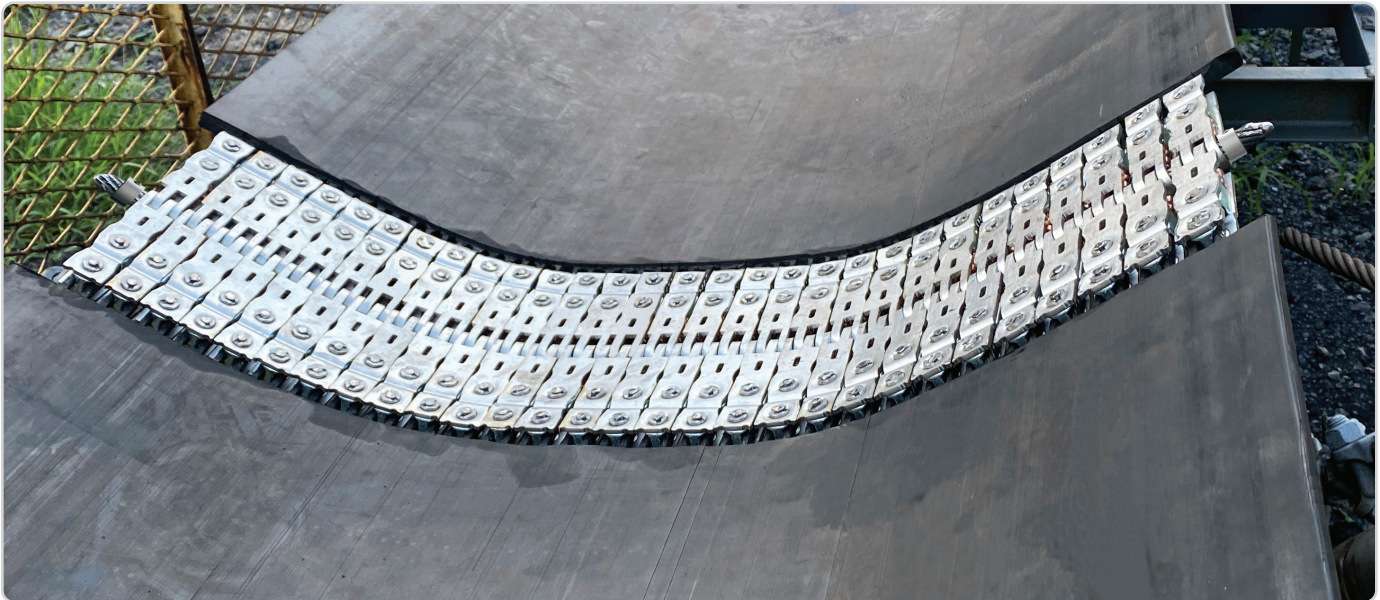

Applications

- **Temporary Splice:** The FXC™ can be installed quickly when there is a splice failure or significant belt damage so the operation can get back up and running until a vulcanized splice is installed. This installation takes approximately five hours with four workers on a 72 in. (1800mm) wide belt.
- **Belt Pull:** The FXC™ can be used to pull a belt onto the conveyor system quickly and efficiently. Belt pull kits use the same components as a temporary splice but quantities may be reduced depending on belt pull tension requirements. This installation takes approximately three hours with four workers on a 72 in. (1800mm) wide belt.



FXC™ Steel Cord Belt Fastening System

Features and Benefits

Engineered Solution

Developed and rigorously tested to perform on standard operating belt tensions.

On-Site Availability

Having the FXC™ Steel Cord Belt Fastening System solution at your facility makes repairs quick and convenient to avoid extended downtime.

Quick Installation


This product was engineered to allow any team to get a steel cord belt back into operation in as little as half of a workday.

Durable

High quality components designed to ensure strong performance while awaiting vulcanization.

Pre-Splice Capability

The FXC™ can be prepared ahead of time on a new roll of belt for minimizing downtime.

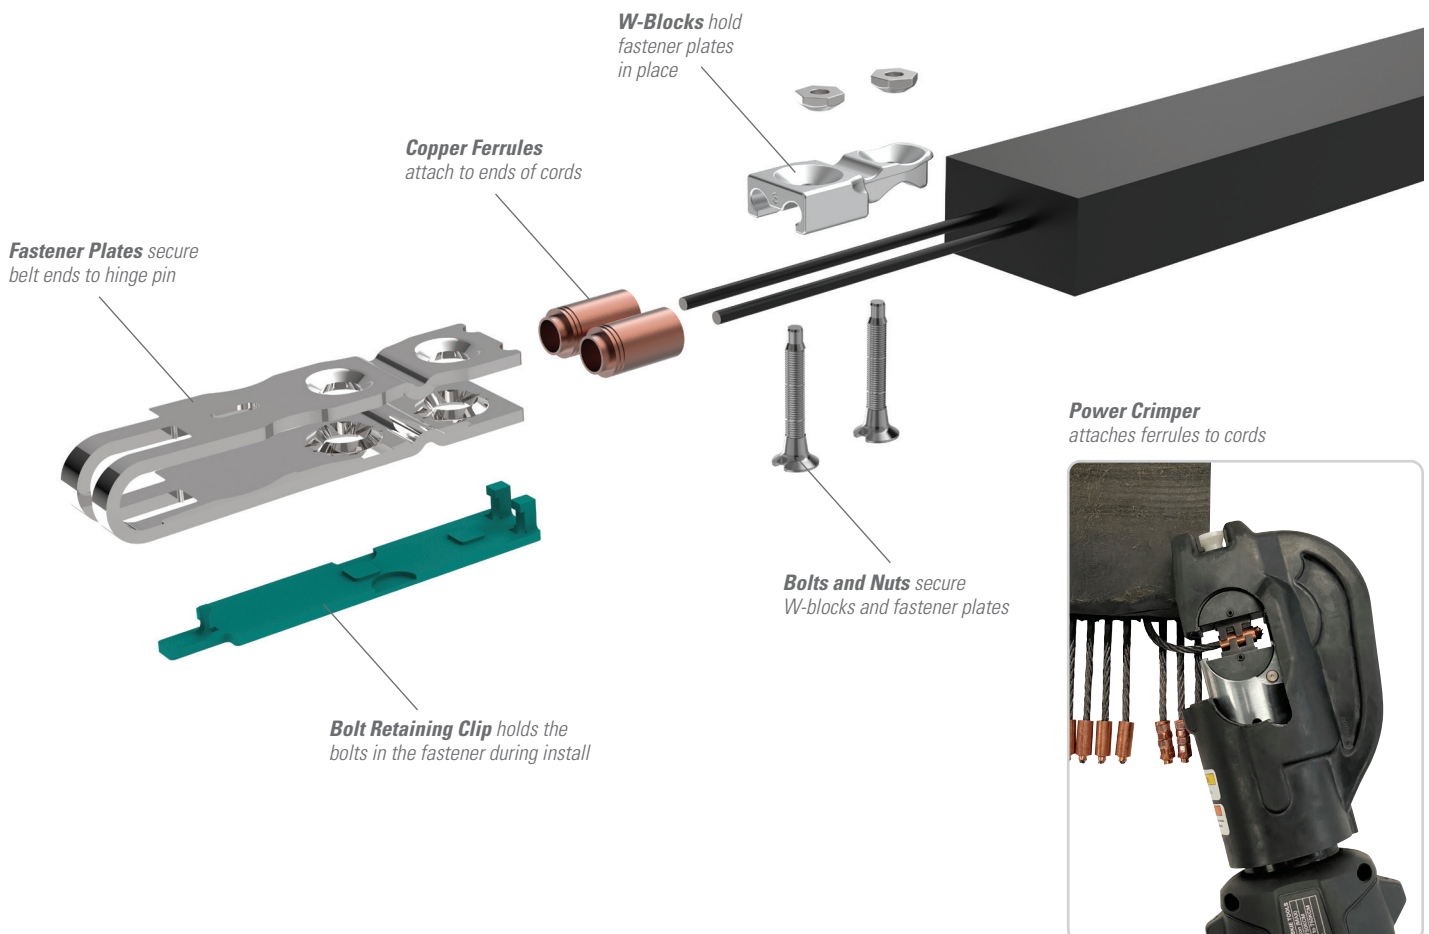




FXC™ Steel Cord Belt Fastening System



Steps To Install

1. Remove the top and bottom covers and strip the rubber from the belt cords.
2. Crimp the ferrules onto the cords of the belt. (Figure A)
3. Place the W-blocks and fastener plates onto the steel cords. (Figure B)
4. Secure W-blocks and fastener plates with nuts and bolts.
5. Break or grind off bolt ends and peen flat.
6. Join belt ends together and insert the hinge pin. (Figure C)
7. For temporary splice only, cover splice with filler rubber.

For detailed installation instructions, please see the Instruction and Operations Manual.

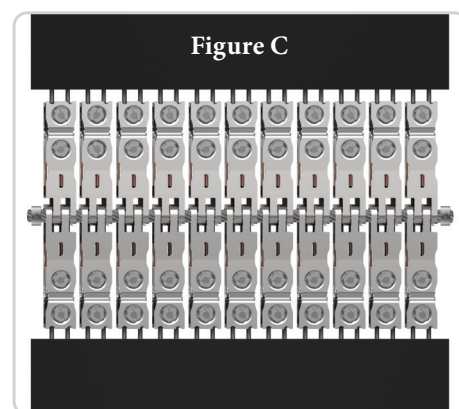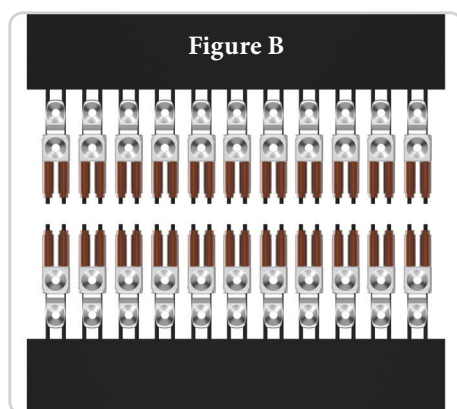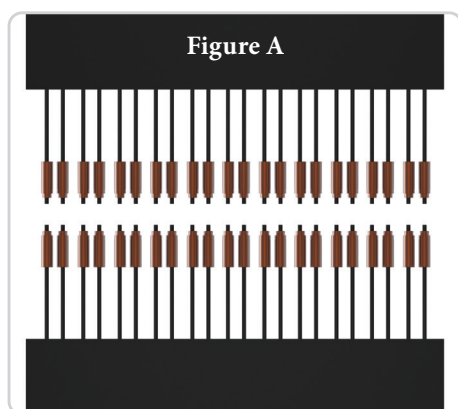

FXC™ STEEL CORD BELT FASTENING SYSTEM

Ordering Information

Because there are many different steel cord belt constructions, a data sheet is used to collect information so a custom splice kit can be made for a specific belt. The key information needed for creating a splice kit is below. The FXC™ data sheet can be found on its product page on the Flexco website. Once completed, please submit to info@flexco.com for kit creation and quoting.

- | | | |
|-----------------------------------|------------------------------|---------------------------------------|
| 1) Belt Rating (ST500 to ST2500) | 3) Cord Pitch (11mm to 23mm) | 5) Belt Width (No Width Restrictions) |
| 2) Cord Diameter (2.5mm to 7.0mm) | 4) Total Number of Cords | 6) Overall Belt Thickness |

FXC™ Steel Cord Belt Fastener Tool Kit *(Ordered separately)*

FXC™ Tool Kit Ordering Information		
Description	Ordering Number	Item Code
FXC Installation Tool Kit - With Batteries and Charger*	FXC-ITK	111282
FXC Installation Tool Kit - Without Batteries and Charger**	FXC-ITKG	111187

*For Shipment in North America Market
 **For Shipment to Markets outside of North America



Powered Crimper and Crimper Dies			
Description	Ordering Number	Item Code	Included with Full Tool Kit
12 Ton Crimper With 2 Batteries and 1 Charger*	FXC-PCB	111081	1 (with 111282)
12 Ton Crimper Without Batteries or Charger**	FXC-PC	111144	1 (with 111187)
Powered Crimper Die Holder Base - 1 Set	FXC-DH-2	111224	1 Pair
Crimper Die for A-B Ferrules - 1 Set	FXC-CD-AB	111056	Included with Splice Kits (Not in Tool Kit)
Crimper Die for C-D Ferrules - 1 Set	FXC-CD-CD	111057	
Crimper Die for E-F-G Ferrules - 1 Set	FXC-CD-EFG	111058	
Crimper Die for H-I-J Ferrules - 1 Set	FXC-CD-HIJ	111059	
2 Spare Crimper Batteries and 1 Charger	FXC-PCBK	111143	(Spare Only)
Spare Crimper Battery - Single	FXC-1BATT	111145	(Spare Only)

*For Shipment in North America Market
 ** For Shipment to Markets outside of North America

Hand Tools For Fastener Installation			
Description	Ordering Number	Item Code	Included with Full Tool Kit
H100 Hex Driver - Single	H100	30446	3 Total Hex Drivers
Quick Change Chuck - Single	5552	30481	3 Total Chucks
Hand Crimper - Single	FXC-HC	111218	3 Total Hand Crimpers
Bolt Breakers - 1 Pair	110-112	30595	1 Pair
6 lb. Hammer - Single	6FH	30375	1 Hammer
Setting Plate - Single	ST-28	50249	1 Setting Plate

Light green shaded areas indicate **Tools Required for Installation**

Belt Preparation Components			
Description	Ordering Number	Item Code	Included with Full Tool Kit
Straight Oscillating Blade - 20 Blades Total	FXC-SOB-20	111146	20 Total Blades
Round Oscillating Blade - 2 Blades Total	FXC-ROB	111149	2 Total Blades
Pointed Oscillating Blade - 10 Blades Total	FXC-POB	111186	10 Total Blades
Oscillating Blade Sharpener - Single	FXC-OBSH	111217	1 Sharpener
Deburr (Flap) Disc - 2 Total	FXC-CDW	111220	2 Deburr (Flap) Discs
Crimped Wire Wheel - 2 Total	FXC-CCW	111222	2 Crimped Wire Wheels
Cord Nipper - Single	FXC-CN	111223	1 Cord Nipper
Angle Grinder Adapter - Single	FXC-AGA	111225	1 Adapter

Liquid Urethane Splice Cover Materials			
Description	Ordering Number	Item Code	Available on request with Temporary Splice Kit (not in tool kit)
4 lb. Liquid Urethane Kit	FILLRUBBER-4	111227	Available on request with Temporary Splice Kit (not in tool kit)
4 oz. Liquid Urethane Primer*	FXC-FRP	112087	
Tape for Liquid Urethane**	FXC-FRT	111392	

*One can of primer required for temporary splices up to 60" (1500mm) wide belt. Over 60" (1500mm) wide belt requires two cans of primer.

**One roll of tape required for temporary splices up to 60" (1500mm) wide belt. Over 60" (1500mm) wide belt requires two rolls of tape.

Visit www.flexco.com for other Flexco locations and products, or to find an authorized distributor.

