


# FXC™ Steel Cord Belt Fastening System Data Sheet

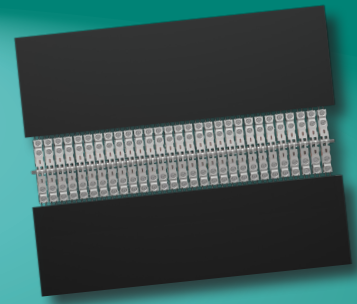

FXC™ Splice Kit creation relies on the accuracy and completeness of the data provided by the customer to deliver optimal results. Any inaccuracies in data may impact product performance and functionality.

## Customer Information

Date:		
Site Name:	Site Location:	
Site Contact:	Phone Number:	E-mail Address:
Distributor Name:		
Contact Person:	Phone Number:	E-mail Address:

## Belt Information

Belt Name/Rating:	Cord Diameter:	Cord Pitch:
		Overall Belt Thickness:
Belt Width:	Total Number of Cords (if known):	Top and Bottom Cover Thickness:

## Proposed Application (Select One)

Temporary Splice: <input type="checkbox"/>	Pull new belt on system: <input type="checkbox"/>
If yes, provide length of time to serve as a temporary:	<b>REQUIRED FOR BELT PULL:</b> Belt Pull Tension (in metric tonnes):
<b>Note: Temporary splices REQUIRE filler rubber. If not purchased with splice kit, customer must provide.</b>	For North America, use tons:
Include Flexco-supplied filler rubber with quote? YES <input type="checkbox"/> NO <input type="checkbox"/>	

**Note: Different belt specs may prevent the ability to join the belt together for a temporary splice and/or pulling a belt on the system.**