

Product Handbook

Effective May 1, 2025

BCPPHB2

Belt Conveyor Products



Av. Jorge Alessandri 11.500 – Edificio 7
Megacentro San Bernardo, San Bernardo, Santiago, Chile
Phone: 56-2-2896-7870
Email: ventaslatam@flexco.com

www.flexco.com

Patents: www.flexco.com/patents

Pages 2–3 intentionally omitted.

Pages 2–3 intentionally omitted.

Table of Contents

Belt Cleaners

Belt Cleaner Information and Selection Guide.....	6
--	----------

Precleaners

EZP1 Standard, Twist Tensioner and Hi-Temp Precleaners; ConShear™ Replacement Blades.....	11
EZP-LS Limited Space Precleaner.....	25
MSP Standard Mine-Duty Precleaner & ConShear™ Replacement Blades.....	34
MMP Medium Mine-Duty Precleaner & TuffShear™ Replacement Blades.....	41
MHP Heavy Mine-Duty Precleaner & MegaShear™ Replacement Blades	49
MHCP Heavy-Duty Cartridge Precleaner & SuperShear™ Replacement Blades	58
MXP Extreme-Duty Precleaner & UltraShear™ Replacement Blades	61
H-Type® Precleaners.....	65

Secondary Cleaners

EZS2 Secondary Cleaners	76
Y-Type™ Secondary Cleaners.....	80
P-Type® & P-Type LS (Limited Space) Secondary Cleaners	88
R-Type® Reversing Secondary Cleaners	92
FMS Medium-Duty Secondary Cleaner	95
MHS HD Secondary Cleaners	98
MHS HD Secondary Cleaners with Enhanced Service Advantage™ Cartridge	107
MHS HD Secondary Cleaners with Service Advantage™ Cartridge – Legacy Replacement Parts	110
U-Type® Secondary Cleaners	111
MDWS DryWipe Secondary Cleaner	114
Motorized Brush Cleaner	118
Chevron Belt Cleaner	121
Continuous Blade Secondary Cleaner	122

Optional Mounting Kits and Accessories

Optional Mounting Kits	129
Spring Tensioner Accessories.....	130

Belt Cleaner Accessories

Inspection Door	131
Spray Pole Systems.....	133
Wash Box	134
Stabilizing Roller Bracket Kits	136
Live-Shaft Hold-down Rollers	137
Optional Installation Tools	138
Legacy Belt Cleaner Parts – H-Type® and I-Type™	139

Table of Contents

Replacement Blades for Other OEM Cleaners

ConShear™ Replacement Blades for Other OEM Cleaners.....	141
Martin Engineering	143
Arch/Gordon	147
Superior Exterra®	149
ASGCO	150
Argonics	151
Stephens-Adamson Metso/Trellex	152
Martin Engineering Durt Hawg®	153
Martin Engineering Durt Tracker®	154

Belt Plows

V-Plows and Diagonal Plows.....	156
---------------------------------	-----

Slider and Impact Beds

Belt Support Systems.....	160
Belt Support Bar	160
Flexco Slider and Impact Beds.....	161
EZSB-C & EZSB-I Slider Beds; EZIB-L & EZIB-M Impact Beds; Modular Impact Beds; Adjustable Idler Sets	162
DRX® Impact Beds	180
DRX™ 200, DRX™ 750, and DRX™ 1500 Impact Beds; DRX™ 3000 and DRX™ 4500 Dynamic Beds.....	181
Optional Parts and Tools.....	191

Belt Positioners and Trainers

Belt Positioner™, PTEZ™, PT Smart™, and PT Max™	192
---	-----

Skirting Systems

Enclosed Skirting, Standard Urethane Skirting; Skirt Clamps – RMC1, Flex-Lok™, and FlexSeal™.....	210
---	-----

Belt Maintenance Tools

Flex-Lifter™, Flexco Belt Cutters, and Belt Clamps	220
--	-----

Pulley Lagging

Flex-Lag® Rubber, Full and Medium Ceramic, Adhesives, Weld-on™ Rubber and Ceramic.....	228
--	-----

Index	234
--------------------	------------

Belt Cleaner Information and Selection Guide

Why Are Belt Cleaners Needed?

- **Saves Money**

- Increases belt wear life.
- Extends life of rollers, pulleys and splices.
- High cost of accidents.



- **Reduces Maintenance Costs**

- Minimizes manual cleanup.
- Protects against belt mistracking.
- Reduces conveyor component replacement costs.
- Reducing carryback from 3% to 1% means a 67% reduction in maintenance costs.

- **Keeps Conveyors Running Efficiently and Consistently**

- Reduces unscheduled downtime.
- Increases production uptime.


- **Improves Safety**

- Reduces housekeeping problems.
- 42% of conveyor-related accidents happen while maintenance tasks are being done.

Types of Belt Cleaners

- **Precleaners**

- Mounted on the head pulley.
- Mounted below the material flow.
- Blade is always narrower than the belt width.
- Ideally, the blade covers just the belt's material path.
- Removes the big stuff. Typically cleans off up to 80% of the initial carryback.

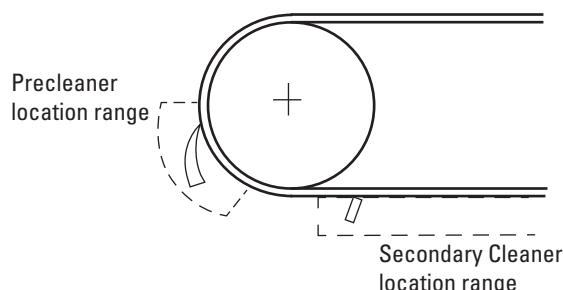

- **Secondary Cleaners**

- Located just past where the belt leaves the head pulley and anywhere down the beltline.
- Special secondaries may allow for mounting under the head pulley.
- Blade width is always the belt width or wider.
- Removes sticky fines – the final cleaning job.
- Cleaning efficiencies can be 90% +.
- May require a hold-down roller for maximum performance.


- **Specialty Cleaners**

- Precleaners or Secondaries designed especially for specific or extreme applications.

Definition of Terms

- **Carryback** – Material that sticks to the belt after it leaves the transfer point and continues falling off along the conveyor's return side.
- **Material Path** – The section of the belt where most of the material is conveyed. Typically the center 2/3 of the belt.
- **Hold-Down Roller** – A stabilizing roller or pressure roller located on top of the return side of the belt to prevent belt flap or to provide a consistent flat surface for the blades on a lighter-tensioned belt.

Types of Cleaner Blades

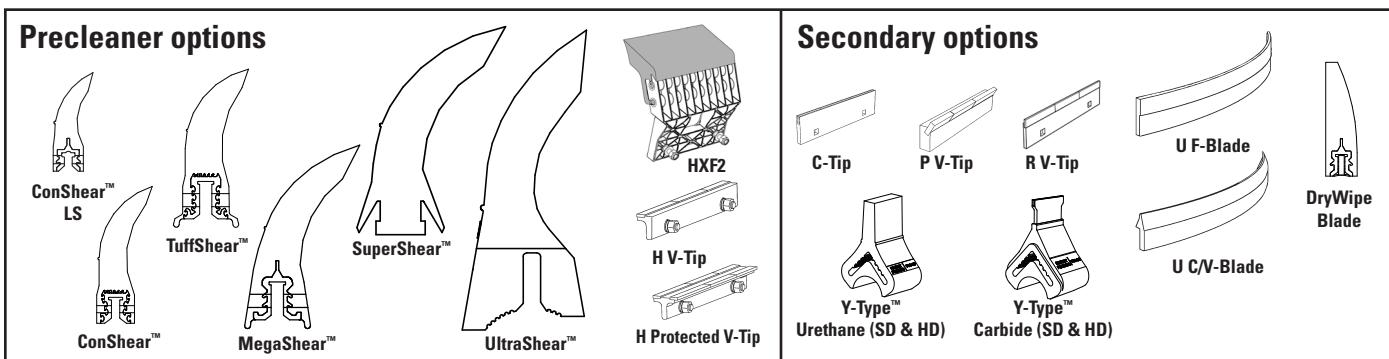

F-Tip/Blade - for mechanically fastened belts


V-Tip/Blade - for vulcanized belts only

C-Tip/Blade - for both

Polyurethane Blades

Not all polyurethanes are the same. Flexco's polyurethane blades are specially formulated for abrasion resistance and long wear. Independent testing has shown that Flexco's polyurethane blades last as much as 30% longer than other OEM blades.

- Easy on the belt.
- Work well with mechanical splices.
- Economical.
- Specialty formulations for high heat, chemical resistance, or water removal.




Less advanced polyurethane formulations result in blades that experience quicker wear and provide less efficient cleaning.

Tungsten Carbide


Excellent for superior cleaning efficiency and long wear. The quality and application of carbides can vary. Flexco has invested years of research and testing to develop tungsten carbide tips for both vulcanized and mechanically fastened belts. And a quality process ensures consistent results.

- Superior cleaning.
- Long wear.
- C-Tips/blades for mechanical splices and V-Tips/blades for vulcanized belts.

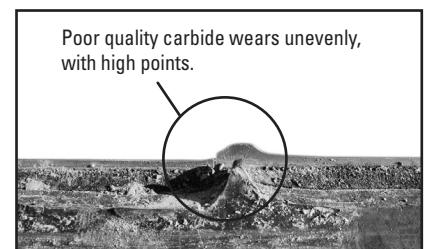

The "Material Path" Option (for Precleaners)

For optimal cleaning and reduced blade retensioning, the cleaner blade width should be sized to fit the material path of the belt. The material path is typically the center 2/3 of the belt width. Choosing a blade only slightly wider than the material path can decrease differential blade wear which reduces blade retensioning maintenance, as well as reducing the frequency of blade replacement.

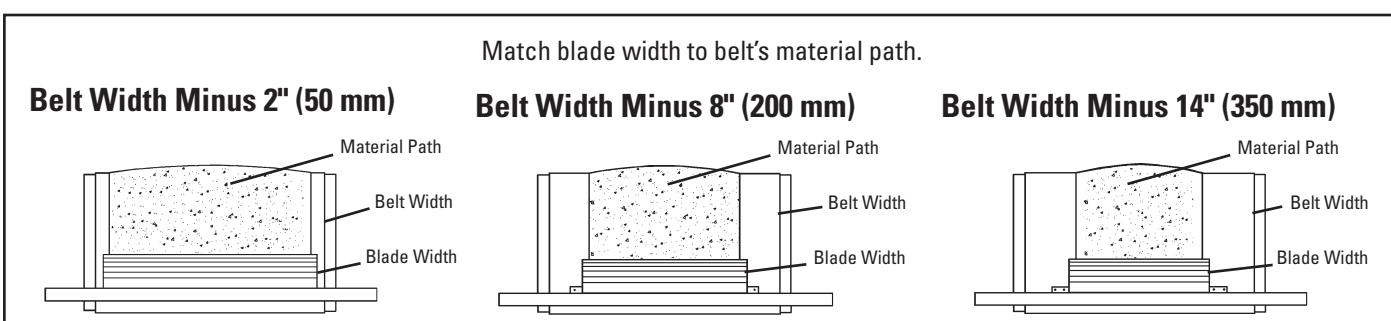

Blade Angle (Secondary Cleaners)



- 1. Aggressive** – excellent cleanability, high risk for belt damage.
- 2. 90° to belt** – good cleaning efficiency; must have good blade relief for splices.
- 3. Wiping** – a little less cleaning power; safer on belts in poor condition or with poor mechanical splices.

Belt Cleaning Systems

Many applications will require more than one belt cleaner to do a satisfactory cleaning job. A typical system includes a precleaner (to knock off the initial flow of carryback), one or more secondary cleaners (to take off the sticky fines) and many times, a final specialty cleaner (to remove the water).


Keys to Good Belt Cleaning

- Proper cleaner selection for the application
- Correct installation
- Regular service maintenance

Spec'ing and Ordering Belt Cleaners

Information needed:

- A. Belt width
- B. Conveyor frame (structure) width
- C. Head pulley diameter
- D. For precleaners – what is the belt's material path
- E. Material conveyed (dry, wet, sticky, etc.)
- F. Type of belt splice:
 - Mechanical – skived or unskived
 - Vulcanized
- G. Temperature or other extreme environmental factors
- H. Does the belt reverse

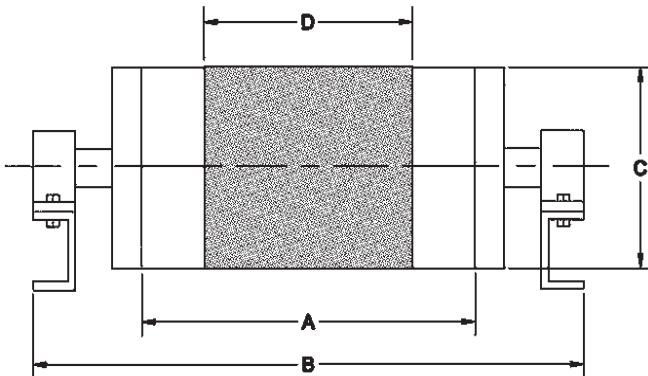

Precleaner Selection Guide

Precleaner Specification Chart

Application Description	EZP-LS	EZP1	MSP	MMP	MHP	MHCP	MXP
Belt Width*	12–60" (300–1500 mm)	12–72" (300–1800 mm)	24–84" (600–2100 mm)	24–96" (600–2400 mm)	24–96" (600–2400 mm)	24–96" (600–2400 mm)	42–120" (1050–3000 mm)
Belt Speed	500 FPM (2.5 m/s)	700 FPM (3.5 m/s)	700 FPM (3.5 m/s)	1000 FPM (5 m/s)	1500 FPM (7.5 m/s)	1200 FPM (6 m/s)	2000 FPM (10 m/s)
Head Pulley Diameter	6–22" (150–550 mm)	10–36" (250–900 mm)	16–42" (400–1050 mm)	16–48" (400–1200 mm)	20–84" (500–2100 mm)	20–84" (500–2100 mm)	48–96" (1200–2400 mm)
Reversing Belts	Yes						
Mechanical Fasteners	Yes						

Precleaner Specification Chart (cont.)

Application Description	H-Type® (XF2- & XF-Tips)	H-Type® (V-Tips)	High Temp (V-Tips)	HV2 (V-Tips)
Belt Width*	18–72" (450–1800 mm)	18–72" (450–1800 mm)	18–48" (450–1200 mm)	18–72" (450–1800 mm)
Belt Speed	1000 FPM (5 m/s)	1500 FPM (7.5 m/s)	1000 FPM (5 m/s)	1500 FPM (7.5 m/s)
Head Pulley Diameter	10–47" (250–1175 mm)	10–67" (250–1675 mm)	8–35" (200–875 mm)	10–67" (250–1675 mm)
Reversing Belts	Yes	Yes	Yes	Yes
Mechanical Fasteners	Yes	No	No	No

*Special sizes available upon request.

Precleaner Blade Specifications

Blade Type	ConShear™ LS	ConShear™ LS High Temp	ConShear™ LS White (Chemical Resistant/Food Grade)‡	ConShear™	ConShear™ High Temp	ConShear™ White (Chemical Resistant/Food Grade)‡	ConShear Ultra High Temp	TuffShear™	TuffShear™ High Temp	Mega-Shear™
Belt Speed	500 FPM (2.5 m/s)	500 FPM (2.5 m/s)	500 FPM (2.5 m/s)	700 FPM (3.5 m/s)	700 FPM (3.5 m/s)	700 FPM (3.5 m/s)	700 FPM (3.5 m/s)	1000 FPM (5 m/s)	1000 FPM (5 m/s)	1500 FPM (7.5 m/s)
Temperature Range	-30 to 180°F (-35 to 82°C)	up to 275°F (135°C) with spikes to 325°F (163°C)	-30 to 180°F (-35 to 82°C)	-30 to 180°F (-35 to 82°C)	up to 275°F (135°C) with spikes to 325°F (163°C)	-30 to 180°F (-35 to 82°C)	up to 400°F (200°C) with spikes to 450°F (232°C)	-30 to 180°F (-35 to 82°C)	up to 275°F (135°C) with spikes to 325°F (163°C)	-30 to 180°F (-35 to 82°C)
Polyurethane	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Durometer	83	93	83	83	93	83	90	83	93	83
Tungsten Carbide	No	No	No	No	No	No	No	No	No	No
Mechanical Fasteners	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

†All ingredients used in the polyurethane formulation of this blade comply with the relevant requirements of 21 CFR (FDA Code of Federal Regulations) for use in repeated bulk dry food applications.

Precleaner Blade Specifications

Blade Type	Super-Shear™	UltraShear™	HXF	HXF2	H V-Tip	H Protected V-Tip	HV2 Tip	Protected HV2 Tip
Belt Speed	1200 FPM (6 m/s)	2000 FPM (10 m/s)	700 FPM (3.5 m/s)	700 FPM (3.5 m/s)	1000 FPM (5 m/s)	1000 FPM (5 m/s)	1500 FPM (7.5 m/s)	1500 FPM (7.5 m/s)
Temperature Range	-30 to 180°F (-35 to 82°C)	-30 to 275°F (-35 to 135°C)	-30 to 180°F (-35 to 82°C)	-30 to 180°F (-35 to 82°C)	-30 to 400°F (-35 to 205°C)			
Polyurethane	Yes	Yes	Yes	Yes	No	No	No	No
Durometer	93	93	84	83	N/A	N/A	N/A	N/A
Tungsten Carbide	No	No	No	No	Yes	Yes	Yes	Yes
Mechanical Fasteners	Yes	Yes	Yes	Yes	No	No	No	No

Secondary Cleaner Selection Guide

SECONDARY CLEANER SPECIFICATION CHART

Application Description	Y-Type SD Polyurethane	Y-Type SD Carbide	Y-Type HD Polyurethane	Y-Type HD Carbide	EZS2	EZS2 High Temp	FMS (C-Tip)	FMS (V-Tip)	MHS (C-Tip)	MHS (V-Tip)
Belt Width*	18–48" (450–1200 mm)	18–48" (450–1200 mm)	36–72" (900–1800 mm)	36–72" (900–1800 mm)	18–72" (450–1800 mm)	18–72" (450–1800 mm)	18–84" (450–2100 mm)	18–84" (450–2100 mm)	18–96" (450–2400 mm)	18–96" (450–2400 mm)
Belt Speed	600 FPM (3 m/s)	600 FPM (3 m/s)	750 FPM (3.8 m/s)	750 FPM (3.8 m/s)	700 FPM (3.5 m/s)	700 FPM (3.5 m/s)	1200 FPM (6 m/s)	1200 FPM (6 m/s)	1200 FPM (6 m/s)	1500 FPM (7.5 m/s)
Reversing Belts	Yes	Yes	Yes	Yes	No	No	No	No	Yes	Yes
Mechanical Fasteners	Yes	No	Yes	No						

*Special sizes available upon request.

SECONDARY CLEANER SPECIFICATION CHART (cont.)

Application Description	MDWS	P-Type® (C-Tip)	P-Type (V-Tip)	U-Type® (F-Blade)	U-Type (C-Blade)	R-Type® (C-Tip)	R-Type (V-Tip)	Chevron	Brush Cleaner
Belt Width*	18–72" (450–1800 mm)	18–72" (450–1800 mm)	18–72" (450–1800 mm)	18–84" (450–2100 mm)	18–84" (450–2100 mm)	18–72" (450–1800 mm)	18–72" (450–1800 mm)	18–84" (450–2100 mm)	18–84" (450–2100 mm)
Belt Speed	1600 FPM (6 m/s)	1000 FPM (5 m/s)	1200 FPM (6 m/s)	1000 FPM (5 m/s)	1300 FPM (6.6 m/s)	1000 FPM (5 m/s)	1000 FPM (5 m/s)	500 FPM (2.5 m/s)	700 FPM (3.5 m/s)
Reversing Belts	Yes	No	No	No	No	Yes	Yes	Yes	No
Mechanical Fasteners	Yes	Yes	No	Yes	Yes	Yes	No	Yes	Yes


*Special sizes available upon request.

SECONDARY CLEANER BLADE SPECIFICATIONS



Blade Type	C-Tip	P V-Tip	R V-Tip	Y-Type Polyurethane (Purple)	Y-Type Polyurethane (White)	Y-Type Carbide	DryWipe Blade
Temperature Range	-30 to 400°F (-35 to 205°C)	-30 to 400°F (-35 to 205°C)	-30 to 400°F (-35 to 205°C)	-30 to 180°F (-35 to 82°C)			
Polyurethane	No	No	No	Yes	Yes	No	Yes
Durometer	N/A	N/A	N/A	86A	83A	N/A	59
Tungsten Carbide	Yes	Yes	Yes	No	No	Yes	No
Mechanical Fasteners	Yes	No	No	Yes	Yes	Yes	Yes

SECONDARY CLEANER BLADE SPECIFICATIONS

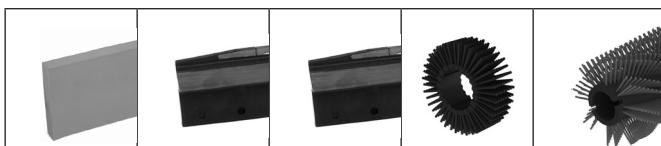

Blade Type	U F-Blade	U C-Blade	U V-Blade	Chevron	Brush Cleaner
Temperature Range	-30 to 180°F (-35 to 82°C)	-20 to 180°F (-30 to 82°C)			
Polyurethane	Yes	Rubber	Rubber	Rubber	Poly-propylene
Durometer	90	84	83	N/A	N/A
Tungsten Carbide	No	Yes	Yes	No	No
Mechanical Fasteners	Yes	Yes	No	Yes	Yes

Product Ordering Information

EZP1
Precleaner

Belt Width Minus 2" (50 mm)

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
12	300	10	250	EZP1-212	75610	49.4
18	450	16	400	EZP1-218	75611	55.3
24	600	22	550	EZP1-224	75612	61.2
30	750	28	700	EZP1-230	75613	67.1
36	900	34	850	EZP1-236	75614	73.0
42	1050	40	1000	EZP1-242	75615	78.9
48	1200	46	1150	EZP1-248	75616	84.8
54	1350	52	1300	EZP1-254	75617	90.7
60	1500	58	1450	EZP1-260	75618	96.6
72	1800	70	1750	EZP1-272	75771	102.5

Lead time: 1 working day



Belt Width Minus 8" (200 mm)

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
12	300	—	—	—	—	—
18	450	10	250	EZP1-818	75779	51.3
24	600	16	400	EZP1-824	75780	57.2
30	750	22	550	EZP1-830	75781	63.1
36	900	28	700	EZP1-836	75782	69.0
42	1050	34	850	EZP1-842	75783	74.9
48	1200	40	1000	EZP1-848	75784	80.8
54	1350	46	1150	EZP1-854	75785	86.7
60	1500	52	1300	EZP1-860	75786	92.6
72	1800	64	1600	EZP1-872	75774	98.5

Lead time: 1 working day

Product Notes:

- For optimal cleaning and reduced blade retensioning maintenance, the cleaner blade width should be sized to fit the material path of the belt. The material path is typically 2/3 of the belt width. In most cases a blade size of belt width minus 8" (200 mm) may be the best selection.
- Each cleaner can be retrofitted with three replacement blade sizes (belt width minus 2" (50 mm), 8" (200 mm), or 14" (350 mm)).
- Comes complete with universal mounting plates and tensioner.
- Visual tension check. No guesswork on blade tensioning. Simply measure the spring, check label on tensioner and turn adjusting nut to restore optimal tension.
- Works with mechanical splices. Polyurethane blade glides over splices.
- Compatible with reversing belts.
- For replacement parts see the EZP1 Parts List on page 19.
- For applications requiring longer pole lengths, go to the minus 8" (200 mm) chart and select the cleaner one belt width size larger. This will provide a pole 6" (150 mm) longer and a blade size of belt width minus 2" (50 mm).

Product Ordering Information

EZP1T
Precleaner
with Twist Tensioner

Belt Width Minus 2" (50 mm)

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
12	300	10	250	EZP1T-212	78488	38.5
18	450	16	400	EZP1T-218	78489	44.5
24	600	22	550	EZP1T-224	78490	50.5
30	750	28	700	EZP1T-230	78491	56.5
36	900	34	850	EZP1T-236	78492	62.5
42	1050	40	1000	EZP1T-242	78493	68.4
48	1200	46	1150	EZP1T-248	78494	74.4
54	1350	52	1300	EZP1T-254	78495	83.7
60	1500	58	1450	EZP1T-260	78496	92.0
72	1800	70	1750	EZP1T-272	78497	101.6

Lead time: 1 working day



Belt Width Minus 8" (200 mm)

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
12	300	—	—	—	—	—
18	450	10	250	EZP1T-818	78498	41.8
24	600	16	400	EZP1T-824	78499	47.8
30	750	22	550	EZP1T-830	78500	53.8
36	900	28	700	EZP1T-836	78501	59.8
42	1050	34	850	EZP1T-842	78502	65.8
48	1200	40	1000	EZP1T-848	78503	71.7
54	1350	46	1150	EZP1T-854	78504	78.5
60	1500	52	1300	EZP1T-860	78505	87.0
72	1800	64	1600	EZP1T-872	78506	98.9

Lead time: 1 working day

Product Notes:

- For optimal cleaning and reduced blade retensioning maintenance, the cleaner blade width should be sized to fit the material path of the belt. The material path is typically 2/3 of the belt width. In most cases a blade size of belt width minus 8" (200 mm) may be the best selection.
- Each cleaner can be retrofitted with three replacement blade sizes (belt width minus 2" (50 mm), 8" (200 mm), or 14" (350 mm)).
- Comes complete with universal mounting plates and tensioner.
- Visual tension check. No guesswork on blade tensioning. Simply measure the spring, check label on tensioner and turn adjusting nut to restore optimal tension.
- Works with mechanical splices. Polyurethane blade glides over splices.
- Compatible with reversing belts.
- For replacement parts see the EZP1T Parts List on page 20.
- For applications requiring longer pole lengths, go to the minus 8" (200 mm) chart and select the cleaner one belt width size larger. This will provide a pole 6" (150 mm) longer and a blade size of belt width minus 2" (50 mm).

Product Ordering Information

EZP1 High-Temp Precleaner

Belt Width Minus 2" (50 mm) - Yellow Blade

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
12	300	10	250	HTF212	76658	49.4
18	450	16	400	HTF218	76659	55.3
24	600	22	550	HTF224	76660	61.2
30	750	28	700	HTF230	76661	67.1
36	900	34	850	HTF236	76662	73.0
42	1050	40	1000	HTF242	76663	78.9
48	1200	46	1150	HTF248	76664	84.8
54	1350	52	1300	HTF254	76665	90.7
60	1500	58	1450	HTF260	76666	96.6
72	1800	70	1750	HTF272	76667	102.5

Pole Diameter – 2-3/8" (60 mm)

Lead time: 1 working day



Product Notes:

- The High-Temp ConShear™ Precleaner works in temperatures up to 275°F (135°C) with spikes to 325°F (164°C).
- Comes complete with universal mounting plates and tensioner.
- Visual tension check. No guesswork on blade tensioning. Simply measure the spring, check label on tensioner and turn adjusting nut to restore optimal tension.
- Works with mechanical splices. Polyurethane blade glides over splices.
- For replacement parts see the EZP1 Parts List on page 19.
- Compatible with reversing belts.

Product Ordering Information

EZP1 Ultra High-Temp Precleaner

Belt Width Minus 2" (50 mm) - Red Blade

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
12	300	10	250	EZP1-UHT212	91226	49.4
18	450	16	400	EZP1-UHT218	91227	55.3
24	600	22	550	EZP1-UHT224	91228	61.2
30	750	28	700	EZP1-UHT230	91229	67.1
36	900	34	850	EZP1-UHT236	91230	73.0
42	1050	40	1000	EZP1-UHT242	91231	78.9
48	1200	46	1150	EZP1-UHT248	91232	84.8
54	1350	52	1300	EZP1-UHT254	91233	90.7
60	1500	58	1450	EZP1-UHT260	91234	96.6
72	1800	70	1750	EZP1-UHT272	91235	102.5

Lead time: 1 working day



Belt Width Minus 8" (200 mm) - Red Blade

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
18	450	10	250	EZP1-UHT818	91236	51.3
24	600	16	400	EZP1-UHT824	91237	57.2
30	750	22	550	EZP1-UHT830	91238	63.1
36	900	28	700	EZP1-UHT836	91239	69.0
42	1050	34	850	EZP1-UHT842	91240	74.9
48	1200	40	1000	EZP1-UHT848	91241	80.8
54	1350	46	1150	EZP1-UHT854	91242	86.7
60	1500	52	1300	EZP1-UHT860	91243	92.6
72	1800	64	1600	EZP1-UHT872	91244	98.5

Lead time: 1 working day

Belt Width Minus 14" (350 mm) - Red Blade

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
24	600	10	250	EZP1-UHT1424	91245	53.2
30	750	16	400	EZP1-UHT1430	91246	59.1
36	900	22	550	EZP1-UHT1436	91247	65.0
42	1050	28	700	EZP1-UHT1442	91248	70.9
48	1200	34	850	EZP1-UHT1448	91249	76.8
54	1350	40	1000	EZP1-UHT1454	91250	82.7
60	1500	46	1150	EZP1-UHT1460	91251	88.6
72	1800	58	1450	EZP1-UHT1472	91252	94.5

Lead time: 1 working day

Product Notes:

- For optimal cleaning and reduced blade retensioning maintenance, the cleaner blade width should be sized to fit the material path of the belt. The material path is typically 2/3 of the belt width. In most cases a blade size of belt width minus 8" (200 mm) may be the best selection.
- Each cleaner can be retrofitted with three replacement blade sizes (belt width minus 2" (50 mm), 8" (200 mm), or 14" (350 mm)).
- Comes complete with universal mounting plates and tensioner.
- Visual tension check. No guesswork on blade tensioning. Simply measure the spring, check label on tensioner and turn adjusting nut to restore optimal tension.
- Works with mechanical splices. Polyurethane blade glides over splices.
- Compatible with reversing belts.

Product Ordering Information

EZP1
Precleaner
with White ConShear™ (Food Grade) Blade

Belt Width Minus 2" (50 mm) - White Blade

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
12	300	10	250	EZP1-212W	78934	49.4
18	450	16	400	EZP1-218W	78935	55.3
24	600	22	550	EZP1-224W	78936	61.2
30	750	28	700	EZP1-230W	78937	67.1
36	900	34	850	EZP1-236W	78938	73.0
42	1050	40	1000	EZP1-242W	78939	78.9
48	1200	46	1150	EZP1-248W	78940	84.8
54	1350	52	1300	EZP1-254W	78941	90.7
60	1500	58	1450	EZP1-260W	78942	96.6
72	1800	70	1750	EZP1-272W	78943	99.4

Lead time: 1 working day



Product Notes:

- All ingredients used in polyurethane formulation comply with the relevant requirements of 21 CFR (FDA Code of Federal Regulations) for use in repeated bulk dry food applications.
- Comes complete with universal mounting plates and tensioner.
- Visual tension check. No guesswork on blade tensioning. Simply measure the spring, check label on tensioner and turn adjusting nut to restore optimal tension.
- Works with mechanical splices. Polyurethane blade glides over splices.
- For replacement parts see the EZP1 Parts List on page 19.
- Compatible with reversing belts.

ConShear™ Replacement Blades

EZP1
Precleaners

Standard ConShear™ Blades

BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
10	250	CRB10	75628	4.6
16	400	CRB16	75629	7.3
22	550	CRB22	75630	10.1
28	700	CRB28	75631	12.8
34	850	CRB34	75632	15.5
40	1000	CRB40	75633	18.3
46	1150	CRB46	75634	21.0
52	1300	CRB52	75635	23.8
58	1450	CRB58	75636	26.5
64	1600	CRB64	75775	29.2
70	1750	CRB70	75773	32.0
76	1900	CRB76	76940	34.7
82	2050	CRB82	76941	37.5

Other blade sizes available upon request.

Lead time: 1 working day

High-Temp ConShear™ Blades - Yellow

BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
10	250	CRB-HT10	76593	4.8
16	400	CRB-HT16	76594	7.6
22	550	CRB-HT22	76595	10.4
28	700	CRB-HT28	76596	13.2
34	850	CRB-HT34	76597	16.2
40	1000	CRB-HT40	76598	19.1
46	1150	CRB-HT46	76599	21.9
52	1300	CRB-HT52	76600	24.8
58	1450	CRB-HT58	76601	27.6
64	1600	CRB-HT64	76602	30.5
70	1750	CRB-HT70	76603	33.4

Lead time: 1 working day

Chemical Resistant/Food Grade ConShear™ Blades - White ‡

BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
10	250	CRB-W10	78471	4.8
16	400	CRB-W16	78472	7.6
22	550	CRB-W22	78473	10.4
28	700	CRB-W28	78474	13.2
34	850	CRB-W34	78475	16.2
40	1000	CRB-W40	78476	19.1
46	1150	CRB-W46	78477	21.9
52	1300	CRB-W52	78478	24.8
58	1450	CRB-W58	78479	27.6

Lead time: 1 working day

‡ All ingredients used in the polyurethane formulation of this blade comply with the relevant requirements of 21 CFR (FDA Code of Federal Regulations) for use in repeated bulk dry food applications.

Ultra High-Temp ConShear™ Blades - Red

BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
10	250	CRB-UHT10	91253	4.6
16	400	CRB-UHT16	91254	7.3
22	550	CRB-UHT22	91255	10.1
28	700	CRB-UHT28	91256	12.8
34	850	CRB-UHT34	91257	15.5
40	1000	CRB-UHT40	91258	18.3
46	1150	CRB-UHT46	91259	21.0
52	1300	CRB-UHT52	91260	23.8
58	1450	CRB-UHT58	91261	26.5
64	1600	CRB-UHT64	91262	29.2
70	1750	CRB-UHT70	91263	32.0

Lead time: 1 working day

Product Notes:

- Take blade width and ordering number from the worn blade and use the Replacement Blade Chart.
- For optimal cleaning and reduced blade retensioning maintenance, the cleaner blade width should be sized to fit the material path of the belt. The material path is typically 2/3 of the belt width. In most cases a blade size of belt width minus 8" (200 mm) may be the best selection.
- The ConShear™ blade has a faceted profile that renews the cleaning edge as it wears.
- Visual tension check. No guesswork on blade tensioning. Simply measure the spring, check label on tensioner and turn adjusting nut to restore optimal tension.
- ConShear™ blades are made of a special long-wearing polyurethane.
- A molded-in blade wear line indicates when the blade is worn out and needs to be replaced.
- Blade replacement is quick. Pull one pin, remove the old blade and slide the new one in.

Blade Width Selection

BELT WIDTH		BELT WIDTH - 2" (50mm)		BELT WIDTH - 8" (200mm)		BELT WIDTH - 14" (350mm)	
in.	mm	in.	mm	in.	mm	in.	mm
12	300	10	250	N/A	N/A	N/A	N/A
18	450	16	400	10	250	N/A	N/A
24	600	22	550	16	400	10	250
30	750	28	700	22	550	16	400
36	900	34	850	28	700	22	550
42	1050	40	1000	34	850	28	700
48	1200	46	1150	40	1000	34	850
54	1350	52	1300	46	1150	40	1000
60	1500	58	1450	52	1300	46	1150
72	1800	70	1600	64	1600	58	1450


Specifications & Guidelines

EZP1 & EZP1T
Precleaners

Pole Length Specifications

CLEANER SIZE		POLE LENGTH		MAXIMUM CONVEYOR SPAN	
in.	mm	in.	mm	in.	mm
12	300	42	1050	37	925
18	450	48	1200	43	1075
24	600	54	1350	49	1225
30	750	60	1500	55	1375
36	900	66	1650	61	1525
42	1050	72	1800	67	1675
48	1200	78	1950	73	1825
54	1350	88	2200	83	2075
60	1500	94	2350	89	2225
72	1800	106	2650	101	2525


Pole Diameter – 2-3/8" (60 mm)

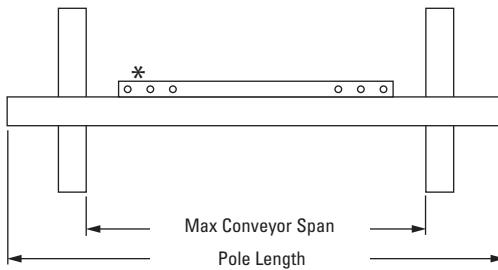

*Each pole size can be used with a blade size either belt width minus 2" (50 mm), 8" (200 mm), or 14" (350 mm).

Clearance Guidelines for Installation


HORIZONTAL CLEARANCE REQUIRED		VERTICAL CLEARANCE REQUIRED	
in.	mm	in.	mm
4	100	9 1/2	238



EST Spring Length Chart

Blade Width		Purple Spring		Silver Spring		Black Spring	
In.	mm	In.	mm	In.	mm	In.	mm
10	250	5 3/4	146	6 1/4	159	N/A	N/A
16	400	5 1/4	133	6	152	N/A	N/A
22	550	4 3/4	121	5 7/8	149	N/A	N/A
28	700	4 1/4	108	5 5/8	143	N/A	N/A
34	850	N/A	N/A	5 3/8	137	5 5/8	143
40	1000	N/A	N/A	5 1/8	130	5 1/2	140
46	1150	N/A	N/A	5	127	5 1/4	133
52	1300	N/A	N/A	4 3/4	121	5 1/8	130
58	1450	N/A	N/A	N/A	N/A	5	127
64	1600	N/A	N/A	N/A	N/A	4 3/4	121
70	1750	N/A	N/A	N/A	N/A	4 5/8	117

Shading indicates preferred spring option



Twist Tensioner Chart

BLADE WIDTH in.	mm	STANDARD		HEAVY DUTY
		STANDARD	HEAVY DUTY	
10	250	8	6	
16	400	13	9	
22	550	18	12	
28	700	23	16	
34	850	27	19	
40	1000	32	23	
46	1150	37	26	
52	1300	N/A	29	
58	1450	N/A	33	
64	1600	N/A	36	
70	1750	N/A	40	


Specifications:

- Maximum Belt Speed 700 FPM (3.5 m/s)
- Temperature Rating ConShear™, ConShear™ White: -30 to 180°F (-35 to 82°C)
ConShear™ High-Temp: up to 275°F (135°C), spikes to 325°F (164°C)
ConShear™ Ultra High-Temp: up to 400°F (200°C), spikes to 450°F (232°C)
- Minimum Pulley Diameter..... 10" (250 mm)
- Blade Height..... 7-1/4" (185 mm)
- Usable Blade Wear Length..... 4" (100 mm)
- Blade Material..... Polyurethane (proprietary blend for abrasion resistance and long wear)
- Available for Belt Widths 12 to 72" (300 to 1800 mm)
- CEMA Cleaner Rating Class 2

Specifications & Guidelines

EZP1 & EZP1T
Precleaners

Pole Location Specs

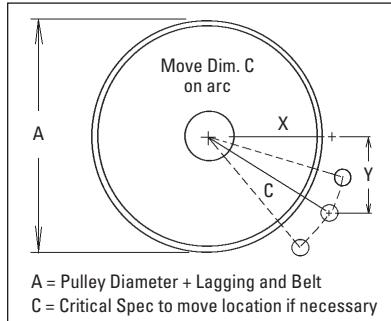


Pole Location Chart

A		X		Y		C	
in	mm	in	mm	in	mm	in	mm
10	250	3	74	9	230	9 1/2	242
11	275	3 3/4	92	9	230	9 3/4	248
12	300	4 3/8	108	9	230	10	254
13	325	5 3/8	131	9	230	10 1/2	265
14	350	5 7/8	146	9	230	10 3/4	273
15	375	6 3/8	166	9	230	11 1/4	284
16	400	7 1/8	179	9	230	11 1/2	291
17	425	7 7/8	195	9	230	12	301
18	450	8 1/4	207	9	230	12 1/4	309
19	475	9	223	9	230	12 3/4	320
20	500	9 3/8	235	9	230	13	329
21	525	10	249	9	230	13 1/2	339
22	550	10 3/4	266	9	230	14	352
23	575	11 3/8	283	9	230	14 1/2	365
24	600	12	299	9	230	15	377
25	625	12 5/8	314	9	230	15 1/2	390
26	650	13 1/4	330	9	230	16	402
27	675	13 7/8	346	9	230	16 1/2	415
28	700	14 3/8	360	9	230	17	427
29	725	15	374	9	230	17 1/2	439
30	750	15 5/8	389	9	230	18	452
31	775	16 1/8	403	9	230	18 1/2	464
32	800	16 3/4	417	9	230	19	477
33	825	17 1/4	432	9	230	19 1/2	489
34	850	17 7/8	446	9	230	20	501
35	875	18 3/8	460	9	230	20 1/2	514
36	900	19	474	9	230	21	526

Replacement Parts List

EZP1
Precleaner

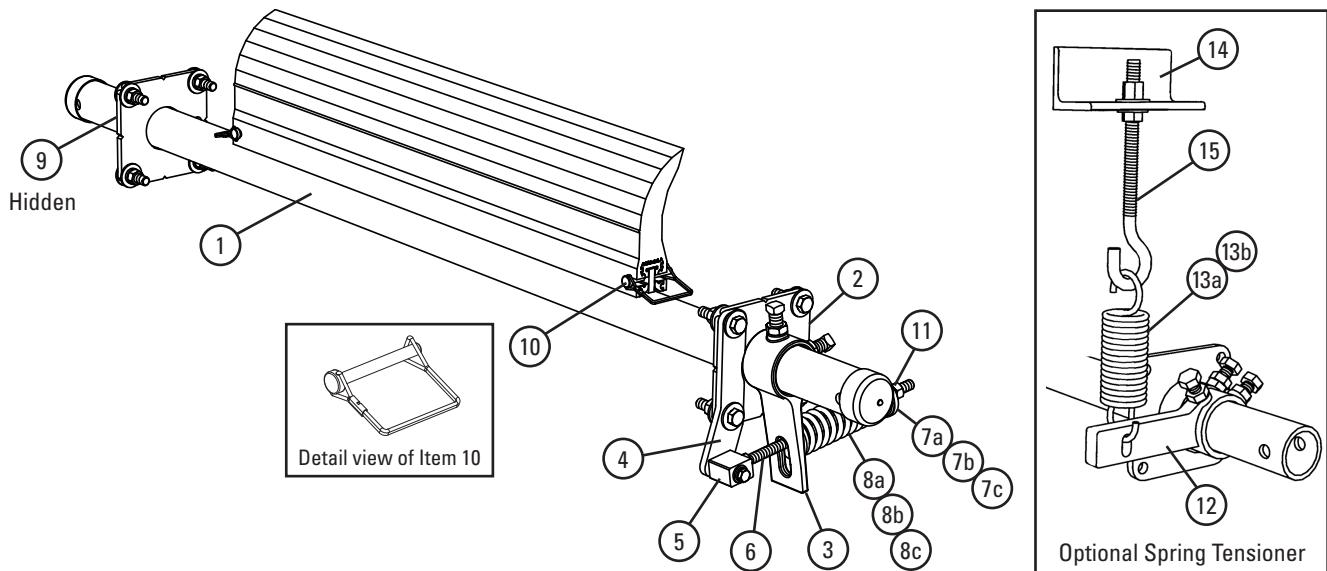

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	12" (300mm) Pole	EZP1P12	75619	17.4
	18" (450mm) Pole	EZP1P18	75620	20.3
	24" (600mm) Pole	EZP1P24	75621	22.7
	30" (750mm) Pole	EZP1P30	75622	26.5
	36" (900mm) Pole	EZP1P36	75623	30.4
	42" (1050mm) Pole	EZP1P42	75624	32.7
	48" (1200mm) Pole	EZP1P48	75625	35.3
	54" (1350mm) Pole	EZP1P54	75626	39.2
	60" (1500mm) Pole	EZP1P60	75627	43.3
	72" (1800mm) Pole	EZP1P72	75772	48.2
2	Mounting Plate Kit* (2 ea.)	EZP1MPK	75637	7.7
3	Torque Arm Kit* (1 ea.)	ESTAK-EST	76406	3.6
4	Pivot Shaft Bracket Kit* (1 ea.)	ESPSBK	76407	1.8
5	Pivot Block Kit*	ESPBK	76408	0.7
6	Pivot Rod Kit*	ESPRK	76409	1.2
7a	Bushing Kit – Purple/Silver (incl. (2) bushings)	ESBK-PS	76410	0.1
7b	Bushing Kit – Black (incl. (2) bushings)	ESBK-B	76411	0.1
7c	EST Bushing Kit - UHT (incl. (2) bushings)	ESBK-ATEX	90264	0.1
8a	Tension Spring – Purple	QMTS-P	75845	1.0
8b	Tension Spring – Silver	ESS-S	76412	1.2
8c	Tension Spring – Black	ESS-B	76413	1.4
9	Pole Lock* (1 ea.)	EZP1PL	75641	1.1
–	EST Tensioner–Purple* (incl. (1) ea. items 3, 4, 5, 6, 7a & 8a)	EST-P	76403	7.7
–	EST Tensioner–Silver* (incl. (1) ea. items 3, 4, 5, 6, 7a & 8b)	EST-S	76404	7.9
–	EST Tensioner–Black* (incl. (1) ea. items 3, 4, 5, 6, 7b & 8c)	EST-B	76405	8.1
–	EST Ultra High Temp Tensioner–Purple* (incl. (1) ea. items 3, 4, 5, 6, 7c & 8a)	EST-A-P	90814	7.7
–	EST Ultra High Temp Tensioner–Silver* (incl. (1) ea. items 3, 4, 5, 6, 7c & 8b)	EST-A-S	90815	7.9
–	EST Ultra High Temp Tensioner–Black* (incl. (1) ea. items 3, 4, 5, 6, 7c & 8c)	EST-A-B	90816	8.1
10	Blade Pin (1 ea.)	EZP1BP	75642	0.1
11	Jam Nut Kit, EST Tensioner	JNK-A	79891	0.3

*Hardware Included

Lead time: 1 working day

Optional Spring Tensioner & Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
12	Tension Arm Kit* (1 ea.)	HAR-K	78786	6.0
13	Tension Spring (1 ea.) (for sizes 12–30" (300–750mm))	STTS	74419	1.4
13a	HD Tension Spring (1 ea.) (for sizes 36–72" (900–1800mm))	HDTSS	74502	2.0
14	Spring Tension J-Bolt Mount (1 ea.)	STJM	74775	3.0
15	J-Bolt Kit* (1 ea.)	STJK	74417	0.7
–	Optional Spring Tensioner Kit* (for sizes 12–30" (300–750mm))	EZP10TK1	76418	11.2
–	Optional Spring Tensioner Kit* (for sizes 36–72" (900–1800mm))	EZP10TK2	76419	11.8

*Hardware Included

Lead time: 1 working day

Spring Tensioner Selection Chart


CLEANER BLADE WIDTH	76403 EST-P	76404 EST-S	76405 EST-B
ConShear™ 12–28" (300–700mm)	X		
ConShear™ 34–52" (850–1300mm)		X	
ConShear™ 58–70" (1450–1750mm)			X

Spring Tensioner Selection Chart - EST UHT

CLEANER BLADE WIDTH	90814 EST-A-P	90815 EST-A-S	90816 EST-A-B
UHT ConShear™ 10–28" (250–700mm)	X		
UHT ConShear™ 34–52" (850–1300mm)		X	
UHT ConShear™ 58–70" (1450–1750mm)			X

Replacement Parts List

EZP1T
Precleaner
with Twist Tensioner

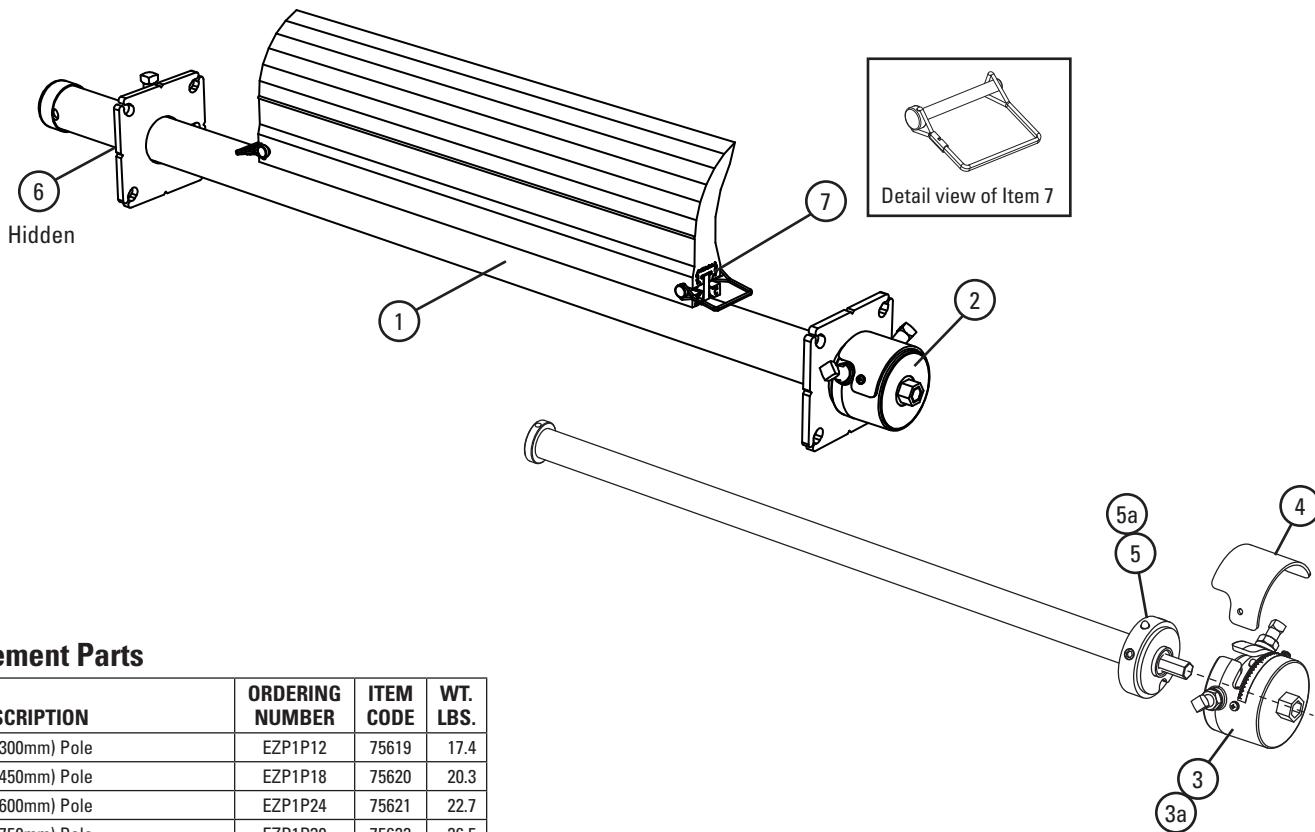

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	12" (300mm) Pole	EZP1P12	75619	17.4
	18" (450mm) Pole	EZP1P18	75620	20.3
	24" (600mm) Pole	EZP1P24	75621	22.7
	30" (750mm) Pole	EZP1P30	75622	26.5
	36" (900mm) Pole	EZP1P36	75623	30.4
	42" (1050mm) Pole	EZP1P42	75624	32.7
	48" (1200mm) Pole	EZP1P48	75625	35.3
	54" (1350mm) Pole	EZP1P54	75626	39.2
	60" (1500mm) Pole	EZP1P60	75627	43.3
	72" (1800mm) Pole	EZP1P72	75772	48.2
2	Torsion Mounting Plate Kit* (2 ea.)	EZPTMPK	78507	8.7
3	Torsion Cap Kit* (1 ea.) (incl. (1) ea. item 4)	EZPTCK	78508	3.2
3a	Torsion Cap Kit HD* (1 ea.) (incl. (1) ea. item 4)	EZPTCKHD	78509	3.2
4	Torsion Shield	EZPTSR	78510	0.1
5	Torsion Spring Kit	EZPTSK	78511	6.0
5a	Torsion Spring Kit HD	EZPTSKHD	78512	8.5
6	Pole Lock* (1 ea.)	EZP1PL	75641	1.1
-	Torsion Bar Tensioner (incl. (1) ea. items 3, 4, & 5)	EZPTBT	77384	17.4
-	Torsion Bar Tensioner HD (incl. (1) ea. items 3a, 4, & 5a)	EZPTBTHD	77385	20.0
7	Blade Pin (1 ea.)	EZP1BP	75642	0.1

*Hardware Included

Lead time: 1 working day

Torsion Bar Tensioner Selection Chart

CLEANER BLADE WIDTH	77384 EZPTBT	77385 EZPTBTHD
ConShear™ 12–48" (300–1200mm)	X	
ConShear™ 54–72" (1350–1800mm)		X

Product Ordering Information

EZP1 Stainless Steel Precleaner with White ConShear™ (Food Grade) Blade

Belt Width Minus 2" (50 mm) - White Blade

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
12	300	10	250	CFG-212	78838	49.4
18	450	16	400	CFG-218	78839	55.3
24	600	22	550	CFG-224	78840	61.2
30	750	28	700	CFG-230	78841	67.1
36	900	34	850	CFG-236	78842	73.0
42	1050	40	1000	CFG-242	78843	78.9
48	1200	46	1150	CFG-248	78844	84.8
54	1350	52	1300	CFG-254	78845	90.7
60	1500	58	1450	CFG-260	78846	96.6

Lead time: 1 working day



Belt Width Minus 8" (200 mm) - White Blade

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
12	300	—	—	—	—	—
18	450	10	250	CFG-818	78924	51.3
24	600	16	400	CFG-824	78925	57.2
30	750	22	550	CFG-830	78926	63.1
36	900	28	700	CFG-836	78927	69.0
42	1050	34	850	CFG-842	78928	74.9
48	1200	40	1000	CFG-848	78929	80.8
54	1350	46	1150	CFG-854	78930	86.7
60	1500	52	1300	CFG-860	78931	92.6

Lead time: 1 working day

Product Notes:

- White food-grade ConShear™ Precleaner is chemical resistant and all ingredients used in polyurethane formulation comply with the relevant requirements of 21 CFR (FDA Code of Federal Regulations) for use in repeated bulk dry food applications.
- For optimal cleaning and reduced blade retensioning maintenance, the cleaner blade width should be sized to fit the material path of the belt. The material path is typically 2/3 of the belt width. In most cases a blade size of belt width minus 8" (200 mm) may be the best selection.
- Each cleaner can be retrofitted with three replacement blade sizes (belt width minus 2" (50 mm), 8" (200 mm), or 14" (350 mm)).
- Comes complete with universal mounting plates and tensioner.
- Visual tension check. No guesswork on blade tensioning. Simply measure the spring, check label on tensioner and turn adjusting nut to restore optimal tension.
- Works with mechanical splices. Polyurethane blade glides over splices.
- Compatible with reversing belts.
- For replacement parts see the EZP1 SS Parts List on page 24.
- For applications requiring longer pole lengths, go to the minus 8" (200 mm) chart and select the cleaner one belt width size larger. This will provide a pole 6" (150 mm) longer and a blade size of belt width minus 2" (50 mm).

ConShear™ Replacement Blades


EZP1
Precleaners

Standard ConShear™ Blades

BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
10	250	CRB10	75628	4.6
16	400	CRB16	75629	7.3
22	550	CRB22	75630	10.1
28	700	CRB28	75631	12.8
34	850	CRB34	75632	15.5
40	1000	CRB40	75633	18.3
46	1150	CRB46	75634	21.0
52	1300	CRB52	75635	23.8
58	1450	CRB58	75636	26.5
64	1600	CRB64	75775	29.2
70	1750	CRB70	75773	32.0
76	1900	CRB76	76940	34.7
82	2050	CRB82	76941	37.5

Other blade sizes available upon request.

Lead time: 1 working day

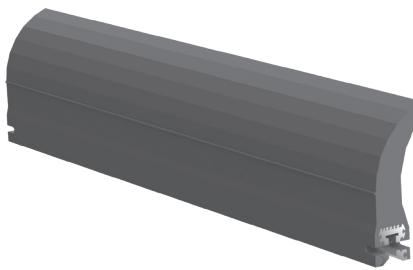

Chemical Resistant/Food Grade ConShear™ Blades - White ‡

BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
10	250	CRB-W10	78471	4.8
16	400	CRB-W16	78472	7.6
22	550	CRB-W22	78473	10.4
28	700	CRB-W28	78474	13.2
34	850	CRB-W34	78475	16.2
40	1000	CRB-W40	78476	19.1
46	1150	CRB-W46	78477	21.9
52	1300	CRB-W52	78478	24.8
58	1450	CRB-W58	78479	27.6

Lead time: 1 working day

‡ All ingredients used in the polyurethane formulation of this blade comply with the relevant requirements of 21 CFR (FDA Code of Federal Regulations) for use in repeated bulk dry food applications.

Product Notes:

- Take blade width and ordering number from the worn blade and use the Replacement Blade Chart.
- For optimal cleaning and reduced blade retensioning maintenance, the cleaner blade width should be sized to fit the material path of the belt. The material path is typically 2/3 of the belt width. In most cases a blade size of belt width minus 8" (200 mm) may be the best selection.
- The ConShear™ blade has a faceted profile that renews the cleaning edge as it wears.
- Visual tension check. No guesswork on blade tensioning. Simply measure the spring, check label on tensioner and turn adjusting nut to restore optimal tension.
- ConShear™ blades are made of a special long-wearing polyurethane.
- A molded-in blade wear line indicates when the blade is worn out and needs to be replaced.
- Blade replacement is quick. Pull one pin, remove the old blade and slide the new one in.
- For replacement parts see the EZP1SS Parts List on page 24.

High-Temp ConShear™ Blades - Yellow

BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
10	250	CRB-HT10	76593	4.8
16	400	CRB-HT16	76594	7.6
22	550	CRB-HT22	76595	10.4
28	700	CRB-HT28	76596	13.2
34	850	CRB-HT34	76597	16.2
40	1000	CRB-HT40	76598	19.1
46	1150	CRB-HT46	76599	21.9
52	1300	CRB-HT52	76600	24.8
58	1450	CRB-HT58	76601	27.6
64	1600	CRB-HT64	76602	30.5
70	1750	CRB-HT70	76603	33.4

Lead time: 1 working day

Blade Width Selection

BELT WIDTH		BELT WIDTH - 2" (50mm)		BELT WIDTH - 8" (200mm)		BELT WIDTH - 14" (350mm)	
in.	mm	in.	mm	in.	mm	in.	mm
12	300	10	250	N/A	N/A	N/A	N/A
18	450	16	400	10	250	N/A	N/A
24	600	22	550	16	400	10	250
30	750	28	700	22	550	16	400
36	900	34	850	28	700	22	550
42	1050	40	1000	34	850	28	700
48	1200	46	1150	40	1000	34	850
54	1350	52	1300	46	1150	40	1000
60	1500	58	1450	52	1300	46	1150
72	1800	70	1600	64	1600	58	1450


Specifications & Guidelines

EZP1 Stainless Steel Precleaner

Pole Length Specifications

CLEANER SIZE		POLE LENGTH		MAXIMUM CONVEYOR SPAN	
in.	mm	in.	mm	in.	mm
12	300	42	1050	37	925
18	450	48	1200	43	1075
24	600	54	1350	49	1225
30	750	60	1500	55	1375
36	900	66	1650	61	1525
42	1050	72	1800	67	1675
48	1200	78	1950	73	1825
54	1350	88	2200	83	2075
60	1500	94	2350	89	2225


Pole Diameter – 2-3/8" (60 mm)

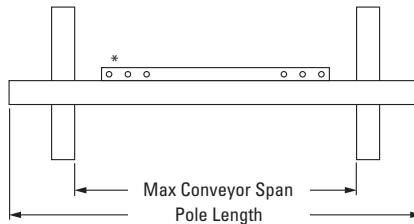


*Each pole size can be used with a blade size either belt width minus 2" (50 mm), 8" (200 mm), or 14" (350 mm).

Clearance Guidelines for Installation

HORIZONTAL CLEARANCE REQUIRED		VERTICAL CLEARANCE REQUIRED	
in.	mm	in.	mm
4	100	9 1/2	238



Pole Location Specs

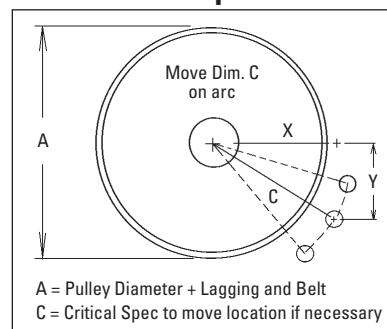


A = Pulley Diameter + Lagging and Belt
C = Critical Spec to move location if necessary

EST Spring Length Chart

Blade Width		Purple Springs		White Springs		Gold Springs	
in.	mm	in.	mm	in.	mm	in.	mm
10	250	5 5/8	143	6 3/8	162	N/A	N/A
16	400	5	127	6 1/8	156	N/A	N/A
22	550	4 3/8	111	6	152	N/A	N/A
28	700	3 7/8	98	5 7/8	149	N/A	N/A
34	850	N/A	N/A	5 5/8	143	6 1/8	156
40	1000	N/A	N/A	5 1/2	140	6	152
46	1150	N/A	N/A	5 1/4	133	5 7/8	149
52	1300	N/A	N/A	5 1/8	130	5 7/8	149
58	1450	N/A	N/A	5	127	5 3/4	146
64	1600	N/A	N/A	4 3/4	121	5 5/8	143

Shading indicates preferred spring option



Pole Location Chart


A		X		Y		C	
in	mm	in	mm	in	mm	in	mm
10	250	3	74	9	230	9 1/2	242
11	275	3 3/4	92	9	230	9 3/4	248
12	300	4 3/8	108	9	230	10	254
13	325	5 3/8	131	9	230	10 1/2	265
14	350	5 7/8	146	9	230	10 3/4	273
15	375	6 3/8	166	9	230	11 1/4	284
16	400	7 1/8	179	9	230	11 1/2	291
17	425	7 7/8	195	9	230	12	301
18	450	8 1/4	207	9	230	12 1/4	309
19	475	9	223	9	230	12 3/4	320
20	500	9 3/8	235	9	230	13	329
21	525	10	249	9	230	13 1/2	339
22	550	10 3/4	266	9	230	14	352
23	575	11 3/8	283	9	230	14 1/2	365
24	600	12	299	9	230	15	377
25	625	12 5/8	314	9	230	15 1/2	390
26	650	13 1/4	330	9	230	16	402
27	675	13 7/8	346	9	230	16 1/2	415
28	700	14 3/8	360	9	230	17	427
29	725	15	374	9	230	17 1/2	439
30	775	15 5/8	389	9	230	18	452
31	775	16 1/8	403	9	230	18 1/2	464
32	825	16 3/4	417	9	230	19	477
33	825	17 1/4	432	9	230	19 1/2	489
34	850	17 7/8	446	9	230	20	501
35	875	18 3/8	460	9	230	20 1/2	514
36	900	19	474	9	230	21	526

Specifications:

- Maximum Belt Speed 700 FPM (3.5 m/s)
- Temperature Rating -30 to 180°F (-35 to 82°C)
- Minimum Pulley Diameter..... 10" (250 mm)
- Blade Height..... 7-1/4" (185 mm)
- Usable Blade Wear Length..... 4" (100 mm)
- Blade Material..... Polyurethane (chemical resistant/food grade)
- Available for Belt Widths 12 to 60" (300 to 1500 mm)
- CEMA Cleaner Rating Class 2

Replacement Parts List

EZP1 Stainless Steel Precleaner

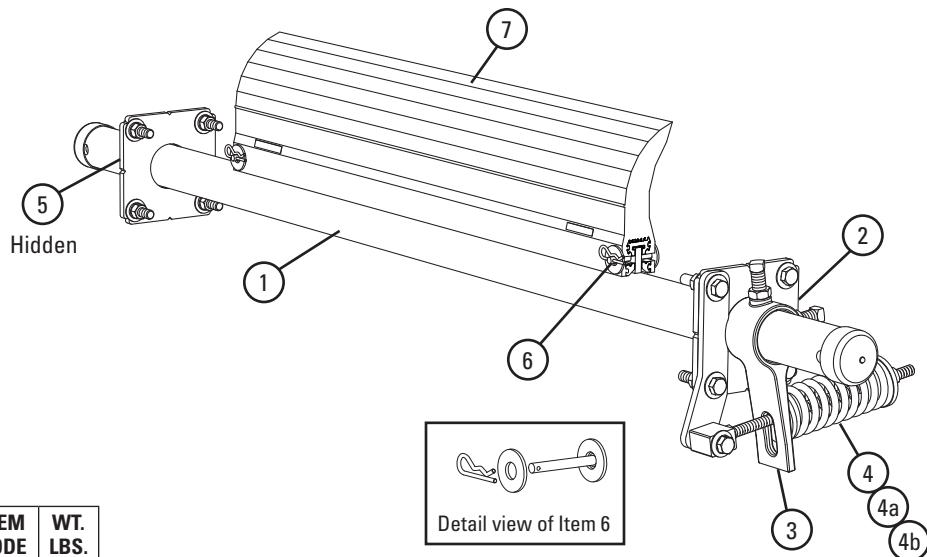

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	12" (300mm) SS Pole	EZP1P12-S/S	78812	17.4
	18" (450mm) SS Pole	EZP1P18-S/S	78813	20.3
	24" (600mm) SS Pole	EZP1P24-S/S	78814	22.7
	30" (750mm) SS Pole	EZP1P30-S/S	78815	26.5
	36" (900mm) SS Pole	EZP1P36-S/S	78816	30.4
	42" (1050mm) SS Pole	EZP1P42-S/S	78817	32.7
	48" (1200mm) SS Pole	EZP1P48-S/S	78818	35.3
	54" (1350mm) SS Pole	EZP1P54-S/S	78819	39.2
	60" (1500mm) SS Pole	EZP1P60-S/S	78820	43.3
	72" (1800mm) SS Pole	EZP1P72-S/S	78821	48.2
2	SS Mounting Plate Kit* (2 ea.)	EZP1MPK-S/S	78923	7.7
3	SS Torque Arm Kit* (1 ea.)	ESTAK-EST-S/S	78849	3.6
4	SS Tension Spring – Purple	QMTS-P-S/S	77450	1.0
4a	SS Tension Spring – White	QMTS-W-S/S	77451	1.2
4b	SS Tension Spring – Gold	QMTS-G-S/S	77452	1.4
5	SS Pole Lock* (1 ea.)	EZP1PL-S/S	78848	1.1
–	SS EST Tensioner – Purple* (incl. (1) ea. items 2, 3, 4)	EST-P-S/S	78808	7.7
–	SS EST Tensioner – White* (incl. (1) ea. items 2, 3, 4a)	EST-W-S/S	78809	7.9
–	SS EST Tensioner – Gold* (incl. (1) ea. items 2, 3, 4b)	EST-G-S/S	78810	8.1
6	Blade Pin (1 ea.)	MSPBPK-S/S	77583	0.1

*Hardware Included

Lead time: 1 working day

Spring Tensioner Selection Chart

CLEANER BLADE WIDTH	78808 EST-P-S/S	78809 EST-W-S/S	78810 EST-G-S/S
ConShear™ 12–28" (300–700mm)	X		
ConShear™ 34–52" (850–1300mm)		X	
ConShear™ 58–70" (1450–1750mm)			X

Product Ordering Information

EZP-LS
Limited Space Precleaner

Belt Width Minus 2" (50 mm)

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
12	300	10	250	EZP-LS212	77127	24.8
18	450	16	400	EZP-LS218	77128	28.2
24	600	22	550	EZP-LS224	77129	31.7
30	750	28	700	EZP-LS230	77130	35.1
36	900	34	850	EZP-LS236	77131	38.6
42	1050	40	1000	EZP-LS242	77132	42.0
48	1200	46	1150	EZP-LS248	77133	45.5
54	1350	52	1300	EZP-LS254	77134	48.9
60	1500	58	1450	EZP-LS260	77135	52.5

Lead time: 1 working day



Belt Width Minus 8" (200 mm)

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
18	450	10	250	EZP-LS818	77136	27.0
24	600	16	400	EZP-LS824	77137	30.4
30	750	22	550	EZP-LS830	77138	33.9
36	900	28	700	EZP-LS836	77139	37.3
42	1050	34	850	EZP-LS842	77140	40.8
48	1200	40	1000	EZP-LS848	77141	44.2
54	1350	46	1150	EZP-LS854	77142	47.7
60	1500	52	1300	EZP-LS860	77143	51.2

Lead time: 1 working day

Product Notes:

- For optimal cleaning and reduced blade retensioning maintenance, the cleaner blade width should be sized to fit the material path of the belt. The material path is typically 2/3 of the belt width.
- Each cleaner can be retrofitted with three replacement blade sizes (belt width minus 2" (50 mm), 8" (200 mm), or 14" (350 mm)).
- Comes complete with universal mounting plates and tensioner.
- Visual tension check. No guesswork on blade tensioning. Simply measure the spring, check label on tensioner and turn adjusting nut to restore optimal tension.
- Visual blade wear check. Tensioner has built-in gauge to monitor blade wear.
- Works with mechanical splices. Polyurethane blade glides over splices.
- Compatible with reversing belts.
- For replacement parts see the EZP-LS Parts List on 29.
- For applications requiring longer pole lengths, go to the minus 8" (200 mm) chart and select the cleaner one belt width size larger. This will provide a pole 6" (150 mm) longer and a blade size of belt width minus 2" (50 mm).

Product Ordering Information

EZP-LS High-Temp Limited Space Precleaner

Belt Width Minus 2" (50 mm) - Yellow Blade

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
12	300	10	250	EZP-LS212HT	77746	24.8
18	450	16	400	EZP-LS218HT	77747	28.2
24	600	22	550	EZP-LS224HT	77748	31.7
30	750	28	700	EZP-LS230HT	77749	35.1
36	900	34	850	EZP-LS236HT	77750	38.6
42	1050	40	1000	EZP-LS242HT	77751	42.0
48	1200	46	1150	EZP-LS248HT	77752	45.5
54	1350	52	1300	EZP-LS254HT	77753	48.9
60	1500	58	1450	EZP-LS260HT	77754	52.5

Lead time: 1 working day



Product Notes:

- The High-Temp ConShear™ LS works in temperatures up to 275°F (135°C) with spikes to 325°F (164°C).
- Each cleaner can be retrofitted with three replacement blade sizes (belt width minus 2" (50 mm), 8" (200 mm), or 14" (350 mm)).
- Comes complete with universal mounting plates and tensioner.
- Visual tension check. No guesswork on blade tensioning. Simply measure the spring, check label on tensioner and turn adjusting nut to restore optimal tension.
- Visual blade wear check. Tensioner has built-in gauge to monitor blade wear.
- Works with mechanical splices. Polyurethane blade glides over splices.
- Compatible with reversing belts.
- For replacement parts see the EZP-LS Parts List on page 29.

ConShear™ LS Replacement Blades

EZP-LS
Limited Space Precleaner

Standard LS ConShear™ Blades

BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
10	250	CRB-LS10	77088	2.1
16	400	CRB-LS16	77089	3.3
22	550	CRB-LS22	77090	4.6
28	700	CRB-LS28	77091	5.8
34	850	CRB-LS34	77092	7.1
40	1000	CRB-LS40	77093	8.3
46	1150	CRB-LS46	77094	9.6
52	1300	CRB-LS52	77095	10.8
58	1450	CRB-LS58	77096	12.1

Other blade sizes available upon request.

Lead time: 1 working day



Chemical Resistant/Food Grade LS ConShear™ Blades - White ‡

BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
10	250	CRB-LS10W	77097	2.1
16	400	CRB-LS16W	77098	3.3
22	550	CRB-LS22W	77099	4.6
28	700	CRB-LS28W	77100	5.8
34	850	CRB-LS34W	77101	7.1
40	1000	CRB-LS40W	77102	8.3
46	1150	CRB-LS46W	77103	9.6
52	1300	CRB-LS52W	77104	10.8
58	1450	CRB-LS58W	77105	12.1

Other blade sizes available upon request.

Lead time: 1 working day

‡ All ingredients used in the polyurethane formulation of this blade comply with the relevant requirements of 21 CFR (FDA Code of Federal Regulations) for use in repeated bulk dry food applications.

High-Temp LS ConShear™ Blades - Yellow

BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
10	250	CRB-LS10HT	77551	2.1
16	400	CRB-LS16HT	77552	3.3
22	550	CRB-LS22HT	77553	4.6
28	700	CRB-LS28HT	77554	5.8
34	850	CRB-LS34HT	77555	7.1
40	1000	CRB-LS40HT	77556	8.3
46	1150	CRB-LS46HT	77557	9.6
52	1300	CRB-LS52HT	77558	10.8
58	1450	CRB-LS58HT	77559	12.1

Other blade sizes available upon request.

Lead time: 1 working day

Product Notes:

- Take blade width and ordering number from the worn blade and use the Replacement Blade Chart.
- For optimal cleaning and reduced blade retensioning maintenance, the cleaner blade width should be sized to fit the material path of the belt. The material path is typically 2/3 of the belt width.
- The ConShear™ blade has a faceted profile that renews the cleaning edge as it wears.
- Visual tension check. No guesswork on blade tensioning. Simply measure the spring, check label on tensioner and turn adjusting nut to restore optimal tension.
- ConShear blades are made of a special long-wearing polyurethane.
- A molded-in blade wear line indicates when the blade is worn out and needs to be replaced.
- Blade replacement is quick. Pull one pin, remove the old blade and slide the new one in.

Blade Width Selection

BELT WIDTH		BELT WIDTH - 2" (50mm)		BELT WIDTH - 8" (200mm)		BELT WIDTH - 14" (350mm)	
in.	mm	in.	mm	in.	mm	in.	mm
12	300	10	250	N/A	N/A	N/A	N/A
18	450	16	400	10	250	N/A	N/A
24	600	22	550	16	400	10	250
30	750	28	700	22	550	16	400
36	900	34	850	28	700	22	550
42	1050	40	1000	34	850	28	700
48	1200	46	1150	40	1000	34	850
54	1350	52	1300	46	1150	40	1000
60	1500	58	1450	52	1300	46	1150


Specifications & Guidelines

EZP-LS
Limited Space Precleaner

Pole Length Specifications

CLEANER SIZE		POLE LENGTH		MAXIMUM CONVEYOR SPAN	
in.	mm	in.	mm	in.	mm
12	300	42	1050	37	925
18	450	48	1200	43	1075
24	600	54	1350	49	1225
30	750	60	1500	55	1375
36	900	66	1650	61	1525
42	1050	72	1800	67	1675
48	1200	78	1950	73	1825
54	1350	88	2200	83	2075
60	1500	94	2350	89	2225


Pole Diameter – 1-7/8" (48 mm)

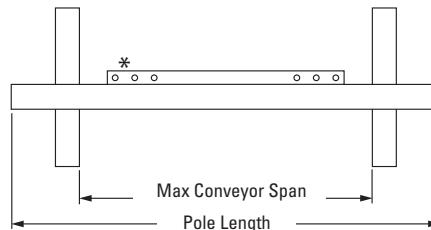


*Each pole size can be used with a blade size either belt width minus 2" (50 mm), 8" (200 mm), or 14" (350 mm).

Clearance Guidelines for Installation

HORIZONTAL CLEARANCE REQUIRED		VERTICAL CLEARANCE REQUIRED	
in.	mm	in.	mm
3	75	6 1/2	165



Pole Location Specs

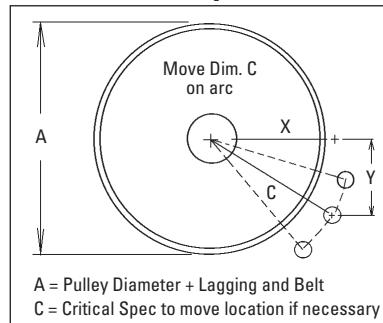


Spring Length Chart

EZP-LS w/Purple or Yellow Blade

Blade Width		Purple Springs		White Springs		Silver Springs	
in.	mm	in.	mm	in.	mm	in.	mm
10	250	2	51	N/A	N/A	N/A	N/A
16	400	1 5/8	48	2 1/8	54	N/A	N/A
22	550	N/A	N/A	2	51	N/A	N/A
28	700	N/A	N/A	1 7/8	48	N/A	N/A
34	850	N/A	N/A	1 3/4	44	N/A	N/A
40	1000	N/A	N/A	1 1/2	38	N/A	N/A
46	1150	N/A	N/A	1 3/8	35	2	51
52	1300	N/A	N/A	N/A	N/A	2	51
58	1450	N/A	N/A	N/A	N/A	1 7/8	48

Shading indicates preferred spring option

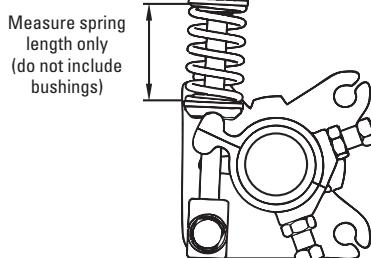

Pole Location Chart


A		X		Y		C	
in.	mm	in.	mm	in.	mm	in.	mm
6	150	2 5/8	65	5 1/2	140	6 1/8	150
7	175	3 1/4	81	5 1/2	140	6 3/8	155
8	200	3 7/8	96	5 1/2	140	6 3/4	162
9	225	4 3/8	109	5 1/2	140	7	171
10	250	5	125	5 1/2	140	7 3/8	179
11	275	5 1/2	138	5 1/2	140	7 3/4	189
12	300	6 1/8	153	5 1/2	140	8 1/4	198
13	325	6 5/8	166	5 1/2	140	8 5/8	209
14	350	7 1/8	178	5 1/2	140	9	219
15	375	7 5/8	191	5 1/2	140	9 3/8	229
16	400	8 1/4	206	5 1/2	140	9 7/8	239
17	425	8 3/4	219	5 1/2	140	10 3/8	252
18	450	9 1/4	231	5 1/2	140	10 3/4	263
19	475	9 3/4	244	5 1/2	140	11 1/4	273
20	500	10 1/4	256	5 1/2	140	11 5/8	284
21	525	10 3/4	269	5 1/2	140	12 1/8	295
22	550	11 1/4	281	5 1/2	140	12 1/2	307

Specifications:

- Maximum Belt Speed 500 FPM (2.5 m/s)
- Temperature Rating ConShear™, ConShear™ White: -30 to 180°F (-35 to 82°C)
ConShear™ High-Temp: up to 275°F (135°C), spikes to 325°F (164°C)
- Minimum Pulley Diameter..... 6" (150 mm)
- Blade Height..... 4.5" (115 mm)
- Usable Blade Wear Length..... 2-3/8" (60 mm)
- Blade Material Polyurethane (proprietary blend for abrasion resistance and long wear)
- Available for Belt Widths 12 to 60" (300 to 1500 mm)
- CEMA Cleaner Rating Class 2

Replacement Parts List

EZP-LS
Limited Space Precleaner

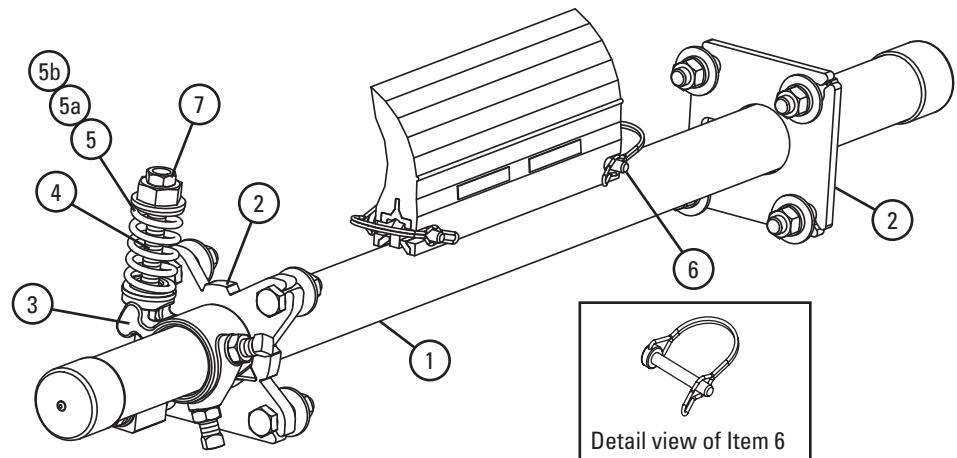

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	12" (300mm) Pole	LSP12	77070	13.3
	18" (450mm) Pole	LSP18	77071	15.5
	24" (600mm) Pole	LSP24	77072	17.7
	30" (750mm) Pole	LSP30	77073	19.9
	36" (900mm) Pole	LSP36	77074	22.1
	42" (1050mm) Pole	LSP42	77075	24.3
	48" (1200mm) Pole	LSP48	77076	26.5
	54" (1350mm) Pole	LSP54	77077	28.7
	60" (1500mm) Pole	LSP60	77078	31.0
2	Mounting Plate Kit* (incl. (1) ea. tensioner mounting plate & pole mounting plate)	LSTMPK	77366	3.6
3	Torque Arm Kit* (1 ea.)	LST-TAK	77120	1.4
4	Pivot Block/Rod Kit* (1 ea.)	LSTPB-RK	77367	0.8
5	Tension Spring – Purple (1 ea.)	LS-SPK	77365	0.2
5a	Tension Spring – White (1 ea.)	LS-SW	77117	0.3
5b	Tension Spring – Silver (1 ea.)	LS-SS	77118	0.3
6	LS Blade Pin (1 ea.)	LS-BP	77114	0.1
7	Jam Nut Kit LST Tensioner	JNK-B	79892	0.3
-	LST Spring Tensioner* – Purple (incl. (1) tensioner mounting plate & (1) ea. items 3, 4 & 5)	LST-P	77121	7.5
-	LST Spring Tensioner* – White (incl. (1) tensioner mounting plate & (1) ea. items 3, 4 & 5a)	LST-W	77122	7.6
-	LST Spring Tensioner* – Silver (incl. (1) tensioner mounting plate & (1) ea. items 3, 4 & 5b)	LST-S	77123	7.6

*Hardware Included

Arch/Gordon Mini-Saber Blades

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	ARCH/GORDON PART NUMBER	WT. LBS.
in.	mm	in.	mm				
18	450	16	400	RBAGM-16	77106	MRBMN00018	3.3
24	600	22	550	RBAGM-22	77107	MRBMN00024	4.6
30	750	28	700	RBAGM-28	77108	MRBMN00030	5.8
36	900	34	850	RBAGM-34	77109	MRBMN00036	7.1
42	1050	40	1000	RBAGM-40	77110	MRBMN00042	8.3
48	1200	46	1150	RBAGM-46	77111	MRBMN00048	9.6

Additional sizes are available upon request. Contact for pricing.

Spring Tensioner Selection Chart

CLEANER BLADE WIDTH	77121 LST-P	77122 LST-W	77123 LST-S
ConShear™-LS 10–16" (250–400mm)	X		
ConShear™-LS 22–46" (550–1150mm)		X	
ConShear™-LS 52–58" (1300–1450mm)			X

For best results use Flexco Genuine Replacement Blades and Parts.

Product Ordering Information

EZP-LS Stainless Steel Limited Space Precleaner with White ConShear™ (Food Grade) Blade

Belt Width Minus 2" (50 mm) - LS White Blade

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
12	300	10	250	CLSFG-212	77144	24.8
18	450	16	400	CLSFG-218	77145	28.2
24	600	22	550	CLSFG-224	77146	31.7
30	750	28	700	CLSFG-230	77147	35.1
36	900	34	850	CLSFG-236	77148	38.6
42	1050	40	1000	CLSFG-242	77149	42.0
48	1200	46	1150	CLSFG-248	77150	45.5
54	1350	52	1300	CLSFG-254	77151	48.9
60	1500	58	1450	CLSFG-260	77152	52.5

Lead time: 1 working day



Belt Width Minus 8" (200 mm) - LS White Blade

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
18	450	10	250	CLSFG-818	77153	27.0
24	600	16	400	CLSFG-824	77154	30.4
30	750	22	550	CLSFG-830	77155	33.9
36	900	28	700	CLSFG-836	77156	37.3
42	1050	34	850	CLSFG-842	77157	40.8
48	1200	40	1000	CLSFG-848	77158	44.2
54	1350	46	1150	CLSFG-854	77159	47.7
60	1500	52	1300	CLSFG-860	77160	51.2

Lead time: 1 working day

Product Notes:

- White food-grade ConShear Precleaner is chemical resistant and all ingredients used in polyurethane formulation comply with the relevant requirements of 21 CFR (FDA Code of Federal Regulations) for use in repeated bulk dry food applications.
- For optimal cleaning and reduced blade retensioning maintenance, the cleaner blade width should be sized to fit the material path of the belt. The material path is typically 2/3 of the belt width.
- Each cleaner can be retrofitted with three replacement blade sizes (belt width minus 2" (50 mm), 8" (200 mm), or 14" (350 mm)).
- Comes complete with universal mounting plates and tensioner(s).
- Visual tension check. No guesswork on blade tensioning. Simply measure the spring, check label on tensioner and turn adjusting nut to restore optimal tension.
- Visual blade wear check. Tensioner has built-in gauge to monitor blade wear.
- Works with mechanical splices. Polyurethane blade glides over splices.
- Compatible with reversing belts.
- For replacement parts see the EZP-LS SS Parts List on page 33.
- For applications requiring longer pole lengths, go to the minus 8" (200 mm) chart and select the cleaner one belt width size larger. This will provide a pole 6" (150 mm) longer and a blade size of belt width minus 2" (50 mm).

ConShear™ LS Replacement Blades

EZP-LS
Limited Space Precleaner

Standard LS ConShear™ Blades

BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
10	250	CRB-LS10	77088	2.1
16	400	CRB-LS16	77089	3.3
22	550	CRB-LS22	77090	4.6
28	700	CRB-LS28	77091	5.8
34	850	CRB-LS34	77092	7.1
40	1000	CRB-LS40	77093	8.3
46	1150	CRB-LS46	77094	9.6
52	1300	CRB-LS52	77095	10.8
58	1450	CRB-LS58	77096	12.1

Other blade sizes available upon request.

Lead time: 1 working day



Chemical Resistant/Food Grade

LS ConShear™ Blades - White ‡

BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
10	250	CRB-LS10W	77097	2.1
16	400	CRB-LS16W	77098	3.3
22	550	CRB-LS22W	77099	4.6
28	700	CRB-LS28W	77100	5.8
34	850	CRB-LS34W	77101	7.1
40	1000	CRB-LS40W	77102	8.3
46	1150	CRB-LS46W	77103	9.6
52	1300	CRB-LS52W	77104	10.8
58	1450	CRB-LS58W	77105	12.1

Other blade sizes available upon request.

Lead time: 1 working day

‡ All ingredients used in the polyurethane formulation of this blade comply with the relevant requirements of 21 CFR (FDA Code of Federal Regulations) for use in repeated bulk dry food applications

LS High-Temp ConShear™ Blades - Yellow

BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
10	250	CRB-LS10HT	77551	2.1
16	400	CRB-LS16HT	77552	3.3
22	550	CRB-LS22HT	77553	4.6
28	700	CRB-LS28HT	77554	5.8
34	850	CRB-LS34HT	77555	7.1
40	1000	CRB-LS40HT	77556	8.3
46	1150	CRB-LS46HT	77557	9.6
52	1300	CRB-LS52HT	77558	10.8
58	1450	CRB-LS58HT	77559	12.1

Other blade sizes available upon request.

Lead time: 1 working day

Product Notes:

- Take blade width and ordering number from the worn blade and use the Replacement Blade Chart.
- For optimal cleaning and reduced blade retensioning maintenance, the cleaner blade width should be sized to fit the material path of the belt. The material path is typically 2/3 of the belt width.
- The ConShear™ blade has a faceted profile that renews the cleaning edge as it wears.
- Visual tension check. No guesswork on blade tensioning. Simply measure the spring, check label on tensioner and turn adjusting nut to restore optimal tension.
- ConShear™ blades are made of a special long-wearing polyurethane.
- A molded-in blade wear line indicates when the blade is worn out and needs to be replaced.
- Blade replacement is quick. Pull one pin, remove the old blade and slide the new one in.

Blade Width Selection

BELT WIDTH		BELT WIDTH - 2" (50mm)		BELT WIDTH - 8" (200mm)		BELT WIDTH - 14" (350mm)	
in.	mm	in.	mm	in.	mm	in.	mm
12	300	10	250	N/A	N/A	N/A	N/A
18	450	16	400	10	250	N/A	N/A
24	600	22	550	16	400	10	250
30	750	28	700	22	550	16	400
36	900	34	850	28	700	22	550
42	1050	40	1000	34	850	28	700
48	1200	46	1150	40	1000	34	850
54	1350	52	1300	46	1150	40	1000
60	1500	58	1450	52	1300	46	1150

Specifications & Guidelines

EZP-LS Stainless Steel Limited Space Precleaner


Pole Length Specifications

CLEANER SIZE		POLE LENGTH		MAXIMUM CONVEYOR SPAN	
in.	mm	in.	mm	in.	mm
12	300	42	1050	37	925
18	450	48	1200	43	1075
24	600	54	1350	49	1225
30	750	60	1500	55	1375
36	900	66	1650	61	1525
42	1050	72	1800	67	1675
48	1200	78	1950	73	1825
54	1350	88	2200	83	2075
60	1500	94	2350	89	2225

Pole Diameter - 1-7/8" (48 mm)

Clearance Guidelines for Installation


HORIZONTAL CLEARANCE REQUIRED		VERTICAL CLEARANCE REQUIRED	
in.	mm	in.	mm
3	75	6 1/2	165



LST Spring Length Chart


Blade Width		Black Springs		White Springs		Dual White Springs	
in.	mm	in.	mm	in.	mm	in.	mm
10	250	3 1/2	89	3 3/4	95	3 7/8	98
16	400	3 1/4	83	3 5/8	92	3 7/8	98
22	550	2 7/8	73	3 1/2	89	3 3/4	95
28	700	2 5/8	67	3 3/8	86	3 3/4	95
34	850	N/A	N/A	3 1/4	83	3 5/8	92
40	1000	N/A	N/A	3 1/8	79	3 5/8	92
46	1150	N/A	N/A	3	76	3 1/2	89
52	1300	N/A	N/A	N/A	N/A	3 1/2	89
58	1450	N/A	N/A	N/A	N/A	3 3/8	86

Shading indicates preferred spring option

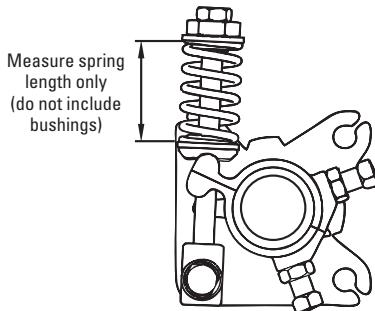


Specifications:

- Maximum Belt Speed 500 FPM (2.5 m/s)
- Temperature Rating ConShear™, ConShear™ White: -30 to 180°F (-35 to 82°C)
ConShear™ High-Temp: up to 275°F (135°C), spikes to 325°F (164°C)
- Minimum Pulley Diameter..... 6" (150 mm)
- Blade Height..... 4.5" (115 mm)
- Usable Blade Wear Length..... 2-3/8" (60 mm)
- Blade Material Polyurethane (chemical resistant/food grade)
- Available for Belt Widths 12 to 60" (300 to 1500 mm)
- CEMA Cleaner Rating Class 2

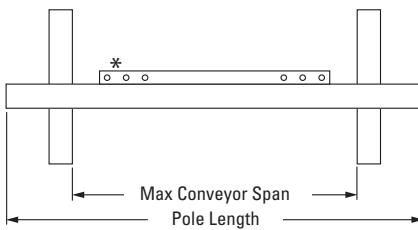

*Each pole size can be used with a blade size either belt width minus 2" (50 mm), 8" (200 mm), or 14" (350 mm).

Pole Location Specs

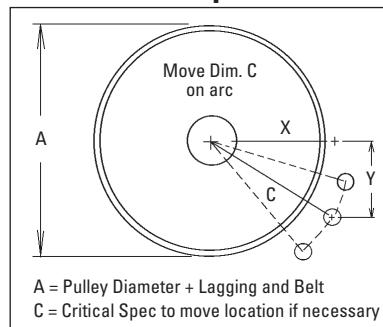


Pole Location Chart

A		X		Y		C	
in.	mm	in.	mm	in.	mm	in.	mm
6	150	2 5/8	65	5 1/2	140	6 1/8	150
7	175	3 1/4	81	5 1/2	140	6 3/8	155
8	200	3 7/8	96	5 1/2	140	6 3/4	162
9	225	4 3/8	109	5 1/2	140	7	171
10	250	5	125	5 1/2	140	7 3/8	179
11	275	5 1/2	138	5 1/2	140	7 3/4	189
12	300	6 1/8	153	5 1/2	140	8 1/4	198
13	325	6 5/8	166	5 1/2	140	8 5/8	209
14	350	7 1/8	178	5 1/2	140	9	219
15	375	7 5/8	191	5 1/2	140	9 3/8	229
16	400	8 1/4	206	5 1/2	140	9 7/8	239
17	425	8 3/4	219	5 1/2	140	10 3/8	252
18	450	9 1/4	231	5 1/2	140	10 3/4	263
19	475	9 3/4	244	5 1/2	140	11 1/4	273
20	500	10 1/4	256	5 1/2	140	11 5/8	284
21	525	10 3/4	269	5 1/2	140	12 1/8	295
22	550	11 1/4	281	5 1/2	140	12 1/2	307

Replacement Parts List

EZP-LS Stainless Steel Limited Space Precleaner

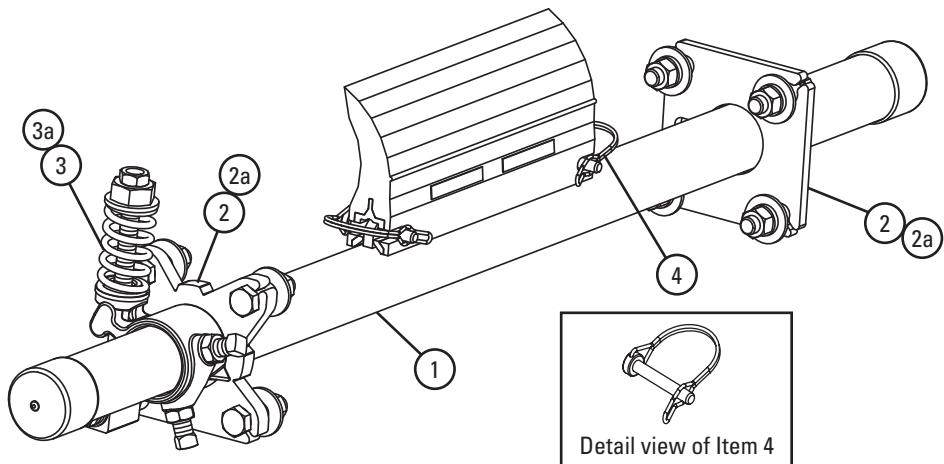

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	12" (300mm) SS Pole	LSP12-S/S	77079	13.3
	18" (450mm) SS Pole	LSP18-S/S	77080	15.5
	24" (600mm) SS Pole	LSP24-S/S	77081	17.7
	30" (750mm) SS Pole	LSP30-S/S	77082	19.9
	36" (900mm) SS Pole	LSP36-S/S	77083	22.1
	42" (1050mm) SS Pole	LSP42-S/S	77084	24.3
	48" (1200mm) SS Pole	LSP48-S/S	77085	26.5
	54" (1350mm) SS Pole	LSP54-S/S	77086	28.7
	60" (1500mm) SS Pole	LSP60-S/S	77087	31.0
2	SS Mounting Plate Kit (10–46"/250–1150mm)* (incl. (1) ea. tensioner mounting plate & pole mounting plate)	LSTMPK-S/S	78933	3.6
2a	SS Mounting Plate Kit (52"+/1300mm+)* (incl. (2) tensioner mounting plate)	LSTMPK2-S/S	78462	7.2
3	Tension Spring – Black (1 ea.)	CTS-B-S/S	78387	.2
3a	Tension Spring – White (1 ea.)	LS-SW-S/S	78850	.3
4	SS LS Blade Pin (1 ea.)	LS-BP-S/S	77115	.1
-	SS LST Spring Tensioner* – Black (incl. (1) ea. items 2 & 3)	LST-B-S/S	77124	7.5
-	SS LST Spring Tensioner* – White (incl. (1) ea. items 2 & 3a)	LST-W-S/S	77125	7.6
-	SS LST Spring Tensioner* – White (dual) (incl. (1) ea. item 2a & (2) ea. item 3a)	LST-W-S/S-2	77126	15.2

*Hardware Included

Lead Time: 1 working day

Spring Tensioner Selection Chart

CLEANER BLADE WIDTH	77124 LST-B-S/S	77125 LST-W-S/S	77126 LST-W-S/S-2
FG-LS 10–28" (250–700mm)	X		
FG-LS 34–46" (850–1150mm)		X	
FG-LS 52–70" (1300–1750mm)			X

Product Ordering Information

MSP
Standard Mine-Duty Precleaner

Belt Width Minus 2" (50 mm)

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
24	600	22	550	MSP-224	75787	83.4
30	750	28	700	MSP-230	75788	89.6
36	900	34	850	MSP-236	75789	98.2
42	1050	40	1000	MSP-242	75790	106.0
48	1200	46	1150	MSP-248	75791	113.2
54	1350	52	1300	MSP-254	75792	120.0
60	1500	58	1450	MSP-260	75793	125.7
72	1800	70	1750	MSP-272	75794	140.2
84	2100	82	2050	MSP-284	76796	164.2

Lead time: 1 working day



Belt Width Minus 8" (200 mm)

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
24	600	16	400	MSP-824	75795	80.6
30	750	22	550	MSP-830	75796	86.9
36	900	28	700	MSP-836	75797	95.5
42	1050	34	850	MSP-842	75798	103.2
48	1200	40	1000	MSP-848	75799	110.5
54	1350	46	1150	MSP-854	75800	117.2
60	1500	52	1300	MSP-860	75801	123.0
72	1800	64	1600	MSP-872	75802	134.7
84	2100	76	1900	MSP-884	76797	160.0

Lead time: 1 working day

Optional Mounting Kits

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Optional Mounting Bar Kit *	MMBK	75830	19.5
Mounting Plate Kit * (2 plates)	MMPK	76537	140.0

*Hardware Included

Lead time: 1 working day

Product Notes:

- Recommended for standard-duty conveyor applications. For tougher belt applications see the MMP Medium-Duty Precleaner (41). For extreme, abusive applications see the MHP Heavy-Duty Precleaner (49) or the MHCP Heavy-Duty Cartridge Precleaner (56).
- Material Path Option: Fit the blade width to the belt's material path. The material path is typically the center 2/3 of the belt width. In most cases a blade size of belt width minus 8" (200mm) may be the best solution.
- Each cleaner pole is retrofittable for three blade sizes (belt width minus 2" (50 mm), 8" (200 mm), or 14" (350 mm)).
- Pole Length: Belt width plus 54" (1350 mm). For conveyors requiring longer pole lengths, go to the minus 8" (200 mm) chart and select the cleaner one belt width size larger. This will provide a pole 6" (150 mm) longer and a blade size of belt width minus 2" (50 mm). For longer requirements see Installation Accessories – Pole Extender Kit on page 129.
- Visual Tension Check: No guesswork on blade tensioning. Measure the spring and adjust to specified length per blade width to restore optimal tensioning.
- To make cleaner installation easier and quicker, see Optional Mounting Kits on page 129.
- For replacement parts see MSP Parts List on page 39.

Product Ordering Information

MSP Ultra High-Temp Standard Mine-Duty Precleaner

Belt Width Minus 2" (50 mm) - Red Blade

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
24	600	22	550	MSP-UHT224	91264	83.4
30	750	28	700	MSP-UHT230	91265	89.6
36	900	34	850	MSP-UHT236	91266	98.2
42	1050	40	1000	MSP-UHT242	91267	106.0
48	1200	46	1150	MSP-UHT248	91268	113.2
54	1350	52	1300	MSP-UHT254	91269	120.0
60	1500	58	1450	MSP-UHT260	91270	125.7
72	1800	70	1750	MSP-UHT272	91271	140.2

Lead time: 1 working day



Belt Width Minus 8" (200 mm) - Red Blade

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
24	600	16	400	MSP-UHT824	91272	80.6
30	750	22	550	MSP-UHT830	91273	86.9
36	900	28	700	MSP-UHT836	91274	95.5
42	1050	34	850	MSP-UHT842	91275	103.2
48	1200	40	1000	MSP-UHT848	91276	110.5
54	1350	46	1150	MSP-UHT854	91277	117.2
60	1500	52	1300	MSP-UHT860	91278	123.0
72	1800	64	1600	MSP-UHT872	91279	134.7

Lead time: 1 working day

Belt Width Minus 14" (350 mm) - Red Blade

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
42	1050	28	700	MSP-UHT1442	91280	100.4
48	1200	34	850	MSP-UHT1448	91281	107.8
54	1350	40	1000	MSP-UHT1454	91282	114.4
60	1500	46	1150	MSP-UHT1460	91283	120.3
72	1800	58	1450	MSP-UHT1472	91284	129.2

Lead time: 1 working day

Product Notes:

- Material Path Option: Fit the blade width to the belt's material path. The material path is typically the center 2/3 of the belt width. In most cases a blade size of belt width minus 8" (200 mm) may be the best solution.
- Each cleaner pole is retrofittable for three blade sizes (belt width minus 2" (50 mm), 8" (200 mm), or 14" (350 mm)).
- Pole Length: Belt width plus 54" (1350 mm). For conveyors requiring longer pole lengths, go to the minus 8" (200 mm) chart and select the cleaner one belt width size larger. This will provide a pole 6" (150 mm) longer and a blade size of belt width minus 2" (50 mm).
- Visual Tension Check: No guesswork on blade tensioning. Measure the spring and adjust to specified length per blade width to restore optimal tensioning.
- For replacement parts see MSP Parts List on page 39.

Product Ordering Information

MSP Stainless Steel Standard Mine-Duty Precleaner

Belt Width Minus 2" (50 mm)

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
24	600	22	550	MSP-224-S/S	77453	83.4
30	750	28	700	MSP-230-S/S	77454	89.6
36	900	34	850	MSP-236-S/S	77455	98.2
42	1050	40	1000	MSP-242-S/S	77456	106.0
48	1200	46	1150	MSP-248-S/S	77457	113.2
54	1350	52	1300	MSP-254-S/S	77458	120.0
60	1500	58	1450	MSP-260-S/S	77459	125.7
72	1800	70	1750	MSP-272-S/S	77460	140.2
84	2100	82	2050	MSP-284-S/S	77461	164.2

Lead time: 3 weeks



Belt Width Minus 8" (200 mm)

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
24	600	16	400	MSP-824-S/S	77462	80.6
30	750	22	550	MSP-830-S/S	77463	86.9
36	900	28	700	MSP-836-S/S	77464	95.5
42	1050	34	850	MSP-842-S/S	77465	103.2
48	1200	40	1000	MSP-848-S/S	77466	110.5
54	1350	46	1150	MSP-854-S/S	77467	117.2
60	1500	52	1300	MSP-860-S/S	77468	123.0
72	1800	64	1600	MSP-872-S/S	77470	134.7
84	2100	76	1900	MSP-884-S/S	77471	160.0

Lead time: 3 weeks

Product Notes:

- Recommended for standard-duty conveyor applications, but in corrosive environments.
- Material Path Option: Fit the blade width to the belt's material path. The material path is typically the center 2/3 of the belt width. In most cases a blade size of belt width minus 8" (200 mm) may be the best solution.
- Each cleaner pole is retrofittable for three blade sizes (belt width minus 2" (50 mm), 8" (200 mm), or 14" (350 mm)).
- Pole Length: Belt width plus 54" (1350 mm). For conveyors requiring longer pole lengths, go to the minus 8" (200 mm) chart and select the cleaner one belt width size larger. This will provide a pole 6" (150 mm) longer and a blade size of belt width minus 2" (50 mm). For longer requirements see Installation Accessories – Pole Extender Kit on page 137.
- Visual Tension Check: No guesswork on blade tensioning. Measure the spring and adjust to specified length per blade width to restore optimal tensioning.
- To make cleaner installation easier and quicker, see Optional Mounting Kits on page 137.
- For replacement parts see MSP Stainless Parts List on page 40.

ConShear™ Replacement Blades

MSP

Standard Mine-Duty Precleaner

Standard ConShear™ Blades

BLADE WIDTH in.	BLADE WIDTH mm	ORDERING NUMBER	ITEM CODE	WT. LBS.
10	250	CRB10	75628	4.6
16	400	CRB16	75629	7.3
22	550	CRB22	75630	10.1
28	700	CRB28	75631	12.8
34	850	CRB34	75632	15.5
40	1000	CRB40	75633	18.3
46	1150	CRB46	75634	21.0
52	1300	CRB52	75635	23.8
58	1450	CRB58	75636	26.5
64	1600	CRB64	75775	29.2
70	1750	CRB70	75773	32.0
76	1900	CRB76	76940	34.7
82	2050	CRB82	76941	37.5

Other blade sizes available upon request.

Lead time: 1 working day

High-Temp ConShear™ Blades - Yellow

BLADE WIDTH in.	BLADE WIDTH mm	ORDERING NUMBER	ITEM CODE	WT. LBS.
10	250	CRB-HT10	76593	4.8
16	400	CRB-HT16	76594	7.6
22	550	CRB-HT22	76595	10.4
28	700	CRB-HT28	76596	13.2
34	850	CRB-HT34	76597	16.2
40	1000	CRB-HT40	76598	19.1
46	1150	CRB-HT46	76599	21.9
52	1300	CRB-HT52	76600	24.8
58	1450	CRB-HT58	76601	27.6
64	1600	CRB-HT64	76602	30.5
70	1750	CRB-HT70	76603	33.4

Lead time: 1 working day

Chemical Resistant/Food Grade ConShear™ Blades - White ‡

BLADE WIDTH in.	BLADE WIDTH mm	ORDERING NUMBER	ITEM CODE	WT. LBS.
10	250	CRB-W10	78471	4.8
16	400	CRB-W16	78472	7.6
22	550	CRB-W22	78473	10.4
28	700	CRB-W28	78474	13.2
34	850	CRB-W34	78475	16.2
40	1000	CRB-W40	78476	19.1
46	1150	CRB-W46	78477	21.9
52	1300	CRB-W52	78478	24.8
58	1450	CRB-W58	78479	27.6

Lead time: 1 working day

‡ All ingredients used in the polyurethane formulation of this blade comply with the relevant requirements of 21 CFR (FDA Code of Federal Regulations) for use in repeated bulk dry food applications.

Ultra High-Temp ConShear™ Blades - Red

BLADE WIDTH in.	BLADE WIDTH mm	ORDERING NUMBER	ITEM CODE	WT. LBS.
10	250	CRB-UHT10	91253	4.6
16	400	CRB-UHT16	91254	7.3
22	550	CRB-UHT22	91255	10.1
28	700	CRB-UHT28	91256	12.8
34	850	CRB-UHT34	91257	15.5
40	1000	CRB-UHT40	91258	18.3
46	1150	CRB-UHT46	91259	21.0
52	1300	CRB-UHT52	91260	23.8
58	1450	CRB-UHT58	91261	26.5
64	1600	CRB-UHT64	91262	29.2
70	1750	CRB-UHT70	91263	32.0

Lead time: 1 working day

Blade Width Selection

BELT WIDTH		BELT WIDTH - 2" (50mm)		BELT WIDTH - 8" (200mm)		BELT WIDTH - 14" (350mm)	
in.	mm	in.	mm	in.	mm	in.	mm
24	600	22	550	16	400	10	250
30	750	28	700	22	550	16	400
36	900	34	850	28	700	22	550
42	1050	40	1000	34	850	28	700
48	1200	46	1150	40	1000	34	850
54	1350	52	1300	46	1150	40	1000
60	1500	58	1450	52	1300	46	1150
72	1800	70	1750	64	1600	58	1450
84	2100	82	2050	76	1900	70	1750

Product Notes:

- A molded-in wear line indicates when the blade is worn out and needs to be replaced.
- Faceted blade profile: Renews its cleaning edge as the blade wears.
- ConShear™ blades are made of a special long-wearing polyurethane.
- Quick blade replacement: Pull one pin, remove the old blade and slide the new one in.

Specifications & Guidelines

MSP
Standard Mine-Duty Precleaner

Pole Length Specifications*

CLEANER SIZE		POLE LENGTH		MAXIMUM CONVEYOR SPAN	
in.	mm	in.	mm	in.	mm
24	600	78	1950	68	1700
30	750	84	2100	74	1850
36	900	90	2250	80	2000
42	1050	96	2400	86	2150
48	1200	102	2550	92	2300
54	1350	108	2700	98	2450
60	1500	114	2850	104	2600
72	1800	126	3150	116	2900
84	2100	138	3450	128	3200

* For special extra long pole length requirements a Pole Extender Kit (#76024) is available that provides 30' (750 mm) of extended pole length. See 129. Pole Diameter - 2-7/8" (73 mm).

Clearance Guidelines for Installation

HORIZONTAL CLEARANCE REQUIRED		VERTICAL CLEARANCE REQUIRED	
in.	mm	in.	mm
4	100	10	250


Spring Length Chart

Blade Width		Purple Springs		White Springs		Gold Springs	
in.	mm	in.	mm	in.	mm	in.	mm
16	400	5 1/4	133	6 1/4	159	N/A	N/A
22	550	4 3/4	121	6 1/8	156	N/A	N/A
28	700	4 1/8	105	5 7/8	149	N/A	N/A
34	850	N/A	N/A	5 3/4	146	6 1/8	156
40	1000	N/A	N/A	5 5/8	143	6 1/8	156
46	1150	N/A	N/A	5 1/2	140	6	152
52	1300	N/A	N/A	5 3/8	137	5 7/8	149
58	1450	N/A	N/A	5 1/8	130	5 7/8	149
64	1600	N/A	N/A	5	127	5 3/4	146
70	1750	N/A	N/A	4 7/8	124	5 5/8	143
76	1900	N/A	N/A	N/A	N/A	5 5/8	143
82	2050	N/A	N/A	N/A	N/A	5 1/2	140
88	2200	N/A	N/A	N/A	N/A	5 1/4	133
94	2350	N/A	N/A	N/A	N/A	5 1/8	130
100	2500	N/A	N/A	N/A	N/A	5 1/8	130
106	2650	N/A	N/A	N/A	N/A	5	127



Shading indicates preferred spring option

Specifications:


- Maximum Belt Speed 700 FPM (3.5 m/s)
- Temperature Rating ConShear™, ConShear™ White: -30 to 180°F (-35 to 82°C)
ConShear™ High-Temp: up to 275°F (135°C), spikes to 325°F (164°C)
ConShear™ Ultra High-Temp: up to 400°F (200°C), spikes to 450°F (232°C)
- Minimum Pulley Diameter..... 16" (400 mm)
- Blade Height..... 7-1/4" (185 mm)
- Usable Blade Wear Length..... 4" (100 mm)
- Blade Material Polyurethane (proprietary blend for abrasion resistance and long wear)
- Available for Belt Widths 24 to 84" (600 to 2100 mm)
- CEMA Cleaner Rating Class 3

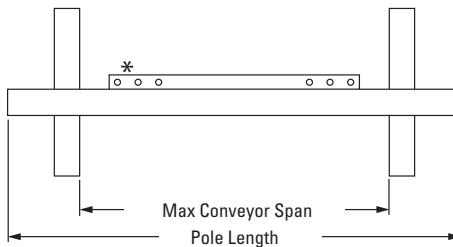

*Each pole size can be used with a blade size either belt width minus 2" (50 mm), 8" (200 mm), or 14" (350 mm).



Pole Location Specs

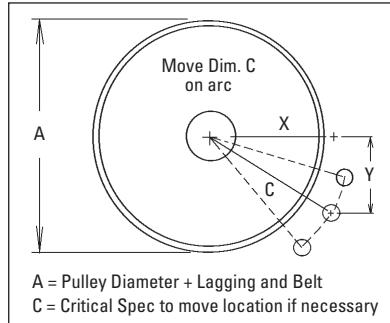


A = Pulley Diameter + Lagging and Belt
C = Critical Spec to move location if necessary

Pole Location Chart

A		X		Y	
in.	mm	in.	mm	in.	mm
16	450	7 1/8	204	9	230
17	475	7 7/8	222	9	230
18	500	8 1/4	232	9	230
19	525	9	248	9	230
20	550	9 3/8	266	9	230
21	575	10	282	9	230
22	600	10 3/4	298	9	230
23	625	11 3/8	312	9	230
24	650	12	330	9	230
25	675	12 5/8	344	9	230
26	700	13 1/4	358	9	230
27	725	13 7/8	372	9	230
28	750	14 3/8	390	9	230
29	775	15	402	9	230
30	800	15 5/8	416	9	230
31	825	16 1/8	430	9	230
32	850	16 3/4	446	9	230
33	875	17 1/4	460	9	230
34	900	17 7/8	474	9	230
35	925	18 3/8	486	9	230
36	950	19	502	9	230
37	975	19 1/2	514	9	230
38	1000	20	528	9	230
39	1025	20 5/8	542	9	230
40	1050	21 1/8	556	9	230
41	1075	21 3/4	572	9	230
42	1100	22 1/4	588	9	230

Replacement Parts List

MSP
Standard Mine-Duty Precleaner

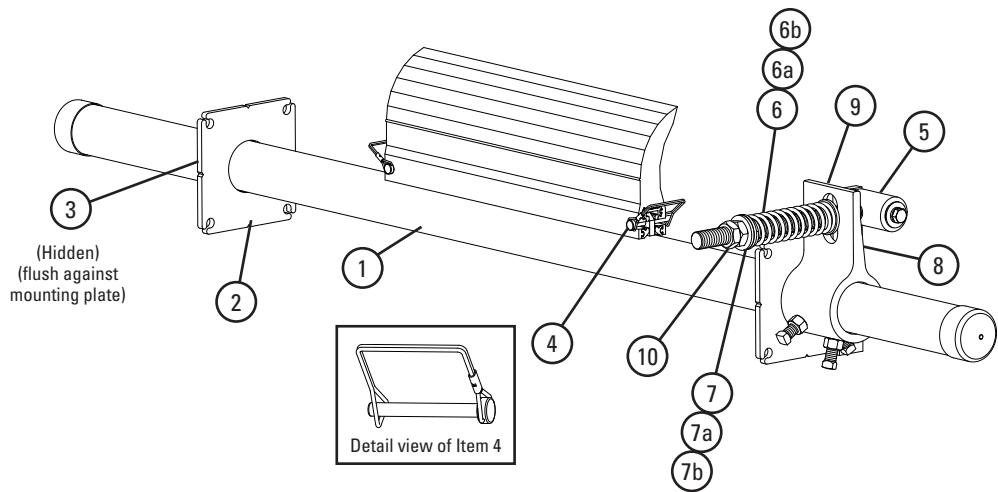

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	24" (600mm) Pole	MSPP24	75803	42.5
	30" (750mm) Pole	MSPP30	75804	46.0
	36" (900mm) Pole	MSPP36	75805	50.5
	42" (1050mm) Pole	MSPP42	75806	55.5
	48" (1200mm) Pole	MSPP48	75807	60.0
	54" (1350mm) Pole	MSPP54	75808	64.0
	60" (1500mm) Pole	MSPP60	75809	67.0
	72" (1800mm) Pole	MSPP72	75810	76.0
	84" (2100mm) Pole	MSPP84	76807	88.6
2	Mounting Plate Kit* (2 ea.)	MSPMPK	75811	8.3
3	Pole Lock* (1 ea.)	MSPPL	75816	1.9
4	Blade Pin Kit* (1 ea.)	MSPBP	107852	0.1
5	Pivot Arm Kit* (1 ea.)	QMTPAK	76096	4.3
6a	Tension Spring – Purple (1 ea.)	QMTS-P	75845	0.6
6b	Tension Spring – White (1 ea.)	PSTS-W	75898	1.7
6c	Tension Spring – Gold (1 ea.)	QMTS-G	76484	2.5
7a	Bushing Kit – Purple (2 ea.)	QMTBK-P	76097	0.1
7b	Bushing Kit – White (2 ea.)	QMTBK-W	76098	0.2
7c	Bushing Kit – Gold (2 ea.)	QMTBK-G	76540	0.3
7d	QMT Bushing Kit – Ultra High-Temp (2 ea.)	QMT-ATEX	90435	0.2
8	Pivot Shaft Bracket Kit* (1 ea.)	QMTPSBK	76099	4.3
9	Torsion Arm Kit* (1 ea.)	PSTA	75896	11.4
10	Jam Nut Kit QMT Tensioner	JNK-C	79893	0.3
-	QMT Spring Tensioner* – Purple (incl. (1) ea. items 5, 6a, 7a, 8, & 9)	QMT-P	76074	20.4
-	QMT Spring Tensioner* – White (incl. (1) ea. items 5, 6b, 7b, 8, & 9)	QMT-W	76075	21.8
-	QMT Spring Tensioner* – Gold (incl. (1) ea. items 5, 6c, 7c, 8, & 9)	QMT-G	76483	23.2
-	QMT Ultra High-Temp Tensioner* – Purple (incl. (1) ea. items 5, 6a, 7, 8, & 9)	QMT-A-P	91285	20.4
-	QMT Ultra High-Temp Tensioner* – White (incl. (1) ea. items 5, 6b, 7, 8, & 9)	QMT-A-W	91286	21.8

*Hardware Included

Lead Time: 1 working day

Spring Tensioner Selection Chart


CLEANER BLADE WIDTH	76074 QMT-P	76075 QMT-W	76483 QMT-G
ConShear™ 16–28" (400–700mm)	X		
ConShear™ 34–70" (850–1750mm)		X	
ConShear™ 76–82" (1900–2050mm)			X

Spring Tensioner Selection Chart - UHT

CLEANER BLADE WIDTH	91285 QMT-A-P	91286 QMT-A-W
UHT ConShear™ 16–28" (400–700mm)	X	
UHT ConShear™ 34–70" (850–1750mm)		X

Replacement Parts List

MSP Stainless Steel Standard Mine-Duty Precleaner

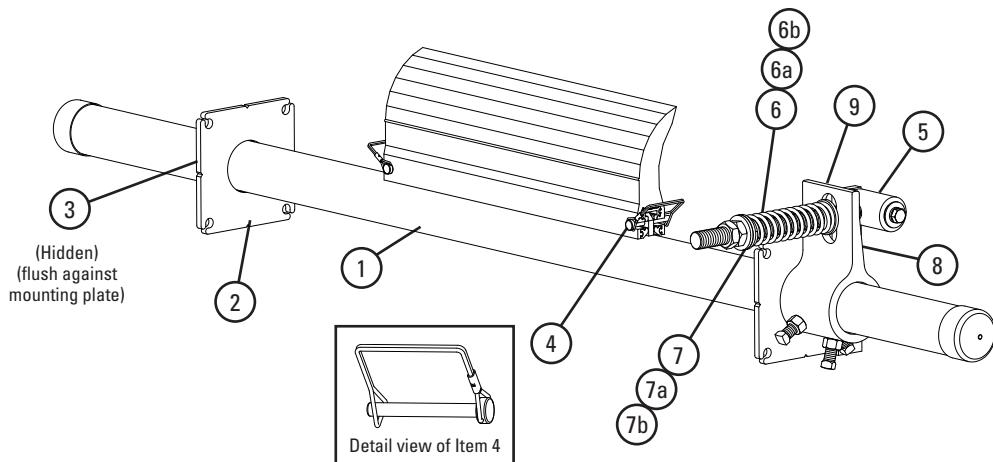

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	24" (600mm) SS Pole	MSPP24-S/S	77472	42.5
	30" (750mm) SS Pole	MSPP30-S/S	77473	46.0
	36" (900mm) SS Pole	MSPP36-S/S	77474	50.5
	42" (1050mm) SS Pole	MSPP42-S/S	77475	55.5
	48" (1200mm) SS Pole	MSPP48-S/S	77476	60.0
	54" (1350mm) SS Pole	MSPP54-S/S	77477	64.0
	60" (1500mm) SS Pole	MSPP60-S/S	77478	67.0
	72" (1800mm) SS Pole	MSPP72-S/S	77479	76.0
	84" (2100mm) SS Pole	MSPP84-S/S	77480	88.6
2	SS Mounting Plate Kit* (2 ea.)	MSPMPK-S/S	77582	8.3
3	SS Pole Lock* (1 ea.)	MSPPL-S/S	77524	1.9
4	Blade Pin Kit* (1 ea.)	MSPBP	107852	0.1
5	SS Pivot Arm Kit* (1 ea.)	QMTPAK-S/S	77587	4.3
6	SS Tension Spring – Purple (1 ea.)	QMTS-P-S/S	77450	0.6
6a	SS Tension Spring – White (1 ea.)	QMTS-W-S/S	77451	1.7
6b	SS Tension Spring – Gold (1 ea.)	QMTS-G-S/S	77452	2.5
7	Bushing Kit – Purple (2 ea.)	QMTBK-P	76097	0.1
7a	Bushing Kit – White (2 ea.)	QMTBK-W	76098	0.2
7b	Bushing Kit – Gold (2 ea.)	QMTBK-G	76540	0.3
8	SS Pivot Shaft Bracket Kit* (1 ea.)	QMTPSBK-S/S	77588	4.3
9	SS Torsion Arm Kit* (1 ea.)	PSTA-S/S	77442	11.4
-	SS QMT Spring Tensioner* – Purple (incl. (1) ea. items 5, 6, 7, 8, & 9)	QMT-P-S/S	77584	20.4
-	SS QMT Spring Tensioner* – White (incl. (1) ea. items 5, 6a, 7a, 8, & 9)	QMT-W-S/S	77585	21.8
-	SS QMT Spring Tensioner* – Gold (incl. (1) ea. items 5, 6b, 7b, 8, & 9)	QMT-G-S/S	77586	23.2

*Hardware Included

Lead Time: 1 working day

Shaded items are made to order.
Lead time: 3 weeks

Spring Tensioner Selection Chart

CLEANER BLADE WIDTH	77584 QMT-P-S/S	77585 QMT-W-S/S	77586 QMT-G-S/S
ConShear™ 16–28" (400–700mm)	X		
ConShear™ 34–70" (850–1750mm)		X	
ConShear™ 76–82" (1900–2050mm)			X


Product Ordering Information

MMP
Medium Mine-Duty Precleaner

Belt Width Minus 6" (150 mm)

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
24	600	18	450	MMP-624	76450	159.4
30	750	24	600	MMP-630	76451	175.0
36	900	30	750	MMP-636	76452	190.6
42	1050	36	900	MMP-642	76453	206.2
48	1200	42	1050	MMP-648	76454	221.8
54	1350	48	1200	MMP-654	76455	237.4
60	1500	54	1350	MMP-660	76456	253.0
72	1800	66	1650	MMP-672	76457	291.1
84	2100	78	1950	MMP-684	76798	344.1
96	2400	90	2250	MMP-696	79033	397.1

Lead time: 1 working day

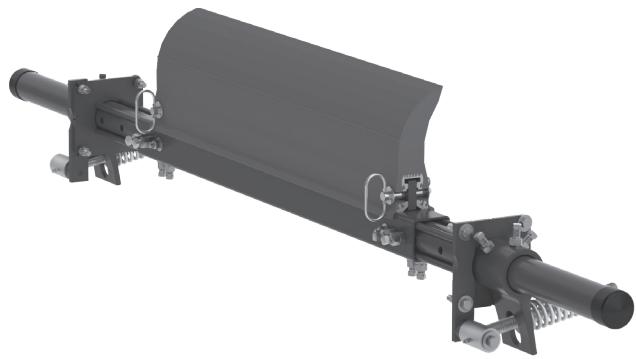

Belt Width Minus 12" (300 mm)

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
30	750	18	450	MMP-1230	76551	168.0
36	900	24	600	MMP-1236	76552	183.6
42	1050	30	750	MMP-1242	76553	199.2
48	1200	36	900	MMP-1248	76554	214.8
54	1350	42	1050	MMP-1254	76555	230.4
60	1500	48	1200	MMP-1260	76556	246.0
72	1800	60	1500	MMP-1272	76557	284.1
84	2100	72	1800	MMP-1284	76799	337.1
96	2400	84	2100	MMP-1296	79034	390.1

Lead time: 1 working day

Belt Width Minus 18" (450 mm)

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
36	900	18	450	MMP-1836	77575	176.6
42	1050	24	600	MMP-1842	77576	192.2
48	1200	30	750	MMP-1848	77577	207.8
54	1350	36	900	MMP-1854	77578	223.4
60	1500	42	1050	MMP-1860	77579	239.0
72	1800	54	1350	MMP-1872	77580	277.1
84	2100	66	1650	MMP-1884	77581	330.1
96	2400	78	1950	MMP-1896	79040	383.1

Lead time: 1 working day

Optional Mounting Kits

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Optional Mounting Bar Kit *	MMBK	75830	19.5
Mounting Plate Kit * (2 plates)	MMPK	76537	140.0

*Hardware Included

Lead time: 1 working day

Product Notes:

- Recommended for medium-duty conveyor applications. For abusive applications see the MHCP Heavy-Duty Cartridge Precleaner on page 56.
- Material Path Option: Fit the blade width to the belt's material path. The material path is typically the center 2/3 of the belt width. In most cases a blade size of belt width minus 6" (150 mm) may be the best solution.
- Each cleaner pole is retrofittable for three blade sizes (belt width minus 6" (150 mm), 12" (300 mm), or 18" (450 mm)).
- Pole Length: Belt width plus 54" (1350 mm). For longer requirements see Installation Accessories – Pole Extender Kit on page 129.
- Visual Tension Check: No guesswork on blade tensioning. Measure the spring and adjust to specified length per blade width to restore optimal tensioning.
- To make cleaner installation easier and quicker, see Optional Mounting Kits on page 129.

Product Ordering Information

MMP Stainless Steel Medium Mine-Duty Precleaner

Belt Width Minus 6" (150 mm)

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
24	600	18	450	MMP-624-S/S	77424	159.4
30	750	24	600	MMP-630-S/S	77425	175.0
36	900	30	750	MMP-636-S/S	77426	190.6
42	1050	36	900	MMP-642-S/S	77427	206.2
48	1200	42	1050	MMP-648-S/S	77428	221.8
54	1350	48	1200	MMP-654-S/S	77429	237.4
60	1500	54	1350	MMP-660-S/S	77430	253.0
72	1800	66	1650	MMP-672-S/S	77431	291.1
84	2100	78	1950	MMP-684-S/S	77432	344.1
96	2400	90	2250	MMP-696-S/S	79035	397.1

Lead time: 3 weeks



Belt Width Minus 12" (300 mm)

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
30	750	18	450	MMP-1230-S/S	77433	168.0
36	900	24	600	MMP-1236-S/S	77434	183.6
42	1050	30	750	MMP-1242-S/S	77435	199.2
48	1200	36	900	MMP-1248-S/S	77436	214.8
54	1350	42	1050	MMP-1254-S/S	77437	230.4
60	1500	48	1200	MMP-1260-S/S	77438	246.0
72	1800	60	1500	MMP-1272-S/S	77439	284.1
84	2100	72	1800	MMP-1284-S/S	77440	337.1
96	2400	84	2100	MMP-1296-S/S	79036	390.1

Lead time: 3 weeks

Product Notes:

- Recommended for medium-duty conveyor applications, but in corrosive environments.
- Material Path Option: Fit the blade width to the belt's material path. The material path is typically the center 2/3 of the belt width. In most cases a blade size of belt width minus 6" (150 mm) may be the best solution.
- Each cleaner pole is retrofittable for three blade sizes (belt width minus 6" (150 mm), 12" (300 mm), or 18" (450 mm)).
- Pole Length: Belt width plus 54" (1350 mm). For longer requirements see Installation Accessories – Pole Extender Kit on page 129.
- Visual Tension Check: No guesswork on blade tensioning. Measure the spring and adjust to specified length per blade width to restore optimal tensioning.
- To make cleaner installation easier and quicker, see Optional Mounting Kits on page 129.


Product Ordering Information

MMP Medium Mine-Duty Precleaner with Pneumatic Air Tensioner

Belt Width Minus 6" (150 mm)

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
24	600	18	450	MMP-624P	78706	202.0
30	750	24	600	MMP-630P	78707	217.6
36	900	30	750	MMP-636P	78708	233.2
42	1050	36	900	MMP-642P	78709	248.8
48	1200	42	1050	MMP-648P	78710	264.4
54	1350	48	1200	MMP-654P	78711	280.0
60	1500	54	1350	MMP-660P	78712	295.6
72	1800	66	1650	MMP-672P	78713	333.7
84	2100	78	1950	MMP-684P	78714	386.7
96	2400	90	2250	MMP-696P	79037	439.7
108	2700	102	2350	MMP-6108P	90389	492.7
120	3000	114	2650	MMP-6120P	90390	545.7

Lead time: 1 working day

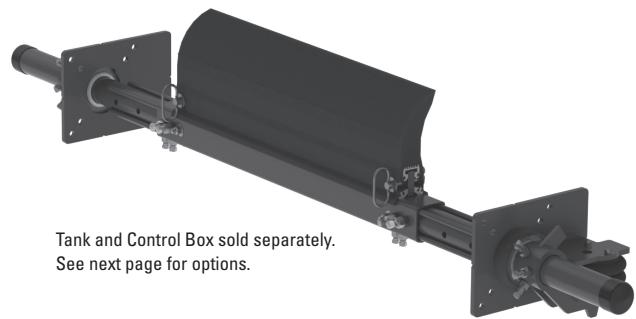

Tank and Control Box sold separately.
See next page for options.

Belt Width Minus 12" (300 mm)

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
30	750	18	450	MMP-1230P	78715	210.6
36	900	24	600	MMP-1236P	78716	226.2
42	1050	30	750	MMP-1242P	78717	241.8
48	1200	36	900	MMP-1248P	78718	257.4
54	1350	42	1050	MMP-1254P	78719	273.0
60	1500	48	1200	MMP-1260P	78720	288.6
72	1800	60	1500	MMP-1272P	78721	326.7
84	2100	72	1800	MMP-1284P	78722	379.7
96	2400	84	2100	MMP-1296P	79038	432.7
108	2700	96	2400	MMP-12108P	90391	485.7
120	3000	108	2700	MMP-12120P	90392	538.7

Lead time: 1 working day

Shaded items are made to order.
Lead time: 3 weeks

Product Notes:

- Recommended for medium-duty conveyor applications. For abusive applications see MHCP Heavy-Duty Cartridge Precleaner (56).
- Material Path Option: Fit the blade width to the belt's material path. The material path is typically the center 2/3 of the belt width. In most cases a blade size of belt width minus 6" (150 mm) may be the best solution.
- Each cleaner pole is retrofittable for three blade sizes (belt width minus 6" (150 mm), 12" (300 mm), or 18" (450 mm)).
- Pole Length: Belt width plus 54" (1350 mm). For longer requirements see Installation Accessories – Pole Extender Kit on page 129.
- Pneumatic Air Tensioner used for constant, automatic tension throughout the life of the blades. Can be used with site-available air lines or with the add-on Control Box or Control Box/Tank Combo Kit.
- To make cleaner installation easier and quicker, see Optional Mounting Kits on page 129.

Product Ordering Information


Line Connections for Pneumatic Air Tensioner

Control Box/Tank Combo Units for Closed System

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Control Box/Tank Combo Unit for Precleaner - 60 PSI	PAT-C-60	108230	64.0
Control Box/Tank Combo Unit for Secondary Cleaner - 100 PSI	PAT-C-100	108231	64.0

Product Notes:

- For use with cleaners with new PAT systems.
- 150# pop-off valve for safe pressurizing/charging of Air Tank.
- ASME construction tank.
- Fully sealed enclosure includes all critical items - regulator, tank gauge, downstream gauge, schrader valve, in-line filter, downstream valve.

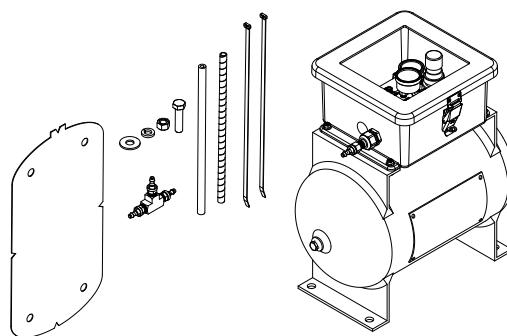


Control Box for Legacy Tank

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Control Box Kit for Precleaner - 60 PSI	PACB2-60	108228	13.6
Control Box Kit for Secondary Cleaner - 100 PSI	PACB2-100	108229	13.6

Product Notes:

- For use with Legacy PAT1/PAT2 tank systems ordered prior to January 2024.
- 150# pop-off valve for safe pressurizing/charging of Air Tank.
- May also be paired with Air Tank for Legacy Control Box if preferred.




Air Tank for Legacy Control Box

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
ASME Air Tank Kit	PAT-N	108232	47.3

Product Notes:

- For use with Legacy PACB60/PACB100 control boxes ordered prior to January 2024.
- 150# pop-off valve for safe pressurizing/charging of Air Tank.
- ASME construction tank.
- May also be paired with Control Box for Legacy Tank if preferred.

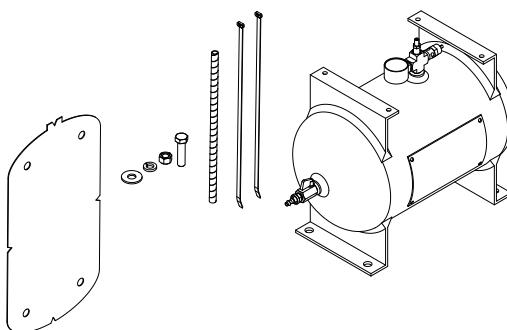

Replacement Parts List

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
10' (3m) Hose Kit	PATHK	78794	1.5
Upgrade Fitting Kit (fill valve, push-on fittings, plugs)	AWTRK	79319	0.4


TuffShear™ Replacement Blades

MMP
Medium Mine-Duty Precleaner

Standard TuffShear™ Blades

BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
18	450	TRB18	76485	21.0
24	600	TRB24	76486	28.0
30	750	TRB30	76487	35.0
36	900	TRB36	76488	42.0
42	1050	TRB42	76489	49.0
48	1200	TRB48	76490	56.0
54	1350	TRB54	76491	63.0
60	1500	TRB60	76492	70.0
66	1650	TRB66	76493	77.0
72	1800	TRB72	76494	84.0
78	1950	TRB78	76697	91.0
84	2100	TRB84	77047	98.0
90	2250	TRB90	77048	105.0

03/15/21: TuffShear replacement blades will retrofit to Martin® QC® XHD Cleaners.

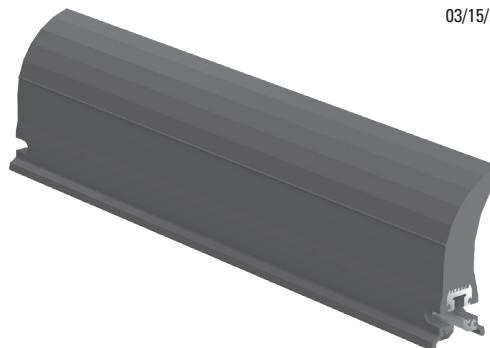

Other blade sizes available upon request.

Lead time: 1 working day

High-Temp TuffShear™ Blades - Yellow

BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
18	450	TRB-HT18	78754	21.0
24	600	TRB-HT24	78755	28.0
30	750	TRB-HT30	78756	35.0
36	900	TRB-HT36	78757	42.0
42	1050	TRB-HT42	78758	49.0
48	1200	TRB-HT48	78759	56.0
54	1350	TRB-HT54	78760	63.0
60	1500	TRB-HT60	78761	70.0
66	1650	TRB-HT66	78762	77.0
72	1800	TRB-HT72	78763	84.0
78	1950	TRB-HT78	78764	91.0

Other blade sizes available upon request.

Lead time: 1 working day

Ultra High-Temp TuffShear™ Blades - Red

BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
18	450	TRB-UHT18	91865	21.0
24	600	TRB-UHT24	91866	28.0
30	750	TRB-UHT30	91867	35.0
36	900	TRB-UHT36	91868	42.0
42	1050	TRB-UHT42	91869	49.0
48	1200	TRB-UHT48	91870	56.0
54	1350	TRB-UHT54	91871	63.0
60	1500	TRB-UHT60	91872	70.0
66	1650	TRB-UHT66	91873	77.0
72	1800	TRB-UHT72	91874	84.0
78	1950	TRB-UHT78	91875	91.0
84	2100	TRB-UHT84	91876	98.0
90	2250	TRB-UHT90	91877	105.0

Lead time: 1 working day; shaded items: 3 weeks

Product Notes:

- A molded-in wear line indicates when the blade is worn out and needs to be replaced.
- Faceted blade profile: Renews its cleaning edge as the blade wears.
- TuffShear™ blades are made of a special long-wearing polyurethane.
- Quick blade replacement: Pull one pin, remove the old blade and slide the new one in.

Martin® and QC1® are registered trademarks of Martin Engineering, Neponset, IL.

Specifications & Guidelines


MMP Medium Mine-Duty Precleaner

Pole Length Specifications*

CLEANER SIZE		MAX OVERALL POLE LENGTH		CENTER POLE LENGTH		MAXIMUM CONVEYOR SPAN	
in.	mm	in.	mm	in.	mm	in.	mm
24	600	78	1950	24	600	66	1650
30	750	84	2100	30	750	72	1800
36	900	90	2250	36	900	78	1950
42	1050	96	2400	42	1050	84	2100
48	1200	102	2550	48	1200	90	2250
54	1350	108	2700	54	1350	96	2400
60	1500	114	2850	60	1500	102	2550
72	1800	126	3150	72	1800	114	2850
84	2100	138	3450	84	2100	126	3150
96	2400	150	3750	96	2400	138	3450
108	2700	162	4050	108	2700	150	3750
120	3000	174	4350	120	3000	162	4050

* For special extra long pole length requirements a Pole Extender Kit (#76024) is available that provides 30" (750 mm) of extended pole length. (p. 129).


Pole Diameter – 2-7/8" (73 mm)

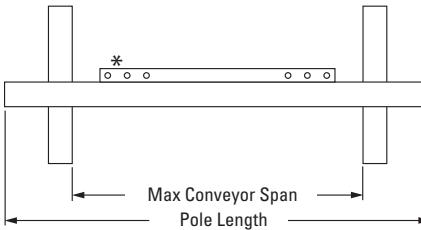

*Each pole size can be used with a blade size down to 18" (450 mm) in 6" (150 mm) increments.

Clearance Guidelines for Installation


HORIZONTAL CLEARANCE REQUIRED		VERTICAL CLEARANCE REQUIRED	
in.	mm	in.	mm
4	100	13	325



QMT Spring Length Chart

Blade Width		Purple Springs		White Springs		Gold Springs		Silver Springs	
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
18	450	4 3/8	111	6	152	N/A	N/A	N/A	N/A
24	600	N/A	N/A	5 3/4	146	6	152	N/A	N/A
30	750	N/A	N/A	5 1/2	140	5 7/8	149	N/A	N/A
36	900	N/A	N/A	5 3/8	137	5 3/4	146	N/A	N/A
42	1050	N/A	N/A	5 1/8	130	5 5/8	143	6 1/8	156
48	1200	N/A	N/A	5	127	5 5/8	143	6 1/8	156
54	1350	N/A	N/A	4 3/4	121	5 1/2	140	6	152
60	1500	N/A	N/A	4 1/2	114	5 3/8	137	6	152
66	1650	N/A	N/A	N/A	N/A	5 1/4	133	5 7/8	149
72	1800	N/A	N/A	N/A	N/A	5 1/8	130	5 7/8	149
78	1950	N/A	N/A	N/A	N/A	5	127	5 3/4	146
84	2100	N/A	N/A	N/A	N/A	4 7/8	124	5 3/4	146
90	2250	N/A	N/A	N/A	N/A	N/A	N/A	5 3/4	146
96	2400	N/A	N/A	N/A	N/A	N/A	N/A	5 5/8	143
102	2550	N/A	N/A	N/A	N/A	N/A	N/A	5 5/8	143
108	2700	N/A	N/A	N/A	N/A	N/A	N/A	5 1/2	140
114	2850	N/A	N/A	N/A	N/A	N/A	N/A	5 1/2	140

Shading indicates preferred spring option.



Top of washer to top of torque arm

Specifications:

- Maximum Belt Speed 1000 FPM (5 m/s)
- Temperature Rating TuffShear™: -30 to 180°F (-35 to 82°C)
TuffShear™ High-Temp: up to 275°F (135°C) with spikes to 325°F (164°C)
- Minimum Pulley Diameter.....16" (400 mm)
- Blade Height.....10" (250 mm)
- Usable Blade Wear Length.....6" (150 mm)
- Blade MaterialPolyurethane (proprietary blend for abrasion resistance and long wear)
- Available for Belt Widths24 to 96" (600 to 2400 mm) Other sizes available upon request.
- CEMA Cleaner RatingClass 4

PAT Pressure Chart

Blade Width		Pressure	
in.	mm	psi	kPa
18	450	5	34
24	600	6	41
32	800	8	55
36	900	9	62
42	1050	11	76
48	1200	13	90
54	1350	14	97
60	1500	16	110
66	1650	17	117
72	1800	19	131
78	1950	21	145
84	2100	22	152
90	2250	24	165
96	2400	25	172
102	2550	27	186
108	2700	28	193
114	2850	30	207

*PSI setting is based on belt width.


Pole Location Chart

A	X	Y	C
in.	mm	in.	mm
16	400	8 1/8	206
17	425	8 3/4	222
18	450	9 1/4	235
19	475	9 3/4	248
20	500	10 3/8	264
21	525	11	279
22	550	11 1/2	292
23	575	12	305
24	600	12 5/8	321
25	625	13 1/8	333
26	650	13 5/8	346
27	675	14 1/8	359
28	700	14 5/8	371
29	725	15 1/4	387
30	750	15 5/8	397
31	775	16 1/8	410
32	800	16 3/4	425
33	825	17 1/4	438
34	850	17 3/4	451
35	875	18 1/4	464
36	900	18 3/4	476
37	925	19 3/8	492
38	950	19 3/4	502
39	975	20 3/8	518
40	1000	20 3/4	527
41	1025	21 3/8	543
42	1050	21 7/8	556
43	1075	22 1/2	572
44	1100	23 1/8	587
45	1125	23 5/8	600
46	1150	24 1/8	613
47	1175	24 3/4	629
48	1200	25 1/4	641

A	X	Y	C
in.	mm	in.	mm
14 1/2	368	14 7/8	378
15 1/8	384	15 1/2	394
16 1/4	413	16 1/4	422
16 5/8	422	17	432
17 3/8	441	17 3/4	451
18 1/8	460	18 1/8	466
18 1/2	470	18 7/8	479
19 3/8	492	19 3/8	492
19 5/8	502	19 3/4	502
20 1/8	511	20 5/8	524
21	533	21	533
21 3/8	543	21 7/8	556
22 1/4	565	22 3/4	578
23 1/8	587	23 5/8	587
23 5/8	600	24 1/2	622
24 1/2	635	24 1/2	648
24 5/8	660	25 1/2	660
25	673	25 1/2	673
25 1/2	686	25 1/2	699
26	711	26	711

Replacement Parts List

MMP
Medium Mine-Duty Precleaner

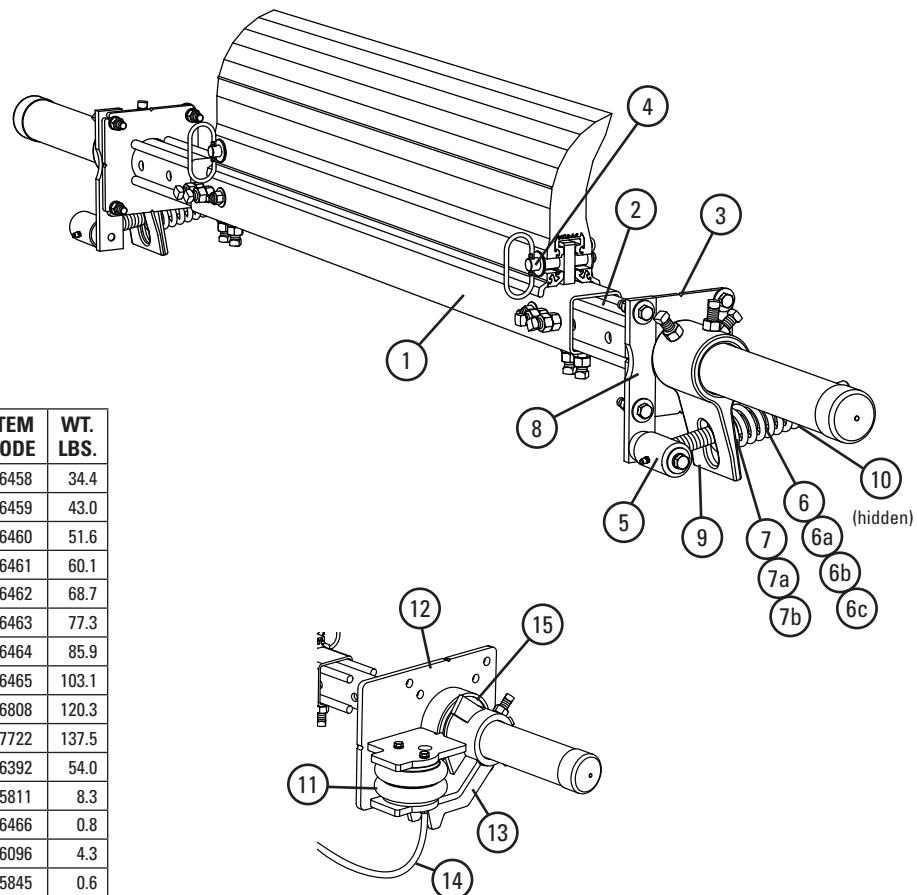

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	24" (600mm) Center Pole	MMPCP24	76458	34.4
	30" (750mm) Center Pole	MMPCP30	76459	43.0
	36" (900mm) Center Pole	MMPCP36	76460	51.6
	42" (1050mm) Center Pole	MMPCP42	76461	60.1
	48" (1200mm) Center Pole	MMPCP48	76462	68.7
	54" (1350mm) Center Pole	MMPCP54	76463	77.3
	60" (1500mm) Center Pole	MMPCP60	76464	85.9
	72" (1800mm) Center Pole	MMPCP72	76465	103.1
	84" (2100mm) Center Pole	MMPCP84	76808	120.3
	96" (2400mm) Center Pole	MMPCP96	77722	137.5
2	Extender Pole Kit (2 ea.)	MHP-EP	76392	54.0
3	Mounting Plate Kit* (2 ea.)	MSPMPK	75811	8.3
4	Blade Pin Kit* (1 ea.)	MMPBPK	76466	0.8
5	Pivot Arm Kit* (1 ea.)	QMTPAK	76096	4.3
6	Tension Spring - Purple (1 ea.)	QMTS-P	75845	0.6
6a	Tension Spring - White (1 ea.)	PSTS-W	75898	1.7
6b	Tension Spring - Gold (1 ea.)	QMTS-G	76484	2.5
6c	Tension Spring - Silver (1 ea.)	PSTS-S	75899	3.0
7	Bushing Kit - Purple (2 ea.)	QMTBK-P	76097	0.1
7a	Bushing Kit - White & Silver (2 ea.)	QMTBK-W	76098	0.2
7b	Bushing Kit - Gold (2 ea.)	QMTBK-G	76540	0.3
8	Pivot Shaft Bracket Kit* (1 ea.)	QMTPSBK	76099	4.3
9	Torsion Arm Kit* (1 ea.)	PSTA	75896	11.4
10	Jam Nut Kit, QMT Tensioner	JNK-C	79893	0.3
-	QMT Spring Tensioner* - Purple (incl. (1) ea. items 5, 6, 7, 8, & 9)	QMT-P	76074	20.4
-	QMT Spring Tensioner* - White (incl. (1) ea. items 5, 6a, 7a, 8, & 9)	QMT-W	76075	21.8
-	QMT Spring Tensioner* - Gold (incl. (1) ea. items 5, 6b, 7b, 8, & 9)	QMT-G	76483	23.2
-	QMT Spring Tensioner* - Silver (incl. (1) ea. items 5, 6c, 7a, 8 & 9)	QMT-S	79039	20.3
11	Air/Water Bag (1 ea.)	AWTB	75905	3.8
12	Mounting Base (1 ea.)	AWTMB	75906	22.9
13	Torque Arm* (1 ea.)	AWTA	75907	11.6
14	Hose Kit (50' of hose & (6) hose clamps)	AWTHK	75909	6.7
15	AWT Pole Bearing Assy (for cleaners shipped after 4/2016)	AWTPBA	90000	2.3
-	AWT Air/Water Tensioner (incl. (2) ea. items 11, 12, 13 & 14)	AWTNBC	76069	75.2

*Hardware Included


Lead Time: 1 working day

Spring Tensioner Selection Chart

CLEANER BLADE WIDTH	76074 QMT-P	76075 QMT-W	76483 QMT-G	79039 QMT-S
TuffShear™ 18–24" (450–600mm)	X			
TuffShear™ 30–48" (750–1200mm)		X		
TuffShear™ 54–78" (1350–1950mm)			X	
TuffShear™ 84–90" (2100–2250mm)				X

Replacement Parts List

MMP Stainless Steel Medium Mine-Duty Precleaner

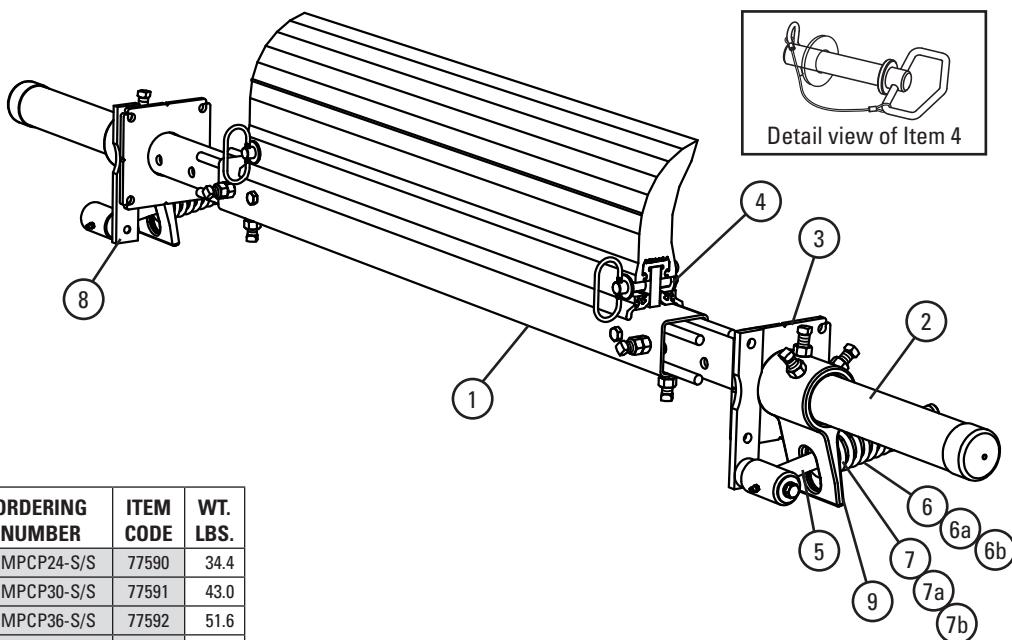

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	24" (600mm) SS Center Pole	MMPCP24-S/S	77590	34.4
	30" (750mm) SS Center Pole	MMPCP30-S/S	77591	43.0
	36" (900mm) SS Center Pole	MMPCP36-S/S	77592	51.6
	42" (1050mm) SS Center Pole	MMPCP42-S/S	77593	60.1
	48" (1200mm) SS Center Pole	MMPCP48-S/S	77594	68.7
	54" (1350mm) SS Center Pole	MMPCP54-S/S	77595	77.3
	60" (1500mm) SS Center Pole	MMPCP60-S/S	77596	85.9
	72" (1800mm) SS Center Pole	MMPCP72-S/S	77597	103.1
	84" (2100mm) SS Center Pole	MMPCP84-S/S	77598	120.3
	96" (2400mm) SS Center Pole	MMPCP96-S/S	78686	137.5
2	SS Extender Pole Kit (2 ea.)	MHP-EP-S/S	77599	54.0
3	SS Mounting Plate Kit* (2 ea.)	MSPMPK-S/S	77582	8.3
4	SS Blade Pin Kit* (1 ea.)	MMPBPK-S/S	77600	0.8
5	SS Pivot Arm Kit* (1 ea.)	QMTPAK-S/S	77587	4.3
6	SS Tension Spring-Purple (1 ea.)	QMTS-P-S/S	77450	0.6
6a	SS Tension Spring-White (1 ea.)	QMTS-W-S/S	77451	1.7
6b	SS Tension Spring-Gold (1 ea.)	QMTS-G-S/S	77452	2.5
6c	SS Tension Spring-Silver (1 ea.)	QMTS-S-S/S	79056	3.1
7	Bushing Kit – Purple (2 ea.)	QMTBK-P	76097	0.1
7a	Bushing Kit – White and Silver (2 ea.)	QMTBK-W	76098	0.2
7b	Bushing Kit – Gold (2 ea.)	QMTBK-G	76540	0.3
8	SS Pivot Shaft Bracket Kit* (1 ea.)	QMTPSBK-S/S	77588	4.3
9	SS Torsion Arm Kit* (1 ea.)	PSTA-S/S	77442	11.4
-	SS QMT Spring Tensioner*-Purple (incl. (1) ea. items 5, 6, 7, 8, & 9)	QMT-P-S/S	77584	20.4
-	SS QMT Spring Tensioner*-White (incl. (1) ea. items 5, 6a, 7a, 8, & 9)	QMT-W-S/S	77585	21.8
-	SS QMT Spring Tensioner*-Gold (incl. (1) ea. items 5, 6b, 7b, 8, & 9)	QMT-G-S/S	77586	23.2
-	SS QMT Spring Tensioner*-Silver (incl. (1) ea. items 5, 6c, 7a, 8 & 9)	QMT-S-S/S	79059	24.6

*Hardware Included

Lead Time: 1 working day


Shaded items are made to order.
Lead time: 3 weeks

Spring Tensioner Selection Chart

CLEANER BLADE WIDTH	77584 QMT-P- S/S	77585 QMT-W- S/S	77586 QMT-G- S/S	79059 QMT-S- S/S
TuffShear™ 18–24" (450–600mm)	X			
TuffShear™ 30–48" (750–1200mm)		X		
TuffShear™ 54–78" (1350–1950mm)			X	
TuffShear™ 84"–90" (2100–2250mm)				X

Product Ordering Information

MHP
Heavy-Duty Precleaner

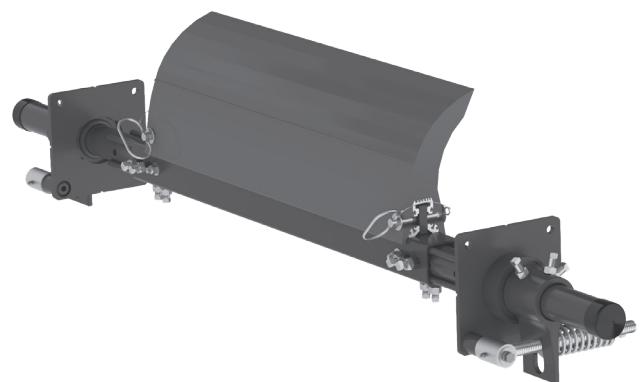

Belt Width Minus 6" (150 mm)

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
24	600	18	450	MHP-624	77703	249.4
30	750	24	600	MHP-630	77704	267.6
36	900	30	750	MHP-636	77705	285.8
42	1050	36	900	MHP-642	77706	304.0
48	1200	42	1050	MHP-648	77707	322.2
54	1350	48	1200	MHP-654	77708	341.7
60	1500	54	1350	MHP-660	77709	359.9
72	1800	66	1650	MHP-672	77710	396.4
84	2100	78	1950	MHP-684	77711	432.9
96	2400	90	2250	MHP-696	77712	469.4

Lead time: 1 working day

Belt Width Minus 18" (450 mm)

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
36	900	18	450	MHP-1836	78591	266.6
42	1050	24	600	MHP-1842	78592	284.7
48	1200	30	750	MHP-1848	78593	302.9
54	1350	36	900	MHP-1854	78594	321.2
60	1500	42	1050	MHP-1860	78595	339.4
72	1800	54	1350	MHP-1872	78596	377.1
84	2100	66	1650	MHP-1884	78597	413.6
96	2400	78	1950	MHP-1896	78598	450.1

Lead time: 1 working day

Belt Width Minus 12" (300 mm)

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
30	750	18	450	MHP-1230	77713	258.0
36	900	24	600	MHP-1236	77714	276.2
42	1050	30	750	MHP-1242	77715	294.3
48	1200	36	900	MHP-1248	77716	312.6
54	1350	42	1050	MHP-1254	77717	330.8
60	1500	48	1200	MHP-1260	77718	350.3
72	1800	60	1500	MHP-1272	77719	386.8
84	2100	72	1800	MHP-1284	77720	432.2
96	2400	84	2100	MHP-1296	77721	477.6

Lead time: 1 working day

Belt Width Minus 24" (450 mm)

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
42	1050	18	450	MHP-2442	78669	275.1
48	1200	24	600	MHP-2448	78670	293.3
54	1350	30	750	MHP-2454	78671	311.5
60	1500	36	900	MHP-2460	78672	329.8
72	1800	48	1200	MHP-2472	78673	367.5
84	2100	60	1500	MHP-2484	78674	404.0
96	2400	72	1800	MHP-2496	78675	440.4

Lead time: 1 working day

Optional Mounting Kits

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Optional Mounting Bar Kit *	MMBK	75830	19.5
Mounting Plate Kit * (2 plates)	MMPK	76537	140.0

*Hardware Included


Lead time: 1 working day

Product Notes:

- Recommended for heavy-duty conveyor applications.
- Material Path Option: Fit the blade width to the belt's material path. The material path is typically the center 2/3 of the belt width. In most cases a blade size of belt width minus 6" (150 mm) may be the best solution.
- Each cleaner pole is retrofittable for four blade sizes (belt width minus 6" (150 mm), 12" (300 mm), 18" (450 mm), or 24" (600 mm)).
- Pole Length: Belt width plus 54" (1350 mm). For longer requirements see Installation Accessories - Pole Extender Kit on page 129.
- Visual Tension Check: No guesswork on blade tensioning. Measure the spring and adjust to specified length per blade width to restore optimal tensioning.
- To make cleaner installation easier and quicker, see Optional Mounting Kits on page 129.

Product Ordering Information

MHP
Heavy-Duty Precleaner
with Pneumatic Air Tensioner

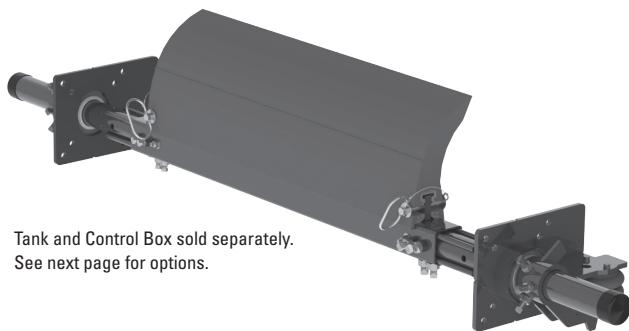

Tank and Control Box sold separately.
 See next page for options.

Belt Width Minus 6" (150 mm)

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
24	600	18	450	MHP-624P	78599	249.6
30	750	24	600	MHP-630P	78600	267.8
36	900	30	750	MHP-636P	78601	286.0
42	1050	36	900	MHP-642P	78602	304.2
48	1200	42	1050	MHP-648P	78603	322.4
54	1350	48	1200	MHP-654P	78604	340.6
60	1500	54	1350	MHP-660P	78605	358.8
72	1800	66	1650	MHP-672P	78606	395.3
84	2100	78	1950	MHP-684P	78607	431.8
96	2400	90	2250	MHP-696P	78608	468.3
108	2700	102	2350	MHP-6108P	90159	506.1
120	3000	114	2650	MHP-6120P	90160	542.6

Lead time: 1 working day

Belt Width Minus 12" (300 mm)

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
30	750	18	450	MHP-1230P	78609	258.2
36	900	24	600	MHP-1236P	78610	276.4
42	1050	30	750	MHP-1242P	78611	294.5
48	1200	36	900	MHP-1248P	78612	312.8
54	1350	42	1050	MHP-1254P	78613	331.0
60	1500	48	1200	MHP-1260P	78614	349.2
72	1800	60	1500	MHP-1272P	78615	385.7
84	2100	72	1800	MHP-1284P	78616	422.1
96	2400	84	2100	MHP-1296P	78617	458.5
108	2700	96	2400	MHP-12108P	90161	496.5
120	3000	108	2700	MHP-12120P	90162	533.0

Lead time: 1 working day

Belt Width Minus 18" (450 mm)

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
36	900	18	450	MHP-1836P	78618	266.8
42	1050	24	600	MHP-1842P	78619	284.9
48	1200	30	750	MHP-1848P	78620	303.1
54	1350	36	900	MHP-1854P	78621	321.4
60	1500	42	1050	MHP-1860P	78622	339.6
72	1800	54	1350	MHP-1872P	78623	376.0
84	2100	66	1650	MHP-1884P	78624	412.5
96	2400	78	1950	MHP-1896P	78625	449.0
108	2700	90	2250	MHP-18108P	90163	486.9
120	3000	102	2550	MHP-18120P	90164	523.4

Lead time: 1 working day

Shaded items are made to order.

Lead time: 3 weeks

Belt Width Minus 24" (600 mm)

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
42	1050	18	450	MHP-2442P	78676	275.3
48	1200	24	600	MHP-2448P	78677	293.5
54	1350	30	750	MHP-2454P	78678	311.7
60	1500	36	900	MHP-2460P	78679	330.0
72	1800	48	1200	MHP-2472P	78680	366.4
84	2100	60	1500	MHP-2484P	78681	402.9
96	2400	72	1800	MHP-2496P	78682	439.3
108	2700	84	2100	MHP-24108P	90165	477.3
120	3000	96	2400	MHP-24120P	90166	513.8

Lead time: 1 working day

Product Notes:

- Recommended for heavy-duty conveyor applications.
- Material Path Option: Fit the blade width to the belt's material path. The material path is typically the center 2/3 of the belt width. In most cases a blade size of belt width minus 6" (150 mm) may be the best solution.
- Each cleaner pole is retrofittable for four blade sizes (belt width minus 6" (150 mm), 12" (300 mm), 18" (450 mm), or 24" (600 mm)).
- Pole Length: Belt width plus 54" (1350 mm). For longer requirements see Installation Accessories – Pole Extender Kit on page 129.
- Check tension from regulator in control box. Adjust according to air tension per blade width for optimal tensioning.
- To make cleaner installation easier and quicker, see Optional Mounting Kits on page 129.

Product Ordering Information


Line Connections for Pneumatic Air Tensioner

Control Box/Tank Combo Units for Closed System

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Control Box/Tank Combo Unit for Precleaner - 60 PSI	PAT-C-60	108230	64.0
Control Box/Tank Combo Unit for Secondary Cleaner - 100 PSI	PAT-C-100	108231	64.0

Product Notes:

- For use with cleaners with new PAT systems.
- 150# pop-off valve for safe pressurizing/charging of Air Tank.
- ASME construction tank.
- Fully sealed enclosure includes all critical items - regulator, tank gauge, downstream gauge, schrader valve, in-line filter, downstream valve.

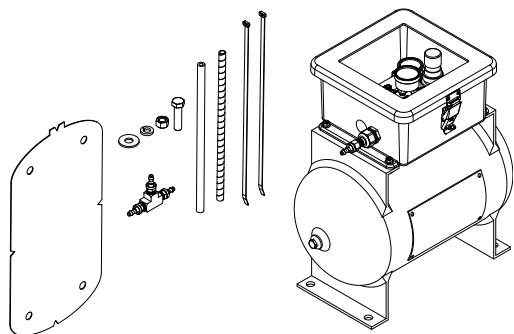


Control Box for Legacy Tank

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Control Box Kit for Precleaner - 60 PSI	PACB2-60	108228	13.6
Control Box Kit for Secondary Cleaner - 100 PSI	PACB2-100	108229	13.6

Product Notes:

- For use with Legacy PAT1/PAT2 tank systems ordered prior to January 2024.
- 150# pop-off valve for safe pressurizing/charging of Air Tank.
- May also be paired with Air Tank for Legacy Control Box if preferred.

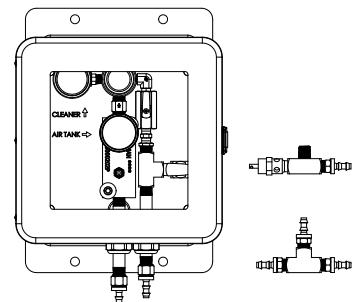


Air Tank for Legacy Control Box

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
ASME Air Tank Kit	PAT-N	108232	47.3

Product Notes:

- For use with Legacy PACB60/PACB100 control boxes ordered prior to January 2024.
- 150# pop-off valve for safe pressurizing/charging of Air Tank.
- ASME construction tank.
- May also be paired with Control Box for Legacy Tank if preferred.

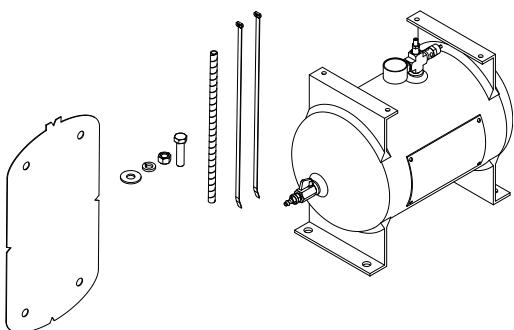

Replacement Parts List

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
10' (3m) Hose Kit	PATHK	78794	1.5
Upgrade Fitting Kit (fill valve, push-on fittings, plugs)	AWTRK	79319	0.4

Product Ordering Information

MegaShear™
Replacement Blades

Standard MegaShear™ Blades

BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
18	450	MRB18	77531	28.9
24	600	MRB24	77532	38.5
30	750	MRB30	77533	48.1
36	900	MRB36	77534	57.8
42	1050	MRB42	77535	67.4
48	1200	MRB48	77536	77.0
54	1350	MRB54	77537	86.6
60	1500	MRB60	77538	96.3
66	1650	MRB66	77539	105.9
72	1800	MRB72	77540	115.5
78	1950	MRB78	77541	125.1
84	2100	MRB84	77542	134.7
90	2250	MRB90	77543	144.3

Other blade sizes available upon request.

Lead time: 1 working day



Blade Width Selection

BELT WIDTH		BELT WIDTH - 6" (150mm)		BELT WIDTH - 12" (300mm)		BELT WIDTH - 18" (450mm)		BELT WIDTH - 24" (600mm)	
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
24	600	18	450	N/A	N/A	N/A	N/A	N/A	N/A
30	750	24	600	18	450	N/A	N/A	N/A	N/A
36	900	30	750	24	600	18	450	N/A	N/A
42	1050	36	900	30	750	24	600	18	450
48	1200	42	1050	36	900	30	750	24	600
54	1350	48	1200	42	1050	36	900	30	750
60	1500	54	1350	48	1200	42	1050	36	900
72	1800	66	1650	60	1500	54	1350	48	1200
84	2100	78	1950	72	1800	66	1650	60	1500
96	2400	90	2250	84	2100	78	1950	72	1800


Specifications & Guidelines

MHP
Heavy-Duty Precleaner

Pole Length Specifications*

CLEANER SIZE		MAX OVERALL POLE LENGTH		CENTER POLE LENGTH		MAXIMUM CONVEYOR SPAN	
in.	mm	in.	mm	in.	mm	in.	mm
24	600	78	1950	24	600	66	1650
30	750	84	2100	30	750	72	1800
36	900	90	2250	36	900	78	1950
42	1050	96	2400	42	1050	84	2100
48	1200	102	2550	48	1200	90	2250
54	1350	108	2700	54	1350	96	2400
60	1500	114	2850	60	1500	102	2550
72	1800	126	3150	72	1800	114	2850
84	2100	138	3450	84	2100	126	3150
96	2400	150	3750	96	2400	138	3450


* For special extra long pole length requirements a Pole Extender Kit (#76024) is available that provides 30" (750 mm) of extended pole length. Pole Diameter – 2-7/8" (73 mm). (p. 129)

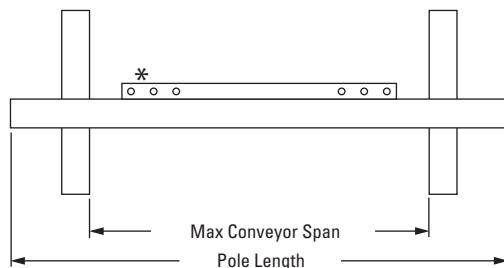

*Each pole size can be used with a blade size down to 18" (450 mm) in 6" (150 mm) increments

Clearance Guidelines for Installation


HORIZONTAL CLEARANCE REQUIRED		VERTICAL CLEARANCE REQUIRED	
in.	mm	in.	mm
8	200	19.5	488



PST Spring Length Chart

Blade Width		White Springs		Silver Springs		Red Springs	
in.	mm	in.	mm	in.	mm	in.	mm
18	450	5 5/8	143	N/A	N/A	N/A	N/A
24	600	5 3/8	137	6 1/4	159	N/A	N/A
30	750	5	127	6 1/8	156	6 1/4	159
36	900	4 3/4	121	6	152	6 1/4	159
42	1050	N/A	N/A	6	152	6 1/8	156
48	1200	N/A	N/A	5 7/8	149	6 1/8	156
54	1350	N/A	N/A	5 3/4	146	6	152
60	1500	N/A	N/A	5 5/8	143	6	152
66	1650	N/A	N/A	5 5/8	143	5 7/8	149
72	1800	N/A	N/A	5 1/2	140	5 7/8	149
78	1950	N/A	N/A	5 3/8	137	5 3/4	146
84	2100	N/A	N/A	N/A	N/A	5 3/4	146
90	2250	N/A	N/A	N/A	N/A	5 5/8	143
96	2400	N/A	N/A	N/A	N/A	5 5/8	143
102	2550	N/A	N/A	N/A	N/A	5 1/2	140
108	2700	N/A	N/A	N/A	N/A	5 1/2	140
114	2850	N/A	N/A	N/A	N/A	5 3/8	137

Shading indicates preferred spring option.



PAT Pressure Chart

Blade Width		Pressure	
in.	mm	psi	kPa
18	450	8	55
24	600	10	69
32	800	13	90
36	900	15	103
42	1050	18	124
48	1200	20	138
54	1350	23	159
60	1500	25	172
66	1650	28	193
72	1800	31	214
78	1950	33	228
84	2100	36	248
90	2250	38	262
96	2400	41	283
102	2550	43	296
108	2700	46	317
114	2850	48	331


Specifications:

- Maximum Belt Speed 1500 FPM (7.5 m/s)
- Temperature Rating -30 to 180°F (-35 to 82°C)
- Minimum Pulley Diameter..... 20" (500 mm)
- Blade Height..... 12.25" (306 mm)
- Usable Blade Wear Length..... 8" (200 mm)
- Blade Material Polyurethane 83 durometer (proprietary blend for abrasion resistance and long wear)
- Available for Belt Widths 24 to 96" (600 to 2400 mm) Other sizes available upon request.
- CEMA Cleaner Rating Class 5

Specifications & Guidelines

MHP
Heavy-Duty Precleaner

Pole Location Specs

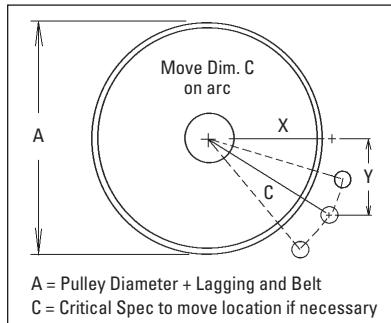

Pole Location Chart


A		X		Y		C	
in.	mm	in.	mm	in.	mm	in.	mm
20	500	10	254	14 3/8	365	17 1/2	445
21	525	10 1/2	267	14 3/8	365	17 3/4	451
22	550	11	279	14 3/8	365	18 1/8	460
23	575	11 1/2	292	14 3/8	365	18 3/8	467
24	600	12	305	14 3/8	365	18 3/4	476
25	625	12 1/2	318	14 3/8	365	19	483
26	650	13	330	14 3/8	365	19 3/8	492
27	675	13 1/2	343	14 3/8	365	19 3/4	502
28	700	14	356	14 3/8	365	20 1/8	511
29	725	14 1/2	368	14 3/8	365	20 3/8	518
30	750	15	381	14 3/8	365	20 3/4	527
31	775	15 1/2	394	14 3/8	365	21 1/8	537
32	800	16	406	14 3/8	365	21 1/2	546
33	825	16 1/2	419	14 3/8	365	21 7/8	556
34	850	17	432	14 3/8	365	22 1/4	565
35	875	17 1/2	445	14 3/8	365	22 5/8	575
36	900	18	457	14 3/8	365	23	584
37	925	18 1/2	470	14 3/8	365	23 3/8	594
38	950	19	483	14 3/8	365	23 7/8	606
39	975	19 1/2	495	14 3/8	365	24 1/4	616
40	1000	20	508	14 3/8	365	24 5/8	625
41	1025	20 1/2	521	14 3/8	365	25	635
42	1050	21	533	14 3/8	365	25 1/2	648
43	1075	21 1/2	546	14 3/8	365	25 7/8	657
44	1100	22	559	14 3/8	365	26 1/2	673
45	1125	22 1/2	572	14 3/8	365	27	686
46	1150	23	584	14 3/8	365	27 1/2	699
47	1175	23 1/2	597	14 3/8	365	28	711
48	1200	24	610	14 3/8	365	28 1/2	724
49	1225	24 5/8	625	14 3/8	365	29	737
50	1250	25 1/8	638	14 3/8	365	29 1/2	749
51	1275	25 3/4	654	14 3/8	365	30	762
52	1300	26 3/8	670	14 3/8	365	30 1/2	775
53	1325	26 7/8	683	14 3/8	365	31	787
54	1350	27 1/2	699	14 3/8	365	31 1/2	800

Pole Location Chart

A		X		Y		C	
in.	mm	in.	mm	in.	mm	in.	mm
55	1375	28 1/8	714	14 3/8	365	32	813
56	1400	28 5/8	727	14 3/8	365	32 1/2	826
57	1425	29 1/8	740	14 3/8	365	33	838
58	1450	29 3/4	756	14 3/8	365	33 1/2	851
59	1475	30 1/4	768	14 3/8	365	34	864
60	1500	30 7/8	784	14 3/8	365	34 1/2	876
61	1525	31 3/8	797	14 3/8	365	35	889
62	1550	31 7/8	810	14 3/8	365	35 1/2	902
63	1575	32 1/2	826	14 3/8	365	36	914
64	1600	33	838	14 3/8	365	36 1/2	927
65	1625	33 1/2	851	14 3/8	365	37	940
66	1650	34 1/8	867	14 3/8	365	37 1/2	953
67	1675	34 5/8	879	14 3/8	365	38	965
68	1700	35 1/8	892	14 3/8	365	38 1/2	978
69	1725	35 3/4	908	14 3/8	365	39	991
70	1750	36 1/4	921	14 3/8	365	39 1/2	1003
71	1775	36 3/4	933	14 3/8	365	40	1016
72	1800	37 3/8	949	14 3/8	365	40 1/2	1029
73	1825	37 7/8	962	14 3/8	365	41	1041
74	1850	38 3/8	975	14 3/8	365	41 1/2	1054
75	1875	38 7/8	987	14 3/8	365	42	1067
76	1900	39 1/2	1003	14 3/8	365	42 1/2	1080
77	1925	40	1016	14 3/8	365	43	1092
78	1950	40 1/2	1029	14 3/8	365	43 1/2	1105
79	1975	41	1041	14 3/8	365	44	1118
80	2000	41 5/8	1057	14 3/8	365	44 1/2	1130
81	2025	42 1/8	1070	14 3/8	365	45	1143
82	2050	42 5/8	1083	14 3/8	365	45 1/2	1156
83	2075	43 1/8	1095	14 3/8	365	46	1168
84	2100	43 3/4	1111	14 3/8	365	46 1/2	1181

Replacement Parts List

MHP
Heavy-Duty Precleaner

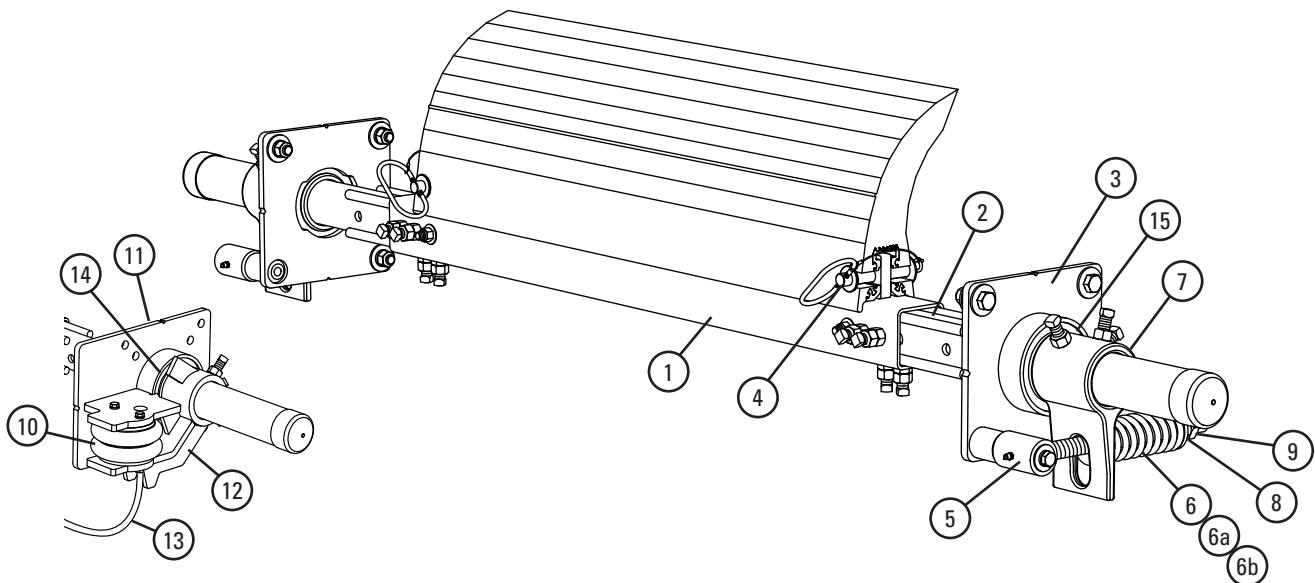

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	24" (600mm) Center Pole	MMPCP24	76458	34.4
	30" (750mm) Center Pole	MMPCP30	76459	43.0
	36" (900mm) Center Pole	MMPCP36	76460	51.6
	42" (1050mm) Center Pole	MMPCP42	76461	60.1
	48" (1200mm) Center Pole	MMPCP48	76462	68.7
	54" (1350mm) Center Pole	MMPCP54	76463	77.3
	60" (1500mm) Center Pole	MMPCP60	76464	85.9
	72" (1800mm) Center Pole	MMPCP72	76465	103.1
	84" (2100mm) Center Pole	MMPCP84	76808	120.3
	96" (2400mm) Center Pole	MMPCP96	77722	137.5
2	Extender Pole Kit (2 ea.)	MHP-EP	76392	54.0
3	Mounting Plate Kit* (2 ea.)	MHPMPK	77727	44.4
4	Blade Pin Kit* (1 ea.)	MHPBPK	77728	0.8
5	Torque Pivot Kit* (1 ea.)	PTPK	75897	7.0
6	Tension Spring – White (1 ea.)	PSTS-W	75898	1.7
6a	Tension Spring – Silver (1 ea.)	PSTS-S	75899	3.0
6b	Tension Spring – Red (1 ea.)	PSTS-R	77726	4.3
7	Torque Arm Kit* (1 ea.)	PSTA	75896	11.4
8	Bushing Kit (2 ea.)	QMTBK-W	76098	0.2
9	Jam Nut Kit PST Tensioner	JNK-D	79894	0.3
-	PST Spring Tensioner* – White (incl. (2) ea. items 3, 5, 6, 7, & 8)	PST2-W	77723	86.1
-	PST Spring Tensioner* – Silver (incl. (2) ea. items 3, 5, 6a, 7, & 8)	PST2-S	77724	87.4
-	PST Spring Tensioner* – Red (incl. (2) ea. items 3, 5, 6b, 7 & 8)	PST2-R	77725	88.8

*Hardware Included

Lead time: 1 working day

PAT Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
10	Air/Water Bag (1 ea.)	AWTB	75905	3.8
11	Mounting Base (1 ea.)	AWTMB	75906	22.9
12	Torque Arm* (1 ea.)	AWTA	75907	11.6
13	Hose Kit (50' of hose & (6) hose clamps)	AWTHK	75909	6.7
14	Pole Bearing Assy (for cleaners shipped after 4/2016)	AWTPBA	90000	2.3
-	AWT Air/Water Tensioner (incl. (2) ea. items 10, 11, 12 & (1) ea. item 13)	AWTNCB	76069	75.2

*Hardware Included

Lead time: 1 working day

Spring Tensioner Selection Chart

CLEANER BLADE WIDTH	77723 PST2-W	77724 PST2-S	77725 PST2-R
MegaShear™ 18–42" (450–1050mm)	X		
MegaShear™ 48–78" (1200–1950mm)		X	
MegaShear™ 84–114" (2100–2850mm)			X


Product Ordering Information

MHCP
Heavy-Duty Cartridge Precleaner

With Spring Tensioner (PST)

BELT WIDTH		BLADE COVERAGE		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
24	600	18	450	MHCP-24S	75929	192.1
30	750	24	600	MHCP-30S	75930	207.2
36	900	30	750	MHCP-36S	75931	222.4
42	1050	36	900	MHCP-42S	75932	237.4
48	1200	42	1050	MHCP-48S	75933	252.5
54	1350	48	1200	MHCP-54S	75934	267.6
60	1500	54	1350	MHCP-60S	75935	282.7
72	1800	66	1650	MHCP-72S	75936	312.8
84	2100	78	1950	MHCP-84S	76800	364.9
96	2400	90	2250	MHCP-96S	78955	417.0


Lead time: 1 working day

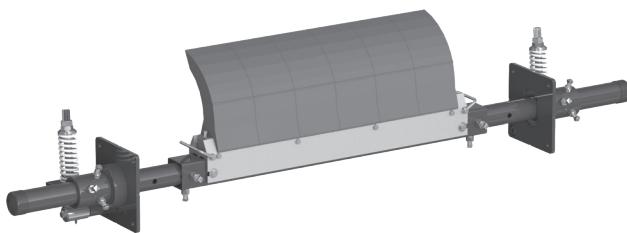

With Pneumatic Air Tensioner (PAT)

BELT WIDTH		BLADE COVERAGE		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
24	600	18	450	MHCP-24P	78723	192.2
30	750	24	600	MHCP-30P	78724	207.3
36	900	30	750	MHCP-36P	78725	222.4
42	1050	36	900	MHCP-42P	78726	237.4
48	1200	42	1050	MHCP-48P	78727	252.5
54	1350	48	1200	MHCP-54P	78728	267.6
60	1500	54	1350	MHCP-60P	78729	282.7
72	1800	66	1650	MHCP-72P	78730	312.8
84	2100	78	1950	MHCP-84P	78731	364.9
96	2400	90	2250	MHCP-96P	78959	417.0
108	2700	102	2550	MHCP-108P	90169	469.1
120	3000	114	2850	MHCP-120P	90170	521.3

Lead time: 1 working day

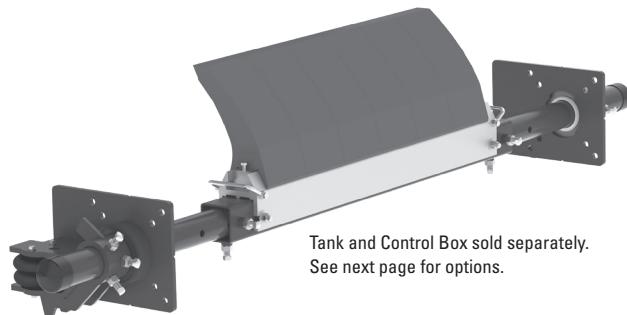

Tank and Control Box sold separately.
See next page for options.

Optional Mounting Kits

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Optional Mounting Bar Kit*	MMBK	75830	19.5
Mounting Plate Kit* (2 plates)	MMPK	76537	140.0

*Hardware Included

Lead time: 1 working day

Product Notes:

- Heavy-duty design with massive SuperShear™ blades for constant cleaning power on abusive beltlines.
- Blade width equals belt width minus 6" (150 mm). Can be adjusted to belt's material path.
- Pole Length: Belt width plus 58" (1450 mm). For longer requirements see Installation Accessories - Pole Extender Kit on page 129.
- Tensioner Options: 1) PST Spring Tensioner for self-adjusting tensioning with easy retensioning adjustments; 2) Pneumatic Air Tensioner used for constant, automatic tension throughout the life of the blades. Can be used with site available air lines or with the add-on air tank.
- To make cleaner installation easier and quicker, see Optional Mounting Kits on page 129.

Product Ordering Information


Line Connections for Pneumatic Air Tensioner

Control Box/Tank Combo Units for Closed System

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Control Box/Tank Combo Unit for Precleaner - 60 PSI	PAT-C-60	108230	64.0
Control Box/Tank Combo Unit for Secondary Cleaner - 100 PSI	PAT-C-100	108231	64.0

Product Notes:

- For use with cleaners with new PAT systems.
- 150# pop-off valve for safe pressurizing/charging of Air Tank.
- ASME construction tank.
- Fully sealed enclosure includes all critical items - regulator, tank gauge, downstream gauge, schrader valve, in-line filter, downstream valve.

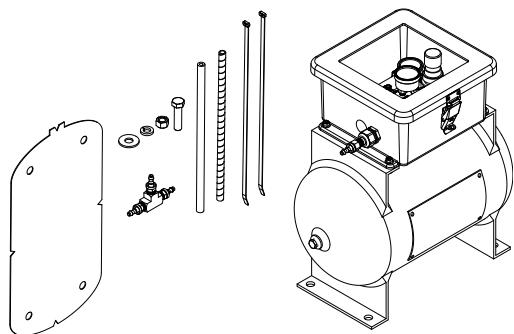


Control Box for Legacy Tank

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Control Box Kit for Precleaner - 60 PSI	PACB2-60	108228	13.6
Control Box Kit for Secondary Cleaner - 100 PSI	PACB2-100	108229	13.6

Product Notes:

- For use with Legacy PAT1/PAT2 tank systems ordered prior to January 2024.
- 150# pop-off valve for safe pressurizing/charging of Air Tank.
- May also be paired with Air Tank for Legacy Control Box if preferred.

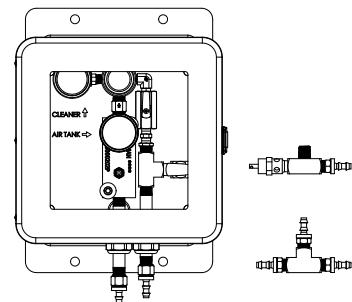


Air Tank for Legacy Control Box

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
ASME Air Tank Kit	PAT-N	108232	47.3

Product Notes:

- For use with Legacy PACB60/PACB100 control boxes ordered prior to January 2024.
- 150# pop-off valve for safe pressurizing/charging of Air Tank.
- ASME construction tank.
- May also be paired with Control Box for Legacy Tank if preferred.

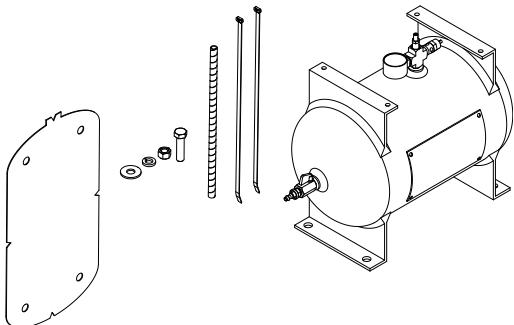

Replacement Parts List

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
10' (3m) Hose Kit	PATHK	78794	1.5
Upgrade Fitting Kit (fill valve, push-on fittings, plugs)	AWTRK	79319	0.4

Optional Assemblies, Tensioners & Kits


MHCP
Heavy-Duty Cartridge Precleaner

Blade/Pole Assemblies

(Includes blades, cartridge, center pole, and 2 extender poles)

BELT WIDTH	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm		
24	600	MHCP-BPA24	75945
30	750	MHCP-BPA30	75946
36	900	MHCP-BPA36	75947
42	1050	MHCP-BPA42	75948
48	1200	MHCP-BPA48	75949
54	1350	MHCP-BPA54	75950
60	1500	MHCP-BPA60	75951
72	1800	MHCP-BPA72	75952
84	2100	MHCP-BPA84	76809
96	2400	MHCP-BPA96	78956
			302.2

Lead time: 1 working day

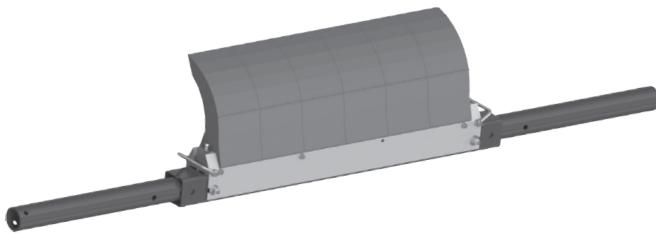

Tensioners

(Includes tensioners for both pole ends)

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
PST Spring Tensioner – White for belts 24–48" (600–1200mm)	PST2-W	77723	86.1
PST Spring Tensioner – Silver for belts 54–84" (1350–2100mm)	PST2-S	77724	86.2
PST Spring Tensioner – Red for belts 96" (2400mm)	PST2-R	77725	86.2
AWT Air/Water Tensioner	AWTNCB	76069	75.2

Lead time: 1 working day



PST Spring Tensioner



PAT Tensioner


Blade Cartridge Kits

(Includes blades, cartridge, and mounting bolts)

BELT WIDTH	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm		
24	600	MHCP-BCK24	75953
30	750	MHCP-BCK30	75954
36	900	MHCP-BCK36	75955
42	1050	MHCP-BCK42	75956
48	1200	MHCP-BCK48	75957
54	1350	MHCP-BCK54	75958
60	1500	MHCP-BCK60	75959
72	1800	MHCP-BCK72	75960
84	2100	MHCP-BCK84	76810
96	2400	MHCP-BCK96	78957
			161.4

NOTE: For easy blade changeout, remove cartridge with worn blades and replace with new blade cartridge kit. New blades can then be installed in the old cartridge for the next changeout.

Lead time: 1 working day

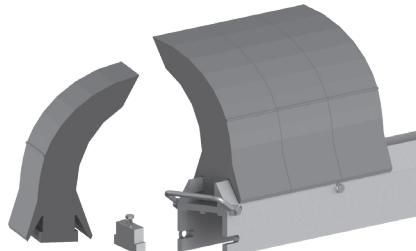

Blade Cartridge Kit

Blades Required per Belt Width

in.	24	30	36	42	48	54	60	72	84	96
mm	600	750	900	1050	1200	1350	1500	1800	2100	2400
No. Blades Required	3	4	5	6	7	8	9	11	13	15

Specifications & Guidelines

MHCP Heavy-Duty Cartridge Precleaner


Telescoping Pole Length Specifications

CLEANER SIZE		MAX OVERALL POLE LENGTH		CENTER POLE LENGTH		MAXIMUM CONVEYOR SPAN	
in.	mm	in.	mm	in.	mm	in.	mm
24	600	82	2050	28	700	66	1650
30	750	88	2200	34	850	72	1800
36	900	94	2350	40	1000	78	1950
42	1050	100	2500	46	1150	84	2100
48	1200	106	2650	52	1300	90	2250
54	1350	112	2800	58	1450	96	2400
60	1500	118	2950	64	1600	102	2550
72	1800	130	3250	76	1900	114	2850
84	2100	142	3550	88	2200	126	3150
96	2400	154	3850	100	2500	138	3450

Pole Diameter - 2-7/8" (73 mm)

Clearance Guidelines for Installation


HORIZONTAL CLEARANCE REQUIRED		VERTICAL CLEARANCE REQUIRED	
in.	mm	in.	mm
7	175	19	475



PST Spring Length Chart

Blade Width in. mm	No. Blades	White Springs		Silver Springs		Red Springs	
		in.	mm	in.	mm	in.	mm
18 450	3	5 5/8	143	N/A	N/A	N/A	N/A
24 600	4	5 3/8	137	6 1/4	159	N/A	N/A
30 750	5	5	127	6 1/8	156	6 1/4	159
36 900	6	4 3/4	121	6	152	6 1/4	159
42 1050	7	N/A	N/A	6	152	6 1/8	156
48 1200	8	N/A	N/A	5 7/8	149	6 1/8	156
54 1350	9	N/A	N/A	5 3/4	146	6	152
60 1500	10	N/A	N/A	5 5/8	143	6	152
66 1650	11	N/A	N/A	5 5/8	143	5 7/8	149
72 1800	12	N/A	N/A	5 1/2	140	5 7/8	149
78 1950	13	N/A	N/A	5 3/8	137	5 3/4	146
84 2100	14	N/A	N/A	N/A	N/A	5 3/4	146
90 2250	15	N/A	N/A	N/A	N/A	5 5/8	143
96 2400	16	N/A	N/A	N/A	N/A	5 5/8	143
102 2550	17	N/A	N/A	N/A	N/A	5 1/2	140
108 2700	18	N/A	N/A	N/A	N/A	5 1/2	140
114 2850	19	N/A	N/A	N/A	N/A	5 3/8	137


Shading indicates preferred spring option.




PAT Pressure Chart

Blade Width in. mm	No. Blades	Pressure	
		psi	kPa
18 450	3	8	55
24 600	4	10	69
30 750	5	13	90
36 900	6	15	103
42 1050	7	18	124
48 1200	8	20	138
54 1350	9	23	159
60 1500	10	25	172
66 1650	11	28	193
72 1800	12	31	214
78 1950	13	33	228
84 2100	14	36	248
90 2250	15	38	262
96 2400	16	41	283
102 2550	17	43	296
108 2700	18	46	317
114 2850	19	48	331

*PSI setting is based on number of blades, not belt width.

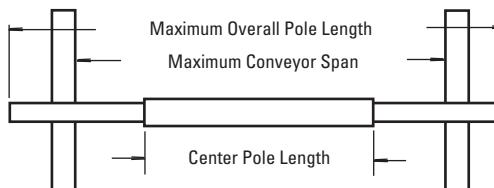

Pole Location Specs

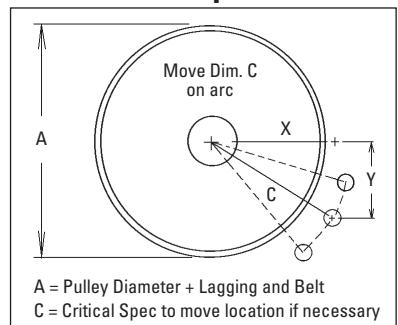

Pole Location Chart

A	X	Y	C
in. mm	in. mm	in. mm	in. mm
20 500	10	254	14 3/8 365
21 525	10 1/2	267	14 3/8 365
22 550	11	279	14 3/8 365
23 575	11 1/2	292	14 3/8 365
24 600	12	305	14 3/8 365
25 625	12 1/2	318	14 3/8 365
26 650	13	330	14 3/8 365
27 675	13 1/2	343	14 3/8 365
28 700	14	356	14 3/8 365
29 725	14 1/2	368	14 3/8 365
30 750	15	381	14 3/8 365
31 775	15 1/2	394	14 3/8 365
32 800	16	406	14 3/8 365
33 825	16 1/2	419	14 3/8 365
34 850	17	432	14 3/8 365
35 875	17 1/2	445	14 3/8 365
36 900	18	457	14 3/8 365
37 925	18 1/2	470	14 3/8 365
38 950	19	483	14 3/8 365
39 975	19 1/2	495	14 3/8 365
40 1000	20	508	14 3/8 365
41 1025	20 1/2	521	14 3/8 365
42 1050	21	533	14 3/8 365
43 1075	21 1/2	546	14 3/8 365
44 1100	22	555	14 3/8 365
45 1125	22 1/2	581	14 3/8 365
46 1150	23	597	14 3/8 365
47 1175	23 1/2	610	14 3/8 365
48 1200	24	625	14 3/8 365

Specifications:

- Maximum Belt Speed 1200 FPM (6 m/s)
- Temperature Rating -30 to 180°F (-35 to 82°C)
- Minimum Pulley Diameter..... 20" (500 mm)
- Blade Height..... 14" (350 mm)
- Usable Blade Wear Length..... 8" (200 mm)
- Blade Material..... Polyurethane (proprietary blend for abrasion resistance and long wear)
- Available for Belt Widths 24 to 96" (600 to 2400 mm) Other sizes available upon request.
- CEMA Cleaner Rating Class 5


Replacement Parts List

MHCP
Heavy-Duty Cartridge Precleaner

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	24" (600mm) Center Pole *	MHP-CP24	75961	19.0
	30" (750mm) Center Pole *	MHP-CP30	75962	23.1
	36" (900mm) Center Pole *	MHP-CP36	75963	27.2
	42" (1050mm) Center Pole *	MHP-CP42	75964	31.2
	48" (1200mm) Center Pole *	MHP-CP48	75965	35.3
	54" (1350mm) Center Pole *	MHP-CP54	75966	39.4
	60" (1500mm) Center Pole *	MHP-CP60	75967	43.5
	72" (1800mm) Center Pole *	MHP-CP72	75968	51.6
	84" (2100mm) Center Pole *	MHP-CP84	76811	60.2
2	96" (2400mm) Center Pole *	MHP-CP96	78958	68.8
	MHCP Extender Poles (2 ea.)	MHP-EP	76392	54.0
3	SuperShear™ Blade	SSRB	75978	6.6
4	24" (600mm) 2-Piece Blade Cartridge *	MHCP-2BC24	76638	13.2
	30" (750mm) 2-Piece Blade Cartridge *	MHCP-2BC30	76639	17.6
	36" (900mm) 2-Piece Blade Cartridge *	MHCP-2BC36	76640	22.0
	42" (1050mm) 2-Piece Blade Cartridge *	MHCP-2BC42	76641	26.4
	48" (1200mm) 2-Piece Blade Cartridge *	MHCP-2BC48	76642	30.8
	54" (1350mm) 2-Piece Blade Cartridge *	MHCP-2BC54	76643	35.2
	60" (1500mm) 2-Piece Blade Cartridge *	MHCP-2BC60	76644	39.6
	72" (1800mm) 2-Piece Blade Cartridge *	MHCP-2BC72	76645	48.4
	84" (2100mm) 2-Piece Blade Cartridge *	MHCP-2BC84	76812	56.5
5	MHCP Cartridge Handle *	MHCP-CH	76393	0.4
6	MHCP Cartridge Blade Stop *	MHCP-BS	76394	0.4


*Hardware Included. Lead time: 1 working day

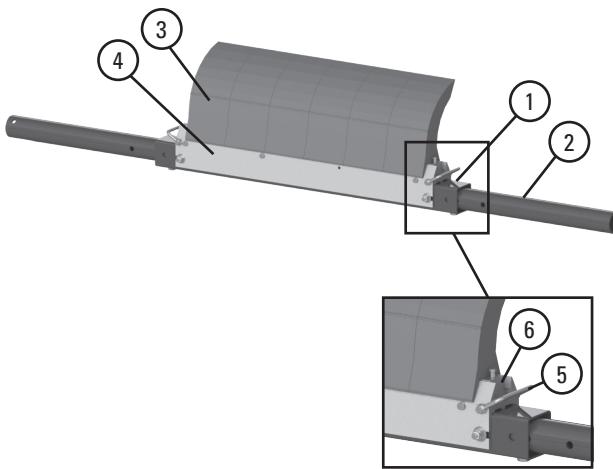

PST Tensioner Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
7	Mounting Plate Kit * (2 ea.)	MHPMPK	77727	44.4
8	Torque Arm * (1 ea.)	PSTA	75896	11.4
9	Torque Pivot Kit (1 ea.) (no spring)	PTPK	75897	7.0
10	Tension Spring – White (1 ea.) for belts 24–48" (600–1200mm)	PSTS-W	75898	1.7
10a	Tension Spring – Silver (1 ea.) for belts 54–84" (1350–2100mm)	PSTS-S	75899	3.0
10b	Tension Spring – Red (1 ea.) for belts 96" (2400mm)	PSTS-R	77726	3.0
11	Bushing Kit (2 ea.) (for White, Silver, & Red Tensioners)	QMTBK-W	76098	0.2
12	Jam Nut Kit PST Tensioner	JNK-D	79894	0.3
-	PST Spring Tensioner* – White for belts 24–48" (600–1200mm) (incl. (2) ea. items 7, 8, 9, 10 & 11)	PST2-W	77723	86.1
-	PST Spring Tensioner* – Silver for belts 54–84" (1350–2100mm) (incl. (2) ea. items 7, 8, 9, 10a & 11)	PST2-S	77724	86.2
-	PST Spring Tensioner* – Red for belts 96" (2400mm) (incl. (2) ea. items 7, 8, 9, 10b & 11)	PST2-R	77725	86.2


*Hardware Included. Lead time: 1 working day

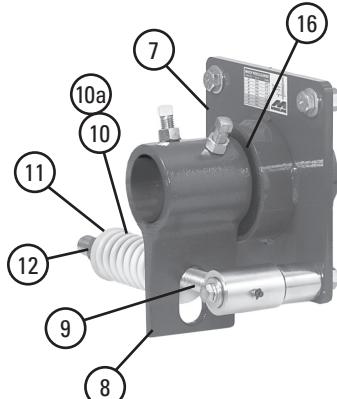

PAT Tensioner Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
13	Air/Water Bag (1 ea.)	AWTB	75905	3.8
14	Mounting Base (1 ea.)	AWTMB	75906	22.9
15	Torque Arm * (1 ea.)	AWTA	75907	11.6
16	Pole Bearing Assy (for cleaners shipped after 4/2016)	AWTPBA	90000	2.3
17	Hose Kit (50' of hose and 6 hose clamps)	AWTHK	75909	6.7
-	AWT Air/Water Tensioner (incl. (2) ea. items 12, 13, 14 & (1) ea. item 15)	AWTNB	76069	75.2

*Hardware Included. Lead time: 1 working day




Product Ordering Information

MXP
Extreme-Duty Precleaner

Belt Width Minus 6" (150 mm)

BELT WIDTH		BLADE COVERAGE		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
42	1050	36	900	MXP-642	90393	659.0
48	1200	42	1050	MXP-648	90394	700.0
54	1350	48	1200	MXP-654	90395	742.0
60	1500	54	1350	MXP-660	90396	783.0
72	1800	66	1650	MXP-672	90397	869.0
84	2100	78	1950	MXP-684	90398	953.0
96	2400	90	2250	MXP-696	90399	1036.0
108	2700	102	2550	MXP-6108	90642	1120.0
120	3000	114	2850	MXP-6120	90400	1207.0

Lead time: 2 weeks

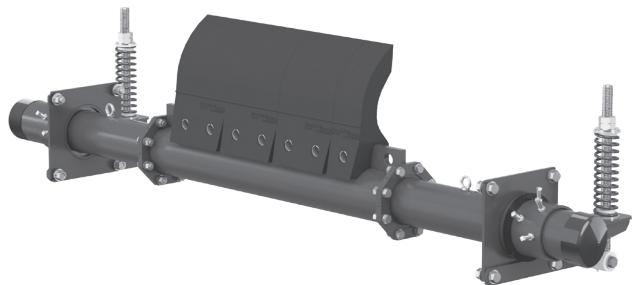

Belt Width Minus 12" (300 mm)

BELT WIDTH		BLADE COVERAGE		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
42	1050	30	750	MXP-1242	90581	636.0
48	1200	36	900	MXP-1248	90582	679.0
54	1350	42	1050	MXP-1254	90583	720.0
60	1500	48	1200	MXP-1260	90584	763.0
72	1800	60	1500	MXP-1272	90585	849.0
84	2100	72	1800	MXP-1284	90586	933.0
96	2400	84	2100	MXP-1296	90587	1016.0
108	2700	96	2400	MXP-12108	90643	1100.0
120	3000	108	2700	MXP-12120	90588	1187.0

Lead time: 2 weeks

Replacement UltraShear™ Blades

BLADE WIDTH	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.			
6	USB6	90410	20.0
12	USB12	90409	40.0

Lead time: 1 working day



Product Notes:


- Heavy-duty design with massive UltraShear™ blades for constant cleaning power on abusive beltlines.
- Blade width options for belt width minus 6" (150 mm) or 12" (300 mm). Can be adjusted to belt's material path.
- Pole Length: Belt width plus 79" (2000 mm).
- Tensioner: XDST Spring Tensioner
- To make cleaner installation easier and quicker, see Optional Mounting Kits on page 129.

Specifications & Guidelines

MXP
Extreme-Duty Precleaner

Pole Length Specifications*


CLEANER SIZE		MAX OVERALL POLE LENGTH		CENTER POLE LENGTH		MAXIMUM CONVEYOR SPAN	
in.	mm	in.	mm	in.	mm	in.	mm
42	1050	121	3050	48	1200	105	2667
48	1200	127	3200	54	1350	111	2819
54	1350	133	3350	60	1500	117	2972
60	1500	139	3500	66	1650	123	3124
72	1800	151	3800	78	1950	135	3429
84	2100	163	4100	90	2250	147	3734
96	2400	175	4400	102	2550	159	4039
108	2700	187	4700	114	2850	171	4343
120	3000	199	5000	126	3150	183	4648

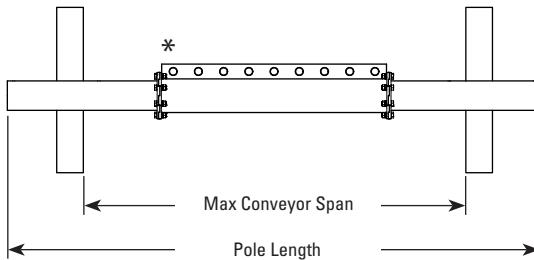

* 6" and 12" (150 mm and 300 mm) blade segments can be configured to match material path.

Clearance Guidelines for Installation

HORIZONTAL CLEARANCE REQUIRED		VERTICAL CLEARANCE REQUIRED	
in.	mm	in.	mm
12	300	27 1/2	700



XDST Spring Length Chart

Belt Width		Blade Coverage		No. of Blades	Purple Springs		White Springs		Black Springs	
in.	mm	in.	mm		in.	mm	in.	mm	in.	mm
BELT WIDTH MINUS 6" (150mm)										
42	1050	36	900	3	10	255	N/A	N/A	N/A	N/A
48	1200	42	1050	3.5	9 1/2	240	10 7/8	280	N/A	N/A
54	1350	48	1200	4	9	230	10 5/8	270	N/A	N/A
60	1500	54	1350	4.5	8 1/2	215	10 3/8	265	N/A	N/A
72	1800	66	1650	5.5	7 5/8	195	9 7/8	250	N/A	N/A
84	2100	78	1950	6.5	6 3/4	170	9 3/8	240	10 3/4	270
96	2400	90	2250	7.5	5 3/4	145	8 7/8	225	10 3/8	265
108	2700	102	2550	8.5	N/A	N/A	8 3/8	210	10 1/8	255
120	3000	114	2850	9.5	N/A	N/A	7 7/8	200	9 3/4	250
BELT WIDTH MINUS 12" (300mm)										
42	1050	30	750	2.5	10 3/8	265	N/A	N/A	N/A	N/A
48	1200	36	900	3	10	255	11 1/4	285	N/A	N/A
54	1350	42	1050	3.5	9 1/2	240	10 7/8	280	N/A	N/A
60	1500	48	1200	4	9	230	10 5/8	270	N/A	N/A
72	1800	60	1500	5	8 1/8	205	10 1/8	260	N/A	N/A
84	2100	72	1800	6	7 1/8	180	9 5/8	245	N/A	N/A
96	2400	84	2100	7	6 1/4	160	9 1/8	230	10 1/2	270
108	2700	96	2400	8	N/A	N/A	8 5/8	220	10 1/4	260
120	3000	108	2700	9	N/A	N/A	8 1/8	205	9 7/8	250

Shading indicates preferred spring option.


Specifications:

- Maximum Belt Speed 2000 FPM (10 m/s)
- Temperature Rating -30 to 275°F (-35 to 135°C)
- Minimum Pulley Diameter 48" (1200 mm)
- Blade Height 19-3/8" (490 mm)
- Usable Blade Wear Length 11-1/2" (290 mm)
- Blade Material Polyurethane 93 durometer (proprietary blend for abrasion resistance and long wear)
- Available for Belt Widths 42 to 120" (1050 to 3000 mm) Other sizes available upon request.
- CEMA Cleaner Rating Class 5

Specifications & Guidelines

MXP
Extreme-Duty Precleaner

Pole Location Specs

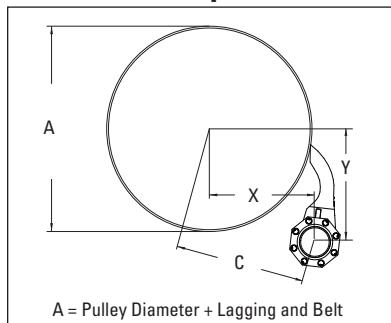

Pole Location Chart


A		X		Y		C	
in.	mm	in.	mm	in.	mm	in.	mm
48	1225	20 1/2	520	26 1/4	665	33 1/4	845
49	1250	21	535	26 3/8	670	33 5/8	855
50	1275	21 1/2	545	26 3/8	670	34	865
51	1300	22	560	26 1/2	675	34 3/8	875
52	1325	22 1/2	570	26 5/8	675	34 3/4	885
53	1350	23	585	26 5/8	675	35 1/8	895
54	1375	23 1/2	595	26 3/4	680	35 5/8	905
55	1400	24	610	26 7/8	680	36	915
56	1425	24 1/2	620	26 7/8	685	36 3/8	925
57	1450	24 7/8	635	27	685	36 3/4	935
58	1475	25 3/8	645	27 1/8	690	37 1/8	945
59	1500	25 7/8	660	27 1/8	690	37 1/2	955
60	1525	26 3/8	670	27 1/4	695	38	965
61	1550	26 7/8	685	27 3/8	695	38 3/8	975
62	1575	27 3/8	695	27 1/2	695	38 3/4	985
63	1600	27 7/8	710	27 1/2	700	39 1/8	995
64	1625	28 3/8	720	27 5/8	700	39 5/8	1005
65	1650	28 7/8	735	27 3/4	705	40	1015
66	1675	29 3/8	745	27 3/4	705	40 3/8	1025
67	1700	29 7/8	760	27 7/8	710	40 7/8	1040
68	1725	30 3/8	770	28	710	41 1/4	1050
69	1750	30 7/8	785	28	710	41 3/4	1060
70	1775	31 3/8	795	28 1/8	715	42 1/8	1070
71	1800	31 7/8	810	28 1/4	715	42 1/2	1080
72	1825	32 3/8	820	28 1/4	720	43	1090

Pole Location Chart

A		X		Y		C	
in.	mm	in.	mm	in.	mm	in.	mm
73	1850	32 3/4	835	28 3/8	720	43 3/8	1100
74	1875	33 1/4	845	28 1/2	725	43 7/8	1115
75	1900	33 3/4	860	28 5/8	725	44 1/4	1125
76	1925	34 1/4	870	28 5/8	730	44 3/4	1135
77	1950	34 3/4	885	28 3/4	730	45 1/8	1145
78	1975	35 1/4	895	28 7/8	730	45 1/2	1155
79	2000	35 3/4	910	28 7/8	735	46	1170
80	2025	36 1/4	920	29	735	46 3/8	1180
81	2050	36 3/4	935	29 1/8	740	46 7/8	1190
82	2075	37 1/4	945	29 1/8	740	47 1/4	1200
83	2100	37 3/4	960	29 1/4	745	47 3/4	1215
84	2125	38 1/4	970	29 3/8	745	48 1/4	1225
85	2150	38 3/4	985	29 1/2	750	48 5/8	1235
86	2175	39 1/4	995	29 1/2	750	49 1/8	1245
87	2200	39 3/4	1010	29 5/8	750	49 1/2	1260
88	2225	40 1/4	1020	29 3/4	755	50	1270
89	2250	40 3/4	1035	29 3/4	755	50 3/8	1280
90	2275	41 1/8	1045	29 7/8	760	50 7/8	1290
91	2300	41 5/8	1060	30	760	51 3/8	1305
92	2325	42 1/8	1070	30	765	51 3/4	1315
93	2350	42 5/8	1085	30 1/8	765	52 1/4	1325
94	2375	43 1/8	1095	30 1/4	770	52 5/8	1340
95	2400	43 5/8	1110	30 1/4	770	53 1/8	1350
96	2425	44 1/8	1120	30 3/8	770	53 5/8	1360

Replacement Parts List

MXP
Extreme-Duty Precleaner

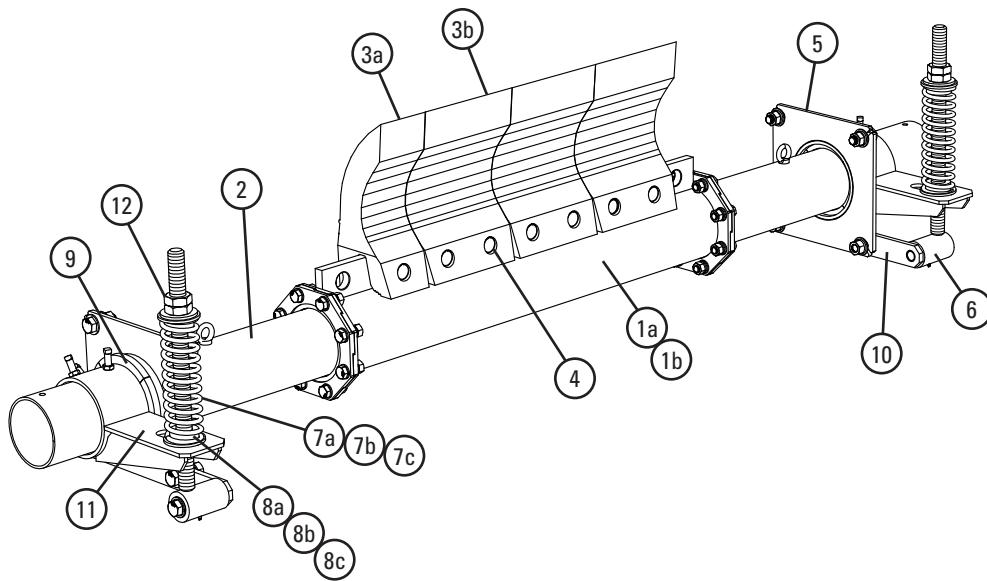

Replacement Poles

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1a	42" (1050mm) Center Pole BW-6	MXPP-642	90589	177.0
	48" (1200mm) Center Pole BW-6	MXPP-648	90590	198.0
	54" (1350mm) Center Pole BW-6	MXPP-654	90591	218.0
	60" (1500mm) Center Pole BW-6	MXPP-660	90592	239.0
	72" (1800mm) Center Pole BW-6	MXPP-672	90593	280.0
	84" (2100mm) Center Pole BW-6	MXPP-684	90594	320.0
	96" (2400mm) Center Pole BW-6	MXPP-696	90595	361.0
	108" (2700mm) Center Pole BW-6	MXPP-6108	90644	402.0
1b	120" (3000mm) Center Pole BW-6	MXPP-6120	90596	443.0
1b	42" (1050mm) Center Pole BW-12	MXPP-1242	90622	178.0
	48" (1200mm) Center Pole BW-12	MXPP-1248	90623	198.0
	54" (1350mm) Center Pole BW-12	MXPP-1254	90624	219.0
	60" (1500mm) Center Pole BW-12	MXPP-1260	90625	239.0
	72" (1800mm) Center Pole BW-12	MXPP-1272	90626	280.0
	84" (2100mm) Center Pole BW-12	MXPP-1284	90627	321.0
	96" (2400mm) Center Pole BW-12	MXPP-1296	90628	362.0
	108" (2700mm) Center Pole BW-12	MXPP-12108	90645	401.0
2	Extreme Duty Pole Ends* (pair)	MXPPE	90598	133.0

*Hardware Included

Lead time: 2 weeks

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
3a	6" (150mm) UltraShear™ Blade	USB6	90410	20.0
3b	12" (300mm) UltraShear™ Blade	USB12	90409	40.0
4	UltraShear™ Blade Pin (1 ea.)	USBP	90411	1.0
5	XDST Mounting Plate Kit* (2 ea.)	XDSTMPK	90599	64.0
6	XDST Pivot Arm Kit* (1 ea.)	XDSTPAK	90600	20.0
7a	XDST Tension Spring – Purple (1 ea.) for blades 42-60" (1050-1500mm)	XDSTS-P	90602	10.0
7b	XDST Tension Spring – White (1 ea.) for blades 72-108" (1800-2700mm)	XDSTS-W	90601	13.0
7c	XDST Tension Spring – Black (1 ea.) for blades 120" (3000mm)	XDSTS-B	90603	17.0
8a	XDST Bushing Kit – Purple (2 ea.)	XDSTBK-P	90605	0.5
8b	XDST Bushing Kit – White (2 ea.)	XDSTBK-W	90604	0.5
8c	XDST Bushing Kit – Black (2 ea.)	XDSTBK-B	90606	0.5
9	MXP Pole Bearing Kit (8 segments) (Replacements for both tensioners)	MXPPBK	90607	2.5
10	XDST Pivot Shaft Bracket* (1 ea.)	XDSTPSBK	90608	15.0
11	XDST Torque Arm Kit* (1 ea.)	XDSTTAK	90609	15.0
12	XDST Jam Nut Kit (2 nuts, 1 washer)	XDSTJNK	90610	1.0
13	USB Blade Pin Removal Tool	USBBRP	90412	9.0
-	XDST Spring Tensioner* – Purple (incl. (1) ea. items 5, 9; (2) ea. items 6, 7a, 8a, 10, 11, 12)	XDST-P	90612	206.0
-	XDST Spring Tensioner* – White (incl. (1) ea. items 5, 9; (2) ea. items 6, 7b, 8b, 10, 11, 12)	XDST-W	90611	212.0
-	XDST Spring Tensioner* – Black (incl. (1) ea. items 5, 9; (2) ea. items 6, 7c, 8c, 10, 11, 12)	XDST-B	90613	220.0

*Hardware Included

Lead time: 1 working day

Spring Tensioner Selection Chart

CLEANER BLADE WIDTH	90612 XDST-P	90611 XDST-W	90613 XDST-B
UltraShear™ 42-60" (1050-1500mm)	X		
UltraShear™ 72-108" (1800-2700mm)		X	
UltraShear™ 120" (3000mm)			X

Product Ordering Information

HV2

Segmented Blade Precleaner

With V-Tips

BELT WIDTH	V-TIP SIZE	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
18	450	SS	HV2-18SS	79323
18	450	S	HV2-18S	79324
18	450	M	HV2-18M	79325
24	600	SS	HV2-24SS	79326
24	600	S	HV2-24S	79327
24	600	M	HV2-24M	79328
30	750	SS	HV2-30SS	79329
30	750	S	HV2-30S	79330
30	750	M	HV2-30M	79331
36	900	SS	HV2-36SS	79332
36	900	S	HV2-36S	79333
36	900	M	HV2-36M	79334
36	900	L	HV2-36L	79335
42	1050	SS	HV2-42SS	79336
42	1050	S	HV2-42S	79337
42	1050	M	HV2-42M	79338
42	1050	L	HV2-42L	79339
42	1050	LL	HV2-42LL	79340
48	1200	SS	HV2-48SS	79341
48	1200	S	HV2-48S	79342
48	1200	M	HV2-48M	79343
48	1200	L	HV2-48L	79344
48	1200	LL	HV2-48LL	79345
54	1350	S	HV2-54S	79346
54	1350	M	HV2-54M	79347
54	1350	L	HV2-54L	79348
54	1350	LL	HV2-54LL	79349
60	1500	S	HV2-60S	79350
60	1500	M	HV2-60M	79351
60	1500	L	HV2-60L	79352
60	1500	LL	HV2-60LL	79353
72	1800	S	HV2-72S	79354
72	1800	M	HV2-72M	79355
72	1800	L	HV2-72L	79356
72	1800	LL	HV2-72LL	79357
				229.2

*NOTE: HV2 Tips must be used only on vulcanized belts.


HV2 Suspension Arm size is determined by head pulley diameter - see chart.

Additional sizes available upon request.

Lead time: 1 working day

Tips Required per Cleaner Size

in.	18	24	30	36	42	48	54	60	72
mm	450	600	750	900	1050	1200	1350	1500	1800
No. HV2-Tips Required	2	3	4	5	6	7	8	9	11

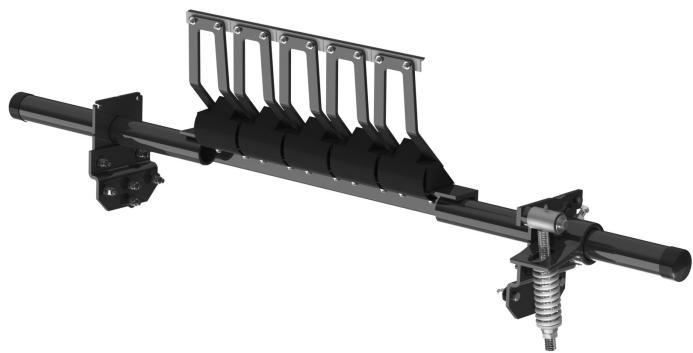

Replacement HV2-Tips

ORDERING NUMBER	ITEM CODE	WT. LBS.
HV2T-S/S	79367	0.6
HV2PT	79368	0.8

Lead time: 1 working day

Replacement HV2 Suspension Arms

SIZE	ORDERING NUMBER	ITEM CODE	WT. LBS.
SS	H2SA6SS	79369	2.5
S	H2SA6S	79370	3.2
M	H2SA6M	79371	3.6
L	H2SA6L	79372	3.8
LL	H2SA6LL	79373	4.5

Lead time: 1 working day

HV2 Suspension Arm Size

HEAD PULLEY DIAMETER + BELT & LAGGING	SIZE	
	in.	mm
10-19	250-475	SS
20-31	500-775	S
32-39	800-975	M
40-47	1000-1175	L
48-67	1200-1675	LL

Specifications & Guidelines


HV2

Segmented Blade Precleaner

Pole Length Specifications*


CLEANER SIZE		POLE LENGTH		MAXIMUM CONVEYOR SPAN	
in.	mm	in.	mm	in.	mm
18	450	66	1650	56	1400
24	600	72	1800	62	1550
30	750	78	1950	68	1700
36	900	84	2100	74	1850
42	1050	90	2250	80	2000
48	1200	96	2400	86	2150
54	1350	102	2550	92	2300
60	1500	108	2700	98	2450
72	1800	120	3000	110	2750

*For special extra long pole length requirements a Pole Extender Kit (#76024) is available that provides 30" (750 mm) of extended pole length. Pole Diameter – 2-7/8" (73 mm) (p. 129)

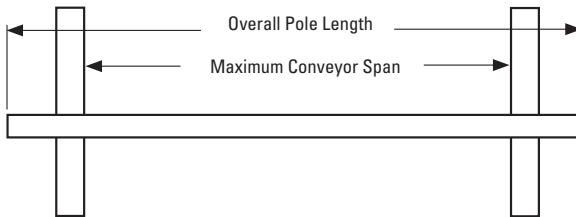

Clearance Guidelines for Installation


SUSPENSION ARM SIZE	HORIZONTAL CLEARANCE REQUIRED		VERTICAL CLEARANCE REQUIRED	
	in.	mm	in.	mm
SS	8-1/4	210	12-5/8	320
S	8-1/4	210	15-3/8	390
M	8-1/4	210	16-5/8	416
L	8-1/4	210	17-1/2	445
LL	8-1/4	210	20-1/8	511



HV2 Spring Length Chart

Belt Width	No. of Tips	SS		S		M		L		LL	
		in	mm	in	mm	in	mm	in	mm	in	mm
18	450	2	5 1/4	133	4 7/8	124	4 3/4	121	4 1/2	114	N/A
24	600	3	4 1/2	114	4 1/8	105	5 3/4	146	5 3/4	146	N/A
30	750	4	4 1/2	114	4 1/8	105	5 3/4	146	5 3/4	146	N/A
36	900	5	5 3/4	146	5 5/8	143	5 1/2	140	5 3/8	137	N/A
42	1050	6	5 5/8	143	5 3/8	137	5 1/4	133	5 1/8	130	4 3/4
48	1200	7	5 5/8	143	5 3/8	137	5 1/4	133	5 1/8	130	4 3/4
54	1350	8	N/A	N/A	5 1/8	130	5	127	4 7/8	124	6
60	1500	9	N/A	N/A	4 7/8	124	6 1/8	156	6	152	5 7/8
72	1800	11	N/A	N/A	6	152	6	152	5 7/8	150	5 3/4

Purple Spring Silver Spring White Spring




Specifications:

- Maximum Belt Speed 1500 FPM (7.5 m/s)
- Temperature Rating -30 to 180°F (-35 to 82°C)
- Usable Blade Wear Length 3/8" (9 mm)
- Blade Material Long Life Tungsten Carbide (for vulcanized belts only)
- Available for Belt Widths 18 to 72" (450 to 1800 mm) Other sizes available upon request.
- CEMA Cleaner Rating Class 4

Replacement Parts List

HV2
Segmented Blade Precleaner

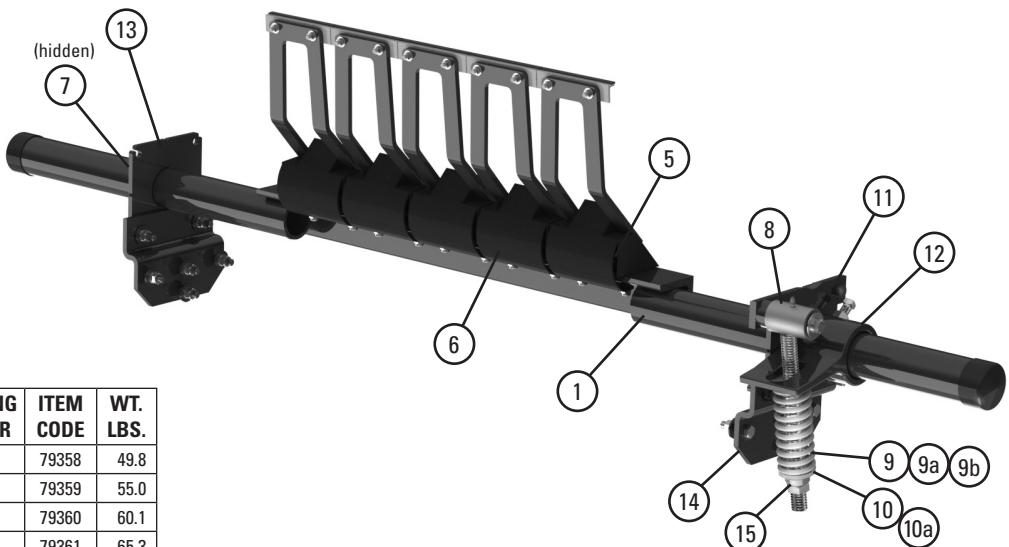

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	18" (450mm) Pole	H2P18	79358	49.8
	24" (600mm) Pole	H2P24	79359	55.0
	30" (750mm) Pole	H2P30	79360	60.1
	36" (900mm) Pole	H2P36	79361	65.3
	42" (1050mm) Pole	H2P42	79362	70.5
	48" (1200mm) Pole	H2P48	79363	75.6
	54" (1350mm) Pole	H2P54	79364	80.8
	60" (1500mm) Pole	H2P60	79365	86.0
	72" (1800mm) Pole	H2P72	79366	96.3
2	HV2 Tip (6" (150mm) Tip, 1 ea.)	HV2T-S/S	79367	0.6
2a	HV2 Protected V-Tip* (6" (150mm) Tip, 1 ea.) (for vulcanized belts only) (for abusive wear)	HV2PT	79368	0.8
3	HV2-S/S Tip Shield (optional)	HV2SSTS	79375	0.5
4	HV2 SS Suspension Arm*	H2SA6SS	79369	2.5
	HV2 S Suspension Arm*	H2SA6S	79370	3.2
	HV2 M Suspension Arm*	H2SA6M	79371	3.6
	HV2 L Suspension Arm*	H2SA6L	79372	3.8
	HV2 LL Suspension Arm*	H2SA6LL	79373	4.5
5	HV2 Cushion	H2RC	79374	4.3
6	HV2 Polyurethane Cushion Cover	UHVC	79453	0.5
7	Pole Lock Collar* (1 ea.)	MSPPL	75816	1.9
8	Pivot Arm Kit* (1 ea.)	QMTPAK	76096	4.3
9a	Tension Spring - Purple (1 ea.)*	QMTSP-P	75845	0.6
9b	Tension Spring - White (1 ea.)*	PSTS-W	75898	1.7
9c	Tension Spring - Silver (1 ea.)*	PSTS-S	75899	3.0
10a	Bushing Kit - Purple (2 ea.) (for item 9a)	QMTBK-P	76097	0.1
10b	Bushing Kit - White (2 ea.) (for items 9b & 9c)	QMTBK-W	76098	0.2
11	Pivot Shaft Bracket Kit* (1 ea.)	QMTPSBK	76099	4.3
12	Torque Arm Kit* (1 ea.)	PSTA	75896	11.4
13	Mounting Plate Kit* (2 ea.)	MSPMPK	75811	8.3
14	Offset Bracket Kit* (1 ea.)	HOBK	76399	12.4
15	Jam Nut Kit QMT Tensioner	JNK-C	79893	0.3
-	QMT Spring Tensioner* - Purple (incl. (1) ea. items 9a, 10a, 11, 12, 13)	QMT-P	76074	20.4
-	QMT Spring Tensioner* - White (incl. (1) ea. items 9b, 10b, 11, 12, 13)	QMT-W	76075	21.8
-	QMT Spring Tensioner* - Silver (incl. (1) ea. items 9c, 10c, 11, 12, 13)	QMT-S	79039	20.3


*Hardware included

NOTE: All poles and tensioners are heavy-duty style.

Lead time: 1 working day

Spring Tensioner Selection Chart

HV2 Size	76074 QMT-P	76075 QMT-W	79039 QMT-S
18" (450mm) SS,S,M; 24" (600mm) SS, S; 30" (750mm) SS,S	X		
24" (600mm) M; 30" (750mm) M; 36" (900mm) SS-L; 42" (1050mm) SS-L; 48" (1200mm) SS-LL; 54" (1350mm) S-L; 60" (1500mm) S; 72" (1800mm) S		X	
54" (1350mm) LL; 60" (1500mm) M-LL; 72" (1800mm) M-LL			X

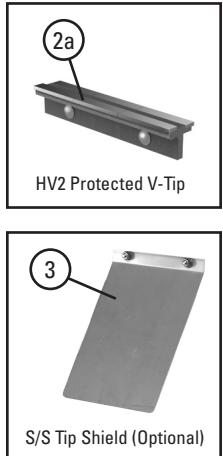

Tips Required per Cleaner Size

in.	18	24	30	36	42	48	54	60	72
mm	450	600	750	900	1050	1200	1350	1500	1800
No. HV2-Tips Required	2	3	4	5	6	7	8	9	11

Product Ordering Information

H-Type®
Segmented Blade Precleaner
with XF2-Tips

With XF2-Tips

BELT WIDTH	XF2-TIP SIZE	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
18	450	SS	HXF2-18SS	76138
18	450	S	HXF2-18S	76289
18	450	M	HXF2-18M	76290
24	600	SS	HXF2-24SS	76139
24	600	S	HXF2-24S	76291
24	600	M	HXF2-24M	76292
30	750	SS	HXF2-30SS	76140
30	750	S	HXF2-30S	76293
30	750	M	HXF2-30M	76294
36	900	SS	HXF2-36SS	76141
36	900	S	HXF2-36S	76295
36	900	M	HXF2-36M	76296
36	900	L	HXF2-36L	76297
42	1050	SS	HXF2-42SS	76142
42	1050	S	HXF2-42S	76298
42	1050	M	HXF2-42M	76299
42	1050	L	HXF2-42L	76300
48	1200	SS	HXF2-48SS	76143
48	1200	S	HXF2-48S	76301
48	1200	M	HXF2-48M	76302
48	1200	L	HXF2-48L	76303
54	1350	SS	HXF2-54SS	76144
54	1350	S	HXF2-54S	76304
54	1350	M	HXF2-54M	76305
54	1350	L	HXF2-54L	76306
60	1500	S	HXF2-60S	76145
60	1500	M	HXF2-60M	76307
60	1500	L	HXF2-60L	76308
72	1800	S	HXF2-72S	76146
72	1800	M	HXF2-72M	76309
72	1800	L	HXF2-72L	76310

*NOTE: XF2-Tips must be used on mechanically spliced belts. Can be used on vulcanized belts.

XF2-Tip size is determined by head pulley diameter - see chart.

Additional sizes available upon request.

To order a cleaner with XF-Tips, call Customer Service.


Lead time: 1 working day



Replacement XF-Tips

SIZE	ORDERING NUMBER	ITEM CODE	WT. LBS.
SS	HXF8SS	74307	3.4
S	HXF8S	74689	3.8
M	HXF8M	74690	4.1
L	HXF8L	74691	4.5


Lead time: 1 working day



Replacement XF2-Tips

SIZE	ORDERING NUMBER	ITEM CODE	WT. LBS.
SS	HXF2-SS	75979	3.0
S	HXF2-S	75980	3.4
M	HXF2-M	75981	3.8
L	HXF2-L	75982	4.1

Lead time: 1 working day



Tips Required per Cleaner Size

	18	24	30	36	42	48	54	60	72
in.	450	600	750	900	1050	1200	1350	1500	1800
mm	450	600	750	900	1050	1200	1350	1500	1800
No. XF2-Tips Required	2	3	3	4	5	5	6	7	8

XF-Tip & XF2-Tip Size

HEAD PULLEY DIAMETER + BELT & LAGGING	SIZE	
	in.	mm
10-19	250-475	SS
20-31	500-775	S
32-39	800-975	M
40-47	1000-1175	L


Specifications & Guidelines

H-Type® Segmented Blade Precleaner with XF2-Tips

Pole Length Specifications*


CLEANER SIZE		POLE LENGTH		MAXIMUM CONVEYOR SPAN	
in.	mm	in.	mm	in.	mm
18	450	66	1650	56	1400
24	600	72	1800	62	1550
30	750	78	1950	68	1700
36	900	84	2100	74	1850
42	1050	90	2250	80	2000
48	1200	96	2400	86	2150
54	1350	102	2550	92	2300
60	1500	108	2700	98	2450
72	1800	120	3000	110	2750

*For special extra long pole length requirements a Pole Extender Kit (#76024) is available that provides 30" (750 mm) of extended pole length. Pole Diameter – 2-7/8" (73 mm) (p. 129).

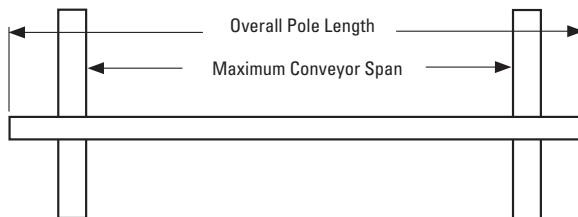

Clearance Guidelines for Installation


SUSPENSION ARM SIZE	HORIZONTAL CLEARANCE REQUIRED		VERTICAL CLEARANCE REQUIRED	
	in.	mm	in.	mm
SS	7	175	13	325
S	7	175	15	375
M	7	175	16 1/2	413
L	7	175	18 1/2	463
LL	7	175	22	550



QMT Spring Length Chart

Belt Width	No. of Tips	SS		S		M		L	
		in	mm	in	mm	in	mm	in	mm
18	450	2	4 1/2	114	4	102	5 3/4	146	N/A
24	600	3	5 5/8	143	5 1/2	140	5 3/8	137	N/A
30	750	3	5 5/8	143	5 1/2	140	5 3/8	137	N/A
36	900	4	5 3/8	137	5 1/8	130	5	127	4 1/4
42	1050	5	5	127	4 3/4	121	6	152	6
48	1200	5	5	127	4 3/4	121	6	152	6
54	1350	6	4 3/4	121	6	152	5 7/8	150	5 7/8
60	1500	7	N/A	N/A	5 7/8	150	5 3/4	146	5 3/4
72	1800	8	N/A	N/A	5 3/4	146	5 5/8	143	5 5/8

Purple Spring Silver Spring White Spring



Specifications:

- Maximum Belt Speed 1000 FPM (5 m/s)
- Temperature Rating -30 to 180°F (-35 to 82°C)
- Usable Blade Wear Length.....3" (75 mm)
- Blade Material.....Polyurethane (proprietary blend for abrasion resistance and long wear)
- Available for Belt Widths 18 to 72" (450 to 1800 mm) Other sizes available upon request.
- CEMA Cleaner Rating Class 4

Product Ordering Information

H-Type® Segmented Blade Precleaner with V-Tips

With V-Tips*


BELT WIDTH	SUSPENSION ARM SIZE	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
18	450	SS	HV-18SS	76101
18	450	S	HV-18S	76190
18	450	M	HV-18M	76191
24	600	SS	HV-24SS	76102
24	600	S	HV-24S	76192
24	600	M	HV-24M	76193
30	750	SS	HV-30SS	76103
30	750	S	HV-30S	76194
30	750	M	HV-30M	76195
36	900	SS	HV-36SS	76104
36	900	S	HV-36S	76196
36	900	M	HV-36M	76197
36	900	L	HV-36L	76198
42	1050	SS	HV-42SS	76105
42	1050	S	HV-42S	76199
42	1050	M	HV-42M	76251
42	1050	L	HV-42L	76252
42	1050	LL	HV-42LL	76253
48	1200	SS	HV-48SS	76106
48	1200	S	HV-48S	76254
48	1200	M	HV-48M	76255
48	1200	L	HV-48L	76256
48	1200	LL	HV-48LL	76257
54	1350	S	HV-54S	76107
54	1350	M	HV-54M	76258
54	1350	L	HV-54L	76259
54	1350	LL	HV-54LL	76260
60	1500	S	HV-60S	76108
60	1500	M	HV-60M	76261
60	1500	L	HV-60L	76262
60	1500	LL	HV-60LL	76263
72	1800	S	HV-72S	76109
72	1800	M	HV-72M	76264
72	1800	L	HV-72L	76265
72	1800	LL	HV-72LL	76266
				228.0

*NOTE: V-Tips can be used ONLY on vulcanized belts.

Suspension arm size is determined by head pulley diameter - see chart.

Additional sizes available upon request.

Lead time: 1 working day

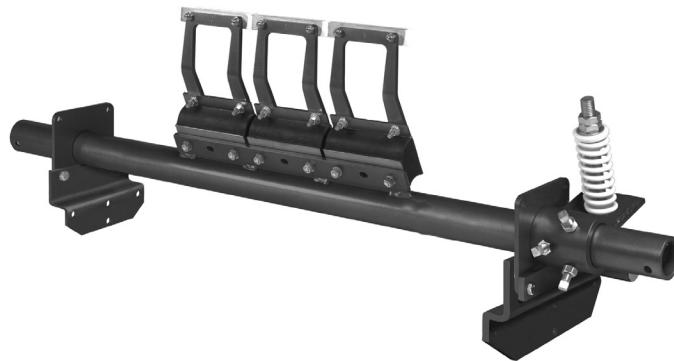

Replacement V-Tips

ORDERING NUMBER	ITEM CODE	WT. LBS.
HVT8-S/S	75419	1.0

Lead time: 1 working day

Replacement Suspension Arms

SIZE	ORDERING NUMBER	ITEM CODE	WT. LBS.
SS	HSA8SS	73047	2.0
S	HSA8S	73048	2.4
M	HSA8M	73049	2.9
L	HSA8L	73063	3.3
LL	HSA8LL	73064	3.8

Lead time: 1 working day

Suspension Arm Size

HEAD PULLEY DIAMETER + BELT & LAGGING	SIZE	
	in.	mm
10-19	250-475	SS
20-31	500-775	S
32-39	800-975	M
40-47	1000-1175	L
48-67	1200-1675	LL

Tips Required per Cleaner Size

in.	18	24	30	36	42	48	54	60	72
mm	450	600	750	900	1050	1200	1350	1500	1800
No. V-Tips Required	2	3	3	4	5	5	6	7	8


Specifications & Guidelines

H-Type® Segmented Blade Precleaner with V-Tips

Pole Length Specifications*


CLEANER SIZE		POLE LENGTH		MAXIMUM CONVEYOR SPAN	
in.	mm	in.	mm	in.	mm
18	450	66	1650	56	1400
24	600	72	1800	62	1550
30	750	78	1950	68	1700
36	900	84	2100	74	1850
42	1050	90	2250	80	2000
48	1200	96	2400	86	2150
54	1350	102	2550	92	2300
60	1500	108	2700	98	2450
72	1800	120	3000	110	2750

*For special extra long pole length requirements a Pole Extender Kit (#76024) is available that provides 30" (750 mm) of extended pole length. Pole Diameter – 2-7/8" (73 mm) (p. 129).

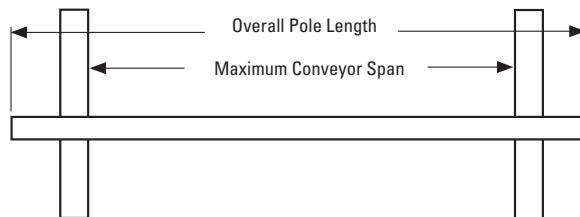

Clearance Guidelines for Installation


SUSPENSION ARM SIZE	HORIZONTAL CLEARANCE REQUIRED		VERTICAL CLEARANCE REQUIRED	
	in.	mm	in.	mm
SS	7	175	13	325
S	7	175	15	375
M	7	175	16 1/2	413
L	7	175	18 1/2	463
LL	7	175	22	550



QMT Spring Length Chart

Belt Width	No. of Tips	SS		S		M		L		LL	
		in	mm	in	mm	in	mm	in	mm	in	mm
18	450	2	5 1/4	133	4 7/8	124	4 3/4	121	4 1/2	114	N/A
24	600	3	4 1/2	114	4 1/8	105	5 3/4	146	5 3/4	146	N/A
30	750	4	4 1/2	114	4 1/8	105	5 3/4	146	5 3/4	146	N/A
36	900	5	5 3/4	146	5 5/8	143	5 1/2	140	5 3/8	137	N/A
42	1050	6	5 5/8	143	5 3/8	137	5 1/4	133	5 1/8	130	4 3/4
48	1200	7	5 5/8	143	5 3/8	137	5 1/4	133	5 1/8	130	4 3/4
54	1350	8	N/A	N/A	5 1/8	130	5	127	4 7/8	124	6
60	1500	9	N/A	N/A	4 7/8	124	6 1/8	156	6	152	5 7/8
72	1800	11	N/A	N/A	6	152	6	152	5 7/8	150	5 3/4

Purple Spring Silver Spring White Spring



Specifications:

- Maximum Belt Speed 1000 FPM (5 m/s)
- Temperature Rating -30 to 180°F (-35 to 82°C)
- Usable Blade Wear Length.....3/8" (9 mm)
- Blade Material.....Long Life Tungsten Carbide (for vulcanized belts only)
- Available for Belt Widths 18 to 72" (450 to 1800 mm) Other sizes available upon request.
- CEMA Cleaner Rating Class 4

Product Ordering Information

H-Type® Segmented Blade Precleaner with Protected V-Tips

With Protected V-Tips*

For abusive applications where materials being cleaned off the belt wear the back sides of the cleaner's V-Tips.

BELT WIDTH	SUSPENSION ARM SIZE	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
18	450	S	HVP-18S	99.1
18	450	M	HVP-18M	100.1
18	450	L	HVP-18L	100.9
24	600	S	HVP-24S	112.8
24	600	M	HVP-24M	114.3
24	600	L	HVP-24L	115.5
30	750	S	HVP-30S	116.6
30	750	M	HVP-30M	118.1
30	750	L	HVP-30L	119.3
36	900	S	HVP-36S	130.4
36	900	M	HVP-36M	133.8
36	900	L	HVP-36L	135.4
42	1050	S	HVP-42S	145.6
42	1050	M	HVP-42M	148.1
42	1050	L	HVP-42L	150.1
48	1200	S	HVP-48S	149.4
48	1200	M	HVP-48M	151.9
48	1200	L	HVP-48L	153.9
48	1200	LL	HVP-48LL	156.4
54	1350	S	HVP-54S	163.2
54	1350	M	HVP-54M	166.2
54	1350	L	HVP-54L	168.6
54	1350	LL	HVP-54LL	171.6
60	1500	S	HVP-60S	201.1
60	1500	M	HVP-60M	204.6
60	1500	L	HVP-60L	207.4
60	1500	LL	HVP-60LL	213.0
72	1800	S	HVP-72S	222.7
72	1800	M	HVP-72M	226.7
72	1800	L	HVP-72L	232.0
72	1800	LL	HVP-72LL	236.0


*NOTE: Protected V-Tips can be used ONLY on vulcanized belts.

Suspension arm size is determined by head pulley diameter - see chart.

Cleaners come standard with Stainless Steel Tip Shields.

Additional sizes available upon request.

Lead time: 1 working day

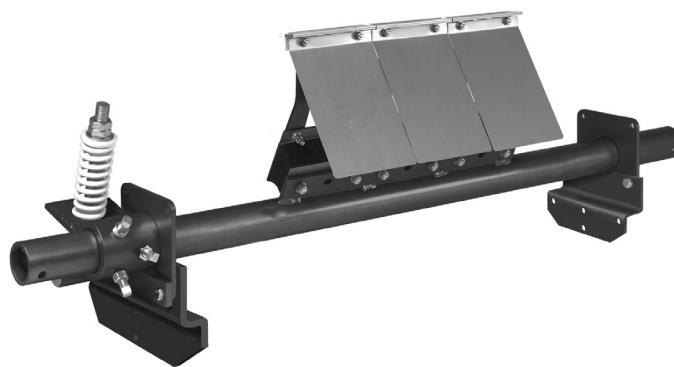

Replacement Protected V-Tips

ORDERING NUMBER	ITEM CODE	WT. LBS.
HVPT	73631	2.7

Lead time: 1 working day

Replacement Suspension Arms

SIZE	ORDERING NUMBER	ITEM CODE	WT. LBS.
SS	HSA8SS	73047	2.0
S	HSA8S	73048	2.4
M	HSA8M	73049	2.9
L	HSA8L	73063	3.3
LL	HSA8LL	73064	3.8

Lead time: 1 working day

Suspension Arm Size

HEAD PULLEY DIAMETER + BELT & LAGGING	SIZE	
	in.	mm
10-19	250-475	SS
20-31	500-775	S
32-39	800-975	M
40-47	1000-1175	L
48-67	1200-1675	LL

Tips Required per Cleaner Size

in.	18	24	30	36	42	48	54	60	72
mm	450	600	750	900	1050	1200	1350	1500	1800
No. Protected V-Tips Required	2	3	3	4	5	5	6	7	8


Specifications & Guidelines

H-Type®
Segmented Blade Precleaner
with Protected V-Tips

Pole Length Specifications*


CLEANER SIZE		POLE LENGTH		MAXIMUM CONVEYOR SPAN	
in.	mm	in.	mm	in.	mm
18	450	66	1650	56	1400
24	600	72	1800	62	1550
30	750	78	1950	68	1700
36	900	84	2100	74	1850
42	1050	90	2250	80	2000
48	1200	96	2400	86	2150
54	1350	102	2550	92	2300
60	1500	108	2700	98	2450
72	1800	120	3000	110	2750

*For special extra long pole length requirements a Pole Extender Kit (#76024) is available that provides 30" (750 mm) of extended pole length. Pole Diameter – 2-7/8" (73 mm) (p. 129).

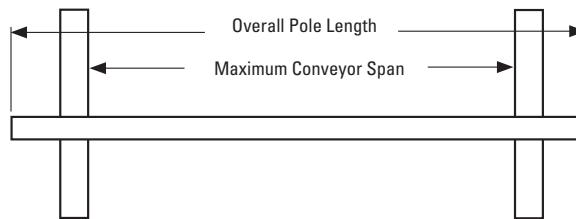

Clearance Guidelines for Installation


SUSPENSION ARM SIZE	HORIZONTAL CLEARANCE REQUIRED		VERTICAL CLEARANCE REQUIRED	
	in.	mm	in.	mm
SS	7	175	13	325
S	7	175	15	375
M	7	175	16 1/2	413
L	7	175	18 1/2	463
LL	7	175	22	550



QMT Spring Length Chart

Belt Width	No. of Tips	SS		S		M		L		LL	
		in	mm	in	mm	in	mm	in	mm	in	mm
18	450	2	5 1/4	133	4 7/8	124	4 3/4	121	4 1/2	114	N/A
24	600	3	4 1/2	114	4 1/8	105	5 3/4	146	5 3/4	146	N/A
30	750	4	4 1/2	114	4 1/8	105	5 3/4	146	5 3/4	146	N/A
36	900	5	5 3/4	146	5 5/8	143	5 1/2	140	5 3/8	137	N/A
42	1050	6	5 5/8	143	5 3/8	137	5 1/4	133	5 1/8	130	4 3/4
48	1200	7	5 5/8	143	5 3/8	137	5 1/4	133	5 1/8	130	4 3/4
54	1350	8	N/A	N/A	5 1/8	130	5	127	4 7/8	124	6
60	1500	9	N/A	N/A	4 7/8	124	6 1/8	156	6	152	5 7/8
72	1800	11	N/A	N/A	6	152	6	152	5 7/8	150	5 3/4

Purple Spring Silver Spring White Spring




Specifications:

- Maximum Belt Speed 1000 FPM (5 m/s)
- Temperature Rating -30 to 180°F (-35 to 82°C)
- Usable Blade Wear Length.....3/8" (9 mm)
- Blade Material.....Long Life Tungsten Carbide (for vulcanized belts only)
- Available for Belt Widths 18 to 72" (450 to 1800 mm) Other sizes available upon request.
- CEMA Cleaner Rating Class 4

Replacement Parts List

H-Type® Segmented Blade Precleaners

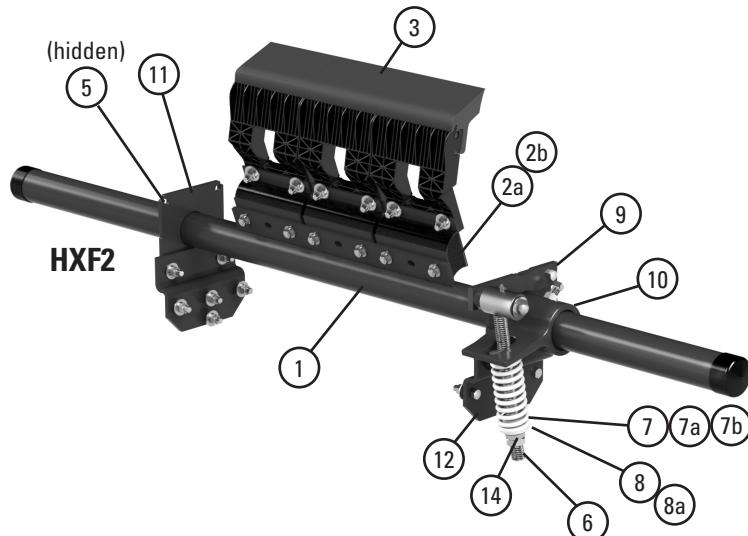

Replacement Parts


REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	18" (450mm) Pole	H78P18	76110	41.2
	24" (600mm) Pole	H78P24	76111	46.5
	30" (750mm) Pole	H78P30	76112	50.3
	36" (900mm) Pole	H78P36	76113	55.7
	42" (1050mm) Pole	H78P42	76114	61.1
	48" (1200mm) Pole	H78P48	76115	64.9
	54" (1350mm) Pole	H78P54	76116	70.3
	60" (1500mm) Pole	H78P60	76117	99.8
	72" (1800mm) Pole	H78P72	76118	113.0
2a	H2 XF-Tip Cushion* (for S, M, L HXF2-Tips; or S - LL Susp. Arms)	HXFC2	75902	4.0
2b	H2 F-Tip Cushion* (for SS HXF2 Tips; or SS Susp. Arms)	HFC2	75901	4.0
3	HXF2-Tip Extra Small*	HXF2-SS	75979	3.0
3	HXF2-Tip Small*	HXF2-S	75980	3.4
3	HXF2-Tip Medium*	HXF2-M	75981	3.8
3	HXF2-Tip Large*	HXF2-L	75982	4.1
3a	H V-Tip* (1 ea.)	HVT8-S/S	75419	1.0
3b	H Protected V-Tip* (1 ea.) (for vulcanized belts only) (for abusive wear)	HVPT	73631	2.7
4	H SS Suspension Arm*	HSA8SS	73047	0.5
	H S Suspension Arm*	HSA8S	73048	1.0
	H M Suspension Arm*	HSA8M	73049	1.5
	H L Suspension Arm*	HSA8L	73063	2.0
	H LL Suspension Arm*	HSA8LL	73064	2.5
5	Pole Lock Collar* (1 ea.)	MSPL	75816	1.9
6	Pivot Arm Kit* (1 ea.)	QMTPAK	76096	4.3
7	Tension Spring - Purple (1 ea.)**	QMTS-P	75845	0.6
7a	Tension Spring - White (1 ea.)**	PSTS-W	75898	1.7
7b	Tension Spring - Silver (1 ea.)**	PSTS-S	75899	3.0
8	Bushing Kit - Purple (2 ea.) (for Item 7)	QMTBK-P	76097	0.1
8a	Bushing Kit - White (2 ea.) (for Items 7a & 7b)	QMTBK-W	76098	0.2
9	Pivot Shaft Bracket Kit* (1 ea.)	QMTPSBK	76099	4.3
10	Torque Arm Kit* (1 ea.)	PSTA	75896	11.4
11	Mounting Plate Kit* (2 ea.)	MSPMPK	75811	8.3
12	Offset Bracket Kit* (1 ea.)	HOBK	76399	12.4
13	H SS Tip Shield	HSSTS	74771	0.5
14	Jam Nut Kit QMT Tensioner	JNK-C	79893	0.3
-	H SS Cushion Shield	HSSCS	74772	0.6
-	QMT Spring Tensioner* - Purple (incl. 1 ea. Items 6, 7, 8, 9, & 10)	QMT-P	76074	20.4
-	QMT Spring Tensioner* - White (incl. 1 ea. Items 6, 7a, 8a, 9, & 10)	QMT-W	76075	21.8
-	QMT Spring Tensioner* - Silver (incl. 1 ea. Items 6, 7b, 8a, 9, & 10)	QMT-S	79039	20.3

*Hardware included

NOTE: All poles and tensioners are heavy-duty style.

Parts for old style H cleaners – See p. 139

Lead time: 1 working day

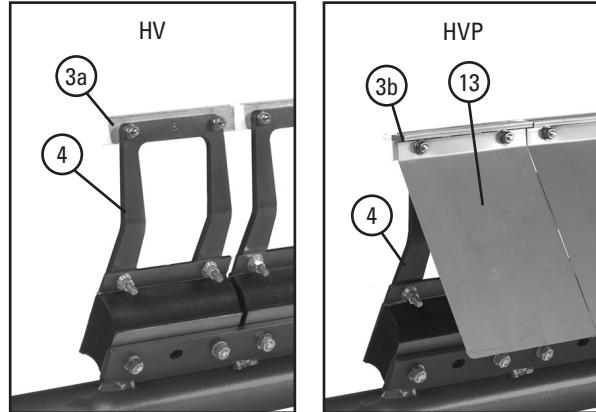

Spring Tensioner Selection Chart

CLEANER TYPE AND SIZE	76074 QMT-P	76075 QMT-W	79039 QMT-S
HXF2			
18" (450mm) SS & S		X	
18" (450mm) M; 24–36" (600–900mm); 42–48" (1050–1200mm) SS & S; 54" (1350mm) SS			X
42–48" (1050–1200mm) M & L; 54–72" (1350–1800mm) S, M, L			X
HV			
18" (450mm) SS, S, M; 24–30" (600–750mm) SS & S	X		
24–30" (600–750mm) M; 36–48" (900–1200mm), 54" (1350mm) S, M, L; 60" (1500mm) S		X	
54" (1350mm) LL; 60" (1500mm) M, L, LL; 72" (1800mm)			X
HVP			
18" (450mm) S, M; 24–30" (600–750mm) S	X		
24–30" (600–750mm) M; 36–48" (900–1200mm), 54" (1350mm) S, M, L; 60" (1500mm) S		X	
54" (1350mm) LL; 60" (1500mm) M, L, LL; 72" (1800mm)			X

Product Ordering Information

H-Type® High-Temp Segmented Blade Precleaner with V-Tips

High-Temp with V-Tips*

BELT WIDTH in.	SUSPENSION ARM SIZE	ORDERING NUMBER	ITEM CODE	WT. LBS.
18	450	SS	HTV18SS	74821
18	450	S	HTV18S	74828
24	600	SS	HTV24SS	74822
24	600	S	HTV24S	74829
30	750	SS	HTV30SS	74823
30	750	S	HTV30S	74830
36	900	SS	HTV36SS	74824
36	900	S	HTV36S	74831
36	900	M	HTV36M	74838
42	1050	SS	HTV42SS	74825
42	1050	S	HTV42S	74832
42	1050	M	HTV42M	74839
48	1200	SS	HTV48SS	74826
48	1200	S	HTV48S	74833
48	1200	M	HTV48M	74840

Suspension arm size is determined by head pulley diameter - see chart.

Pole Diameter - 2-3/8" (60 mm)

Lead time: 1 working day



Replacement Spring

ORDERING NUMBER	ITEM CODE	WT. LBS.
HTTS-HT	79068	1.0

Lead time: 1 working day

Replacement Suspension Arms

SIZE	ORDERING NUMBER	ITEM CODE	WT. LBS.
SS	HSA8SS	73047	2.0
S	HSA8S	73048	2.4
M	HSA8M	73049	2.9

Lead time: 1 working day

Replacement V-Tips

ORDERING NUMBER	ITEM CODE	WT. LBS.
HVT8-S/S	75419	1.0

Lead time: 1 working day

Tips Required per Cleaner Size

in.	18	24	30	36	42	48
mm	450	600	750	900	1050	1200
No. V-Tips Required	2	3	3	4	5	5

Suspension Arm Size

HEAD PULLEY DIAMETER + BELT & LAGGING		
	in.	mm
8-15	200-375	SS
16-27	400-675	S
28-35	700-875	M

Product Notes:

- The High-Temp Precleaner works in ambient temperatures up to 400°F (204°C) with spikes to 450°F (232°C)
- V-Tips can be used ONLY on vulcanized belts.
- Cleaners come standard with stainless steel tip shields.
- For replacement parts see the old-style H-Type® Replacement Parts List on page 139.
- Compatible with reversing belts.

Product Ordering Information

EZS2
Secondary Cleaner

EZS2 Secondary Cleaner

BELT WIDTH	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm		
18	450	EZS2-18	75643
24	600	EZS2-24	75644
30	750	EZS2-30	75645
36	900	EZS2-36	75646
42	1050	EZS2-42	75647
48	1200	EZS2-48	75648
54	1350	EZS2-54	75649
60	1500	EZS2-60	75650
72	1800	EZS2-72	75651
			151.9

Lead time: 1 working day



Replacement C-Tips

ORDERING NUMBER	ITEM CODE	WT. LBS.
ICT6	74535	0.7

Lead time: 1 working day

Tips Required per Cleaner Size

in.	18	24	30	36	42	48	54	60	72
mm	450	600	750	900	1050	1200	1350	1500	1800
No. C-Tips Required	3	4	5	6	7	8	9	10	12

Product Notes:

- Blade width equals belt width.
- Can be installed in any location from where the belt leaves the pulley on down the beltline.
- FormFlex™ cushions automatically adjust the individual tension of each blade to the belt.
- Works with mechanical splices.
- A special cushion pad helps absorb the impact from mechanical splices and eliminates blade vibration.
- Comes complete with universal mounting brackets.
- Versatile tensioner can be installed to either push-up or pull-up the cleaner to the belt, depending on installation space constraints.
- If belt is cupped or has low tension, a hold-down roller may be required to flatten and support the belt for optimal cleaning results.

Product Ordering Information


EZS2 High-Temp Secondary Cleaner

High-Temp with C-Tips

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
18	450	HTS18	76085	64.0
24	600	HTS24	76086	68.0
30	750	HTS30	76087	72.0
36	900	HTS36	76088	76.0
42	1050	HTS42	76089	80.0
48	1200	HTS48	76090	84.0
54	1350	HTS54	76091	88.0
60	1500	HTS60	76092	145.3
72	1800	HTS72	76093	149.5

Pole Diameter – 2-3/8" (60 mm)

Lead time: 1 working day

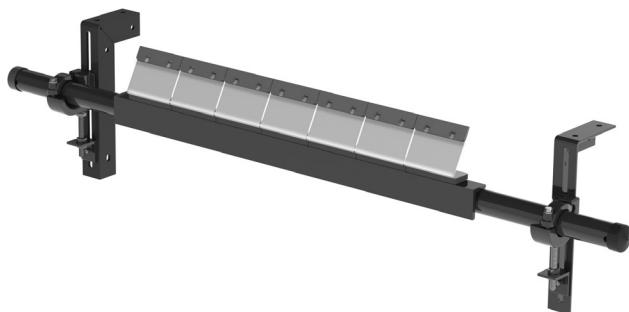

Replacement C-Tips

ORDERING NUMBER	ITEM CODE	WT. LBS.
ICT6	74535	0.7

Lead time: 1 working day

Replacement Cushion Kit

ORDERING NUMBER	ITEM CODE	WT. LBS.
HTSCK	76094	1.5

Lead time: 1 working day

Tips Required per Cleaner Size

in.	18	24	30	36	42	48	54	60	72
mm	450	600	750	900	1050	1200	1350	1500	1800
No. C-Tips Required	3	4	5	6	7	8	9	10	12

Product Notes:

- The High-Temp Secondary works in ambient temperatures up to 400°F (204°C) with spikes to 450°F (232°C).
- Works with mechanical fasteners.

Specifications & Guidelines


EZS2
Secondary Cleaner

Pole Length Specifications

BELT WIDTH		BLADE WIDTH		POLE LENGTH		MAXIMUM CONVEYOR SPAN	
in.	mm	in.	mm	in.	mm	in.	mm
18	450	18	450	52	1300	47	1175
24	600	24	600	58	1450	53	1325
30	750	30	750	64	1600	59	1475
36	900	36	900	70	1750	65	1625
42	1050	42	1050	76	1900	71	1775
48	1200	48	1200	82	2050	77	1925
54	1350	54	1350	88	2200	83	2075
60	1500	60	1500	94	2350	89	2225
72	1800	72	1800	106	2650	101	2525


Pole Diameter – 2-3/8" (60 mm) on 18–54" (450–1350 mm)

Pole Diameter – 2-7/8" (73 mm) on 60–72" (1500–1800 mm)

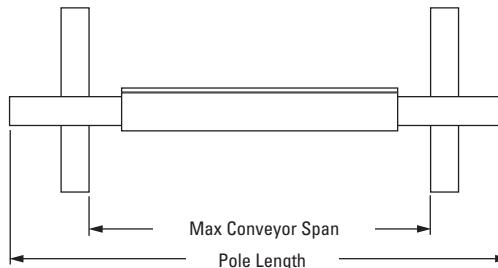

Clearance Guidelines for Installation

HORIZONTAL CLEARANCE REQUIRED		VERTICAL CLEARANCE REQUIRED	
in.	mm	in.	mm
4	100	8 1/2 for 18–54"	213 for 450–1350 mm
		9 1/2 for 60–72"	238 for 1500–1800 mm

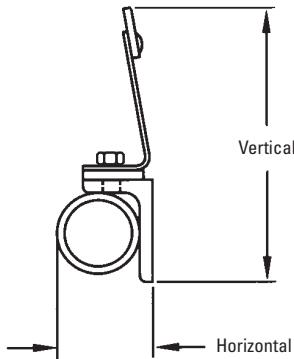


Specifications:

- Maximum Belt Speed 700 FPM (3.5 m/s)
- Temperature Rating EZS2: -30 to 200°F (-35 to 93°C)
EZS2 High-Temp: up to 400°F (204°C), spikes to 450°F (232°C)
- Usable Blade Wear Length..... 3/8" (9 mm)
- Blade Material Impact Resistant Tungsten Carbide (works with mechanical fasteners)
- Available for Belt Widths 18 to 72" (450 to 1800 mm)
- CEMA Cleaner Rating Class 3

Replacement Parts List

EZS2
Secondary Cleaner

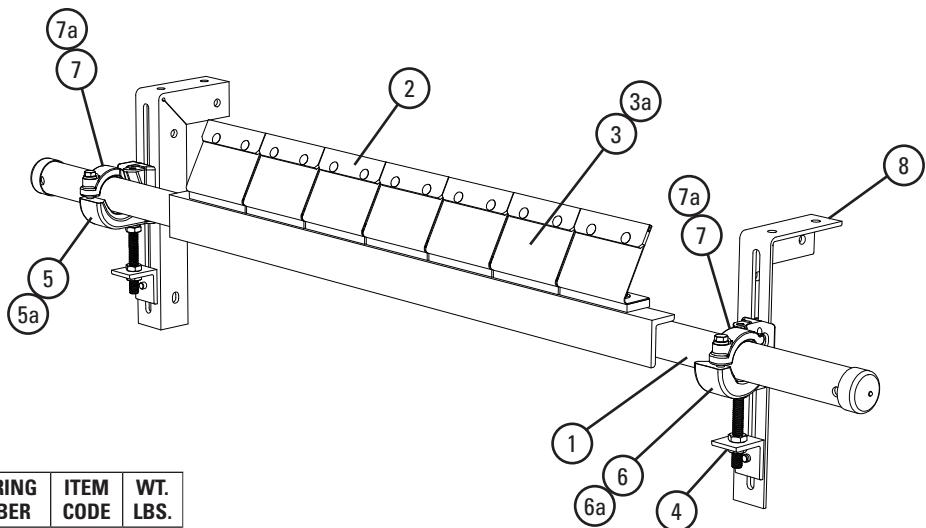

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	18" (450mm) Pole	EZS2P18	75652	25.0
	24" (600mm) Pole	EZS2P24	75653	28.0
	30" (750mm) Pole	EZS2P30	75654	30.0
	36" (900mm) Pole	EZS2P36	75655	34.0
	42" (1050mm) Pole	EZS2P42	75656	36.0
	48" (1200mm) Pole	EZS2P48	75657	39.0
	54" (1350mm) Pole	EZS2P54	75658	42.0
	60" (1500mm) Pole	EZS2P60	75659	77.0
	72" (1800mm) Pole	EZS2P72	75660	89.0
2	C-Tip Kit* (1 ea.)	ICT6	74535	0.7
3	FormFlex™ Cushion Kit* (incl. (1) cushion & (1) pad)	FFCK	75661	1.5
3a	High Temp Replacement Cushion Kit* (incl. (1) cushion & (1) pad)	HTSCK	76094	1.5
4	Adjusting Bracket Kit* (1 ea.)	PAB	75513	1.5
5	Pole Clamp Kit LEFT* (1 ea.) (incl. item 7)	CCKL	79224	6.8
5a	HD Pole Clamp Kit LEFT* (1 ea.) (incl. item 7a)	CCKHDL	79225	8.7
6	Pole Clamp Kit RIGHT* (1 ea.) (incl. item 7)	CCCR	79228	6.8
6a	HD Pole Clamp Kit RIGHT* (1 ea.) (incl. item 7a)	CCKHDR	79229	8.7
7	Cradle Clamp Top Strap (1 ea.) (for use on L or R Pole Clamp Kit)	CCKTS	79232	1.1
7a	HD Cradle Clamp Top Strap (1 ea.) (for use on L or R HD Pole Clamp Kit)	CCKHDT	79233	1.7
8	Mounting Bracket Kit (1 Right & 1 Left)	EZS2MBK	75666	13.0
—	Cradle Clamp Mounting Kit* (incl. (2) ea. item 4 & (1) ea. items 5, 6 & 8)	CCMK	78919	33.0
—	HD Cradle Clamp Mounting Kit* (incl. (2) ea. item 4 & (1) ea. items 5a, 6a & 8)	CCMKHD	78920	36.7

*Hardware Included

Lead time: 1 working day

Tips Required per Cleaner Size


in.	18	24	30	36	42	48	54	60	72
mm	450	600	750	900	1050	1200	1350	1500	1800
No. C-Tips Required	3	4	5	6	7	8	9	10	12

Mounting Kit Selection Chart

Cleaner Width	78919 CCMK	78920 CCMKHD
EZS2 18–54" (450–1350mm)	X	
EZS2 60–72" (1500–1800mm)		X

Product Ordering Information


Y-Type™ Standard-Duty Secondary Cleaner with Carbide/Polyurethane Blades and YST Tensioner

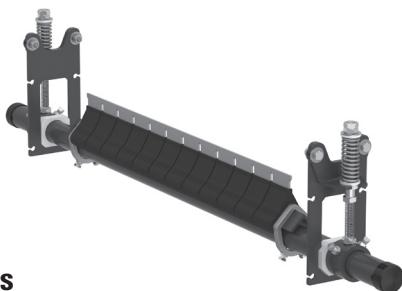

With Carbide Blades

BELT WIDTH	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm		
18	450	YT-TC-18S	55.0
24	600	YT-TC-24S	60.0
30	750	YT-TC-30S	65.0
36	900	YT-TC-36S	70.0
42	1050	YT-TC-42S	76.0
48	1200	YT-TC-48S	82.0


Lead time: 1 working day

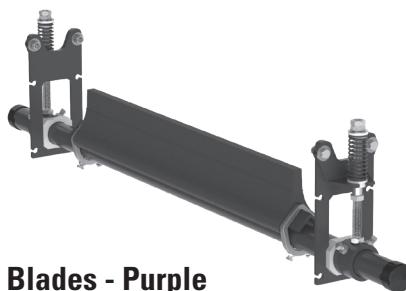

With Polyurethane Blades - Purple

BELT WIDTH	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm		
18	450	YT-18S	59.0
24	600	YT-24S	65.0
30	750	YT-30S	71.0
36	900	YT-36S	77.0
42	1050	YT-42S	83.0
48	1200	YT-48S	89.0

Lead time: 1 working day

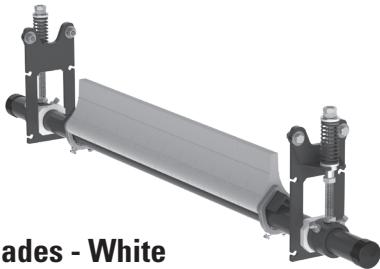

With Polyurethane Blades - White


BELT WIDTH	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm		
18	450	YTW-18S	59.0
24	600	YTW-24S	65.0
30	750	YTW-30S	71.0
36	900	YTW-36S	77.0
42	1050	YTW-42S	83.0
48	1200	YTW-48S	89.0

Lead time: 1 working day

Optional YST Drop Brackets (2)

ORDERING NUMBER	ITEM CODE	WT. LBS.
YSTDBK2	113390	32.0

Lead time: 1 working day



YST Standard Duty
Drop Brackets

Product Notes:

- Works on reversing belts, vulcanized belts, and belts with mechanical fasteners.
- Pole Length: Belt width plus 30" (750 mm). For longer requirements, see Installation Accessories – Pole Extender Kit on page 137.
- Visual Blade Tension Check: Measure the tension spring and refer to Spring Length Chart on mounting base for the correct length for best cleaning performance.
- Tensioner: Standard Duty YST Spring Tensioner for self-adjusting tensioning with easy retensioning adjustments. The tensioner can be mounted in pull-up or push-up position.
- To make cleaner installation easier and quicker, see Optional Mounting Kits on replacement parts page or page 137.
- Simple design makes changing the blades fast and easy. Blades can be removed and replaced individually, or all at once by replacing the cartridge.

Product Ordering Information


Y-Type™
Standard-Duty Secondary Cleaner
with Carbide/Polyurethane Blades and YST Tensioner

Standard Carbide Blades

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	YT-C*	79574	1.1
18	450	YCART-18/450-TC	79811	12.6
24	600	YCART-24/600-TC	79812	16.5
30	750	YCART-30/750-TC	79813	20.4
36	900	YCART-36/900-TC	79814	24.2
42	1050	YCART-42/1050-TC	79815	28.1
48	1200	YCART-48/1200-TC	79816	31.9

*Single 3" (75 mm) blade segment

Lead time: 1 working day

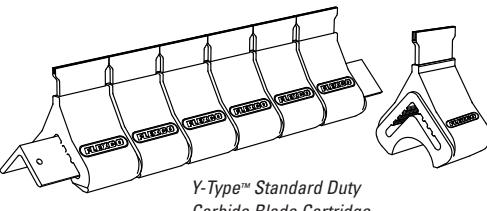


Y-Type™ Standard Duty Carbide Blade Cartridge

Standard Polyurethane Blades - Purple

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	YT-P*	79573	1.2
18	450	YCART-18/450-P	79617	13.1
24	600	YCART-24/600-P	79618	17.1
30	750	YCART-30/750-P	79619	21.1
36	900	YCART-36/900-P	79620	25.1
42	1050	YCART-42/1050-P	79621	29.1
48	1200	YCART-48/1200-P	79622	33.1

*Single 3" (75 mm) blade segment

Lead time: 1 working day

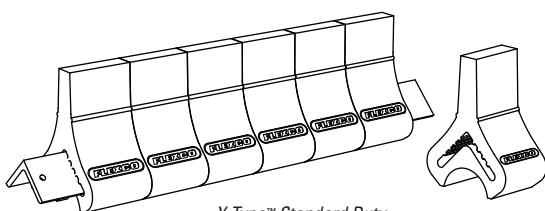

Y-Type™ Standard Duty Polyurethane Blade Cartridge

Polyurethane Blades - White[†]

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	YT-W*	79572	1.2
18	450	YCART-18/450-W	79611	13.1
24	600	YCART-24/600-W	79612	17.1
30	750	YCART-30/750-W	79613	21.1
36	900	YCART-36/900-W	79614	25.1
42	1050	YCART-42/1050-W	79615	29.1
48	1200	YCART-48/1200-W	79616	33.1

*Single 3" (75 mm) blade segment

[†]White blades are chemical resistant, and all ingredients used in Polyurethane formulation comply with the relevant requirements of 21 CFR (FDA Code of Federal Regulations) for use in repeated bulk dry food applications.

Lead time: 1 working day

UHT Polyurethane Blades - Red

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	YT-R*	91804	1.2
18	450	YCART-18/450-R	91805	13.1
24	600	YCART-24/600-R	91806	17.1
30	750	YCART-30/750-R	91807	21.1
36	900	YCART-36/900-R	91808	25.1
42	1050	YCART-42/1050-R	91809	29.1
48	1200	YCART-48/1200-R	91810	33.1

*Single 3" (75 mm) blade segment

Lead time: 1 working day

Blades Required per Cleaner Size

in.	18	24	30	36	42	48
mm	450	600	750	900	1050	1200
No. Required	6	8	10	12	14	16

Specifications & Guidelines


Y-Type™ Standard-Duty Secondary Cleaner with YST Tensioner

Pole Length Specifications

CLEANER SIZE		POLE LENGTH		MAXIMUM CONVEYOR SPAN	
in.	mm	in.	mm	in.	mm
18	450	48	1200	40	1025
24	600	54	1350	46	1175
30	750	60	1500	52	1325
36	900	66	1650	58	1475
42	1050	72	1800	64	1625
48	1200	78	1950	70	1775


Pole Length – Belt +30" (750 mm)

Pole Diameter – 2-3/8" (60 mm)

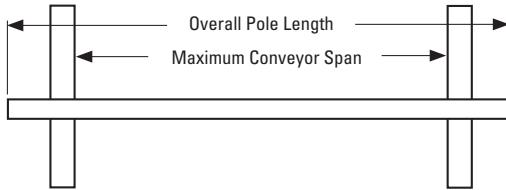

Clearance Guidelines for Installation

CLEANER TYPE	BELT WIDTH/CLEANER SIZE		HORIZONTAL CLEARANCE REQUIRED		VERTICAL CLEARANCE REQUIRED	
	in.	mm	in.	mm	in.	mm
Y-Type® Polyurethane	18–48	450–1200	4-1/4	110	8-1/4	210
Y-Type® Carbide	18–48	450–1200	4-1/4	110	7-3/4	184



Blade Specifications


CUSHION	DUROMETER	TEMPERATURE RANGE
Purple (Standard)	83A	-30 to 180°F (-35 to 82°C)
White (Food Grade) ‡	83A	-30 to 180°F (-35 to 82°C)
Red (Ultra High-Temp)	93A	Up to 400°F (200°C) Spikes to 450°F (232°C)
Carbide	83A	-30 to 180°F (-35 to 82°C)

‡ All ingredients used in the polyurethane formulation of this blade comply with the relevant requirements of 21 CFR (FDA Code of Federal Regulations) for use in repeated bulk dry food applications

YST Spring Length Chart

Blade Width	Carbide Tip		Purple or White Polyurethane Tip		Red UHT Polyurethane Tip						
	Silver Springs		Yellow Springs		Purple Springs						
	in.	mm	in.	mm	in.	mm					
18	450	4 1/8	105	3 1/4	83	3 5/8	92	3 1/8	79	3 5/8	92
24	600	4	102	2 7/8	73	3 3/8	86	2 3/4	70	3 3/8	86
30	750	3 7/8	98	2 5/8	67	3 1/8	79	2 1/2	64	3 1/8	79
36	900	3 3/4	95	2 1/4	57	2 7/8	73	2 1/4	57	2 7/8	73
42	1050	3 5/8	92	NA	NA	2 5/8	67	NA	NA	2 5/8	67
48	1200	3 1/2	89	NA	NA	2 3/8	60	NA	NA	2 3/8	60

Shading indicates preferred spring option.


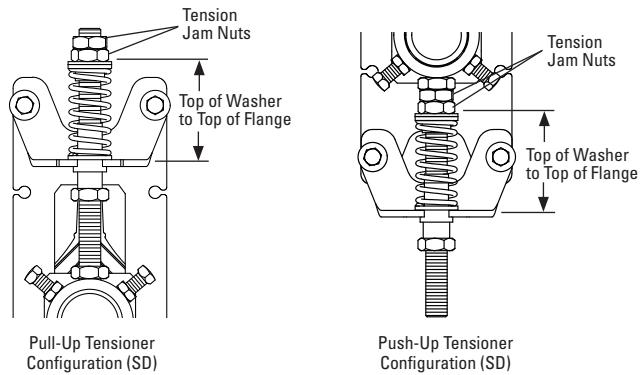


Specifications:

- Maximum Belt Speed 600 FPM (3 m/s)
- Usable Blade Wear Length 2' (50 mm) (Polyurethane)
1/4" (6 mm) (Carbide)
- Blade Materials Purple: Polyurethane (proprietary blend for abrasion resistance and long wear)
White: Polyurethane (chemical resistant/food grade)
Red: Polyurethane (ultra high-temp)
Carbide: Tungsten Carbide
- Available for Belt Widths 18 to 48" (450 to 1200 mm) Other sizes available upon request.
- CEMA Cleaner Rating Class 2 (Standard-duty with polyurethane blades)
Class 3 (Standard-duty with carbide blades)

Replacement Parts List

Y-Type™
Standard-Duty Secondary Cleaner
with YST Tensioner

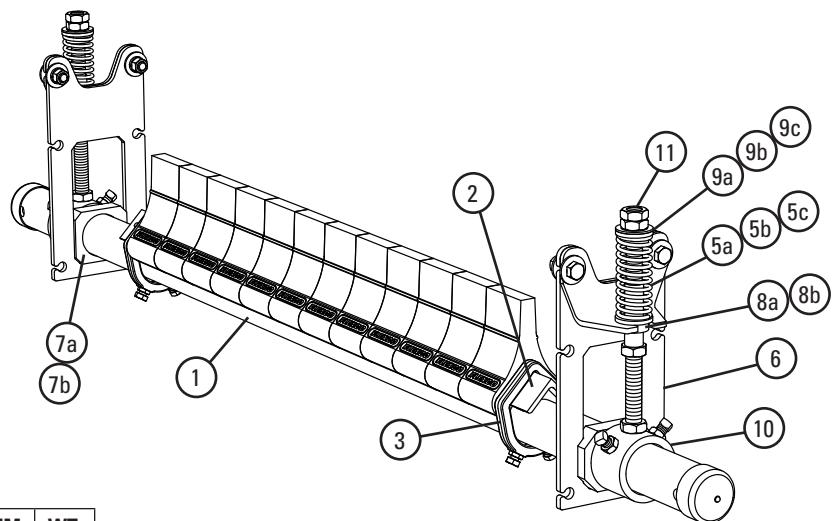

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	18" (450mm) Pole	YTP-18/450	79587	20.2
	24" (600mm) Pole	YTP-24/600	79588	22.7
	30" (750mm) Pole	YTP-30/750	79589	25.2
	36" (900mm) Pole	YTP-36/900	79590	27.7
	42" (1050mm) Pole	YTP-42/1050	79591	30.2
	48" (1200mm) Pole	YTP-48/1200	79592	32.7
2	18" (450mm) Cushion Angle	YTA-18/450	79593	5.7
	24" (600mm) Cushion Angle	YTA-24/600	79594	7.3
	30" (750mm) Cushion Angle	YTA-30/750	79595	8.9
	36" (900mm) Cushion Angle	YTA-36/900	79596	10.4
	42" (1050mm) Cushion Angle	YTA-42/1050	79597	12.0
	48" (1200mm) Cushion Angle	YTA-48/1200	79598	13.6
3	Y-Type Angle Clamp* (2 ea.)	YTAC	79623	2.2
4	YST Drop Bracket Kit (2 ea.)	YSTDBK2	113390	32.0
5a	YST Spring - Yellow	YSTS-Y	79795	0.3
5b	YST Spring - Purple	YSTS-P	79796	0.4
5c	YST Spring - Silver (Carbide Cleaners)	CTS-S	77743	0.5
6	YST Mounting Bracket (incl. Angle Bracket)	YSTMB	79843	3.3
7a	YST Guide Block Kit (Pair)	YSTGBK	79845	0.4
7b	YST Guide Block Kit - UHT (Pair)	YSTGBK-R	91811	0.4
8a	YST Lower Bushing Kit (Pair)	YSTLBK	79846	0.1
8b	YST Lower Bushing Kit - UHT (Pair)	YSTLBK-R	91812	0.1
9a	YST Top Bushing Kit - White (Pair)	YSTTBK-W	79847	0.1
9b	YST Top Bushing Kit - Black (Pair)	YSTTBK-B	79855	0.1
9c	YST Top Bushing Kit - UHT (Pair)	YSTBKPU-R	91813	0.1
10	YST Pole Mount Kit*	YSTPMK	79848	4.3
11	YST Adjusting Rod Nut Kit	YSTANK	79857	0.2
-	YST Spring Tensioner - Yellow (Pair) (incl. (2) ea. items 5a, 6, 10, 11; (1) ea. items 7a, 8a, 9a)	YST-Y	79836	18.2
-	YST Spring Tensioner - Purple (Pair) (incl. (2) ea. items 5b, 6, 10, 11; (1) ea. items 7a, 8a, 9a)	YST-P	79837	18.5
-	YST Spring Tensioner - Silver (Pair) (incl. (2) ea. items 5c, 6, 10, 11; (1) ea. items 7a, 8a, 9b)	YST-S	79838	18.8
-	UHT YST Spring Tensioner - Yellow (Pair) (incl. (2) ea. items 5a, 6, 10, 11; (1) ea. items 7b, 8b, 9c)	YST-Y-R	91814	18.2
-	UHT YST Spring Tensioner - Purple (Pair) (incl. (2) ea. items 5b, 6, 10, 11; (1) ea. items 7b, 8b, 9c)	YST-P-R	91815	18.5

*Hardware included


Lead time: 1 working day

Spring Tensioner Selection Chart

CLEANER BLADE WIDTH	79838 YST-S	79836 YST-Y	79837 YST-P	91814 YST-Y-R	91815 YST-P-R
Carbide 18–48" (450–1200mm)	X				
Polyurethane 18–30" (450–750mm)		X			
Polyurethane 36–48" (900–1200mm)			X		
Red Polyurethane 18–30" (450–750mm)				X	
Red Polyurethane 36–48" (900–1200mm)					X

Product Ordering Information


Y-Type™ HD Heavy-Duty Secondary Cleaner with HD Carbide/Urethane Blades and YST Tensioner

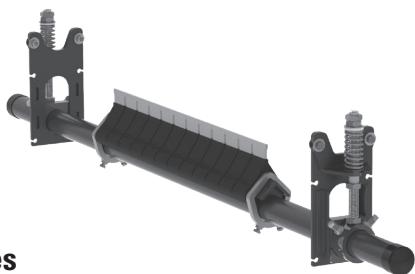

With Carbide Blades

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
36	900	YTHD-TC-36S	79777	130.0
42	1050	YTHD-TC-42S	79778	142.4
48	1200	YTHD-TC-48S	79779	151.9
54	1350	YTHD-TC-54S	79780	161.5
60	1500	YTHD-TC-60S	79781	171.0
72	1800	YTHD-TC-72S	79782	190.1


Lead time: 1 working day

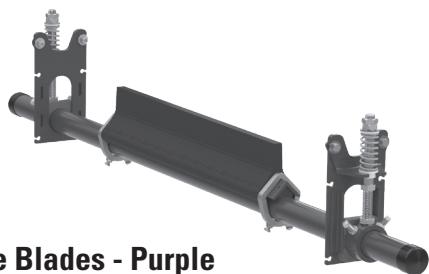

With Polyurethane Blades - Purple

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
36	900	YTHD-36S	79783	131.0
42	1050	YTHD-42S	79784	140.3
48	1200	YTHD-48S	79785	149.5
54	1350	YTHD-54S	79786	158.8
60	1500	YTHD-60S	79787	168.0
72	1800	YTHD-72S	79788	186.5


Lead time: 1 working day

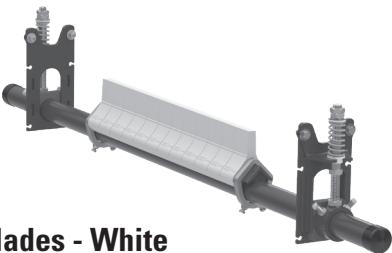

With Polyurethane Blades - White

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
36	900	YTHDW-36S	79789	131.0
42	1050	YTHDW-42S	79790	140.3
48	1200	YTHDW-48S	79791	149.5
54	1350	YTHDW-54S	79792	158.8
60	1500	YTHDW-60S	79793	168.0
72	1800	YTHDW-72S	79794	186.5

Lead time: 1 working day

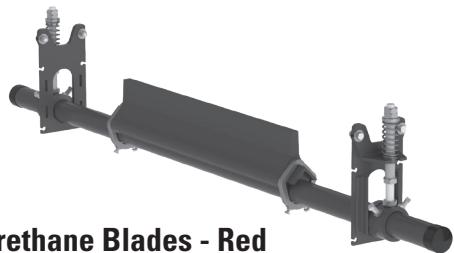

With UHT Polyurethane Blades - Red


BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
36	900	YTHDR-36S	91816	131.0
42	1050	YTHDR-42S	91817	140.3
48	1200	YTHDR-48S	91818	149.5
54	1350	YTHDR-54S	91819	158.8
60	1500	YTHDR-60S	91820	168.0
72	1800	YTHDR-72S	91821	186.5

Lead time: 1 working day

Optional YST HD Drop Brackets (2)

ORDERING NUMBER	ITEM CODE	WT. LBS.
YSTHDBK	79850	32.1

Lead time: 1 working day



YST HD Drop Brackets

Product Notes:

- Works on reversing belts, vulcanized belts, and belts with mechanical fasteners.
- Pole Length: Belt width plus 54" (1350 mm). For longer requirements, see Installation Accessories – Pole Extender Kit page 137.
- Visual Blade Tension Check: Measure tension spring and refer to Spring Length Chart on mounting base for correct length for best cleaning performance.
- Tensioner: Standard Duty YST Spring Tensioner for self-adjusting tensioning with easy retensioning adjustments. The tensioner can be mounted in pull-up or push-up position.
- To make cleaner installation easier and quicker, see Optional Mounting Kits on replacement parts page.
- Simple design makes changing the blades fast and easy. Blades can be removed and replaced individually, or all at once by replacing the cartridge.

Product Ordering Information


Y-Type™ HD Heavy-Duty Secondary Cleaner with HD Carbide/Urethane Blades and YST Tensioner

HD Carbide Blades

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	YT-HDC*	79728	1.8
36	900	YCART-36/900-HDTC	79829	38.4
42	1050	YCART-42/1050-HDTC	79830	44.5
48	1200	YCART-48/1200-HDTC	79831	50.6
54	1350	YCART-54/1350-HDTC	79832	56.8
60	1500	YCART-60/1500-HDTC	79833	62.9
72	1800	YCART-72/1800-HDTC	79834	75.2

*Single 3" (75 mm) blade segment

Lead time: 1 working day

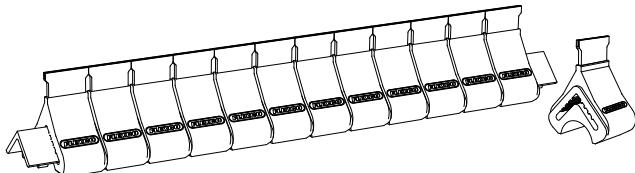


Y-Type™ HD Carbide Blade Cartridge

HD Polyurethane Blades - Purple

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	YT-HDP*	79677	1.7
36	900	YCART-36/900-HDP	79817	36.5
42	1050	YCART-42/1050-HDP	79818	42.3
48	1200	YCART-48/1200-HDP	79819	48.1
54	1350	YCART-54/1350-HDP	79820	53.9
60	1500	YCART-60/1500-HDP	79821	59.8
72	1800	YCART-72/1800-HDP	79822	71.4

*Single 3" (75 mm) blade segment

Lead time: 1 working day

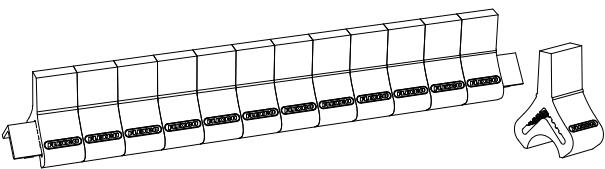

Y-Type™ HD Polyurethane Blade Cartridge

HD Blades - White[†]

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	YT-HDW*	79676	1.7
36	900	YCART-36/900-HDW	79823	36.5
42	1050	YCART-42/1050-HDW	79824	42.3
48	1200	YCART-48/1200-HDW	79825	48.1
54	1350	YCART-54/1350-HDW	79826	53.9
60	1500	YCART-60/1500-HDW	79827	59.8
72	1800	YCART-72/1800-HDW	79828	71.4

*Single 3" (75 mm) blade segment

[†]White blades are chemical resistant, and all ingredients used in Polyurethane formulation comply with the relevant requirements of 21 CFR (FDA Code of Federal Regulations) for use in repeated bulk dry food applications.

Lead time: 1 working day

HD UHT Polyurethane Blades - Red

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	YT-HDR*	91822	1.7
36	900	YCART-36/900-HDR	91823	36.5
42	1050	YCART-42/1050-HDR	91824	42.3
48	1200	YCART-48/1200-HDR	91825	48.1
54	1350	YCART-54/1350-HDR	91826	53.9
60	1500	YCART-60/1500-HDR	91827	59.8
72	1800	YCART-72/1800-HDR	91828	71.4

*Single 3" (75 mm) blade segment

Lead time: 1 working day

Blades Required per Cleaner Size

in.	36	42	48	54	60	72
mm	900	1050	1200	1350	1500	1800
No. Required	12	14	16	18	20	24

Specifications & Guidelines

Y-Type™ HD Heavy-Duty Secondary Cleaner with YST Tensioner

Pole Length Specifications


CLEANER SIZE		POLE LENGTH		MAXIMUM CONVEYOR SPAN	
in.	mm	in.	mm	in.	mm
36	900	90	2286	82	2083
42	1050	96	2438	88	2235
48	1200	102	2590	94	2388
54	1350	108	2743	100	2540
60	1500	114	2895	106	2692
72	1800	126	3200	118	2997

Pole Length – Belt +54" (1350 mm)

Pole Diameter – 2-7/8" (73 mm)

Clearance Guidelines for Installation


CLEANER TYPE	BELT WIDTH/CLEANER SIZE		HORIZONTAL CLEARANCE REQUIRED		VERTICAL CLEARANCE REQUIRED	
	in.	mm	in.	mm	in.	mm
Y-Type® HD Polyurethane	36–72	900–1800	5-1/4	133	9-1/2	241
Y-Type® HD Carbide	36–72	900–1800	5-1/4	133	9-3/4	248

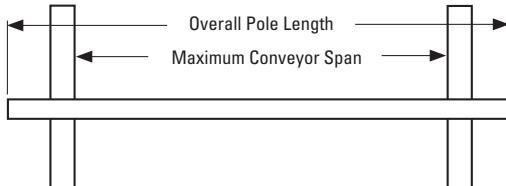

Blade Specifications

CUSHION	DUROMETER	TEMPERATURE RANGE
Purple (Standard)	83A	-30 to 180°F (-35 to 82°C)
White (Food Grade) ‡	83A	-30 to 180°F (-35 to 82°C)
Red (Ultra High-Temp)	93A	Up to 400°F (200°C) Spikes to 450°F (232°C)
Carbide	83A	-30 to 180°F (-35 to 82°C)


‡ All ingredients used in the polyurethane formulation of this blade comply with the relevant requirements of 21 CFR (FDA Code of Federal Regulations) for use in repeated bulk dry food applications



YST Spring Length Chart

Blade Width	Carbide Tip		Polyurethane Tip						
	Silver Springs		Black Springs		Green Springs		Blue Springs		
	in.	mm	in.	mm	in.	mm	in.	mm	
36	900	3 7/8	98	4	102	3	76	3 3/8	86
42	1050	3 3/4	95	3 7/8	98	2 7/8	73	3 1/4	83
48	1200	3 5/8	92	3 3/4	95	2 5/8	67	3 1/8	79
54	1350	3 1/2	89	3 3/4	95	2 1/2	64	3	76
60	1500	3 3/8	86	3 5/8	92	NA	NA	2 7/8	73
72	1800	3 1/4	83	3 1/2	89	NA	NA	2 1/2	64

Shading indicates preferred spring option.


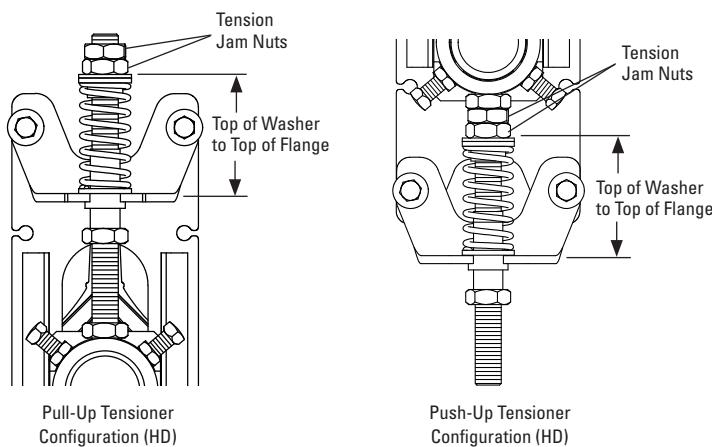


Specifications:

- Maximum Belt Speed 750 FPM (3.8 m/s)
- Usable Blade Wear Length 3" (76 mm) (Polyurethane)
3/8" (10 mm) (Carbide)
- Blade Materials Purple: Polyurethane (proprietary blend for abrasion resistance and long wear)
White: Polyurethane (chemical resistant/food grade)
Red: Polyurethane (ultra high-temp)
Carbide: Tungsten Carbide
- Available for Belt Widths 36 to 72" (900 to 1800 mm) Other sizes available upon request.
- CEMA Cleaner Rating Class 3 (Heavy-duty with polyurethane or carbide blades)

Replacement Parts List

Y-Type™ HD
Heavy-Duty Secondary Cleaner
with YST Tensioner

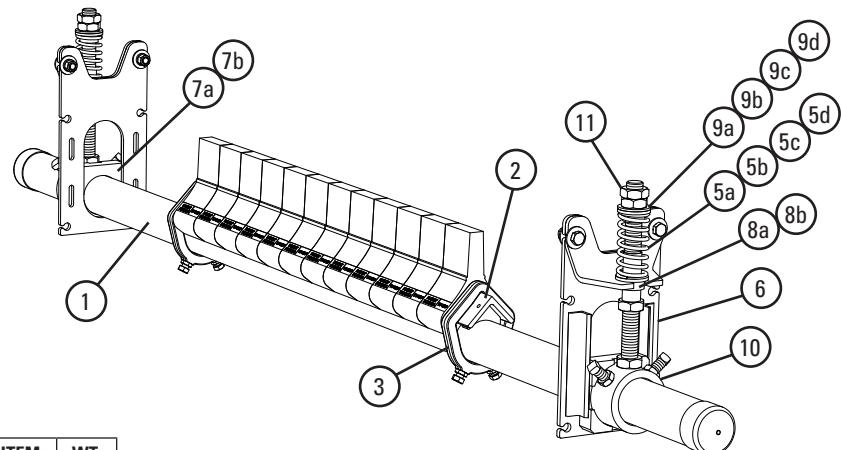

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	36" (900mm) HD Pole	YTPHD-36/900	79799	60.0
	42" (1050mm) HD Pole	YTPHD-42/1050	79800	63.4
	48" (1200mm) HD Pole	YTPHD-48/1200	79801	66.8
	54" (1350mm) HD Pole	YTPHD-54/1350	79802	70.2
	60" (1500mm) HD Pole	YTPHD-60/1500	79803	73.6
	72" (1800mm) HD Pole	YTPHD-72/1800	79804	77.0
2	36" (900mm) HD Cushion Angle	YTAHD-36/900	79805	16.5
	42" (1050mm) HD Cushion Angle	YTAHD-42/1050	79806	18.9
	48" (1200mm) HD Cushion Angle	YTAHD-48/1200	79807	21.4
	54" (1350mm) HD Cushion Angle	YTAHD-54/1350	79808	23.9
	60" (1500mm) HD Cushion Angle	YTAHD-60/1500	79809	26.3
	72" (1800mm) HD Cushion Angle	YTAHD-72/1800	79810	31.3
3	Y-Type HD Angle Clamp* (2 ea.)	YTACHD	79835	4.8
4	YST HD Drop Bracket Kit (2 ea.)	YSTHDBBK	79850	32.1
5a	YST HD Spring - Green	YSTHDS-GR	79797	0.5
5b	SST Spring - Silver	STS-S	75843	0.8
5c	YST HD Spring - Blue (Carbide Cleaners)	YSTHDS-BL	79798	0.6
5d	SST Spring - Black (Carbide Cleaners)	STS-B	75844	1.1
6	YST HD Mounting Bracket (incl. Angle Bracket)	YSTHDMB	79849	6.7
7a	YST HD Guide Block Kit (Pair)	YSTHDGPK	79851	1.0
7b	YST HD Guide Block Kit - UHT (Pair)	YSTHDGPK-R	91829	1.0
8a	YST HD Lower Bushing Kit (Pair)	YSTHDLBK	79852	0.1
8b	YST HD Lower Bushing Kit - UHT (Pair)	YSTHDLBK-R	91830	0.1
9a	YST HD Top Bushing Kit - White (Pair)	YSTHDBK-W	79853	0.1
9b	YST HD Top Bushing Kit - Black (Pair)	YSTHDBK-B	79856	0.1
9c	YST HD Top Bushing Kit - Green (Pair)	YSTHDBK-GR-R	91832	0.1
9d	YST HD Top Bushing Kit - Blue (Pair)	YSTHDBK-BL-R	91831	0.1
10	YST HD Pole Mount Kit*	YSTPHDMK	79854	7.8
11	YST HD Adjusting Rod Nut Kit	YSTANKHD	79858	0.6
-	YST Spring Tensioner - Silver (Pair) (incl. (2) ea. items 5b, 6, 10, 11; (1) ea. items 7a, 8a, 9a)	YSTHD-S	79840	33.4
-	YST Spring Tensioner - Black (Pair) (incl. (2) ea. items 5d, 6, 10, 11; (1) ea. items 7a, 8a, 9b)	YSTHD-BK	79842	34.1
-	YST Spring Tensioner - Green (Pair) (incl. (2) ea. items 5a, 6, 10, 11; (1) ea. items 7a, 8a, 9a)	YSTHD-GR	79839	32.8
-	YST Spring Tensioner - Blue (Pair) (incl. (2) ea. items 5c, 6, 10, 11; (1) ea. items 7a, 8a, 9b)	YSTHD-BL	79841	33.1
-	UHT YST Spring Tensioner - Green (Pair) (incl. (2) ea. items 5a, 6, 10, 11; (1) ea. items 7b, 8b, 9c)	YSTHD-GR-R	91833	32.8
-	UHT YST Spring Tensioner - Blue (Pair) (incl. (2) ea. items 5c, 6, 10, 11; (1) ea. items 7b, 8b, 9d)	YSTHD-BL-R	91834	33.1

*Hardware included

Lead time: 1 working day

Spring Tensioner Selection Chart

CLEANER BLADE WIDTH	79840 YSTHD-S	79842 YSTHD-BK	79839 YSTHD-GR	79841 YSTHD-BL	91833 YSTHD-GR-R	91834 YSTHD-BL-R
Carbide 36–54" (900–1350mm)	X					
Carbide 60–72" (1500–1800mm)		X				
Polyurethane 36–48" (900–1200mm)			X			
Polyurethane 54–72" (1350–1800mm)				X		
UHT 36–48" (900–1200mm)					X	
UHT 54–72" (1350–1800mm)						X

Product Ordering Information


**P-Type®
Secondary Cleaner**

With C-Tips*

BELT WIDTH	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm		
18	450	PC18	72.4
24	600	PC24	79.3
30	750	PC30	85.2
36	900	PC36	92.1
42	1050	PC42	105.0
48	1200	PC48	111.8
54	1350	PC54	122.2
60	1500	PC60	128.1
72	1800	PC72	139.9

*NOTE: C-Tips can be used on mechanically spliced and vulcanized belts.

Lead time: 1 working day

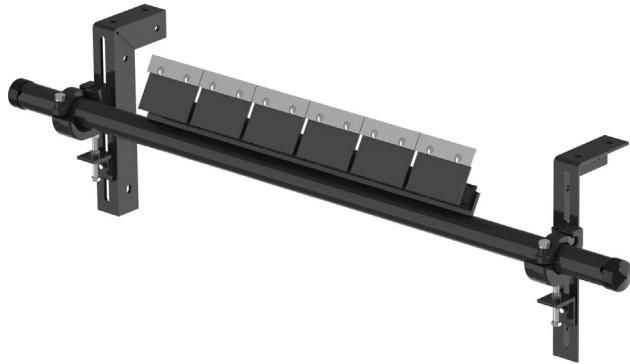


With V-Tips*

BELT WIDTH	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm		
18	PV-18	78453	72.4
24	PV-24	78415	79.3
30	PV-30	78417	85.2
36	PV-36	78419	92.1
42	PV-42	78421	105.0
48	PV-48	78423	111.8
54	PV-54	78454	122.2
60	PV-60	78455	128.1
72	PV72	73438	139.9

*NOTE: V-Tips can be used ONLY on vulcanized belts.

Lead time: 1 working day

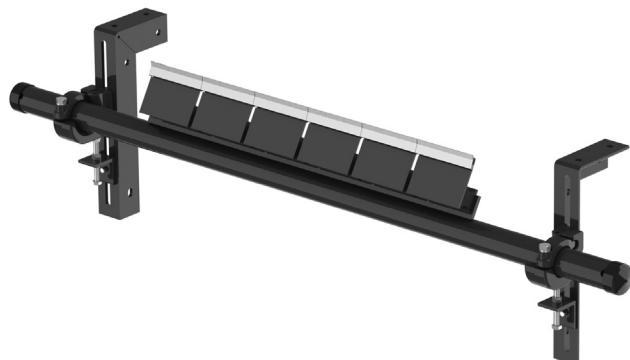

Replacement Tips

ORDERING NUMBER	ITEM CODE	WT. LBS.
ICT6	74535	0.7
PSA150	73156	1.0

Lead time: 1 working day

Tips Required per Cleaner Size

in.	18	24	30	36	42	48	54	60	72
mm	450	600	750	900	1050	1200	1350	1500	1800
No. C-Tips or V-Tips Required	3	4	5	6	7	8	9	10	12

Product Notes:

- **C-Tip:** specially formulated tungsten carbide blades to work with mechanical fasteners.
- **V-Tip:** for use on vulcanized belts only.
- Compact design: fits in small transfer areas and tight chutes.
- Tips set at a non-aggressive 70° angle to give quick relief for passing mechanical splices.

Product Ordering Information

P-Type® LS
Limited Space Secondary Cleaner

With C-Tips*

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
18	450	PLSC18	75588	73.4
24	600	PLSC24	75589	80.3
30	750	PLSC30	75590	86.2
36	900	PLSC36	75591	93.1
42	1050	PLSC42	75592	100.0
48	1200	PLSC48	75593	106.9
54	1350	PLSC54	75594	113.8

*NOTE: C-Tips can be used on mechanically spliced and vulcanized belts.

Lead time: 1 working day



Replacement C-Tips

ORDERING NUMBER	ITEM CODE	WT. LBS.
ICT6	74535	0.7

Lead time: 1 working day

Tips Required per Cleaner Size

in.	18	24	30	36	42	48	54
mm	450	600	750	900	1050	1200	1350
No. C-Tips Required	3	4	5	6	7	8	9

Product Notes:

- LS = Limited Space. Requires only 5 1/2" (138 mm) of vertical clearance for installation.
- Not available in belt widths larger than 54" (1350 mm).


Specifications & Guidelines

**P-Type®
Secondary Cleaner**

Pole Length Specifications


CLEANER SIZE		POLE LENGTH		MAXIMUM CONVEYOR SPAN	
in.	mm	in.	mm	in.	mm
18	450	48	1200	43	1075
24	600	54	1350	49	1225
30	750	60	1500	55	1375
36	900	66	1650	61	1525
42	1050	72	1800	67	1675
48	1200	78	1950	73	1825
54	1350	88	2200	83	2075
60	1500	94	2350	89	2225
72	1800	106	2650	101	2525

Pole Diameter - 2-3/8" (60 mm)

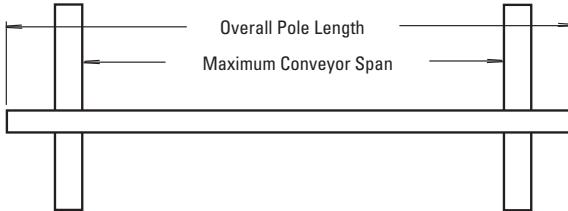

Clearance Guidelines for Installation

CLEANER TYPE	BELT WIDTH/ CLEANER SIZE		HORIZONTAL CLEARANCE REQUIRED		VERTICAL CLEARANCE REQUIRED	
	in.	mm	in.	mm	in.	mm
P-Type®	18-72	450-1800	4	100	8	200
P-Type® LS	18-54	450-1350	5	125	5 1/2	138

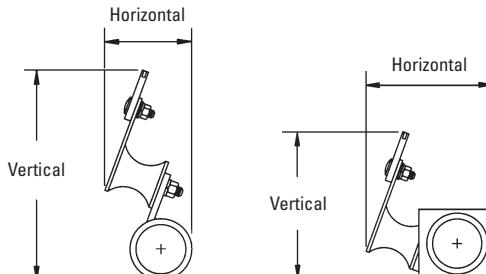

P-Type®

P-Type® LS

P-Type Cushion Specifications





CUSHION	DUROMETER	TEMPERATURE RANGE
Standard	55A	-30 to 180°F (-35 to 82°C)

Specifications:

- Maximum Belt Speed 1000 FPM (5 m/s)
- Temperature Rating -30 to 180°F (-35 to 82°C)
- Usable Blade Wear Length 3/8" (9 mm)
- Blade Materials C-Tip: Impact Resistant Tungsten Carbide (works with mechanical fasteners)
V-Tip: Long Life Tungsten Carbide (works on vulcanized belts only)
- Available for Belt Widths P-Type®: 18 to 72" (450 to 1800 mm)
P-Type® LS: 18 to 54" (450 to 1350 mm)
Other sizes available upon request.
- CEMA Cleaner Rating Class 3

Replacement Parts List

P-Type®
Secondary Cleaner

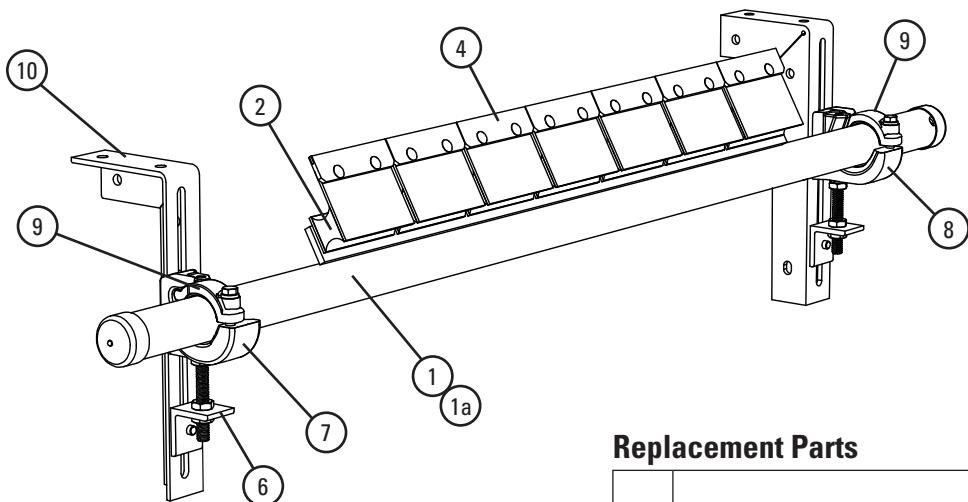

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	18" (450mm) Pole	PP-18	78414	22.5
	24" (600mm) Pole	PP-24	78416	26.0
	30" (750mm) Pole	PP-30	78418	32.3
	36" (900mm) Pole	PP-36	78420	33.0
	42" (1050mm) Pole	PP-42	78422	43.0
	48" (1200mm) Pole	PP-48	78424	47.5
	54" (1350mm) Pole	PP-54	78425	55.0
	60" (1500mm) Pole	PP-60	78451	58.0
1a	72" (1800mm) Pole	PP72	73017	64.0
	18" (450mm) LS Pole	PLSP18	75595	32.3
	24" (600mm) LS Pole	PLSP24	75596	36.0
	30" (750mm) LS Pole	PLSP30	75597	38.7
	36" (900mm) LS Pole	PLSP36	75598	42.4
	42" (1050mm) LS Pole	PLSP42	75599	46.1
	48" (1200mm) LS Pole	PLSP48	75600	49.8
	54" (1350mm) LS Pole	PLSP54	75601	53.5
2	P2 C-Tip Cushion*	PHA	73626	2.0
3	P Polyshield	PPS6	73024	0.5
3a	P SS Shield	PSSS	74773	0.5
4	C-Tip* Kit (1 ea.)	ICT6	74535	0.7
5	P V-Tip* (for vulcanized belts only)	PSA150	73156	1.0
6	Adjusting Bracket Kit* (1 ea.)	PAB	75513	1.5
7	Pole Clamp Kit - Left* (1 ea.) (incl. item 9)	CCKL	79224	6.8
8	Pole Clamp Kit - Right* (1 ea.) (incl. item 9)	CCKR	79228	6.8
9	Cradle Clamp Top Strap (1 ea.) (for use on left or right Pole Clamp Kit)	CCKTS	79232	1.1
10	Mounting Bracket Kit (1 Right and 1 Left)	EZS2MBK	75666	13.0
-	Cradle Clamp Mounting Kit* (incl. (2) ea. item 6; (1) ea. items 7, 8 & 10)	CCMK	78919	33.0

*Hardware included

Lead time: 1 working day

Tips Required per Cleaner Size

in.	18	24	30	36	42	48	54	60	72
mm	450	600	750	900	1050	1200	1350	1500	1800
No. C-Tips or V-Tips Required	3	4	5	6	7	8	9	10	12

Product Ordering Information

R-Type®
Reversing Secondary Cleaner

With C-Tips*

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
18	450	RC18	74618	72.8
24	600	RC24	74619	79.3
30	750	RC30	74620	85.2
36	900	RC36	74621	91.9
42	1050	RC42	74622	104.9
48	1200	RC48	74623	113.5
54	1350	RC54	74624	121.1
60	1500	RC60	74625	129.8
72	1800	RC72	74626	141.1

*NOTE: C-Tips can be used on mechanically spliced and vulcanized belts.

Lead time: 1 working day



With V-Tips*

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
18	450	RV-18	78402	72.4
24	600	RV-24	78403	78.7
30	750	RV-30	78404	84.6
36	900	RV-36	78405	91.1
42	1050	RV-42	78406	104.0
48	1200	RV-48	78407	113.3
54	1350	RV-54	78408	119.9
60	1500	RV-60	78409	128.5
72	1800	RV-72	74641	139.7

*NOTE: V-Tips can be used ONLY on vulcanized belts.

Lead time: 1 working day

Replacement Tips

ORDERING NUMBER	ITEM CODE	WT. LBS.
ICT6	74535	0.7
RSA150	73628	1.3

Lead time: 1 working day

Tips Required per Cleaner Size

in.	18	24	30	36	42	48	54
mm	450	600	750	900	1050	1200	1350
No. C-Tips or V-Tips Required	3	4	5	6	7	8	9

Product Notes:

- Two-way cushions allow cleaning in both directions.
- Tungsten carbide tips for long wear and superior cleaning.


Specifications & Guidelines

R-Type® Reversing Secondary Cleaner

Pole Length Specifications


CLEANER SIZE		POLE LENGTH		MAXIMUM CONVEYOR SPAN	
in.	mm	in.	mm	in.	mm
18	450	48	1200	43	1075
24	600	54	1350	49	1225
30	750	60	1500	55	1375
36	900	66	1650	61	1525
42	1050	72	1800	67	1675
48	1200	78	1950	73	1825
54	1350	88	2200	83	2075
60	1500	94	2350	89	2225
72	1800	106	2650	101	2525

Pole Diameter - 2-3/8" (60 mm)

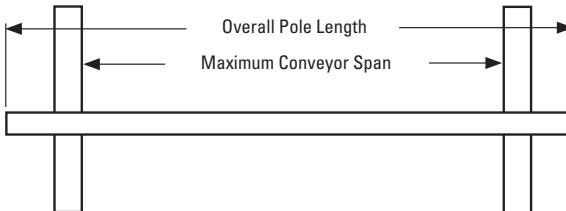

Clearance Guidelines for Installation

BELT WIDTH/ CLEANER SIZE		HORIZONTAL CLEARANCE REQUIRED		VERTICAL CLEARANCE REQUIRED	
in.	mm	in.	mm	in.	mm
18-72	450-1800	4	100	8	200



R-Type Cushion Specifications



CUSHION	DUROMETER	TEMPERATURE RANGE
Standard	55A	-30 to 180°F (-35 to 82°C)

Specifications:

- Maximum Belt Speed 1000 FPM (5 m/s)
- Temperature Rating -30 to 180°F (-35 to 82°C)
- Usable Blade Wear Length..... 3/8" (9 mm)
- Blade Materials C-Tip: Impact Resistant Tungsten Carbide (works with mechanical fasteners)
V-Tip: Long Life Tungsten Carbide (works on vulcanized belts only)
- Available for Belt Widths 18 to 72" (450 to 1800 mm) Other sizes available upon request.
- CEMA Cleaner Rating Class 4

Replacement Parts List

R-Type®
Secondary Cleaner

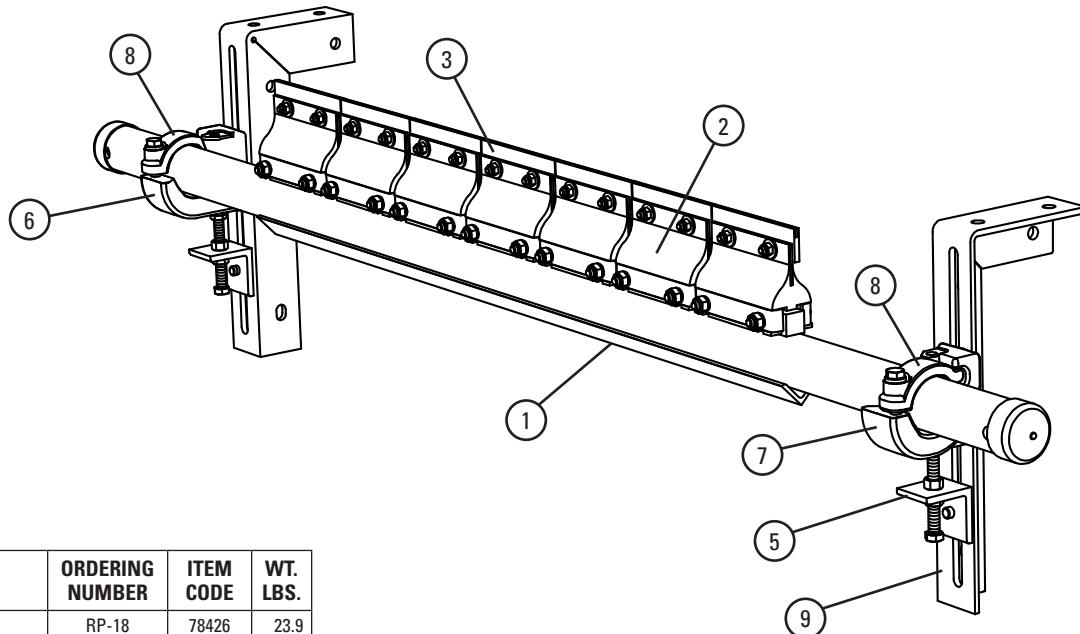

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	18" (450mm) Pole	RP-18	78426	23.9
	24" (600mm) Pole	RP-24	78427	27.8
	30" (750mm) Pole	RP-30	78428	31.1
	36" (900mm) Pole	RP-36	78429	35.2
	42" (1050mm) Pole	RP-42	78430	45.6
	48" (1200mm) Pole	RP-48	78431	50.6
	54" (1350mm) Pole	RP-54	78432	56.6
	60" (1500mm) Pole	RP-60	78433	62.7
	72" (1800mm) Pole	RP-72	74612	71.4
2	R2 C-Tip Cushion*	RSA	76249	2.0
3	C-Tip Kit* (1 ea.)	ICT6	74535	0.7
4	R V-Tip* (for vulcanized belts only)	RSA150	73628	1.3
5	Adjusting Bracket Kit* (1 ea.)	PAB	75513	1.5
6	Pole Clamp Kit Left* (1 ea.) (incl. 1 item 8)	CCKL	79224	6.8
7	Pole Clamp Kit Right* (1 ea.) (incl. 1 item 8)	CCKR	79228	6.8
8	Pole Clamp Top Strap (1 ea.) (for use on left or right Pole Clamp Kit)	CCKTS	79232	1.1
9	Mounting Bracket Kit (1 Right and 1 Left)	EZS2MBK	75666	13.0
-	Cradle Clamp Mounting Kit* (incl. (2) ea. item 5; (1) ea. items 6, 7 & 9)	CCMK	78919	33.0

*Hardware included

Lead time: 1 working day

Tips Required per Cleaner Size

in.	18	24	30	36	42	48	54	60	72
mm	450	600	750	900	1050	1200	1350	1500	1800
No. C-Tips or V-Tips Required	3	4	5	6	7	8	9	10	12


Product Ordering Information

FMS
**Secondary Cleaner
with YST Tensioners**

With YST Tensioner & C-Tips

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
18	450	FMS-18-YST	90545	98.7
24	600	FMS-24-YST	90546	111.2
30	750	FMS-30-YST	90547	123.6
36	900	FMS-36-YST	90548	136.1
42	1050	FMS-42-YST	90549	148.6
48	1200	FMS-48-YST	90550	161.1
54	1350	FMS-54-YST	90551	173.5
60	1500	FMS-60-YST	90552	186.0
72	1800	FMS-72-YST	90553	211.0

Lead time: 1 working day

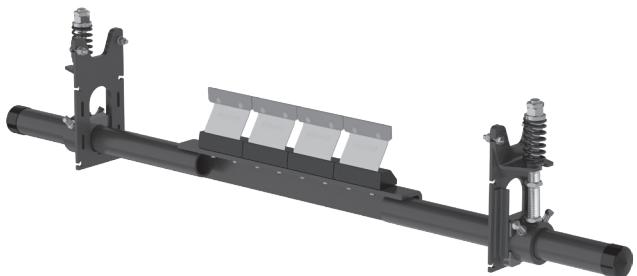

Replacement Tips

ORDERING NUMBER	ITEM CODE	WT. LBS.
ICT6	74535	0.7
RSA150	73628	1.3

Lead time: 1 working day

Tips Required per Cleaner Size

in.	18	24	30	36	42	48	54	60	72
mm	450	600	750	900	1050	1200	1350	1500	1800
No. C-Tips or V-Tips Required	3	4	5	6	7	8	9	10	12

Product Notes:

- Recommended for medium-duty conveyor applications.
- Pole Length: Belt width plus 54" (1350 mm). For longer requirements, see Mineline Installation Accessories – Pole Extender Kit on page 129.
- Cushion is designed to maintain continuous blade-to-belt contact and quick relief from passing mechanical splices.
- C-Tips are for mechanically fastened or vulcanized belts. V-Tips are for vulcanized belts only.
- Visual Blade Tension Check: Measure the tension spring and refer to Spring Length Chart for the correct length for best cleaning performance.

Specifications & Guidelines


FMS
Secondary Cleaner
with YST Tensioners

Pole Length Specifications*

CLEANER SIZE		BLADE WIDTH		POLE LENGTH		MAXIMUM CONVEYOR SPAN	
in.	mm	in.	mm	in.	mm	in.	mm
18	450	18	450	72	1800	62	1550
24	600	24	600	78	1950	68	1700
30	750	30	750	84	2100	74	1850
36	900	36	900	90	2250	80	2000
42	1050	42	1050	96	2400	86	2150
48	1200	48	1200	102	2550	92	2300
54	1350	54	1350	108	2700	98	2450
60	1500	60	1500	114	2850	104	2600
72	1800	72	1800	126	3150	116	2900


*For special extra long pole length requirements a Pole Extender Kit (#76024) is available that provides 30" (750 mm) of extended pole length. See page (129).

Pole Diameter - 2-7/8" (73 mm)

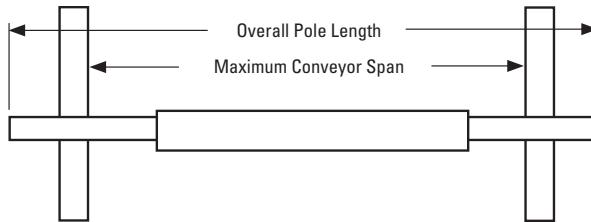

Clearance Guidelines for Installation


HORIZONTAL CLEARANCE REQUIRED		VERTICAL CLEARANCE REQUIRED	
in.	mm	in.	mm
3-1/2	89	10	245



FMS with YST HD Spring Length Chart

Blade Width		Green Springs		Blue Springs		Silver Springs		Black Springs	
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
18	450	3 1/8	79	3 3/8	85	N/A	N/A	N/A	N/A
24	600	2 3/4	69	3 1/8	79	3 3/4	95	3 7/8	98
30	750	2 1/2	63	2 7/8	73	3 5/8	92	3 3/4	95
36	900	N/A	N/A	2 5/8	66	3 1/2	88	3 5/8	92
42	1050	N/A	N/A	2 3/8	60	3 3/8	85	3 5/8	92
48	1200	N/A	N/A	N/A	N/A	3 1/4	82	3 1/2	88
54	1350	N/A	N/A	N/A	N/A	3 1/8	79	3 3/8	85
60	1500	N/A	N/A	N/A	N/A	3	76	3 1/4	82
72	1800	N/A	N/A	N/A	N/A	N/A	N/A	3 1/8	79

Shading indicates preferred spring option.




Specifications:

- Maximum Belt Speed 1000 FPM (5 m/s)
- Temperature Rating -30 to 180°F (-35 to 82°C)
- Usable Blade Wear Length 3/8" (9 mm)
- Blade Materials C-Tip: Impact Resistant Tungsten Carbide (works with mechanical fasteners)
V-Tip: Long Life Tungsten Carbide (for vulcanized belts only)
- Available for Belt Widths 18 to 72" (450 to 1800 mm) Other sizes available upon request.
- CEMA Cleaner Rating Class 4



Replacement Parts List

FMS
Secondary Cleaner
with YST Tensioners

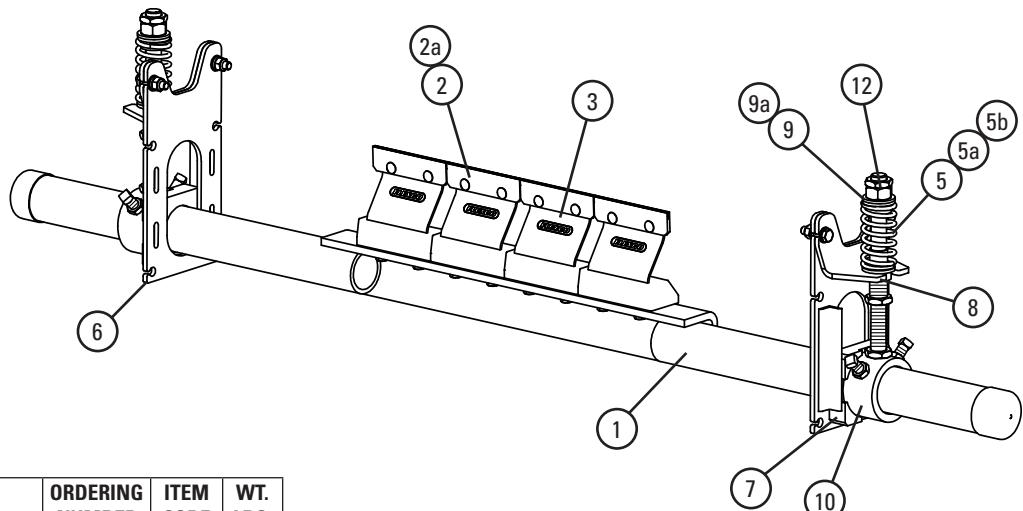

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	18" (450mm) Pole	MHSP-18	76178	46.2
	24" (600mm) Pole	MHSP-24	75918	51.7
	30" (750mm) Pole	MHSP-30	75919	57.2
	36" (900mm) Pole	MHSP-36	75920	62.8
	42" (1050mm) Pole	MHSP-42	75921	68.3
	48" (1200mm) Pole	MHSP-48	75922	73.9
	54" (1350mm) Pole	MHSP-54	75923	79.4
	60" (1500mm) Pole	MHSP-60	75924	85.0
	72" (1800mm) Pole	MHSP-72	75925	96.1
2	C-Tip*	ICT6	74535	0.7
2a	V-Tip* (for vulcanized belts only)	RSA150	73628	1.3
3	FMS Cushion Kit*	FMSC	79699	4.2
4	PSS Shield	PSSS	74773	.5
5	YST Spring Yellow	YSTS-Y	79795	0.3
5a	YST Spring Purple	YSTS-P	79796	0.4
5b	YST Spring Silver (Carbide Cleaners)	CTS-S	77743	0.5
6	YST Mounting Bracket (incl. Angle Bracket)	YSTMB	79843	3.3
7	YST Guide Block Kit (Pair)	YSTGBK	79845	0.4
8	YST Lower Bushing Kit (Pair)	YSTLBK	79846	0.1
9	YST Top Bushing Kit White (Pair)	YSTTBK-W	79847	0.1
9a	YST Top Bushing Kit Black (Pair)	YSTTBK-B	79855	0.1
10	YST Pole Mount Kit*	YSTPMK	79848	4.3
11	YST Drop Bracket Kit (2 ea.)	YSTDBK2	113390	32.0
12	YST Adjusting Rod Nut Kit	YSTANK	79857	0.2
-	YST Spring Tensioner – Yellow (Pair) (incl. (2) ea. item 14a, 15, 19, 20 & (1) ea. items 16, 17, 18a)	YST-Y	79836	18.2
-	YST Spring Tensioner – Purple (Pair) (incl. (2) ea. item 14b, 15, 19, 20 & (1) ea. items 16, 17, 18a)	YST-P	79837	18.5
-	YST Spring Tensioner – Silver (Pair) (incl. (2) ea. item 14c, 15, 19, 20 & (1) ea. items 16, 17, 18b)	YST-S	79838	18.8



*Hardware Included

Lead time: 1 working day

Spring Tensioner Selection Chart

CLEANER SIZE	79836 YST-Y	79837 YST-P	79838 YST-S
FMS 18–30" (450–750mm)	X		
FMS 36–54" (900–1350mm)		X	
FMS 60–72" (1500–1800mm)			X


Product Ordering Information

MHS
Heavy-Duty Secondary Cleaner
with Polyurethane Cushion Shields and SST XD Tensioners

With C-Tips

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
24	600	MHS-24RU	79738	125.8
30	750	MHS-30RU	79739	131.0
36	900	MHS-36RU	79740	141.8
42	1050	MHS-42RU	79741	152.5
48	1200	MHS-48RU	79742	163.3
54	1350	MHS-54RU	79743	174.0
60	1500	MHS-60RU	79744	184.8
72	1800	MHS-72RU	79745	211.9
84	2100	MHS-84RU	79746	247.2
96	2400	MHS-96RU	79747	282.5

Lead time: 1 working day

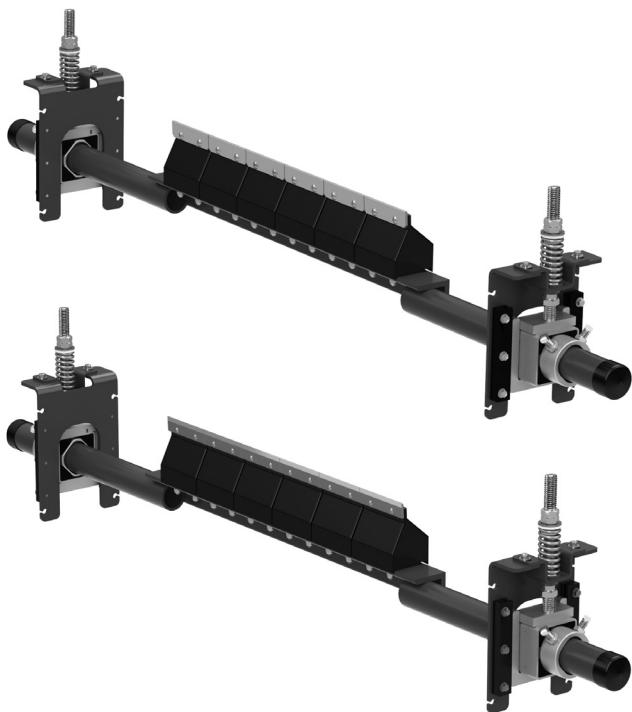

With V-Tips*

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
18	450	MHS-18RUV	79748	120.6
24	600	MHS-24RUV	79749	125.8
30	750	MHS-30RUV	79750	131.0
36	900	MHS-36RUV	79751	141.8
42	1050	MHS-42RUV	79752	152.5
48	1200	MHS-48RUV	79753	163.3
54	1350	MHS-54RUV	79754	174.0
60	1500	MHS-60RUV	79755	184.8
72	1800	MHS-72RUV	79756	211.9
84	2100	MHS-84RUV	79757	247.3
96	2400	MHS-96RUV	79758	282.7

*NOTE: V-Tips can be used ONLY on vulcanized belts.

Lead time: 1 working day

Replacement Tips


ORDERING NUMBER	ITEM CODE	WT. LBS.
ICT6	74535	0.7
RSA150	73628	1.3

Lead time: 1 working day

Replacement Cushion Shield

ORDERING NUMBER	ITEM CODE	WT. LBS.
UPFCC	79320	0.3

Lead time: 1 working day



Polyurethane Cushion Shield

Tips Required per Cleaner Size

in.	18	24	30	36	42	48	54	60	72	84	96
mm	450	600	750	900	1050	1200	1350	1500	1800	2100	2400
No. C-Tips or V-Tips Required	3	4	5	6	7	8	9	10	12	14	16

Product Notes:

- Heavy-duty design to deliver maximum cleaning efficiency on the most demanding, abusive beltlines.
- Pole Length: Belt width plus 54" (1350 mm). For longer requirements, see Mineline Installation Accessories – Pole Extender Kit on page 129.
- Patented PowerFlex™ cushion design to maintain continuous blade-to-belt contact and quick relief from passing mechanical splices.
- C-Tips are for mechanically fastened or vulcanized belts. V-Tips are for vulcanized belts only.
- Visual Blade Tension Check: Measure the tension spring and refer to Spring Length Chart on mounting base for the correct length for best cleaning performance.
- Tensioner: SST XD Spring Tensioner for self-adjusting tensioning with easy retensioning adjustments.
- To make cleaner installation easier and quicker, see Optional Mounting Kits on page 129.


Product Ordering Information

MHS
Heavy-Duty Secondary Cleaner
with SST XD Tensioners

With C-Tips

BELT WIDTH	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm		
24	600	MHS-24	124.6
30	750	MHS-30	129.5
36	900	MHS-36	140.0
42	1050	MHS-42	150.4
48	1200	MHS-48	160.9
54	1350	MHS-54	171.3
60	1500	MHS-60	181.8
72	1800	MHS-72	208.3
84	2100	MHS-84	243.0
96	2400	MHS-96	277.7

Lead time: 1 working day

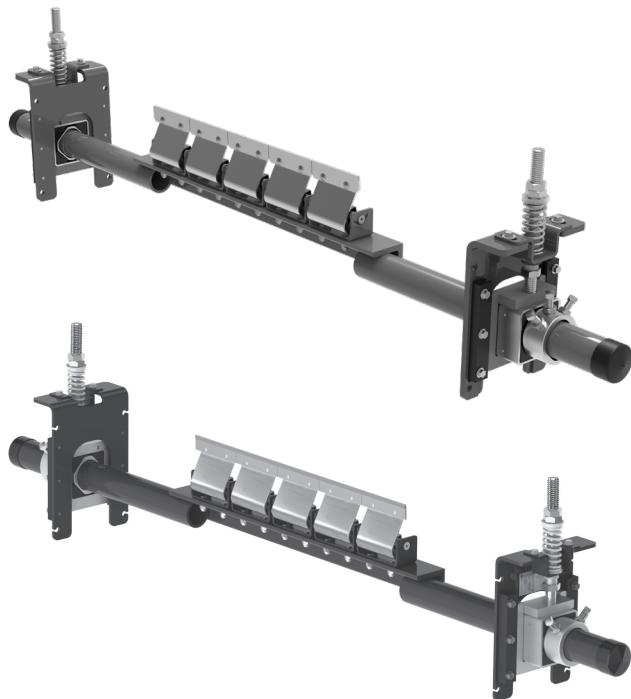

With V-Tips*

BELT WIDTH	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm		
18	450	MHS-18V	119.7
24	600	MHS-24V	124.6
30	750	MHS-30V	129.5
36	900	MHS-36V	140.0
42	1050	MHS-42V	150.4
48	1200	MHS-48V	160.9
54	1350	MHS-54V	171.3
60	1500	MHS-60V	181.8
72	1800	MHS-72V	208.3
84	2100	MHS-84V	243.1
96	2400	MHS-96V	277.9

*NOTE: V-Tips can be used ONLY on vulcanized belts.

Lead time: 1 working day

Optional Mounting Kits

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Standard Mounting Bracket Kit *	SSTSMB	76071	34.3
Long Mounting Bracket Kit *	SSTLMB	76072	43.5
Optional Top Angle Kit *	SSTOTA	76073	10.5

*Hardware Included

Lead time: 1 working day

Replacement Tips

ORDERING NUMBER	ITEM CODE	WT. LBS.
ICT6	74535	0.7
RSA150	73628	1.3

Lead time: 1 working day

Tips Required per Cleaner Size

	in.	18	24	30	36	42	48	54	60	72	84	96
	mm	450	600	750	900	1050	1200	1350	1500	1800	2100	2400
No. C-Tips or V-Tips Required		3	4	5	6	7	8	9	10	12	14	16

Product Notes:

- Heavy-duty design to deliver maximum cleaning efficiency on the most demanding, abusive beltlines.
- Pole Length: Belt width plus 54" (1350 mm). For longer requirements, see Mineline Installation Accessories – Pole Extender Kit on page 129.
- Patented PowerFlex™ cushion design to maintain continuous blade-to-belt contact and quick relief from passing mechanical splices.
- C-Tips are for mechanically fastened or vulcanized belts. V-Tips are for vulcanized belts only.
- Visual Blade Tension Check: Measure the tension spring and refer to Spring Length Chart on mounting base for the correct length for best cleaning performance.
- Tensioner: SST XD Spring Tensioner for self-adjusting tensioning with easy retensioning adjustments.
- To make cleaner installation easier and quicker, see Optional Mounting Kits on page 129.


Product Ordering Information

MHS Reversing Heavy-Duty Secondary Cleaner with SST XD/SAT XD Tensioners

With SST XD Tensioner & C-Tips

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
24	600	MHS-24R	76613	128.2
30	750	MHS-30R	76614	134.0
36	900	MHS-36R	76615	145.4
42	1050	MHS-42R	76616	156.7
48	1200	MHS-48R	76617	168.1
54	1350	MHS-54R	76618	179.4
60	1500	MHS-60R	76619	190.8
72	1800	MHS-72R	76620	219.1
84	2100	MHS-84R	76621	247.4
96	2400	MHS-96R	79045	275.7

Lead time: 1 working day

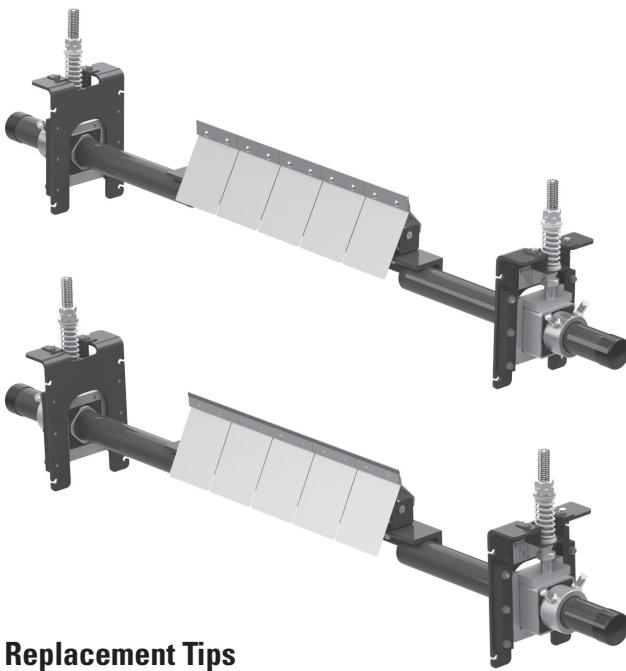

With SST XD Tensioner & V-Tips*

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
18	450	MHS-18RV	76646	122.4
24	600	MHS-24RV	76647	128.2
30	750	MHS-30RV	76648	134.0
36	900	MHS-36RV	76649	145.4
42	1050	MHS-42RV	76650	156.7
48	1200	MHS-48RV	76651	168.1
54	1350	MHS-54RV	76652	179.4
60	1500	MHS-60RV	76653	190.8
72	1800	MHS-72RV	76654	219.1
84	2100	MHS-84RV	76805	255.6
96	2400	MHS-96RV	79046	292.1

*NOTE: V-Tips can be used ONLY on vulcanized belts.

Lead time: 1 working day

Replacement Tips


ORDERING NUMBER	ITEM CODE	WT. LBS.
ICT6	74535	0.7
RSA150	73628	1.3

Lead time: 1 working day

Replacement Shields

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
P Stainless Steel Shield	PSSS	74773	0.5
PowerFlex™ Reverse Shield	PFRS	76622	0.4

Lead time: 1 working day

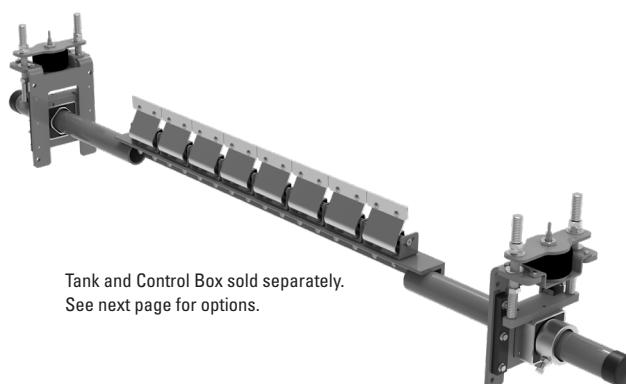

With SAT XD Tensioner*

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
24	600	MHS-24P	78736	102.4
30	750	MHS-30P	78737	107.3
36	900	MHS-36P	78738	116.4
42	1050	MHS-42P	78739	126.8
48	1200	MHS-48P	78740	137.3
54	1350	MHS-54P	78741	147.7
60	1500	MHS-60P**	78742	158.2
72	1800	MHS-72P**	78743	183.9
84	2100	MHS-84P**	78744	209.6
96	2400	MHS-96P**	79047	292.1

*60-96" (1500-2400 mm) models have a 3-piece pole.

Lead time: 1 working day

Product Notes:

- The SAT XD Tensioners automatically adjust the blades to the belt until the blades are worn out.

Product Ordering Information


Line Connections for Pneumatic Air Tensioner

Control Box/Tank Combo Units for Closed System

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Control Box/Tank Combo Unit for Precleaner - 60 PSI	PAT-C-60	108230	64.0
Control Box/Tank Combo Unit for Secondary Cleaner - 100 PSI	PAT-C-100	108231	64.0

Product Notes:

- For use with cleaners with new PAT systems.
- 150# pop-off valve for safe pressurizing/charging of Air Tank.
- ASME construction tank.
- Fully sealed enclosure includes all critical items - regulator, tank gauge, downstream gauge, schrader valve, in-line filter, downstream valve.

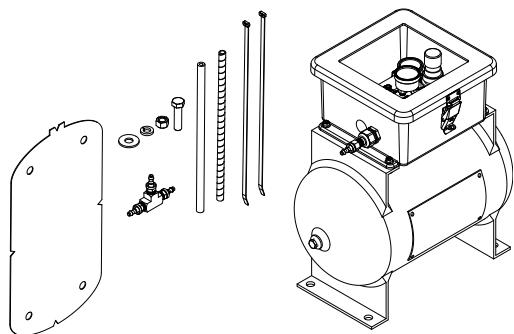


Control Box for Legacy Tank

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Control Box Kit for Precleaner - 60 PSI	PACB2-60	108228	13.6
Control Box Kit for Secondary Cleaner - 100 PSI	PACB2-100	108229	13.6

Product Notes:

- For use with Legacy PAT1/PAT2 tank systems ordered prior to January 2024.
- 150# pop-off valve for safe pressurizing/charging of Air Tank.
- May also be paired with Air Tank for Legacy Control Box if preferred.

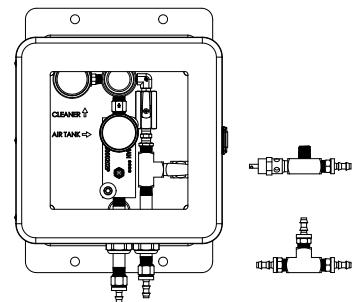


Air Tank for Legacy Control Box

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
ASME Air Tank Kit	PAT-N	108232	47.3

Product Notes:

- For use with Legacy PACB60/PACB100 control boxes ordered prior to January 2024.
- 150# pop-off valve for safe pressurizing/charging of Air Tank.
- ASME construction tank.
- May also be paired with Control Box for Legacy Tank if preferred.

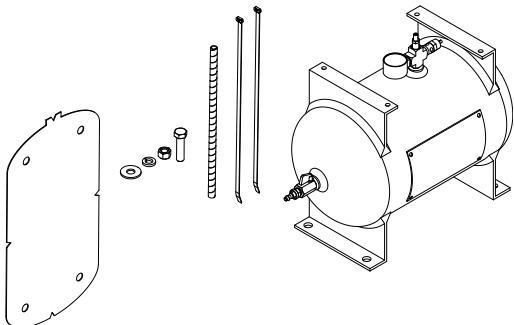



Replacement Parts List

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
10' (3m) Hose Kit	PATHK	78794	1.5
Upgrade Fitting Kit (fill valve, push-on fittings, plugs)	AWTRK	79319	0.4

Product Ordering Information

MHS Stainless Steel Heavy-Duty Secondary Cleaner with SST Tensioners

For replacement tips and qty of tips per cleaner, see page 99.

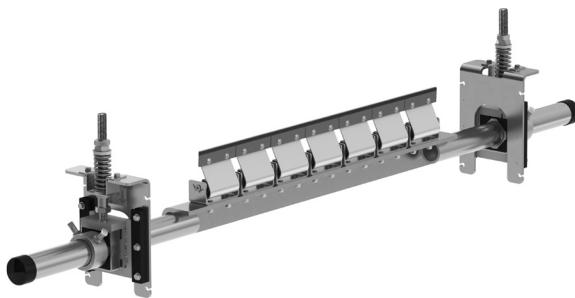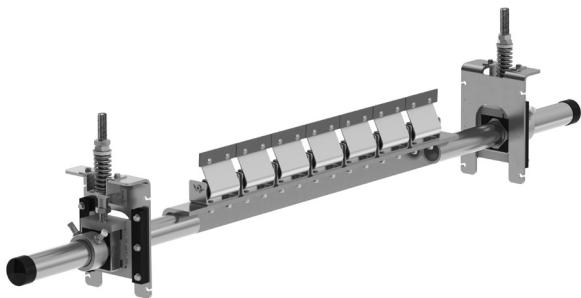

With C-Tips

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
24	600	MHS-24-S/S	77601	124.6
30	750	MHS-30-S/S	77602	129.5
36	900	MHS-36-S/S	77603	140.0
42	1050	MHS-42-S/S	77604	150.4
48	1200	MHS-48-S/S	77605	160.9
54	1350	MHS-54-S/S	77606	171.3
60	1500	MHS-60-S/S	77607	181.8
72	1800	MHS-72-S/S	77608	208.3
84	2100	MHS-84-S/S	77609	243.0
96	2400	MHS-96-S/S	79048	277.7



Lead time: 3 weeks

With V-Tips*

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
24	600	MHS-24V-S/S	77610	119.7
30	750	MHS-30V-S/S	77611	124.6
36	900	MHS-36V-S/S	77612	129.5
42	1050	MHS-42V-S/S	77613	140.0
48	1200	MHS-48V-S/S	77614	150.4
54	1350	MHS-54V-S/S	77615	160.9
60	1500	MHS-60V-S/S	77616	171.3
72	1800	MHS-72V-S/S	77617	181.8
84	2100	MHS-84V-S/S	77618	208.3
96	2400	MHS-96V-S/S	79049	243.1

*NOTE: V-Tips can be used ONLY on vulcanized belts.

Lead time: 3 weeks

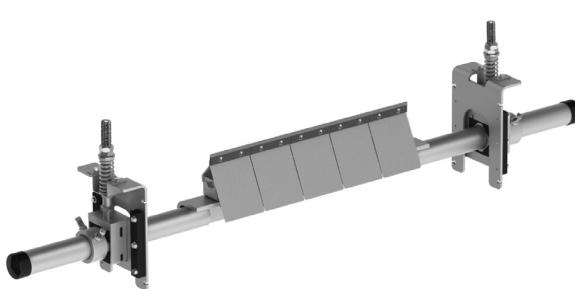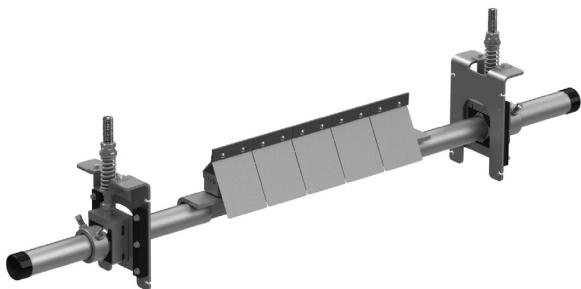

Reversing with C-Tips

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
24	600	MHS-24R-S/S	77640	128.2
30	750	MHS-30R-S/S	77641	134.0
36	900	MHS-36R-S/S	77642	145.4
42	1050	MHS-42R-S/S	77643	156.7
48	1200	MHS-48R-S/S	77644	168.1
54	1350	MHS-54R-S/S	77645	179.4
60	1500	MHS-60R-S/S	77646	190.8
72	1800	MHS-72R-S/S	77647	219.1
84	2100	MHS-84R-S/S	77648	247.4
96	2400	MHS-96R-S/S	79050	275.7

Lead time: 3 weeks

Reversing with V-Tips*

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
24	600	MHS-24RV-S/S	77649	122.4
30	750	MHS-30RV-S/S	77650	128.2
36	900	MHS-36RV-S/S	77651	134.0
42	1050	MHS-42RV-S/S	77652	145.4
48	1200	MHS-48RV-S/S	77653	156.7
54	1350	MHS-54RV-S/S	77654	168.1
60	1500	MHS-60RV-S/S	77655	179.4
72	1800	MHS-72RV-S/S	77656	190.8
84	2100	MHS-84RV-S/S	77657	219.1
96	2400	MHS-96RV-S/S	79051	255.6

*NOTE: V-Tips can be used ONLY on vulcanized belts.

Lead time: 3 weeks

Specifications & Guidelines


MHS
Heavy-Duty Secondary Cleaners

Pole Length Specifications*

CLEANER SIZE		BLADE WIDTH		POLE LENGTH		MAXIMUM CONVEYOR SPAN	
in.	mm	in.	mm	in.	mm	in.	mm
18	450	18	450	72	1800	62	1550
24	600	24	600	78	1950	68	1700
30	750	30	750	84	2100	74	1850
36	900	36	900	90	2250	80	2000
42	1050	42	1050	96	2400	86	2150
48	1200	48	1200	102	2550	92	2300
54	1350	54	1350	108	2700	98	2450
60	1500	60	1500	114	2850	104	2600
72	1800	72	1800	126	3150	116	2900
84	2100	84	2100	138	3450	128	3200
96	2400	96	2400	150	3750	140	3500


*For special extra long pole length requirements a Pole Extender Kit (#76024) is available that provides 30" (750 mm) of extended pole length. (p. 129).

Pole Diameter – 2-7/8" (73 mm)

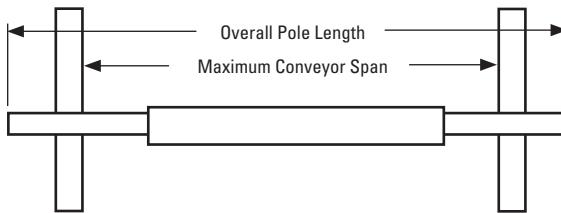

Clearance Guidelines for Installation


HORIZONTAL CLEARANCE REQUIRED		VERTICAL CLEARANCE REQUIRED	
in.	mm	in.	mm
4	100	10	245



SST XD Spring Length Chart

Belt Width		White Springs		Silver Springs		Black Springs		Gold Springs	
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
18	450	3 3/8	86	4	102	N/A	N/A	N/A	N/A
24	600	3 1/8	79	3 7/8	98	N/A	N/A	N/A	N/A
30	750	2 7/8	73	3 3/4	95	N/A	N/A	N/A	N/A
36	900	N/A	N/A	3 3/4	95	3 7/8	98	N/A	N/A
42	1050	N/A	N/A	3 5/8	92	3 3/4	95	N/A	N/A
48	1200	N/A	N/A	3 1/2	89	3 5/8	92	N/A	N/A
54	1350	N/A	N/A	3 3/8	86	3 5/8	92	3 3/4	95
60	1500	N/A	N/A	3 1/4	83	3 1/2	89	3 3/4	95
72	1800	N/A	N/A	N/A	N/A	3 3/8	86	3 5/8	92
84	2100	N/A	N/A	N/A	N/A	3 1/8	79	3 1/2	89
96	2400	N/A	N/A	N/A	N/A	N/A	N/A	3 3/8	86

Shading indicates preferred spring option.



SAT XD Pressure Chart


Belt Width		No. Blades	Pressure
in.	mm	psi	kPa
18	450	3	103
24	600	4	131
30	750	5	159
36	900	6	186
42	1050	7	214
48	1200	8	241
54	1350	9	269
60	1500	10	296
72	1800	12	352
84	2100	14	407
96	2400	16	462

Specifications:

- Maximum Belt Speed 1200 FPM (6 m/s)
- Temperature Rating -30 to 180°F (-35 to 82°C)
- Usable Blade Wear Length..... 3/8" (9 mm)
- Blade Materials C-Tip: Impact Resistant Tungsten Carbide (works with mechanical fasteners)
V-Tip: Long Life Tungsten Carbide (for vulcanized belts only)
- Available for Belt Widths 18 to 96" (450 to 2400 mm) Other sizes available upon request.
- CEMA Cleaner Rating Class 5

Replacement Parts List

MHS Heavy-Duty Secondary Cleaner with SST XD Tensioner

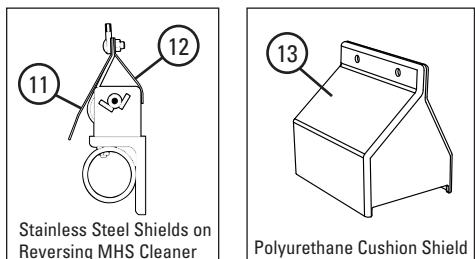


For cleaners/tensioners shipped prior to 12/31/14 ONLY*

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	18" (450mm) Pole	MHSP-18	76178	46.2
	24" (600mm) Pole	MHSP-24	75918	51.7
	30" (750mm) Pole	MHSP-30	75919	57.2
	36" (900mm) Pole	MHSP-36	75920	62.8
	42" (1050mm) Pole	MHSP-42	75921	68.3
	48" (1200mm) Pole	MHSP-48	75922	73.9
	54" (1350mm) Pole	MHSP-54	75923	79.4
	60" (1500mm) Pole	MHSP-60	75924	85.0
	72" (1800mm) Pole	MHSP-72	75925	96.1
	84" (2100mm) Pole	MHSP-84	76814	112.1
2	C-Tip*	ICT6	74535	0.7
2a	V-Tip* (for vulcanized belts only)	RSA150	73628	1.3
3	PowerFlex™ Cushion (complete)	PFC	75927	4.2
4	Tension Spring - White (1 ea.) for belts 18-30" (450-750mm)	STS-W	75846	0.5
4a	Tension Spring - Silver (1 ea.) for belts 36-48" (900-1200mm)	STS-S	75843	0.8
4b	Tension Spring - Black (1 ea.) for belts 54-84" (1350-2100mm)	STS-B	75844	1.0
4c	Tension Spring - Gold (1 ea.) for belts 96" (2400mm)	STS-G	78142	1.3
5	HD Torsion Pole Mount* (1 ea.) (incl. HD adjusting rod, nuts & sleeve) (See 9 & 9a for bushings)	SSTHDPM	77868	15.0
6	SST XD Mounting Base Kit* (includes 1 mtg base, 2 slide guides, top hat bracket & bottom bushing)	SSTXDMK	91412	10.2
7	SST Hat Bracket (pair)	SSTHB	79582	3.0
8	Slide Guide Kit* (incl. 2 slide guides)	STGK2	77867	1.1
9	SST Bushing Kit - White/Silver (incl. 2 bushings)	SSTBK-W	76636	0.1
9a	SST Bushing Kit - Black/Gold (incl. 2 bushings)	SSTBK-B	76637	0.1
10	SST Lower Bushing Kit (pair)	SSTLBK	79493	.2
11	P Stainless Steel Shield	PSSS	74773	0.5
12	PowerFlex™ Reverse Shield	PFRS	76622	0.4
13	Polyurethane Cushion Shield	UPFCC	79320	0.3
14	Jam Nut Kit SST	JNK-C	79893	0.3
-	SST XD Spring Tensioner* - White (incl. (2) ea. items 4, 5, 6, & 9)	SSTXD-W	91408	60.6
-	SST XD Spring Tensioner* - Silver (incl. (2) ea. items 4a, 5, 6, & 9)	SSTXD-S	91409	61.4
-	SST XD Spring Tensioner* - Black (incl. (2) ea. items 4b, 5, 6, & 9a)	SSTXD-B	91410	62.0
-	SST XD Spring Tensioner* - Gold (incl. (2) ea. items 4c, 5, 6, & 9a)	SSTXD-G	91411	62.6

*Hardware Included

Lead time: 1 working day

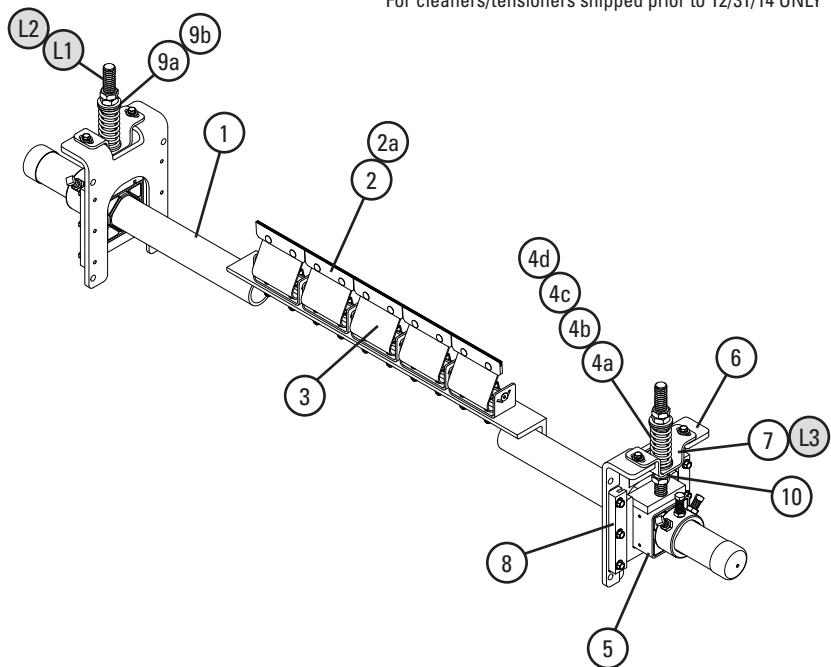

Legacy Replacement Parts for Tensioners shipped prior to Dec. 31, 2014*

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
L1	Adjusting Rod Kit (for belts 24-60" (600-1500mm)) (incl. 1 rod, 2 nuts, 1 bushing, 1 washer)	STAK	75847	2.9
L2	HD Adjusting Rod Kit (for belts 72-96" (1800-2400mm)) (incl. 1 rod, 2 nuts, 1 HD bushing, 1 washer)	STAKHD	75892	3.0
L3	Legacy SST Hat Channel Kit	SSTHK	79070	1.5
-	SAT2 Adjusting Rod Kit (2 ea.)	SAT2AK	78733	5.0
-	SST Tensioner Bushing Update Kit (incl. 2 lower bushings, 2 sleeves, 2 nuts)	SST-BUK	76943	0.3

*Verify if legacy parts are needed by looking at threaded rod. If it has standard threads, use legacy parts. If it has flat/acme threads, choose from regular replacement parts.



Spring Tensioner Selection Chart

CLEANER SIZE	91408 SSTXD-W	91409 SSTXD-S	91410 SSTXD-B	91411 SSTXD-G
MHS 18-30" (450-750mm)	X			
MHS 36-48" (900-1200mm)		X		
MHS 54-84" (1350-2100mm)			X	
MHS 96" (2400mm)				X


Replacement Parts List

MHS
Heavy-Duty Secondary Cleaner
Optional SAT XD Tensioner

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
15	SAT XD	SATXDNBC	91414	41.0
16	SAT Air/Water Bag Kit	SATB	76083	5.1
17	SAT 1/8" Hose Barb Kit	SATHB	76084	0.1
18	SAT XD Mounting Base Kit	SATXDMK	91415	11.6
19	ST Slide Guide Kit	STGK2	77867	1.1
20	SAT2 Torsion Pole Mount	SAT2PM	78732	11.1
21	SAT2 Adjusting Rod Kit	SAT2AK	78733	5.0



Lead time: 1 working day

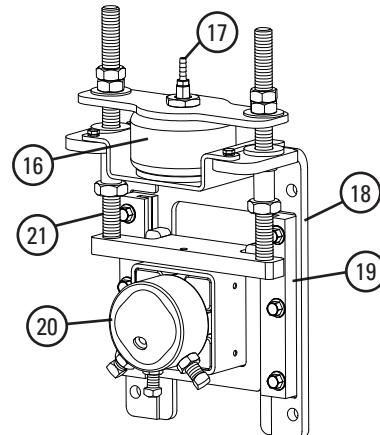

(15) Secondary Air Tensioner XD

Replacement Parts List

MHS Stainless Steel Heavy-Duty Secondary Cleaner with SST Tensioner

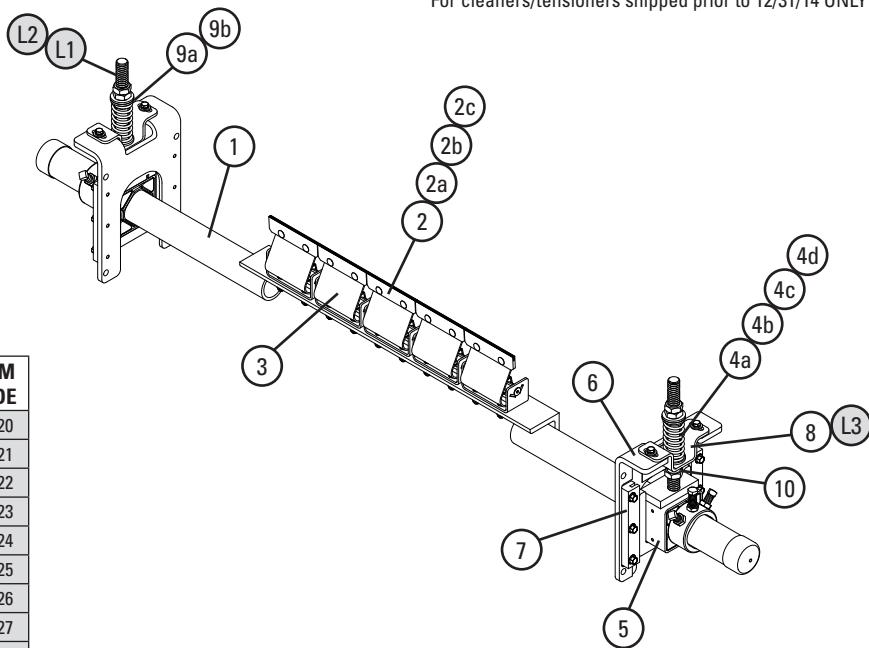

For cleaners/tensioners shipped prior to 12/31/14 ONLY*

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE
1	24" (600mm) SS Pole	MHSP24-S/S	77620
	30" (750mm) SS Pole	MHSP30-S/S	77621
	36" (900mm) SS Pole	MHSP36-S/S	77622
	42" (1050mm) SS Pole	MHSP42-S/S	77623
	48" (1200mm) SS Pole	MHSP48-S/S	77624
	54" (1350mm) SS Pole	MHSP54-S/S	77625
	60" (1500mm) SS Pole	MHSP60-S/S	77626
	72" (1800mm) SS Pole	MHSP72-S/S	77627
	84" (2100mm) SS Pole	MHSP84-S/S	77628
	96" (2400mm) SS Pole	MHSP96-S/S	79053
2	C-Tip*	ICT6	74535
2a	SS C-Tip	ICT6-S/S	78700
2b	V-Tip* (for vulcanized belts only)	RSA150	73628
2c	S/S V-Tip* (for vulcanized belts only)	RVT6-S/S	76205
3	PowerFlex Cushion* (complete)	PFC-SS	76560
4a	Tension Spring – White (1 ea.)	STS-W-S/S	77630
4b	Tension Spring – Silver (1 ea.)	STS-S-S/S	77631
4c	Tension Spring – Black (1 ea.)	STS-B-S/S	77632
4d	Tension Spring – Gold (1 ea.)	STS-G-S/S	79057
5	SS HD Torsion Mounting Kit* (1 ea.) (incl. 1 adjusting rod, 3 nuts, 1 sleeve) (See 9 & 9a for bushings)	STHDPM2-S/S	77633
6	SS Mounting Base Kit* (incl. 1 mounting base, 2 slide guides, top hat bracket & bottom bushing)	STHDMK2-S/S	77634
7	SS Base Mounting Kit* (incl. 2 slide guides)	STGK2-S/S	77635
8	SST Hat Bracket S/S (Pair)	SSTHB-S/S	79586
9a	SST Bushing Kit – White/Silver (incl. 2 bushings)	SSTBK-W	76636
9b	SST Bushing Kit – Black/Gold (incl. 2 bushings)	SSTBK-B	76637
10	SST Lower Bushing Kit (Pair)	SSTLBK	79493
11	P Stainless Steel Shield	PSSS	74773
12	PowerFlex™ Reverse Shield	PFRS	76622
–	SS SST Spring Tensioner* – White (incl. (2) ea. items 4a, 5, 6 & 9a)	SST2HD-W-S/S	77637
–	SS SST Spring Tensioner* – Silver (incl. (2) ea. items 4b, 5, 6 & 9a)	SST2HD-S-S/S	77638
–	SS SST Spring Tensioner* – Black (incl. (2) ea. items 4c, 5, 6 & 9b)	SST2HD-B-S/S	77639
–	SS SST Spring Tensioner* – Gold (incl. (2) ea. items 4d, 5, 6 & 9b)	SST2HD-G-S/S	79042

*Hardware Included
Lead time: 1 working day

Legacy Replacement Parts for Tensioners shipped prior to Dec. 31, 2014*

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE
L1	Adjusting Rod Kit* (incl. 1 rod, 2 nuts, 1 bushing, 1 washer) for belts 18–60" (450–1500mm)	STAK	75847
L2	HD Adjusting Rod Kit* (incl. 1 rod, 2 nuts, 1 HD bushing, 1 washer) for belts 72–96" (1800–2400mm)	STAKHD	75892
L3	SST Hat Channel Kit S/S	SSTHK-S/S	79071
–	SS Bushing Update Kit (incl. (2) ea. lower bushing, sleeve, nut)	SST-BUK-S/S	77636

*Verify if legacy parts are needed by looking at threaded rod. If it has standard threads, use legacy parts. If it has flat/acme threads, choose from regular replacement parts.



Standard
thread profile



Acme/trapezoidal
thread profile

Spring Tensioner Selection Chart

CLEANER SIZE	77637 SSTHD- W-S/S	77638 SSTHD- S-S/S	77639 SSTHD- B-S/S	79042 SST2HD- G-S/S
MHS S/S 18–30" (450–750mm)	X			
MHS S/S 36–48" (900–1200mm)		X		
MHS S/S 54–84" (1350–2100mm)			X	
MHS S/S 96" (2400mm)				X

Shaded items are made to order.

Lead time: 3 weeks


Product Ordering Information

MHS ESAC Heavy-Duty Secondary Cleaner with Enhanced Service Advantage Cartridge


With C-Tips

BELT WIDTH	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm		
24	600	MHS-24-ESAC	195.0
30	750	MHS-30-ESAC	206.5
36	900	MHS-36-ESAC	218.5
42	1050	MHS-42-ESAC	230.1
48	1200	MHS-48-ESAC	241.6
54	1350	MHS-54-ESAC	253.2
60	1500	MHS-60-ESAC	264.9
72	1800	MHS-72-ESAC	288.4
60	1500	MHS-60-2ESAC	278.4
72	1800	MHS-72-2ESAC	332.9
84	2100	MHS-84-2ESAC	356.6
96	2400	MHS-96-2ESAC	381.1
120	3000	MHS-120-2ESAC	432.5

Lead time: 1 working day

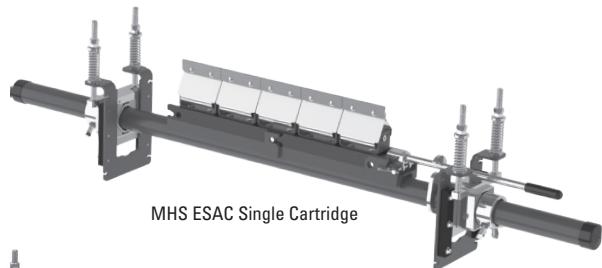

MHS ESAC Single Cartridge

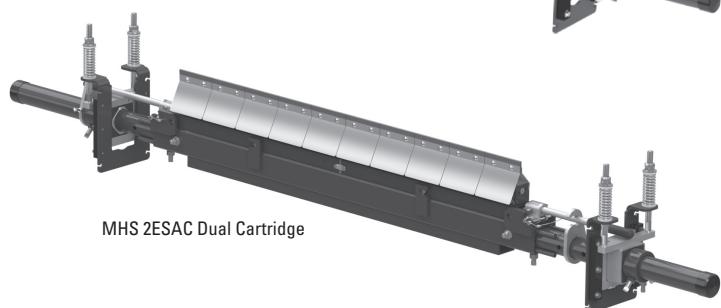

MHS 2ESAC Dual Cartridge

With V-Tips*

BELT WIDTH	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm		
24	600	MHS-24V-ESAC	195.0
30	750	MHS-30V-ESAC	206.5
36	900	MHS-36V-ESAC	218.5
42	1050	MHS-42V-ESAC	230.1
48	1200	MHS-48V-ESAC	241.6
54	1350	MHS-54V-ESAC	253.2
60	1500	MHS-60V-ESAC	264.9
72	1800	MHS-72V-ESAC	288.4
60	1500	MHS-60V-2ESAC	298.4
72	1800	MHS-72V-2ESAC	332.9
84	2100	MHS-84V-2ESAC	356.6
96	2400	MHS-96V-2ESAC	381.1
120	3000	MHS-120V-2ESAC	432.5

*NOTE: V-Tips can be used ONLY on vulcanized belts.

Lead time: 1 working day

Replacement Tips

ORDERING NUMBER	ITEM CODE	WT. LBS.
ICT6	74535	0.7
RSA150	73628	1.3

Lead time: 1 working day

Replacement Shields

ORDERING NUMBER	ITEM CODE	WT. LBS.
PFS-ESAC	79073	0.5
PFRS	76622	0.4

Lead time: 1 working day

Shaded items are made to order.
Lead time: 15 working days

Tips Required per Cleaner Size

in.	24	30	36	42	48	54	60	72	84	96	120
mm	600	750	900	1050	1200	1350	1500	1800	2100	2400	3000
No. C-Tips or V-Tips Required	4	5	6	7	8	9	10	12	14	16	20

Product Notes:

- Patented Enhanced Service Advantage Cartridge™ allows for easy removal in even the dirtiest conditions.
- Heavy-duty design to deliver maximum cleaning efficiency on the most demanding, abusive beltlines.
- Pole Length: Belt width plus 54" (1350 mm) (single cartridge cleaners); Belt width plus 60" (1500 mm) (dual cartridge cleaners).
- Patented PowerFlex™ cushion design to maintain continuous blade-to-belt contact and quick relief from passing mechanical splices.
- C-Tips are for mechanically fastened or vulcanized belts. V-Tips are for vulcanized belts only.
- Visual Blade Tension Check: Measure the tension spring and refer to Spring Length Chart on mounting base for the correct length for best cleaning performance.
- Tensioner mounting brackets included for fast and easy installation.
- Cartridge Removal Kit included for easy removal of the cartridge.

Product Ordering Information

MHS ESAC Heavy-Duty Secondary Cleaner Replacement Cartridge Kits

With C-Tips

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
24	600	MHS-CARK-C24/600	77929	29.4
30	750	MHS-CARK-C30/750	77930	35.1
36	900	MHS-CARK-C36/900	77931	40.8
42	1050	MHS-CARK-C42/1050	77932	46.5
48	1200	MHS-CARK-C48/1200	77933	52.3
54	1350	MHS-CARK-C54/1350	77934	58.0
60	1500	MHS-CARK-C60/1500	77935	63.8
72	1800	MHS-CARK-C72/1800	77936	75.3
60	1500	MHS-CARK2-C60/1500	77945	70.2
72	1800	MHS-CARK2-C72/1800	77946	81.6
84	2100	MHS-CARK2-C84/2100	77947	93.1
96	2400	MHS-CARK2-C96/2400	77948	104.5
120	3000	MHS-CARK2-C120/3000	77949	127.7

Lead time: 1 working day


With V-Tips*

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
24	600	MHS-CARK-V24/600	77937	29.4
30	750	MHS-CARK-V30/750	77938	35.1
36	900	MHS-CARK-V36/900	77939	40.8
42	1050	MHS-CARK-V42/1050	77940	46.5
48	1200	MHS-CARK-V48/1200	77941	52.3
54	1350	MHS-CARK-V54/1350	77942	58.0
60	1500	MHS-CARK-V60/1500	77943	63.8
72	1800	MHS-CARK-V72/1800	77944	75.3
60	1500	MHS-CARK2-V60/1500	77950	70.2
72	1800	MHS-CARK2-V72/1800	77951	81.6
84	2100	MHS-CARK2-V84/2100	77952	93.1
96	2400	MHS-CARK2-V96/2400	77953	104.5
120	3000	MHS-CARK2-V120/3000	77954	127.7


*NOTE: V-Tips can be used ONLY on vulcanized belts.

Lead time: 1 working day

 Shaded items are made to order.
Lead time: 15 working days

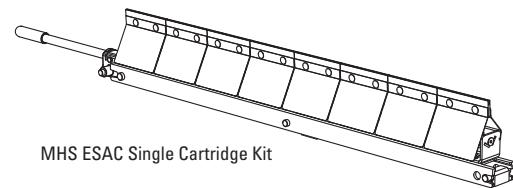

MHS ESAC Single Cartridge Kit

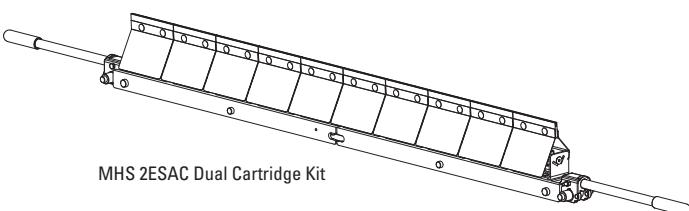

MHS 2ESAC Dual Cartridge Kit


Specifications & Guidelines

MHS ESAC Heavy-Duty Secondary Cleaner with Enhanced Service Advantage Cartridge

Pole Length Specifications


VERSION	CLEANER SIZE		BLADE WIDTH		POLE LENGTH		MAXIMUM CONVEYOR SPAN	
	in.	mm	in.	mm	in.	mm	in.	mm
Single	24	600	24	600	78	1950	66	1650
	30	750	30	750	84	2100	72	1800
	36	900	36	900	90	2250	78	1950
	42	1050	42	1050	96	2400	84	2100
	48	1200	48	1200	102	2550	90	2250
	54	1350	54	1350	108	2700	96	2400
	60	1500	60	1500	114	2850	102	2550
Dual	72	1800	72	1800	126	3150	114	2850
	60	1500	60	1500	120	3000	108	2700
	72	1800	72	1800	132	3300	120	3000
	84	2100	84	2100	144	3600	132	3300
	96	2400	96	2400	156	3900	144	3600
	120	3000	120	3000	180	4500	168	4200

*For special extra long pole length requirements a Pole Extender Kit (#76024) is available that provides 30" (750 mm) of extended pole length (p. 129). Pole Diameter - 2-7/8" (73 mm)).

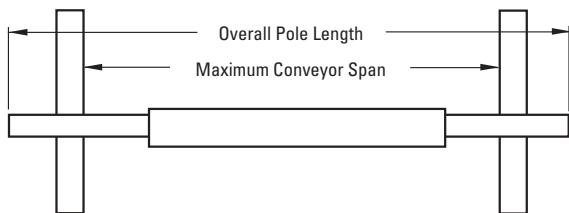

Clearance Guidelines for Installation


VERSION	HORIZONTAL CLEARANCE REQUIRED		VERTICAL CLEARANCE REQUIRED	
	in.	mm	in.	mm
Single	4-1/2	114	11	279
Dual	4-1/2	114	12-1/2	318



CST Spring Length Chart

Blade Width		White Springs		Silver Springs		Black Springs		Gold Springs	
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
24	600	3 1/8	80	3 7/8	98	N/A	N/A	N/A	N/A
30	750	2 7/8	73	3 3/4	95	N/A	N/A	N/A	N/A
36	900	N/A	N/A	3 3/4	95	3 7/8	98	N/A	N/A
42	1050	N/A	N/A	3 5/8	92	3 3/4	95	N/A	N/A
48	1200	N/A	N/A	3 1/2	89	3 5/8	92	N/A	N/A
54	1350	N/A	N/A	3 3/8	86	3 5/8	92	N/A	N/A
60	1500	N/A	N/A	3 1/4	83	3 1/2	89	4	101
72	1800	N/A	N/A	N/A	N/A	3 3/8	86	4	101
84	2100	N/A	N/A	N/A	N/A	3 1/8	80	3 7/8	98
96	2400	N/A	N/A	N/A	N/A	N/A	N/A	3 7/8	98
120	3000	N/A	N/A	N/A	N/A	N/A	N/A	3 5/8	92

Shading indicates preferred spring option



Aluminum Content


ALUMINUM ALLOY TYPE	PERCENT	
	Mg Magnesium	Ti Titanium
6061	1.0%	0.0%

Specifications:

- Maximum Belt Speed 1200 FPM (6 m/s)
- Temperature Rating -30 to 180°F (-35 to 82°C)
- Usable Blade Wear Length..... 3/8" (9 mm)
- Blade Materials C-Tip: Impact Resistant Tungsten Carbide (works with mechanical fasteners)
V-Tip: Long Life Tungsten Carbide (for vulcanized belts only)
- Available for Belt Widths 24 to 120" (600 to 3000 mm) Other sizes available upon request.
- CEMA Cleaner Rating Class 5

Replacement Parts List

MHS ESAC Heavy-Duty Secondary Cleaner with Enhanced Service Advantage Cartridge

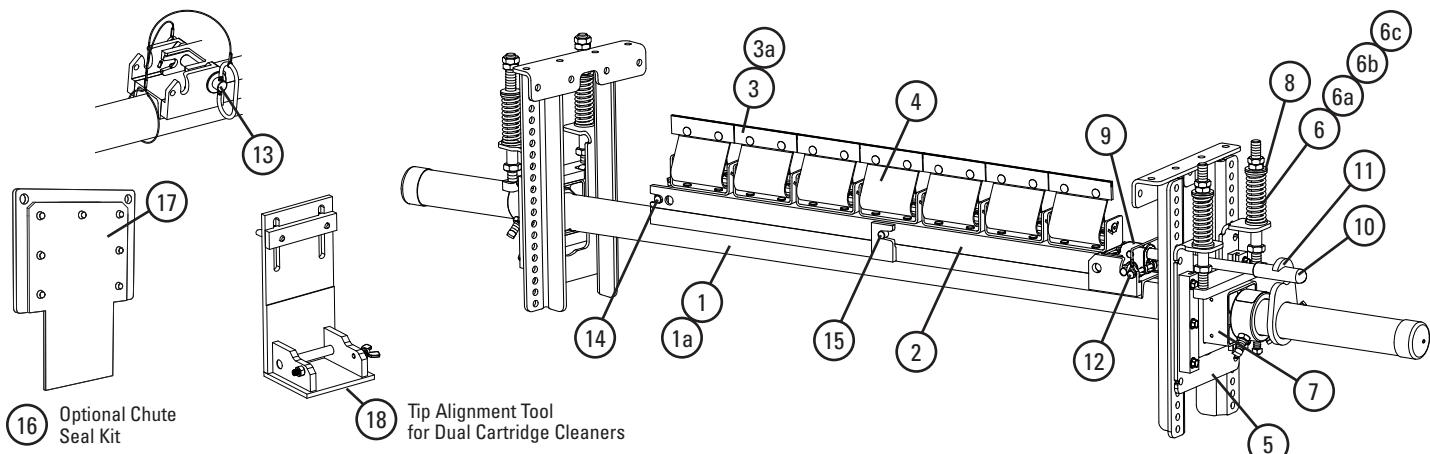

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	ESAC Pole 24" (600mm)	SACPL-24/600	77887	65.4
	ESAC Pole 30" (750mm)	SACPL-30/750	77888	71.2
	ESAC Pole 36" (900mm)	SACPL-36/900	77889	77.1
	ESAC Pole 42" (1050mm)	SACPL-42/1050	77890	82.9
	ESAC Pole 48" (1200mm)	SACPL-48/1200	77891	88.8
	ESAC Pole 54" (1350mm)	SACPL-54/1350	77892	94.6
	ESAC Pole 60" (1500mm)	SACPL-60/1500	77893	100.5
	ESAC Pole 72" (1800mm)	SACPL-72/1800	77894	112.2
	ESAC Center Pole 60" (1500mm) (Dual)	SACPL2-60/1500	77895	77.3
	ESAC Center Pole 72" (1800mm) (Dual)	SACPL2-72/1800	77896	89.5
1a	ESAC Center Pole 84" (2100mm) (Dual)	SACPL2-84/2100	77897	101.8
	ESAC Center Pole 96" (2400mm) (Dual)	SACPL2-96/2400	77898	114.1
	ESAC Center Pole 120" (3000mm) (Dual)	SACPL2-120/3000	77899	142.3
	Extender Pole (for use with Dual Cartridge Center Pole)	MHP-EP	76392	54.0
	ESAC 24" (600mm)	CART-24/600	77900	3.5
	ESAC 30" (750mm)	CART-30/750	77901	4.3
	ESAC 36" (900mm)	CART-36/900	77902	5.1
	ESAC 42" (1050mm)	CART-42/1050	77903	5.9
	ESAC 48" (1200mm)	CART-48/1200	77904	6.7
	ESAC 54" (1350mm)	CART-54/1350	77905	7.4
2	ESAC 60" (1500mm)	CART-60/1500	77906	8.4
	ESAC 72" (1800mm)	CART-72/1800	77907	10.0
	ESAC 60" (1500mm) (Dual)	CART2-60/1500	77908	8.6
	ESAC 72" (1800mm) (Dual)	CART2-72/1800	77909	10.2
	ESAC 84" (2100mm) (Dual)	CART2-84/2100	77910	11.7
	ESAC 96" (2400mm) (Dual)	CART2-96/2400	77911	13.3
	ESAC 120" (3000mm) (Dual)	CART2-120/3000	77912	16.8
	C-Tip*	ICT6	74535	0.7
	V-Tip* (for vulcanized belts only)	RSA150	73628	1.3
	PowerFlex™ Cushion*	PFC	75927	4.2
3	CST HD Mounting Base Kit*	CSTHDMK	77871	8.5
6	CST Spring - White (1 ea.)	CTS-W	77742	0.5
6a	CST Spring - Silver (1 ea.)	CTS-S	77743	0.5
6b	CST Spring - Black (1 ea.)	CTS-B	77744	0.6
6c	CST Spring - Gold (1 ea.)	CTS-G	77745	0.8
7	CST HD Torsion Pole Mount* (1 ea.)	CSTHDPM	77869	16.4
8	CST Bushing Kit (incl. 4 bushings)	CSTBK	77037	0.1

*Hardware Included

Lead Time: 1 working day

Shaded items are made to order.
Lead time: 15 working days

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
-	CST HD Cartridge Tensioner - White (incl. (1) ea. items 5, 7, 8; (2) ea. item 6)	CST1HD-W	77872	30.1
-	CST HD Cartridge Tensioner - Silver (incl. (1) ea. items 5, 7, 8; (2) ea. item 6a)	CST1HD-S	77873	30.1
-	CST HD Cartridge Tensioner - Black (incl. (1) ea. items 5, 7, 8; (2) ea. item 6b)	CST1HD-B	77874	30.1
-	CST HD Cartridge Tensioner - Gold (incl. (1) ea. items 5, 7, 8; (2) ea. item 6c)	CST1HD-G	77875	30.7
9	ESAC Removal Knuckle	SACRKN	77882	3.2
10	ESAC Removal Handle	SACRH	77883	3.0
11	ESAC Handle Lock Plate	SACRHL	77884	1.7
12	Knuckle Retainer Pin	SACKRP	77885	0.2
13	SAC Hitch Pin	SACHP2	77768	0.9
14	Flexible End Pin	FLXEP	91431	1
15	Flexible Center Pin	FLXCP	91430	1
-	ESAC Removal Kit (incl. (1) ea. items 10-14)	SACRKT	77886	9.0
16	ESAC Chute Seal Kit	SACSK	77052	3.9
17	ESAC Chute Seal Replacement Cover	SACSRC	77065	0.5
18	ESAC Tip Alignment Tool (Dual)	SAC2-TIP-TL	77866	2.5

Legacy Replacement Parts for Tensioners shipped prior to Dec. 31, 2014*

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE
-	Adjusting Rod Kit* (incl. 1 rod, 2 nuts, 1 bushing, 1 washer) for belts 18"-60" (450-1500mm)	STAK	75847
-	HD Adjusting Rod Kit* (incl. 1 rod, 2 nuts, 1 HD bushing, 1 washer) for belts 72"-96" (1800-2400mm)	STAKHD	75892
-	SST Hat Channel Kit	SSTHK	79070

*Verify if legacy parts are needed by looking at threaded rod. If it has standard threads, use legacy parts. If it has flat/acme threads, choose from regular replacement parts.



Standard
thread profile




Acme/trapezoidal
thread profile

Spring Tensioner Selection Chart

CLEANER SIZE	77872 CST1HD-W	77873 CST1HD-S	77874 CST1HD-B	77875 CST1HD-G
MHS ESAC 18-30" (450-750mm)	X			
MHS ESAC 36-48" (900-1200mm)		X		
MHS ESAC 54-84" (1350-2100mm)			X	
MHS ESAC 96-120" (2400-3000mm)				X

Product Ordering Information

**U-Type®
Secondary Cleaner**

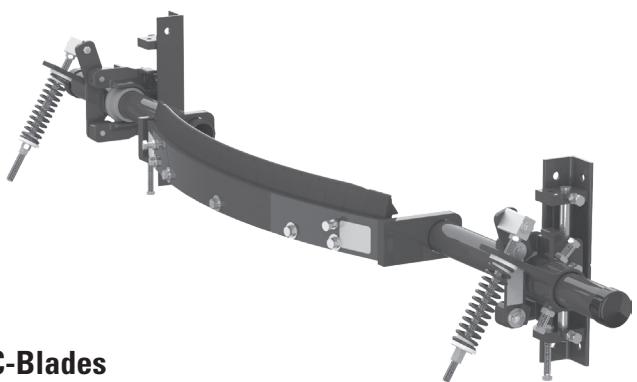

With C-Blade (Impact-Resistant Tungsten Carbide)*

BELT WIDTH	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm		
18	450	UTC18	76712
24	600	UTC24	76713
30	750	UTC30	76714
36	900	UTC36	76715
42	1050	UTC42	76716
48	1200	UTC48	76717
54	1350	UTC54	76718
60	1500	UTC60	76719
72	1800	UTC72	76720
84	2100	UTC84	76721
			241.5

*NOTE: C-Blades can be used on Flexco® Solid Plate, mechanically fastened and vulcanized belts.

Lead time: 1 working day

With F-Blade (Polyurethane)*

BELT WIDTH	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm		
18	450	UTF18	76724
24	600	UTF24	76725
30	750	UTF30	76726
36	900	UTF36	76727
42	1050	UTF42	76728
48	1200	UTF48	76729
54	1350	UTF54	76730
60	1500	UTF60	76731
72	1800	UTF72	76732
84	2100	UTF84	76733
			232.0

*NOTE: F-Blades (Polyurethane) can be used on mechanically spliced and vulcanized belts.

Lead time: 1 working day

Replacement C-Blades

BELT WIDTH	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm		
18	450	URCB18/450	76748
24	600	URCB24/600	76749
30	750	URCB30/750	76750
36	900	URCB36/900	76751
42	1050	URCB42/1050	76752
48	1200	URCB48/1200	76753
54	1350	URCB54/1350	76754
60	1500	URCB60/1500	76755
72	1800	URCB72/1800	76756
84	2100	URCB84/2100	76757
			23.5

*NOTE: C-Blades can be used on Flexco® Solid Plate, mechanically fastened and vulcanized belts.

Lead time: 1 working day

Replacement F-Blades

BELT WIDTH	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm		
18	450	UFB18	74448
24	600	UFB24	74449
30	750	UFB30	74450
36	900	UFB36	74451
42	1050	UFB42	74452
48	1200	UFB48	74453
54	1350	UFB54	74454
60	1500	UFB60	74455
72	1800	UFB72	74456
84	2100	UFB84	74460
			14.0

*NOTE: F-Blades (Polyurethane) can be used on mechanically spliced and vulcanized belts.

Lead time: 1 working day

Specifications & Guidelines


**U-Type®
Secondary Cleaner**

Pole Length Specifications

CLEANER SIZE		POLE LENGTH		MAXIMUM CONVEYOR SPAN	
in.	mm	in.	mm	in.	mm
18	450	64	1600	54	1350
24	600	70	1750	60	1500
30	750	76	1900	66	1650
36	900	82	2050	72	1800
42	1050	88	2200	78	1950
48	1200	94	2350	84	2100
54	1350	100	2500	90	2250
60	1500	106	2650	96	2400
72	1800	124	3100	114	2850
84	2100	136	3400	126	3150


Pole Diameter - 18 to 54" (450 to 1350 mm) cleaner 2-3/8" (60 mm)

Pole Diameter - 60 to 84" (1500 to 2400 mm) cleaner 2-7/8" (73 mm)

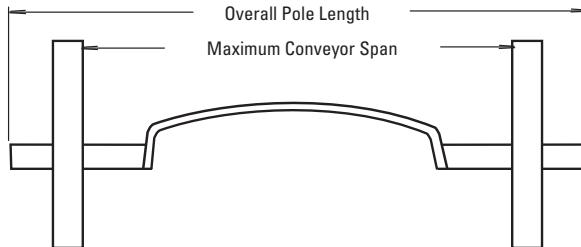

Clearance Guidelines for Installation


CLEANER SIZE		CLEARANCE	
in.	mm	in.	mm
18	450	6	155
24	600	7	180
30	750	8	205
36	900	8	205
42	1050	9 1/4	235
48	1200	10 1/2	270
54	1350	10 3/4	275
60	1500	10 3/4	275
72	1800	10 3/4	275
84	2100	10 3/4	275
96	2400	10 3/4	275



UST Spring Length Chart


Blade Width		Purple Springs		Silver Springs		White Springs	
in.	mm	in.	mm	in.	mm	in.	mm
18	450	5 5/8	143	N/A	N/A	N/A	N/A
24	600	5 1/4	133	6	152	N/A	N/A
30	750	4 5/8	117	5 3/4	146	6 1/8	156
36	900	4 1/4	108	5 5/8	143	6	152
42	1050	N/A	N/A	5 1/4	133	5 3/4	146
48	1200	N/A	N/A	4 7/8	124	5 1/2	140
54	1350	N/A	N/A	4 5/8	117	5 3/8	137
60	1500	N/A	N/A	N/A	N/A	5 1/4	133
72	1800	N/A	N/A	N/A	N/A	4 7/8	124
84	2100	N/A	N/A	N/A	N/A	4 5/8	117

Shading indicates preferred spring option.



Spring Tensioner Guidelines (For Cleaners with J-Bolt Tensioners)

- Spring gap = .03" (.7 mm)
- * Gauge provided

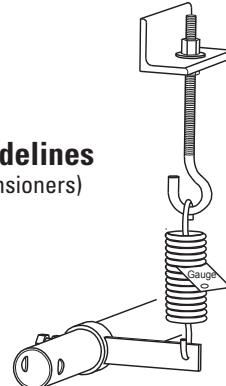


Specifications:

- Maximum Belt Speed C-Blade: 1300 FPM (6.6 m/s)
F-Blade: 1000 FPM (5 m/s)
- Temperature Rating -30 to 180°F (-35 to 82°C)
- Usable Blade Wear Length C-Blade: 3/8" (9 mm)
F-Blade: 1 3/4" (44 mm)
- Available for Belt Widths 18 to 84" (450 to 2100 mm) Other sizes available upon request.
- CEMA Cleaner Rating Class 5


Replacement Parts List

U-Type®
Secondary Cleaner

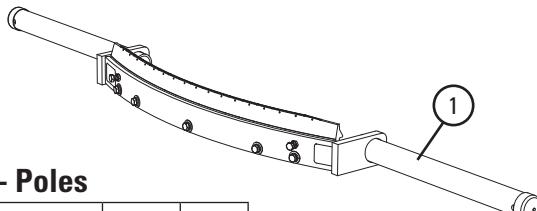

Replacement Parts - Poles


REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	18" (450mm) Pole	USP18/450	76772	45.0
	24" (600mm) Pole	USP24/600	76773	50.0
	30" (750mm) Pole	USP30/750	76774	56.0
	36" (900mm) Pole	USP36/900	76775	60.0
	42" (1050mm) Pole	USP42/1050	76776	65.0
	48" (1200mm) Pole	USP48/1200	76777	71.0
	54" (1350mm) Pole	USP54/1350	76778	76.0
	60" (1500mm) Pole	USP60/1500	76779	82.0
	72" (1800mm) Pole	USP72/1800	76780	125.0
	84" (2100mm) Pole	USP84/2100	76781	138.0

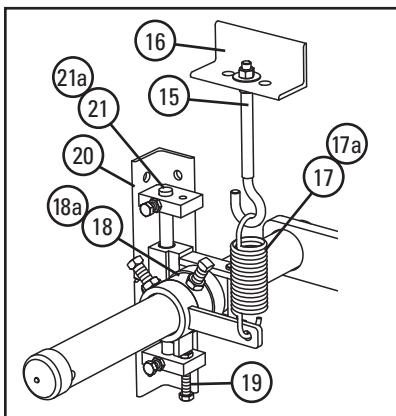

For use in changing UST to J-Bolt Tensioner

Replacement Parts - J-bolt Tensioner

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
14	J-Bolt (incl. locknut & washer)	STJK	74417	0.7
15	J-Bolt Mount (1 ea.)	STJM	74775	3.0
16	Tension Spring (1 ea.) †	STTS	74419	1.4
16a	HD Tension Spring (1 ea.) §	HTDS	74502	2.0
17	Stop Collar †	USTSC	79299	1.5
17a	HD Stop Collar §	USTSCHD	79300	2.0
18	Adjusting Bolt Kit (1 ea.) (incl. locknut)	ABU	76788	0.2
19	Mounting Bracket Kit* (1 ea.)	UMBK	76789	9.7
20	Slide Plate Kit* (1 ea.) †Δ	USPK	76790	4.6
20a	HD Slide Plate Kit* (1 ea.) §	UHSPK	76791	5.2
—	J-Bolt Conversion Kit † (Optional) (incl. (2) ea. items 15, 16, 17, 18)	UBTK	76977	4.7
—	HD J-Bolt Conversion Kit § (Optional) (incl. (2) ea. items 15, 16, 17a, 18a)	UHDBTK	76978	5.2
—	Standard Mounting Kit* (incl. (1) ea. items 8, 9, 10) †Δ for blade widths 18–54" (450–1350mm)	USMK	76792	14.6
—	HD Mounting Kit* (incl. (1) ea. items 8, 9, 10a) § for blade widths 60–84" (1500–2100mm)	UHMK	76793	15.5
—	18–54" J-Bolt Complete Tension Kit (incl. 2 ea. 15, 16, 17, 18, 19, 20, 21)†	MMKU	77324	19.3
—	60+ J-Bolt Complete Tension Kit (incl. (2) ea. 15a, 16, 17a, 18a, 19, 20, 21a)§	MMKUHD	77327	20.7

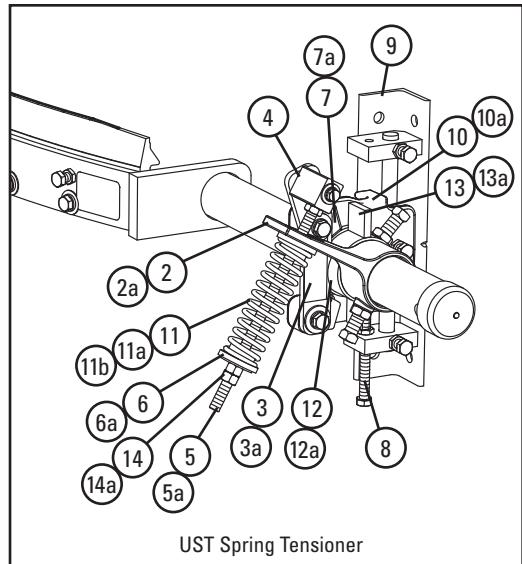

Replacement Parts - UST Tensioner

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
2	Torque Arm Kit* (1 ea.) †Δ	ESTAK-EST	76406	3.6
2a	Torque Arm Kit HD* (1 ea.) §	PSTA	75896	11.4
3	Pivot Shaft Bracket Kit* (1 ea.) †Δ	UPSBK	76784	1.7
4	Pivot Rod Kit* (1 ea.) †Δ	UPBKA	114389	2.2
4a	Pivot Rod Kit HD* (1 ea.) §	QMTPAK	76096	4.3
5	Bushing Kit (incl. 2 bushings) †Δ	ESBK-PS	76410	0.1
5a	Bushing Kit HD (incl. 2 bushings) §	QMTBK-W	76098	0.1
6	Standard Pole Bearing (1 ea.) †Δ	USPB2	79206	0.1
6a	HD Pole Bearing (1 ea.) §	UHPB2	79207	0.2
7	Adjusting Bolt Kit (1 ea.) (incl. locknut)	ABU	76788	0.2
8	Mounting Bracket Kit* (1 ea.)	UMBK	76789	9.7
9	Slide Plate Kit* (1 ea.) †Δ	USPK	76790	4.6
9a	HD Slide Plate Kit* (1 ea.) §	UHSPK	76791	5.2
10	Tension Spring - Purple (1 ea.) †	QMTS-P	75845	0.6
10a	Tension Spring - Silver (1 ea.) Δ	ESS-S	76412	1.2
10b	Tension Spring - White (1 ea.) §	PSTS-W	75898	1.7
11	UST Stop Collar Retrofit Kit* †Δ	USTSCK	79202	5.0
11a	HD UST Stop Collar Retrofit Kit* §	USTSCKHD	79204	7.4
12	Stop Collar*	USTSC	79299	1.5
12a	HD Stop Collar*	USTSCHD	79300	2.0
13	ACME Jam Nut Kit UST	JNK-G	114390	0.3
13a	Jam Nut Kit USTHD	JNK-C	79893	0.3
—	UST Spring Tensioner* - Purple † (incl. (1) ea. items 2, 3, 4, 5, 7, 8, 9, 10)	UST-P	76794	25.0
—	UST Spring Tensioner* - Silver Δ (incl. (1) ea. items 2, 3, 4, 5, 7, 8, 9, 10a)	UST-S	77757	25.0
—	HD UST Spring Tensioner* - White § (incl. (1) ea. items 2a, 3a, 4a, 5a, 7, 8, 9a, 10b)	UST-W	76795	40.0
—	Standard Mounting Kit* (incl. (1) ea. items 7, 8, 9) †Δ for blade widths 18–54" (450–1350mm)	USMK	76792	14.6
—	HD Mounting Kit* (incl. (1) ea. items 7, 8, 9a) § for blade widths 60–84" (1500–2100 mm)	UHMK	76793	15.5

*Hardware included

† Standard components for blade widths 18–42" (450–1050 mm)

Δ Standard components for blade widths 48–60" (1200–1500 mm)

§ HD components for blade widths 72–84" (1800–2100 mm)


Product Ordering Information

MDWS
Heavy-Duty Secondary Cleaner
DryWipe for Removing Water

With SST XD Tensioner

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
24	600	MDWS-24	75868	115.1
30	750	MDWS-30	75869	122.8
36	900	MDWS-36	75870	127.8
42	1050	MDWS-42	75871	138.3
48	1200	MDWS-48	75872	146.8
54	1350	MDWS-54	75873	154.5
60	1500	MDWS-60	75874	162.2
72	1800	MDWS-72	75875	177.7
84	2100	MDWS-84	76806	193.2
96	2400	MDWS-96	79063	208.7


Lead time: 1 working day

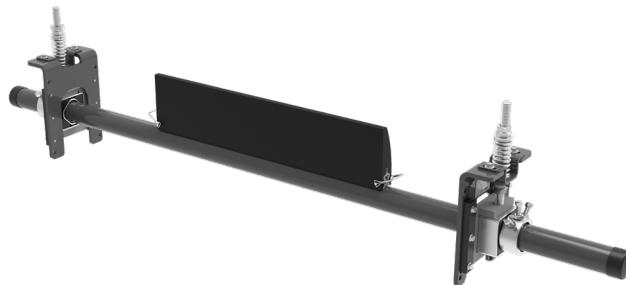

With SAT XD Tensioner

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
24	600	MDWS-24P	78745	115.1
30	750	MDWS-30P	78746	122.8
36	900	MDWS-36P	78747	127.8
42	1050	MDWS-42P	78748	138.3
48	1200	MDWS-48P	78749	146.8
54	1350	MDWS-54P	78750	154.5
60	1500	MDWS-60P	78751	162.2
72	1800	MDWS-72P	78752	177.7
84	2100	MDWS-84P	78753	193.2
96	2400	MDWS-96P	79064	208.7
108	2700	MDWS-108P	90177	234.8

Lead time: 1 working day

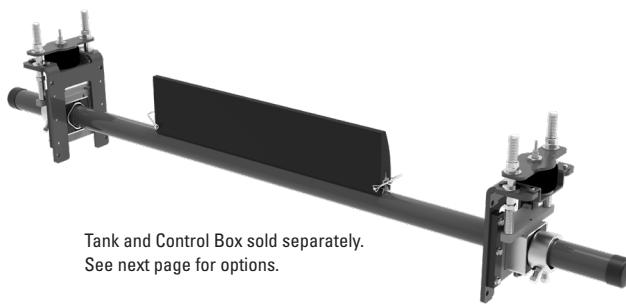

Tank and Control Box sold separately.
See next page for options.

Optional Mounting Kits

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Standard Mounting Bracket Kit*	SSTSMB	76071	34.3
Long Mounting Bracket Kit*	SSTLMB	76072	43.5
Optional Top Angle Kit*	SSTOTA	76073	10.5

*Hardware Included

Lead time: 1 working day

Replacement ConShear™ DW Blades

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
24	600	CDWB24	75884	12.8
30	750	CDWB30	75885	15.5
36	900	CDWB36	75886	18.3
42	1050	CDWB42	75887	21.0
48	1200	CDWB48	75888	23.8
54	1350	CDWB54	75889	26.5
60	1500	CDWB60	75890	29.2
72	1800	CDWB72	75891	34.7
84	2100	CDWB84	76942	40.5
96	2400	CDWB96	79062	46.3

Actual blade width is belt width + 4" (100 mm).

ConShear DW Blades are black for easy identification.

Lead time: 1 working day

Product Notes:

- The ConShear™ "DryWipe" (DW) Blade is excellent for removing water from the belt. Use as the final cleaner in a cleaning system.
- Actual blade width is belt width plus 4" (100 mm). The extra length ensures the water is removed from the belt.
- Pole Length: Belt width plus 60" (1500 mm) for cleaners up to 60" (1500 mm), belt width plus 54" (1350 mm) for cleaners over 60" (1500 mm). For longer requirements, see Accessories – Pole Extender Kit on page 129.
- Visual Blade Tension Check: Measure the tension spring and refer to the Spring Length Chart on mounting base for the correct length for best cleaning performance.
- To make cleaner installation easier and quicker, see Optional Mounting Kits on page 129.

Product Ordering Information


Line Connections for Pneumatic Air Tensioner

Control Box/Tank Combo Units for Closed System

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Control Box/Tank Combo Unit for Precleaner - 60 PSI	PAT-C-60	108230	64.0
Control Box/Tank Combo Unit for Secondary Cleaner - 100 PSI	PAT-C-100	108231	64.0

Product Notes:

- For use with cleaners with new PAT systems.
- 150# pop-off valve for safe pressurizing/charging of Air Tank.
- ASME construction tank.
- Fully sealed enclosure includes all critical items - regulator, tank gauge, downstream gauge, schrader valve, in-line filter, downstream valve.

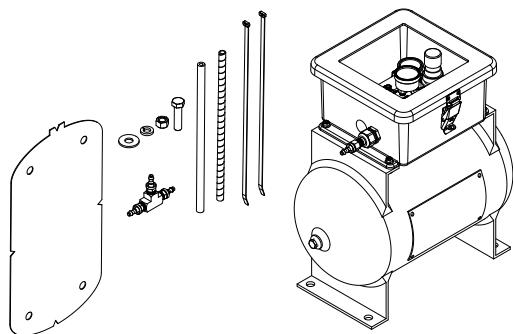


Control Box for Legacy Tank

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Control Box Kit for Precleaner - 60 PSI	PACB2-60	108228	13.6
Control Box Kit for Secondary Cleaner - 100 PSI	PACB2-100	108229	13.6

Product Notes:

- For use with Legacy PAT1/PAT2 tank systems ordered prior to January 2024.
- 150# pop-off valve for safe pressurizing/charging of Air Tank.
- May also be paired with Air Tank for Legacy Control Box if preferred.

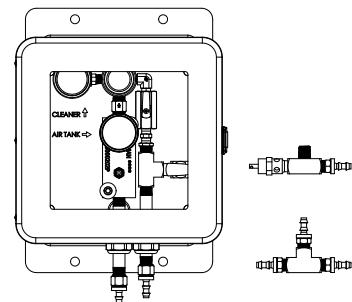


Air Tank for Legacy Control Box

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
ASME Air Tank Kit	PAT-N	108232	47.3

Product Notes:

- For use with Legacy PACB60/PACB100 control boxes ordered prior to January 2024.
- 150# pop-off valve for safe pressurizing/charging of Air Tank.
- ASME construction tank.
- May also be paired with Control Box for Legacy Tank if preferred.

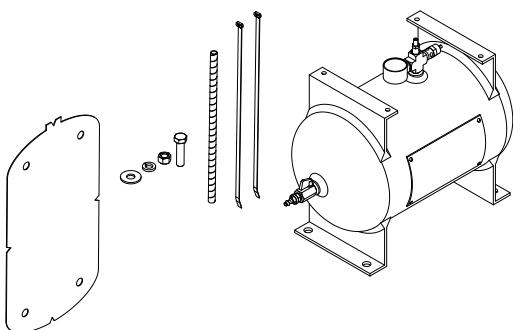

Replacement Parts List

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
10' (3m) Hose Kit	PATHK	78794	1.5
Upgrade Fitting Kit (fill valve, push-on fittings, plugs)	AWTRK	79319	0.4


Specifications & Guidelines

MDWS Heavy-Duty Secondary Cleaner DryWipe for Removing Water

Pole Length Specifications


CLEANER SIZE		BLADE WIDTH		POLE LENGTH		MAXIMUM CONVEYOR SPAN	
in.	mm	in.	mm	in.	mm	in.	mm
24	600	28	700	84	2100	68	1700
30	750	34	850	90	2250	74	1850
36	900	40	1000	96	2400	80	2000
42	1050	46	1150	102	2550	86	2150
48	1200	52	1300	108	2700	92	2300
54	1350	58	1450	114	2850	98	2450
60	1500	64	1600	120	3000	104	2600
72	1800	76	1900	126	3150	116	2900
84	2100	88	2200	138	3450	128	3200
96	2400	100	2500	150	3750	140	3500

*For special extra long pole length requirements a Pole Extender Kit (#76024) is available that provides 30" (750 mm) of extended pole length. See Page 7.
Pole Diameter - 2-7/8" (73 mm)

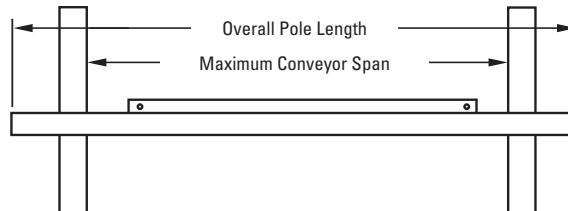

Clearance Guidelines for Installation


HORIZONTAL CLEARANCE REQUIRED		VERTICAL CLEARANCE REQUIRED	
in.	mm	in.	mm
4	100	10	250



SST XD Spring Length Chart

Blade Width		White Springs		Silver Springs		Black Springs		Gold Springs	
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
18	450	3 3/8	86	4	102	N/A	N/A	N/A	N/A
24	600	3 1/8	79	3 7/8	98	N/A	N/A	N/A	N/A
30	750	2 7/8	73	3 3/4	95	N/A	N/A	N/A	N/A
36	900	N/A	N/A	3 3/4	95	3 7/8	98	N/A	N/A
42	1050	N/A	N/A	3 5/8	92	3 3/4	95	N/A	N/A
48	1200	N/A	N/A	3 1/2	89	3 5/8	92	N/A	N/A
54	1350	N/A	N/A	3 3/8	86	3 5/8	92	3 3/4	95
60	1500	N/A	N/A	3 1/4	83	3 1/2	89	3 3/4	95
72	1800	N/A	N/A	N/A	N/A	3 3/8	86	3 5/8	92
84	2100	N/A	N/A	N/A	N/A	3 1/8	79	3 1/2	89
96	2400	N/A	N/A	N/A	N/A	N/A	N/A	3 3/8	86
108	2700	N/A	N/A	N/A	N/A	N/A	N/A	3 1/2	89
120	3000	N/A	N/A	N/A	N/A	N/A	N/A	3 3/8	86

Shading indicates preferred spring option.



SAT XD Pressure Chart

Blade Width		Pressure	
in.	mm	psi	kPa
18	450	15	103
24	600	19	131
30	750	23	159
36	900	27	186
42	1050	31	214
48	1200	35	241
54	1350	39	269
60	1500	43	296
72	1800	51	352
84	2100	59	407
96	2400	67	462


Specifications:

- Maximum Belt Speed 1000 FPM (5 m/s)
- Temperature Rating -30 to 180°F (-35 to 82°C)
- Usable Blade Wear Length 4-1/2" (113 mm)
- Blade Height 7-1/4" (185 mm)
- Blade Material Polyurethane with UHMW additive (softer durometer to squeegee water off and enhance blade life)
- Available for Belt Widths 24 to 96" (600 to 2400 mm) Other sizes available upon request.
- CEMA Cleaner Rating Class 4

Replacement Parts List

MDWS Heavy-Duty Secondary Cleaner DryWipe for Removing Water

For cleaners/tensioners shipped prior to 12/31/14 ONLY

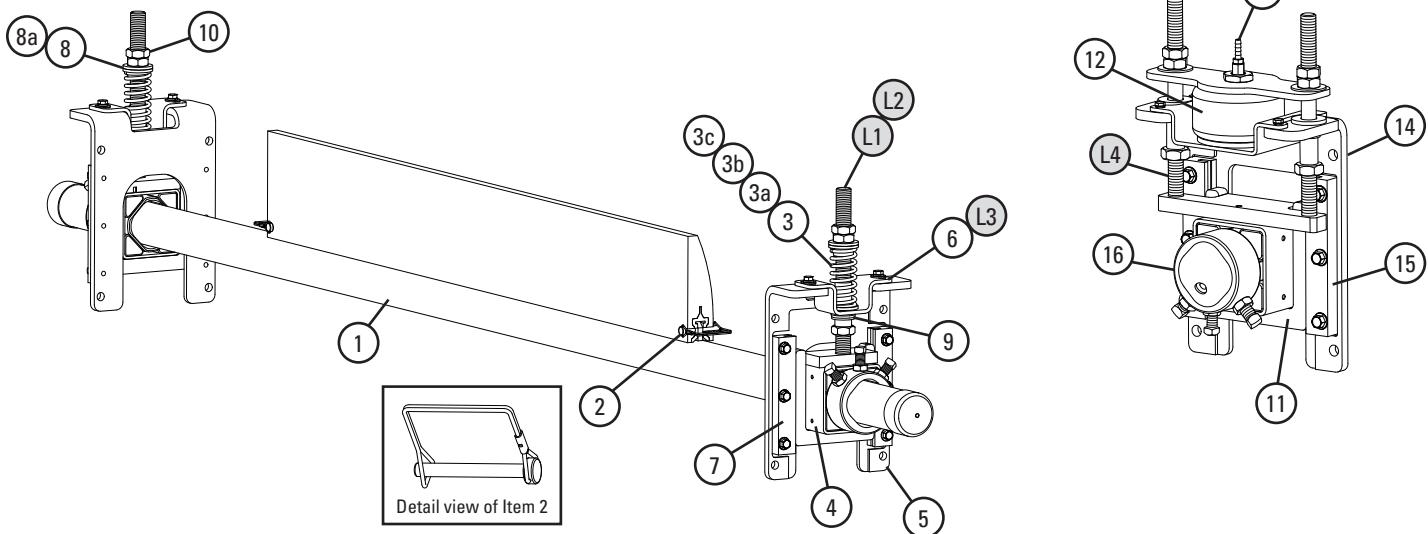

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	24" (600mm) Pole	MSPP30	75804	46.0
	30" (750mm) Pole	MSPP36	75805	50.5
	36" (900mm) Pole	MSPP42	75806	55.5
	42" (1050mm) Pole	MSPP48	75807	60.0
	48" (1200mm) Pole	MSPP54	75808	64.0
	54" (1350mm) Pole	MSPP60	75809	67.0
	60" (1500mm) Pole	MSPP66	76695	76.0
	72" (1800mm) Pole	DWP-72	75883	90.0
	84" (2100mm) Pole	DWP-84	76815	100.0
	96" (2400mm) Pole	DWP-96	79060	110.0
2	Blade Pin Kit* (1 ea.)	MSPBP	107852	0.1
3	Tension Spring - White (1 ea.) for belts 18"-30" (450-750mm)	STS-W	75846	0.5
3a	Tension Spring - Silver (1 ea.) for belts 36"-60" (900-1500mm)	STS-S	75843	0.8
3b	Tension Spring - Black (1 ea.) for belts 72"-84" (1800-2100mm)	STS-B	75844	1.0
3c	Tension Spring - Gold (1 ea.) for belts 96" (2400mm)	STS-G	78142	1.3
4	HD Torsion Pole Mount* (1 ea.) (incl. 1 adjusting rod, 3 nuts & 1 sleeve) (See 8 & 8a for bushings)	SSTHDPM	77868	15.0
5	SST XD Mounting Base Kit* (incl. 1 mtg. base, 2 slide guides, 1 top hat bracket & 1 bottom bushing)	SSTXDMK	91412	10.2
6	SST Hat Bracket (pair)	SSTHB	79582	3.5
7	SST Slide Guide Kit* (incl. 2 slide guides)	STGK2	77867	1.1
8	SST Bushing Kit - White/Silver (incl. 2 bushings)	SSTBK-W	76636	0.1
8a	SST Bushing Kit - Black/Gold (incl. 2 bushings)	SSTBK-B	76637	0.1
9	SST Lower Bushing Kit (pair)	SSTLBK	79493	0.1
10	Jam Nut Kit SST Tensioner	JNK-C	79893	0.3
-	SST XD Spring Tensioner* - White (incl. (2) ea. items 3, 4, 5, & 8a)	SSTXD-W	91408	60.6
-	SST XD Spring Tensioner* - Silver (incl. (2) ea. items 3a, 4, 5, & 8a)	SSTXD-S	91409	61.4
-	SST XD Spring Tensioner* - Black (incl. (2) ea. items 3b, 4, 5, & 8b)	SSTXD-B	91410	62.0
-	SST XD Spring Tensioner* - Gold (incl. (2) ea. items 3c, 4, 5, & 8b)	SSTXD-G	91411	62.6

*Hardware Included

Lead time: 1 working day

Replacement Parts - SAT XD Tensioner

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
11	SAT XD	SATXDNBC	78703	41.0
12	SAT Air/Water Bag Kit	SATB	76083	5.1
13	SAT 1/8" Hose Barb Kit	SATHB	76084	0.1
14	SAT XD Mounting Base Kit	SATXDMK	91415	11.6
15	ST Slide Guide Kit	STGK2	77867	1.1
16	SAT2 Torsion Pole Mount (incl. threaded rods & 6 nuts)	SAT2PM	78732	11.1

Lead time: 1 working day

Legacy Replacement Parts for Tensioners shipped prior to Dec. 31, 2014*

L1	Adjusting Rod Kit (incl. 1 rod, 2 nuts, 1 bushing, 1 washer) for belts 24"-60" (600-1500mm)	STAK	75847	2.9
L2	HD Adjusting Rod Kit (incl. 1 rod, 2 nuts, 1 HD bushing, 1 washer) for belts 72"-84" (1800-2100mm)	STAKHD	75892	3.0
L3	Legacy SST Hat Channel Kit	SSTHK	79070	1.5
L4	SAT2 Adjusting Rod Kit	SAT2AK	78733	5.0
-	SST Tensioner Bushing Update Kit (incl. 2 lower bushings, 2 sleeves, 2 nuts)	SST-BUK	76943	0.3

*Verify if legacy parts are needed by looking at threaded rod. If it has standard threads, use legacy parts. If it has flat/acme threads, choose from regular replacement parts.



Standard
thread profile



Acme/trapezoidal
thread profile

Spring Tensioner Selection Chart

CLEANER SIZE	91408 SSTXD-W	91409 SSTXD-S	91410 SSTXD-B	91411 SSTXD-G
MDWS 24"-30" (600-750 mm)	X			
MDWS 36"-60" (900-1500 mm)		X		
MDWS 72"-84" (1800-2100 mm)			X	
MDWS 96" (2400 mm)				X

Product Ordering Information

With 208-230/460VAC 3-Phase Motor IP55

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
18	450	MBC-18	79494	136.7
24	600	MBC-24	79495	146.5
30	750	MBC-30	79496	150.2
36	900	MBC-36	79497	156.5
42	1050	MBC-42	79498	162.6
48	1200	MBC-48	79499	179.0
54	1350	MBC-54	79500	185.9
60	1500	MBC-60	79501	192.0
72	1800	MBC-72	79502	205.1
84	2100	MBC-84	79503	217.5

Lead time: 1 working day

With 575V 3-Phase Motor IP55

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
18	450	MBC-18-575V	79914	136.7
24	600	MBC-24-575V	79915	146.5
30	750	MBC-30-575V	79916	150.2
36	900	MBC-36-575V	79917	156.5
42	1050	MBC-42-575V	79918	162.6
48	1200	MBC-48-575V	79919	179.0
54	1350	MBC-54-575V	79920	185.9
60	1500	MBC-60-575V	79921	192.0
72	1800	MBC-72-575V	79922	205.1
84	2100	MBC-84-575V	79923	217.5

Lead time: 1 working day

Replacement Brushes

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
18	450	MBRD-18	79514	9.6
24	600	MBRD-24	79515	13.5
30	750	MBRD-30	79516	17.1
36	900	MBRD-36	79517	20.5
42	1050	MBRD-42	79518	23.7
48	1200	MBRD-48	79519	26.8
54	1350	MBRD-54	79520	30.7
60	1500	MBRD-60	79521	33.9
72	1800	MBRD-72	79522	41.0
84	2100	MBRD-84	79523	47.5

Lead time: 1 working day

Product Notes:

- Spins opposite the belt direction for optimal cleaning.
- Uniquely patterned bristles aid in reducing material buildup and clogging.
- Adjustable tensioners allow easy brush-to-belt adjustment as the bristles wear.
- Works on mechanically spliced or vulcanized belts.

Motorized Brush Cleaner

With IP66 Motor


BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
18	450	MBC-18-S	91571	136.7
24	600	MBC-24-S	91572	146.5
30	750	MBC-30-S	91573	150.2
36	900	MBC-36-S	91574	156.5
42	1050	MBC-42-S	91575	162.6
48	1200	MBC-48-S	91576	179.0
54	1350	MBC-54-S	91577	185.9
60	1500	MBC-60-S	91578	192.0
72	1800	MBC-72-S	91579	205.1
84	2100	MBC-84-S	91580	217.5

Lead time: 1 working day

With IP66 Motor

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
18	450	MBC-18-575V-S	91581	136.7
24	600	MBC-24-575V-S	91582	146.5
30	750	MBC-30-575V-S	91583	150.2
36	900	MBC-36-575V-S	91584	156.5
42	1050	MBC-42-575V-S	91585	162.6
48	1200	MBC-48-575V-S	91586	179.0
54	1350	MBC-54-575V-S	91587	185.9
60	1500	MBC-60-575V-S	91588	192.0
72	1800	MBC-72-575V-S	91589	205.1
84	2100	MBC-84-575V-S	91590	217.5


Lead time: 1 working day

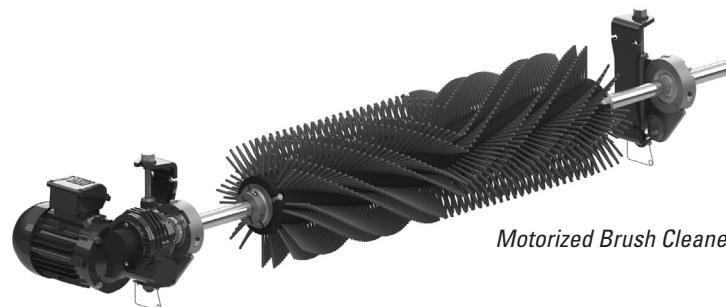

Optional Mounting Brackets (Pair)

ORDERING NUMBER	ITEM CODE	WT. LBS.
MBCDBK	79536	28.9

Lead time: 1 working day






Specifications & Guidelines

Motorized Brush Cleaner


Specifications

Belt Speed	Up to 700 FPM (3.5 m/s)
Vertical and Horizontal Clearance	12" (305mm)
Temperature Range	-20 to 180°F (-30 to 82°C)
Maximum Chevron/Cleat Height	1/2" (13mm)
Bristle Length	3-1/4" (83mm)
Overall Diameter	12" (305mm)
Shaft Length	Belt Width plus 42" (1067mm)
Shaft Diameter	1-7/16" (36.5 mm)
208-230/460VAC 3 Phase*	
1 HP (cleaners 18-42") (450-1050mm)	
2 HP (cleaners 48-84") (1200-2100mm)	
575V 3 Phase*	
1 HP (cleaners 18-36") (450-900mm)	
2 HP (cleaners 42-84") (1050-2100mm)	
Motor Ingress Protection	IP55 or IP66
CEMA Cleaner Rating	Class 4

*Other motors available upon request

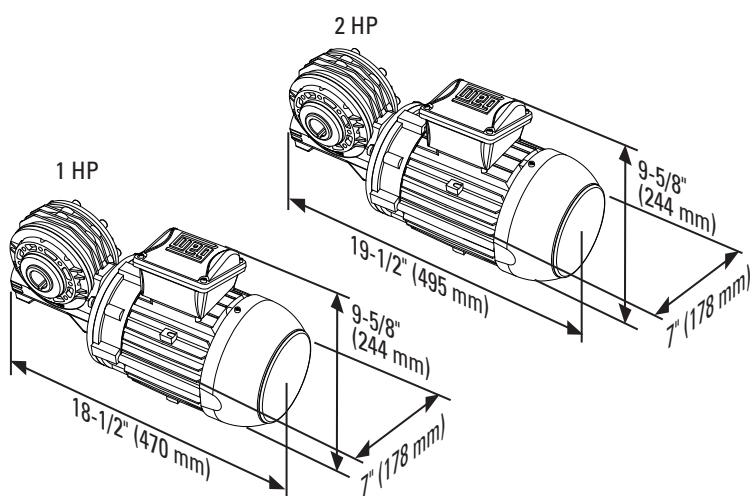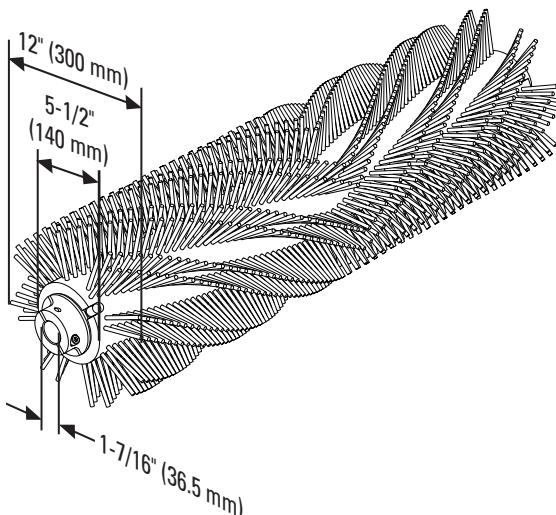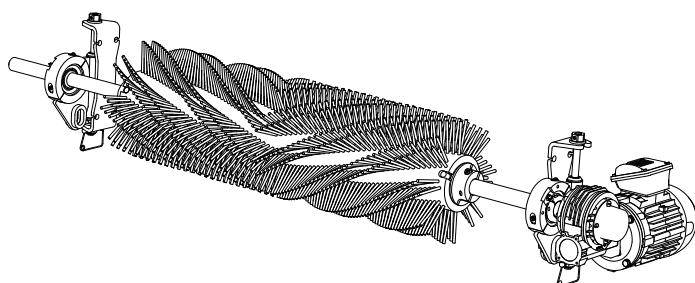

Shaft Measurements

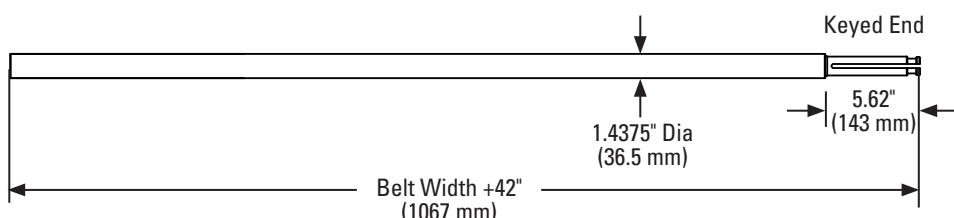


Product Notes:

- Spins opposite the belt direction for optimal cleaning.
- Uniquely patterned bristles aid in reducing material buildup and clogging.
- Adjustable tensioners allow easy brush-to-belt adjustment as the bristles wear.
- Works on mechanically spliced or vulcanized belts.

Replacement Parts List

Motorized Brush Cleaner

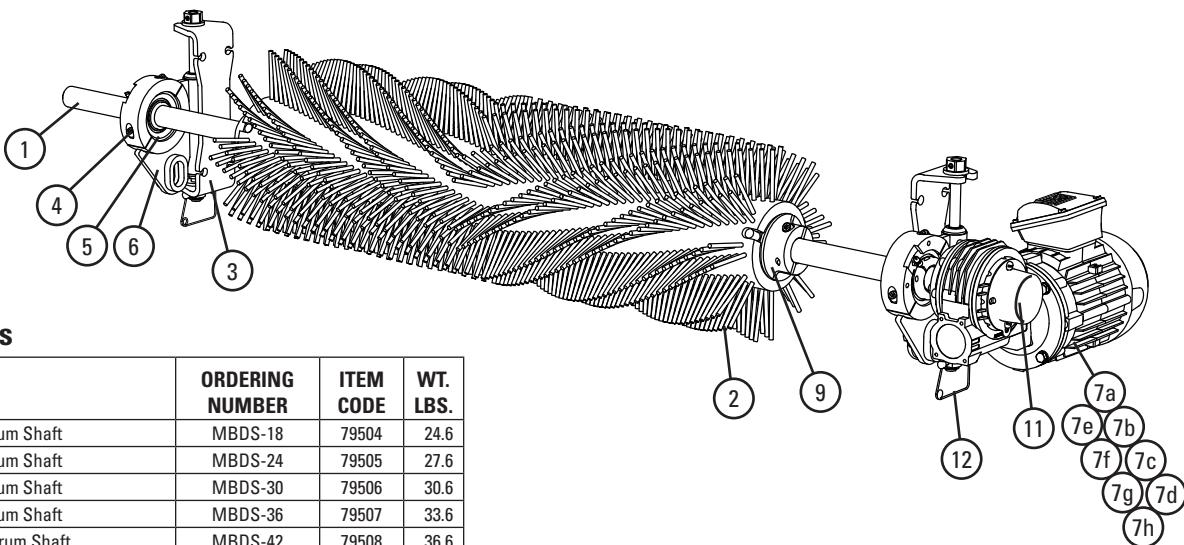

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	18" (450mm) Brush Drum Shaft	MBDS-18	79504	24.6
	24" (600mm) Brush Drum Shaft	MBDS-24	79505	27.6
	30" (750mm) Brush Drum Shaft	MBDS-30	79506	30.6
	36" (900mm) Brush Drum Shaft	MBDS-36	79507	33.6
	42" (1050mm) Brush Drum Shaft	MBDS-42	79508	36.6
	48" (1200mm) Brush Drum Shaft	MBDS-48	79509	39.5
	54" (1350mm) Brush Drum Shaft	MBDS-54	79510	42.5
	60" (1500mm) Brush Drum Shaft	MBDS-60	79511	45.5
	72" (1800mm) Brush Drum Shaft	MBDS-72	79512	51.5
2	84" (2100mm) Brush Drum Shaft	MBDS-84	79513	57.5
	18" (450mm) Replacement Brush Drum	MBRD-18	79514	9.6
	24" (600mm) Replacement Brush Drum	MBRD-24	79515	13.5
	30" (750mm) Replacement Brush Drum	MBRD-30	79516	17.1
	36" (900mm) Replacement Brush Drum	MBRD-36	79517	20.5
	42" (1050mm) Replacement Brush Drum	MBRD-42	79518	23.7
	48" (1200mm) Replacement Brush Drum	MBRD-48	79519	26.8
	54" (1350mm) Replacement Brush Drum	MBRD-54	79520	30.7
	60" (1500mm) Replacement Brush Drum	MBRD-60	79521	33.9
3	72" (1800mm) Replacement Brush Drum	MBRD-72	79522	41.0
	84" (2100mm) Replacement Brush Drum	MBRD-84	79523	47.5
	Brush Mounting Base* (1)	MBCMK	79524	4.7
	Brush Bearing Clamp* (1)	MBCBC	79525	1.9
	Brush Cleaner Bearings (2)	MBCB	79526	7.2
	Brush Bearing Mount* (1)	MBCBM	79528	9.7
	Gearmotor Assy, 1 HP IP55 for belts up to 42" (1050mm)	MBCM-1	79529	55.0
	Gearmotor Assy, 2 HP IP55 for belts 48" (1200mm) and up	MBCM-2	79530	65.0
	Gearmotor Assy, 1 HP 575V IP55 for belts up to 36" (900mm)	MBCM-575-1	79924	55.0
4	Gearmotor Assy, 2 HP 575V IP55 for belts up to 42" (1050mm) and up	MBCM-575-2	79925	65.0
	Gearmotor Assy, 1 HP IP66 for belts up to 42" (1050mm)	MBCM-1-S	91591	55.0
	Gearmotor Assy, 2 HP IP66 for belts 48" (1200mm) and up	MBCM-2-S	91592	65.0
	Gearmotor Assy, 1 HP 575V IP66 for belts up to 36" (900mm)	MBCM-575-1-S	91593	55.0
	Gearmotor Assy, 2 HP 575V IP66 for belts 42" (1050mm) and up	MBCM-575-2-S	91594	65.0
	Brush Cleaner Torque Arm* (1)	MBCTA	79531	2.5
	Brush Locks* (2)	MBCBL	79532	9.4
	Brush Motor Key Kit (1)	MBCMKK	79533	0.3
	MBC Shaft End Cap* (1)	MBCEC	79534	0.1
5	Tensioner Lock Pins (2)	STLP	79535	0.2
	Brush Cleaner Drop Brackets* (2)	MBCDBK	79536	28.9
	Brush Cleaner Adjusting Bracket (1) (incl. (1) bearing; (1) ea. items 3, 4, 6 & 12)	MBADB	79527	18.1

*Hardware Included

† If brush ordered before January 2021, also order replacement shaft

Lead time: 1 working day


Product Ordering Information

Chevron Secondary Cleaner

Chevron Belt Cleaner

BELT WIDTH		DRUM WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
18	450	18	450	CBC18	76668	74.0
24	600	24	600	CBC24	76669	81.9
30	750	30	750	CBC30	76670	90.8
36	900	36	900	CBC36	76671	99.7
42	1050	42	1050	CBC42	76672	107.5
48	1200	48	1200	CBC48	76673	116.5
54	1350	54	1350	CBC54	76674	124.3
60	1500	60	1500	CBC60	76675	133.2
72	1800	72	1800	CBC72	90762	150.0
84	2100	84	2100	CBC84	90763	166.8

Lead time: 1 working day

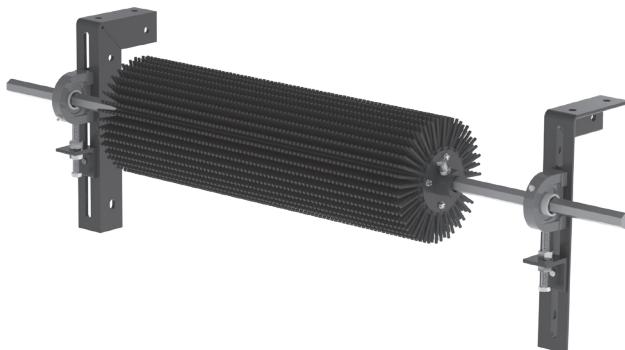

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	18" (450mm) Drum Shaft	CBCS18	90537	15.1
	24" (600mm) Drum Shaft	CBCS24	90538	17.0
	30" (750mm) Drum Shaft	CBCS30	90539	18.9
	36" (900mm) Drum Shaft	CBCS36	90540	20.8
	42" (1050mm) Drum Shaft	CBCS42	90541	22.7
	48" (1200mm) Drum Shaft	CBCS48	90542	24.6
	54" (1350mm) Drum Shaft	CBCS54	90543	26.4
	60" (1500mm) Drum Shaft	CBCS60	90544	28.3
	72" (1800mm) Drum Shaft	CBCS72	90554	33.9
2	Chevron Pillow Block*	CPB	76692	1.2
3	18" (450mm) Repl Drum w/Fingers*	CRDF18	90631	25.0
	24" (600mm) Repl Drum w/Fingers*	CRDF24	90632	31.0
	30" (750mm) Repl Drum w/Fingers*	CRDF30	90633	38.0
	36" (900mm) Repl Drum w/Fingers*	CRDF36	90634	45.0
	42" (1050mm) Repl Drum w/Fingers*	CRDF42	90635	51.0
	48" (1200mm) Repl Drum w/Fingers*	CRDF48	90636	58.0
	54" (1350mm) Repl Drum w/Fingers*	CRDF54	90637	64.0
	60" (1500mm) Repl Drum w/Fingers*	CRDF60	90638	71.0
	72" (1800mm) Repl Drum w/Fingers*	CRDF72	90639	84.0
4	3" (75mm) Replacement Finger Ring	CBC3R	90641	2.5
5	Mounting Bracket Kit (1 Right and 1 Left)	EZS2MBK	75666	13.0
6	Adjusting Bracket Kit* (1 ea.)	PAB	75513	1.5


*Hardware Included

Lead time: 1 working day

Shaded items are made to order.
Lead time: 3 working days

Product Notes:

- Free-rotating. Works only when the belt is running.
- Self-cleaning. Finger length, spacing and the rotary action allows carryback to fall free instead of clogging.
- Easy to install. Few parts and step-by-step instructions make the job simple.
- Long-wearing SBR rubber. Drum life ranges from 1 to 3 years depending upon the application conditions and the material being conveyed.
- Works on reversing belts.
- Finger rings can be replaced individually or all at once by replacing the drum.

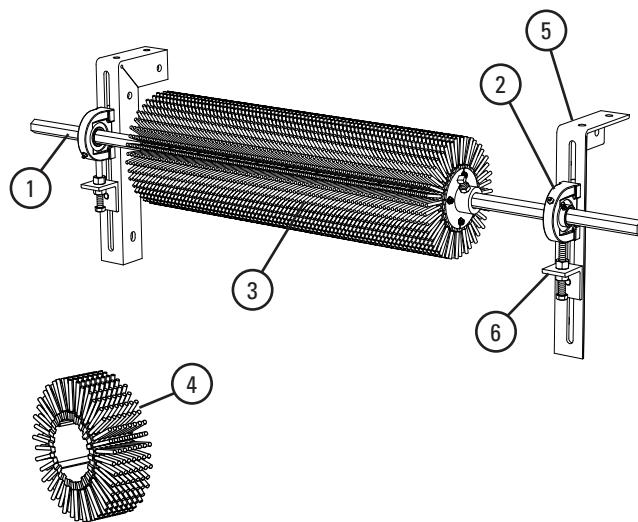

Specifications

Belt Speed	Up to 500 fpm (2.5M/s)
Vertical and Horizontal Clearance	10" (250mm)
Temperature Range	-30 to 180°F (-35 to 82°C)
Maximum Chevron or Cleat Height	1" (25mm)
Finger Length	2" (50mm)
Rubber Durometer	45A
Overall Diameter	9-1/2" (238mm)
Shaft Length	Belt Width plus 30" (750mm)
Shaft	1" (25mm) Hex
CEMA Cleaner Rating	Class 3


Product Ordering Information

CBS Continuous Blade Secondary Cleaner

With SST XD Tenioner

BELT WIDTH		FLAT BLADE		CURVED BLADE	
in.	mm	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE
18	450	CBS18SF	79936	CBS18SC	91495
24	600	CBS24SF	79937	CBS24SC	91496
30	750	CBS30SF	79938	CBS30SC	91497
36	900	CBS36SF	79939	CBS36SC	91498
42	1050	CBS42SF	79940	CBS42SC	91499
48	1200	CBS48SF	79941	CBS48SC	91500
54	1350	CBS54SF	79942	CBS54SC	91501
60	1500	CBS60SF	79943	CBS60SC	91502
72	1800	CBS72SF	79944	CBS72SC	91503
84	2100	CBS84SF	79945	CBS84SC	91504
96	2400	CBS96SF	79946	CBS96SC	91505

Lead time: 1 day; shaded items 3 weeks

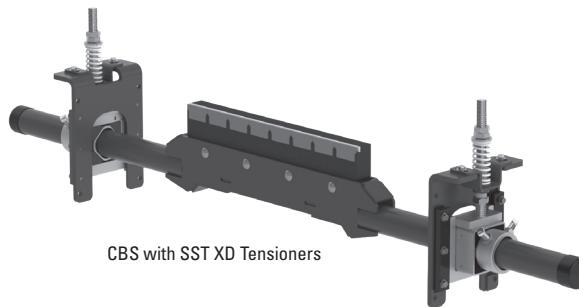


CBS with SST XD Tensioners

With SAT XD Tenioner

BELT WIDTH		FLAT BLADE		CURVED BLADE	
in.	mm	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE
18	450	CBS18PF	79958	CBS18PC	91549
24	600	CBS24PF	79959	CBS24PC	91550
30	750	CBS30PF	79960	CBS30PC	91551
36	900	CBS36PF	79961	CBS36PC	91552
42	1050	CBS42PF	79962	CBS42PC	91553
48	1200	CBS48PF	79963	CBS48PC	91554
54	1350	CBS54PF	79964	CBS54PC	91555
60	1500	CBS60PF	79965	CBS60PC	91556
72	1800	CBS72PF	79966	CBS72PC	91557
84	2100	CBS84PF	79967	CBS84PC	91558
96	2400	CBS96PF	79968	CBS96PC	91559

Lead time: 1 day; shaded items 3 weeks

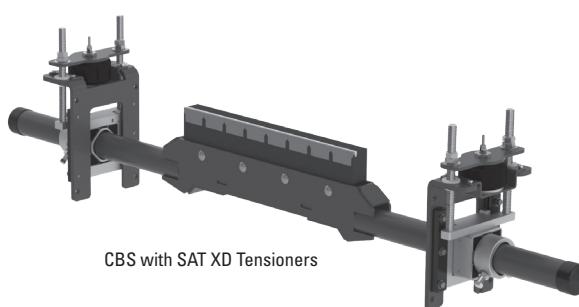


CBS with SAT XD Tensioners

Tank and Control Box sold separately.
See next page for options.

Replacement Blades

BELT WIDTH		FLAT BLADE		CURVED BLADE	
in.	mm	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE
18	450	CBSBLD18F	79947	CBSBLD18C	91527
24	600	CBSBLD24F	79948	CBSBLD24C	91528
30	750	CBSBLD30F	79949	CBSBLD30C	91529
36	900	CBSBLD36F	79950	CBSBLD36C	91530
42	1050	CBSBLD42F	79951	CBSBLD42C	91531
48	1200	CBSBLD48F	79952	CBSBLD48C	91532
54	1350	CBSBLD54F	79953	CBSBLD54C	91533
60	1500	CBSBLD60F	79954	CBSBLD60C	91534
72	1800	CBSBLD72F	79955	CBSBLD72C	91535
84	2100	CBSBLD84F	79956	CBSBLD84C	91536
96	2400	CBSBLD96F	79957	CBSBLD96C	91537

Lead time: 1 day; shaded items 3 weeks

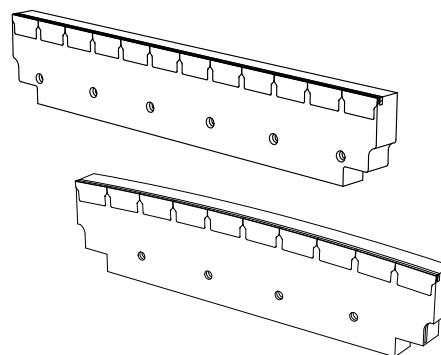

Product Notes:

- Heavy-duty design to deliver maximum cleaning efficiency on the most demanding, abusive beltlines.
- Pole Length: Belt width plus 54' (1350 mm). For longer requirements, see Mineline Installation Accessories – Pole Extender Kit on page 129.
- To make cleaner installation easier and quicker, see Optional Mounting Kits on page 129.
- It is recommended that mechanical fasteners on the belt be skived.

Product Ordering Information


Line Connections for Pneumatic Air Tensioner

Control Box/Tank Combo Units for Closed System

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Control Box/Tank Combo Unit for Precleaner - 60 PSI	PAT-C-60	108230	64.0
Control Box/Tank Combo Unit for Secondary Cleaner - 100 PSI	PAT-C-100	108231	64.0

Product Notes:

- For use with cleaners with new PAT systems.
- 150# pop-off valve for safe pressurizing/charging of Air Tank.
- ASME construction tank.
- Fully sealed enclosure includes all critical items - regulator, tank gauge, downstream gauge, schrader valve, in-line filter, downstream valve.

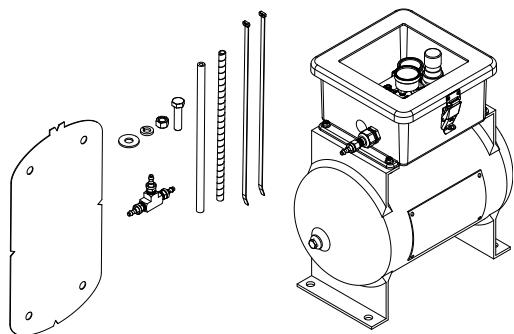


Control Box for Legacy Tank

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Control Box Kit for Precleaner - 60 PSI	PACB2-60	108228	13.6
Control Box Kit for Secondary Cleaner - 100 PSI	PACB2-100	108229	13.6

Product Notes:

- For use with Legacy PAT1/PAT2 tank systems ordered prior to January 2024.
- 150# pop-off valve for safe pressurizing/charging of Air Tank.
- May also be paired with Air Tank for Legacy Control Box if preferred.

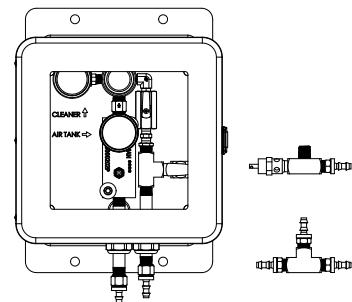


Air Tank for Legacy Control Box

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
ASME Air Tank Kit	PAT-N	108232	47.3

Product Notes:

- For use with Legacy PACB60/PACB100 control boxes ordered prior to January 2024.
- 150# pop-off valve for safe pressurizing/charging of Air Tank.
- ASME construction tank.
- May also be paired with Control Box for Legacy Tank if preferred.

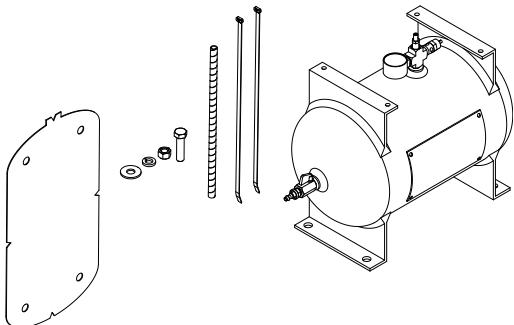

Replacement Parts List

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
10' (3m) Hose Kit	PATHK	78794	1.5
Upgrade Fitting Kit (fill valve, push-on fittings, plugs)	AWTRK	79319	0.4

Specifications and Guidelines


CBS Continuous Blade Secondary Cleaner

Pole Length Specifications

CLEANER SIZE		BLADE WIDTH		POLE LENGTH		MAXIMUM CONVEYOR SPAN	
in.	mm	in.	mm	in.	mm	in.	mm
18	450	18	450	72	1800	62	1550
24	600	24	600	78	1950	68	1700
30	750	30	750	84	2100	74	1850
36	900	36	900	90	2250	80	2000
42	1050	42	1050	96	2400	86	2150
48	1200	48	1200	102	2550	92	2300
54	1350	54	1350	108	2700	98	2450
60	1500	60	1500	114	2850	104	2600
72	1800	72	1800	126	3150	116	2900
84	2100	84	2100	138	3450	128	3200
96	2400	96	2400	150	3750	140	3500


*For special extra long pole length requirements a Pole Extender Kit (#76024) is available that provides 30" (750 mm) of extended pole length. See p. 129.

Pole Diameter - 2-7/8" (73 mm)

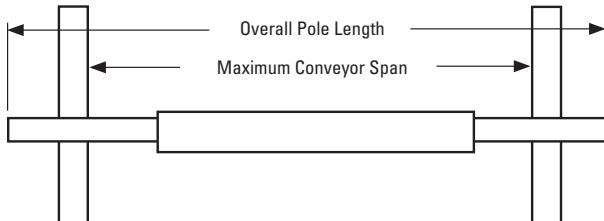

Clearance Guidelines for Installation


HORIZONTAL CLEARANCE REQUIRED		VERTICAL CLEARANCE REQUIRED	
in.	mm	in.	mm
5	125	10	254



SST XD Spring Length Chart

Belt Width		White Springs		Silver Springs		Black Springs		Gold Springs	
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
18	450	3 3/8	86	4	102	N/A	N/A	N/A	N/A
24	600	3 1/8	79	3 7/8	98	N/A	N/A	N/A	N/A
30	750	2 7/8	73	3 3/4	95	N/A	N/A	N/A	N/A
36	900	N/A	N/A	3 3/4	95	3 7/8	98	N/A	N/A
42	1050	N/A	N/A	3 5/8	92	3 3/4	95	N/A	N/A
48	1200	N/A	N/A	3 1/2	89	3 5/8	92	N/A	N/A
54	1350	N/A	N/A	3 3/8	86	3 5/8	92	3 3/4	95
60	1500	N/A	N/A	3 1/4	83	3 1/2	89	3 3/4	95
72	1800	N/A	N/A	N/A	N/A	3 3/8	86	3 5/8	92
84	2100	N/A	N/A	N/A	N/A	3 1/8	79	3 1/2	89
96	2400	N/A	N/A	N/A	N/A	N/A	N/A	3 3/8	86

Shading indicates preferred spring option.

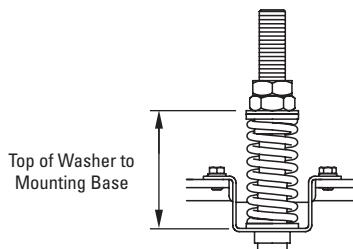

SAT XD Pressure Chart



Belt Width		Pressure	
in.	mm	psi	kPa
18	450	15	103
24	600	19	131
30	750	23	159
36	900	27	186
42	1050	31	214
48	1200	35	241
54	1350	39	269
60	1500	43	296
72	1800	51	352
84	2100	59	407
96	2400	67	462

Specifications:

- Maximum Belt Speed 800 FPM (4 m/s) for mechanical fasteners
1200 FPM (6 m/s) for vulcanized belts
- Temperature Rating -30 to 180°F (-35 to 82°C)
- Available for Belt Widths 18 to 96" (450 to 2400 mm) Other sizes available upon request.

Replacement Parts List

CBS Continuous Blade Secondary Cleaner

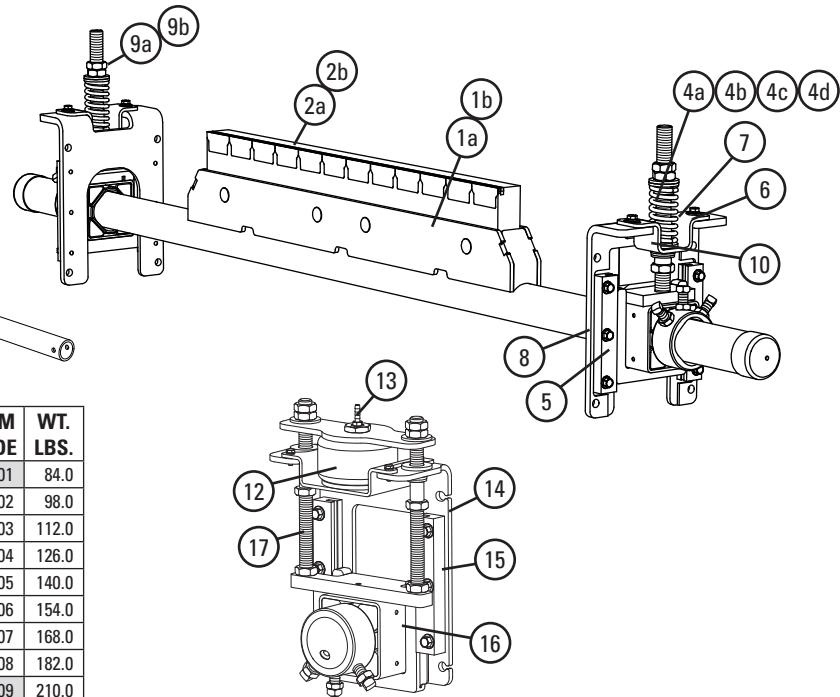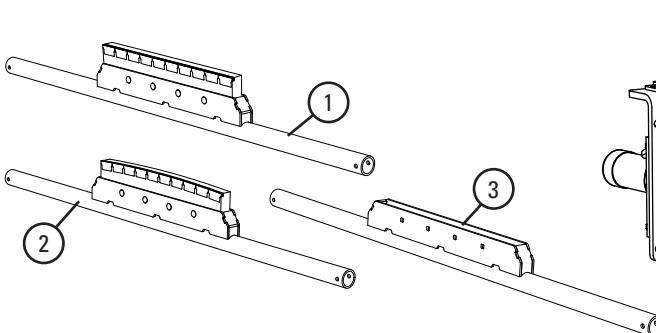

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1 (flat)	18" (450mm) CBS Blade/Pole	CBSBP18F	90101	84.0
	24" (600mm) CBS Blade/Pole	CBSBP24F	90102	98.0
	30" (750mm) CBS Blade/Pole	CBSBP30F	90103	112.0
	36" (900mm) CBS Blade/Pole	CBSBP36F	90104	126.0
	42" (1050mm) CBS Blade/Pole	CBSBP42F	90105	140.0
	48" (1200mm) CBS Blade/Pole	CBSBP48F	90106	154.0
	54" (1350mm) CBS Blade/Pole	CBSBP54F	90107	168.0
	60" (1500mm) CBS Blade/Pole	CBSBP60F	90108	182.0
	72" (1800mm) CBS Blade/Pole	CBSBP72F	90109	210.0
	84" (2100mm) CBS Blade/Pole	CBSBP84F	90110	238.0
2 (curved)	96" (2400mm) CBS Blade/Pole	CBSBP96F	90111	266.0
	18" (450mm) CBS Blade/Pole	CBSBP18C	91538	84.0
	24" (600mm) CBS Blade/Pole	CBSBP24C	91539	98.0
	30" (750mm) CBS Blade/Pole	CBSBP30C	91540	112.0
	36" (900mm) CBS Blade/Pole	CBSBP36C	91541	126.0
	42" (1050mm) CBS Blade/Pole	CBSBP42C	91542	140.0
	48" (1200mm) CBS Blade/Pole	CBSBP48C	91543	154.0
	54" (1350mm) CBS Blade/Pole	CBSBP54C	91544	168.0
	60" (1500mm) CBS Blade/Pole	CBSBP60C	91545	182.0
	72" (1800mm) CBS Blade/Pole	CBSBP72C	91546	210.0
3	84" (2100mm) CBS Blade/Pole	CBSBP84C	91547	238.0
	96" (2400mm) CBS Blade/Pole	CBSBP96C	91548	266.0
	18" (450mm) CBS Repl Pole	CBSP18	91432	68.0
	24" (600mm) CBS Repl Pole	CBSP24	91433	76.0
	30" (750mm) CBS Repl Pole	CBSP30	91434	85.0
	36" (900mm) CBS Repl Pole	CBSP36	91435	93.0
	42" (1050mm) CBS Repl Pole	CBSP42	91436	101.0
	48" (1200mm) CBS Repl Pole	CBSP48	91437	109.0
	54" (1350mm) CBS Repl Pole	CBSP54	91438	118.0
	60" (1500mm) CBS Repl Pole	CBSP60	91439	126.0
4a	72" (1800mm) CBS Repl Pole	CBSP72	91440	143.0
	84" (2100mm) CBS Repl Pole	CBSP84	91441	159.0
	96" (2400mm) CBS Repl Pole	CBSP96	91442	176.0
	Tension Spring - White (1 ea.)	STS-W	75846	0.5
4b	Tension Spring - Silver (1 ea.)	STS-S	75843	0.8
4c	Tension Spring - Black (1 ea.)	STS-B	75844	1.0
4d	Tension Spring - Gold (1 ea.)	STS-G	78142	1.3
5	HD Torsion Pole Mount* (1 ea.) (incl. HD adjusting rod, nuts & sleeve) (See 9 & 9a for bushings)	SSTHDPM	77868	15.0
6	SST XD Mounting Base Kit* (incl. 1 mtg base, 2 slide guides, top hat bracket & bottom bushing)	SSTXDMK	91412	10.2
7	SST Hat Bracket (pair)	SSTHB	79582	3.0
8	Slide Guide Kit* (incl. 2 slide guides)	STGK2	77867	1.1
9a	SST Bushing Kit - White/Silver (incl. 2 bushings)	SSTBK-W	76636	0.1
9b	SST Bushing Kit - Black/Gold (incl. 2 bushings)	SSTBK-B	76637	0.1
10	SST Lower Bushing Kit (pair)	SSTLBK	79493	0.2

*Hardware Included

Lead time: 1 day; shaded items 3 weeks

SAT XD Tensioner Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
11	SAT XD	SATXNCB	91414	41.0
12	SAT Air/Water Bag Kit	SATB	76083	5.1
13	SAT 1/8" Hose Barb Kit	SATHB	76084	0.1
14	SAT XD Mounting Base Kit	SATXDMK	91415	11.6
15	ST Slide Guide Kit	STGK2	77867	1.1
16	SAT2 Torsion Pole Mount	SAT2PM	78732	11.1
17	SAT2 Adjusting Rod Kit	SAT2AK	78733	5.0

Lead time: 1 working day

SST XD Tensioner Options

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
-	SST XD Spring Tensioner* - White (incl. (2) ea. items 4a, 5, 6, & 9a)	SSTXD-W	91408	60.6
-	SST XD Spring Tensioner* - Silver (incl. (2) ea. items 4b, 5, 6, & 9a)	SSTXD-S	91409	61.4
-	SST XD Spring Tensioner* - Black (incl. (2) ea. items 4c, 5, 6, & 9b)	SSTXD-B	91410	62.0
-	SST XD Spring Tensioner* - Gold (incl. (2) ea. items 4d, 5, 6, & 9b)	SSTXD-G	91411	62.6

Spring Tensioner Selection Chart

CLEANER SIZE	91408 SSTXD-W	91409 SSTXD-S	91410 SSTXD-B	91411 SSTXD-G
CBS 18-30" (450-750mm)	X			
CBS 36-48" (900-1200mm)		X		
CBS 54-84" (1350-2100mm)			X	
CBS 96" (2400mm)				X

Product Ordering Information

Richwood® 1C Cleaner Flexco Retrofit Replacement Blades

Belt Width Minus 6" (150 mm)

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
24	600	18	450	RWPREC-624	90068	37.7
30	750	24	600	RWPREC-630	90069	48.9
36	900	30	750	RWPREC-636	90070	54.4
42	1050	36	900	RWPREC-642	90071	62.6
48	1200	42	1050	RWPREC-648	90072	71.1
54	1350	48	1200	RWPREC-654	90073	79.3
60	1500	54	1350	RWPREC-660	90074	87.7
72	1800	66	1650	RWPREC-672	90075	104.4
84	2100	78	1950	RWPREC-684	90076	121.1
96	2400	90	2250	RWPREC-696	90077	137.8

Lead time: 1 working day

Belt Width Minus 12" (300 mm)

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
30	750	18	450	RWPREC-1230	90078	40.9
36	900	24	600	RWPREC-1236	90079	50.1
42	1050	30	750	RWPREC-1242	90080	57.6
48	1200	36	900	RWPREC-1248	90081	66.8
54	1350	42	1050	RWPREC-1254	90082	74.3
60	1500	48	1200	RWPREC-1260	90083	83.5
72	1800	60	1500	RWPREC-1272	90084	100.2
84	2100	72	1800	RWPREC-1284	90085	116.9
96	2400	84	2100	RWPREC-1296	90086	133.6

Lead time: 1 working day


Belt Width Minus 18" (450 mm)

BELT WIDTH		BLADE WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm			
36	900	18	450	RWPREC-1836	91214	45.1
42	1050	24	600	RWPREC-1842	91215	53.3
48	1200	30	750	RWPREC-1848	91216	61.8
54	1350	36	900	RWPREC-1854	91217	70.0
60	1500	42	1050	RWPREC-1860	91218	78.5
72	1800	54	1350	RWPREC-1872	91219	95.2
84	2100	66	1650	RWPREC-1884	91220	111.9
96	2400	78	1950	RWPREC-1896	91221	128.6

Lead time: 1 working day

Shaded items are made to order.
Lead time: 10 working days

Richwood® is a registered trademark of Richwood Industries, Inc.
The replacement parts described herein are designed and made by Flexco.
Flexco is not affiliated with or authorized by Richwood.

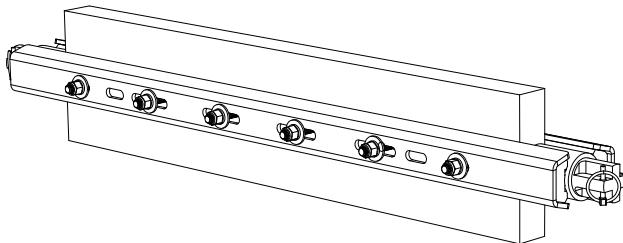

Product Notes:

- For optimal cleaning and reduced blade retensioning maintenance, the cleaner blade width should be sized to fit the material path of the belt. The material path is typically 2/3 of the belt width. In most cases a blade size of belt width minus 6" (150 mm) may be the best selection.
- Each cleaner can be retrofitted with multiple standard replacement blade sizes belt width minus 6" (150 mm), 12" (300 mm), and 18" (450 mm), and provides additional options for custom-fit material paths.
- Blades can be worn until 1/4" (6 mm) above the blade holder, then rotated 180° for a second blade wear area.
- Works with mechanical or vulcanized splices.
- Pole end adjustment allows the blade to be set at a perfect attack angle for the application.
- Replacement blades with this design are simple and easy – no longer do you need to purchase an entire blade/pole assembly to replace the blade.

Product Ordering Information

Retrofit Blades

BLADE WIDTH in.	BLADE WIDTH mm	ORDERING NUMBER	ITEM CODE	WT. LBS.
18	450	RWPBLD-18	90087	12.7
24	600	RWPBLD-24	90088	16.9
30	750	RWPBLD-30	90089	21.1
36	900	RWPBLD-36	90090	25.3
42	1050	RWPBLD-42	90091	29.6
48	1200	RWPBLD-48	90092	33.8
54	1350	RWPBLD-54	90093	38.0
60	1500	RWPBLD-60	90094	42.2
66	1650	RWPBLD-66	90095	46.5
72	1800	RWPBLD-72	90096	50.7
78	1950	RWPBLD-78	90097	54.9
84	2100	RWPBLD-84	90098	59.1
90	2250	RWPBLD-90	90099	63.4

*Hardware included


Lead time: 1 working day

Shaded items are made to order.

Lead time: 10 working days

Richwood® 1C Cleaner Flexco Retrofit Replacement Blades

Richwood® is a registered trademark of Richwood Industries, Inc.
The replacement parts described herein are designed and made by Flexco.
Flexco is not affiliated with or authorized by Richwood.

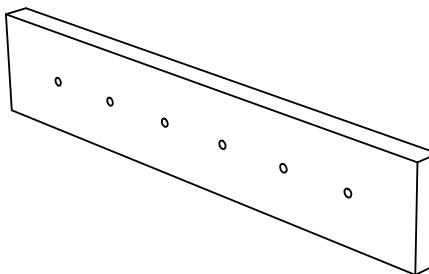

Product Ordering Information


Richwood® 1C Cleaner Flexco Retrofit Replacement Blades

Retrofit Blade/Holder

BELT WIDTH		FLAT BLADE		CURVED BLADE	
in.	mm	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE
18	450	RWSECS-18F	91417	RWSECS-18C	91560
24	600	RWSECS-24F	91418	RWSECS-24C	91561
30	750	RWSECS-30F	91419	RWSECS-30C	91562
36	900	RWSECS-36F	91420	RWSECS-36C	91563
42	1050	RWSECS-42F	91421	RWSECS-42C	91564
48	1200	RWSECS-48F	91422	RWSECS-48C	91565
54	1350	RWSECS-54F	91423	RWSECS-54C	91566
60	1500	RWSECS-60F	91424	RWSECS-60C	91567
72	1800	RWSECS-72F	91425	RWSECS-72C	91568
84	2100	RWSECS-84F	91426	RWSECS-84C	91569
96	2400	RWSECS-96F	91427	RWSECS-96C	91570

Lead time: 1 working day

Richwood® is a registered trademark of Richwood Industries, Inc.
The replacement parts described herein are designed and made by Flexco.
Flexco is not affiliated with or authorized by Richwood.

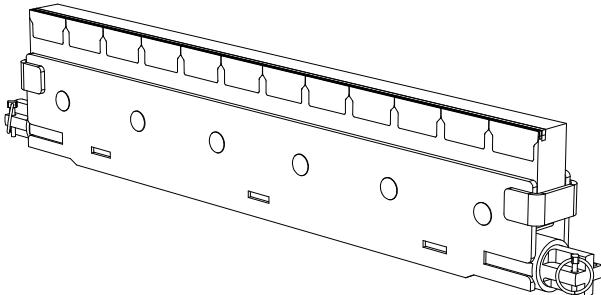


Replacement Blades

BELT WIDTH		FLAT BLADE		CURVED BLADE	
in.	mm	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE
18	450	CBSBLD18F	79947	CBSBLD18C	91527
24	600	CBSBLD24F	79948	CBSBLD24C	91528
30	750	CBSBLD30F	79949	CBSBLD30C	91529
36	900	CBSBLD36F	79950	CBSBLD36C	91530
42	1050	CBSBLD42F	79951	CBSBLD42C	91531
48	1200	CBSBLD48F	79952	CBSBLD48C	91532
54	1350	CBSBLD54F	79953	CBSBLD54C	91533
60	1500	CBSBLD60F	79954	CBSBLD60C	91534
72	1800	CBSBLD72F	79955	CBSBLD72C	91535
84	2100	CBSBLD84F	79956	CBSBLD84C	91536
96	2400	CBSBLD96F	79957	CBSBLD96C	91537

Lead time: 1 working day

Shaded items are made to order.
Lead time: 3 weeks

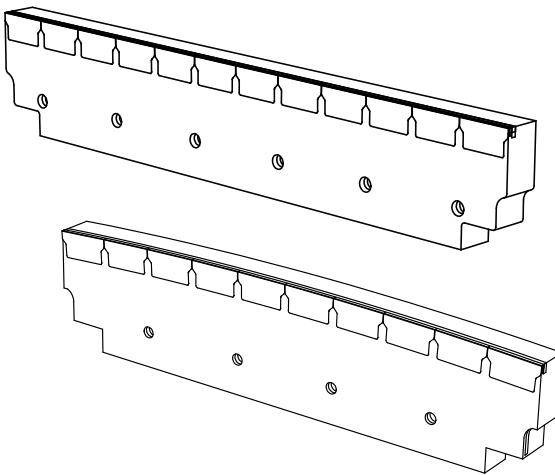

Product Notes:

- Works with mechanical or vulcanized splices.
- Pole end adjustment allows the blade to be set at a perfect attack angle for the application.
- Replacement blades with this design are simple and easy – no longer do you need to purchase an entire blade/pole assembly to replace the blade.

Optional Mounting Kits


Installation Accessories

OPTIONAL MOUNTING KITS FOR BELT CLEANERS

Versatile, adjustable brackets and plates that can be mounted on the conveyor structure so precleaners and secondary cleaners can be easily and quickly bolted into place.


75830

- Optional Mounting Bar Kit
(with bolts, nuts and washers)
- For mounting precleaners on open head pulleys.
 - Weld on both sides of pulley and bolt on steel plates.
 - For use with MSP, MMP, MHP, MHCP




76071

- Standard Mounting Bracket Kit
- For MHS/MDWS secondary cleaner installs.




76537

- Mounting Plate Kit (incl. 2 plates, 16" x 32" (400 mm x 800 mm))
- For use with Mounting Bars to mount cleaners on open head pulleys.
 - For use with MSP, MMP, MHP, MHCP




76072

- Long Mounting Bracket Kit
- For installations that require extra length legs.




76073

- Optional Top Angle Kit
- Used with both standard and long mounting bracket kits for additional mounting options.



79536

- Brush Cleaner Drop Bracket Kit
- For brush cleaner installations that require extra length legs.

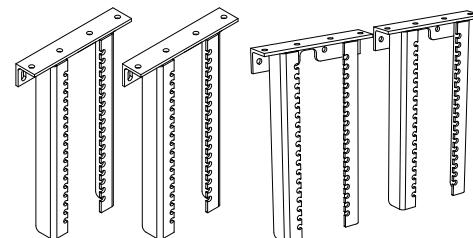

113390 & 79850

- Y-Type SD & HD Drop Bracket Kits
- For Y-Type cleaner installations that require extra length legs.

Optional Mounting Kits (incl. 2 brackets/bars)

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Standard Mounting Bracket Kit *	SSTSMB	76071	34.3
Long Mounting Bracket Kit *	SSTLMB	76072	43.5
Optional Top Angle Kit *	SSTOTA	76073	10.5
Optional Mounting Bar Kit *	MMBK	75830	19.5
Mounting Plate Kit (incl. 2 plates)	MMPK	76537	140.0
Brush Cleaner Drop Brackets (2)	MBCDBK	79536	28.9
Y-Type Standard Duty Drop Brackets (2)	YSTDBK2	113390	32.0
Y-Type Heavy Duty Drop Brackets (2)	YSTHDBK	79850	32.1

*Hardware Included

Lead time: 1 working day

Pole Extender Kit (incl. 2 pole extenders)

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
2-7/8" (73mm) Pole Extender Kit	MAPEK	76024	21.9
2-3/8" (60mm) Pole Extender Kit	RAPEK	77423	18.0

Provides 30" (750 mm) of extended pole length.


Lead time: 1 working day

Specs and Notes:

- Standard brackets are 13" x 15-1/2" (330 mm x 394 mm).
- Long brackets are 13" x 21-1/2" (330 mm x 546 mm).
- Mounting bars are 1-1/2" x 16" (38 mm x 400 mm) with (4) 5/8-11 tapped holes.
- Mounting plates are 16" x 32" (400 mm x 800 mm) with (4) 5/8" (16 mm) holes.


77423

2-3/8" Pole Extender Kit



76024

2-7/8" Pole Extender Kit



Product Ordering Information




Spring Tensioner Accessories

Spring Covers

ORDERING NUMBER	ITEM CODE	WT. LBS.
SPG-CVR-A	77387	0.3
SPG-CVR-B	77388	0.3
SPG-CVR-C	77389	0.3
SPG-CVR-D	77390	0.4
SPG-CVR-E	77391	0.4
SPG-CVR-F	77392	0.3
SPG-CVR-G	77393	0.3
SPG-CVR-H	77741	0.3

Includes 1 spring cover

Lead time: 1 working day

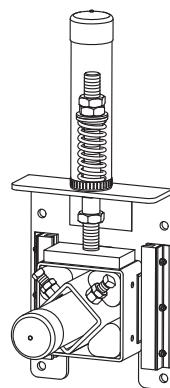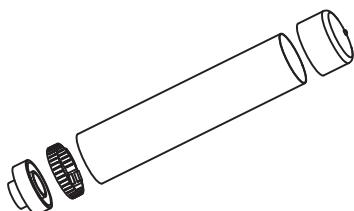

Tensioner Lock*



Designed to prevent tampering or unauthorized retensioning of the cleaner.

ORDERING NUMBER	ITEM CODE	WT. LBS.
TEN-LOCK-KIT	77443	0.4

*For MSP, MMP, MHP, MHCP, H-Type Precleaners and MSS, MHS, MDWS Secondary Cleaners

Includes 1 tensioner lock

Lead time: 1 working day

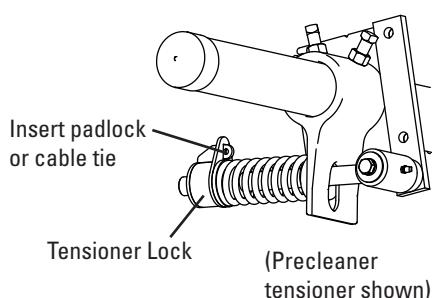

Insert padlock
or cable tie

Tensioner Lock
(Precleaner
tensioner shown)

Spring cover on
Precleaner tensioner

Spring cover on Secondary
cleaner tensioner

Spring Cover Selection Chart

TENSIONER	SPRING COVER REQ'D
EST-P	77387
EST-S	77387
EST-B	77388
QMT-P	77389
QMT-W	77390
QMT-G	77391
QMT-S	77391
PST-R	77391
PST-W	77390
PST-S	77390
SST-W	77392
SST-S	77392
SST-B	77393
SST-G	77392
UST-P	77387
UST-S	77387
UST-W	77390
CST-W	77741
CST-S	77741
CST-B	77741
CST-G	77741


Product Ordering Information

Inspection Door

Inspection Doors

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Inspection Door 12 x 12" (300 x 300mm)*	INDR-1212	79303	19.2
Inspection Door 12 x 18" (300 x 450mm)*	INDR-1218	79304	23.5
Inspection Door 18 x 24" (450 x 600mm)*	INDR-1824	79305	35.2
Inspection Door 24 x 24" (600 x 600mm)*	INDR-2424	79306	42.8
Inspection Door w/Screen 12 x 12" (300 x 300mm)*	INDR-1212S	79307	21.2
Inspection Door w/Screen 12 x 18" (300 x 450mm)*	INDR-1218S	79308	26.0
Inspection Door w/Screen 18 x 24" (450 x 600mm)*	INDR-1824S	79309	39.7
Inspection Door w/Screen 24 x 24" (600 x 600mm)*	INDR-2424S	79310	48.3

*Hardware included

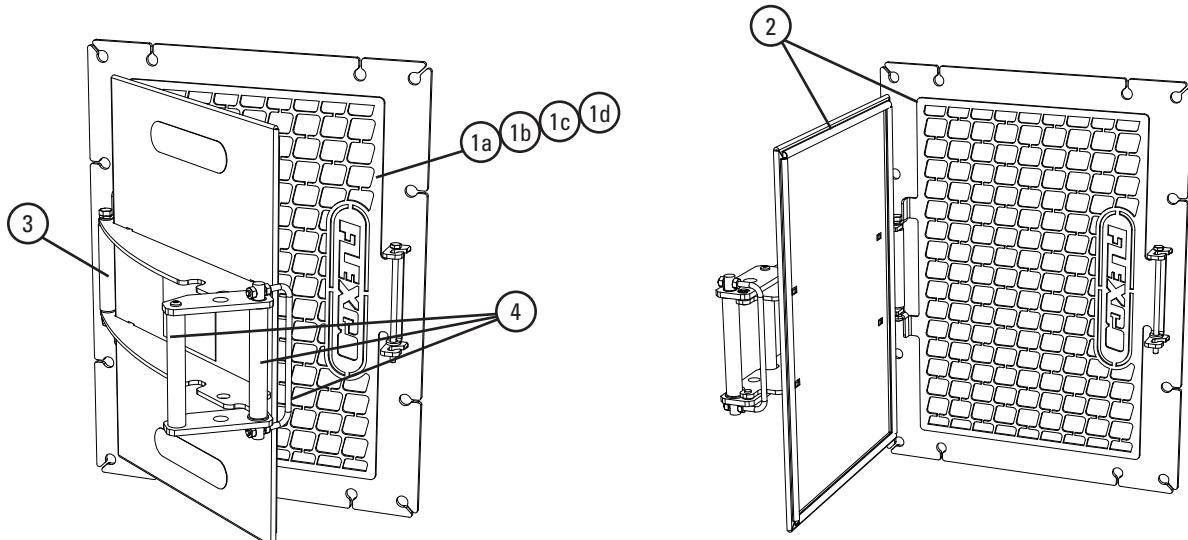

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1a	Inspection Door Screen 12 x 12" (300 x 300mm)*	IDSC-1212	79311	1.9
1b	Inspection Door Screen 12 x 18" (300 x 450mm)*	IDSC-1218	79312	2.5
1c	Inspection Door Screen 18 x 24" (450 x 600mm)*	IDSC-1824	79313	4.4
1d	Inspection Door Screen 24 x 24" (600 x 600mm)*	IDSC-2424	79314	5.5
2	Replacement Seal - 5' (1.5 m)**	IDSEAL	79315	0.1
3	Replacement Hinge	IDHINGE	79316	0.2
4	Replacement Latch (incl. bolt, bushings & nut)	IDLATCH	79317	2.5

*Hardware included



**One 5' length of seal is needed for 12 x 12" and 12 x 18" doors or screens, and two 5' lengths are needed for 18 x 24" and 24 x 24" doors or screens. Double if replacing seal on both door and screen.

Specifications & Guidelines

Inspection Door

Inspection Door Specifications

Door (Opening) Size (Width x Length)		Outer Dimensions (Width x Length)		Height	
in.	mm	in.	mm	in.	mm
12 x 12	300 x 300	16-5/16 x 15-3/4	415 x 400	3-7/16	90
12 x 18	300 x 450	16-5/16 x 21-3/4	415 x 555	3-7/16	90
18 x 24	450 x 600	22-5/16 x 27-3/4	570 x 705	3-7/16	90
24 x 24	600 x 600	28-5/16 x 27-3/4	720 x 705	3-7/16	90

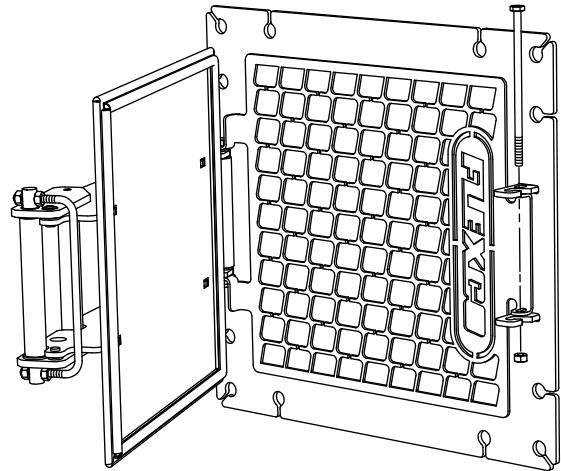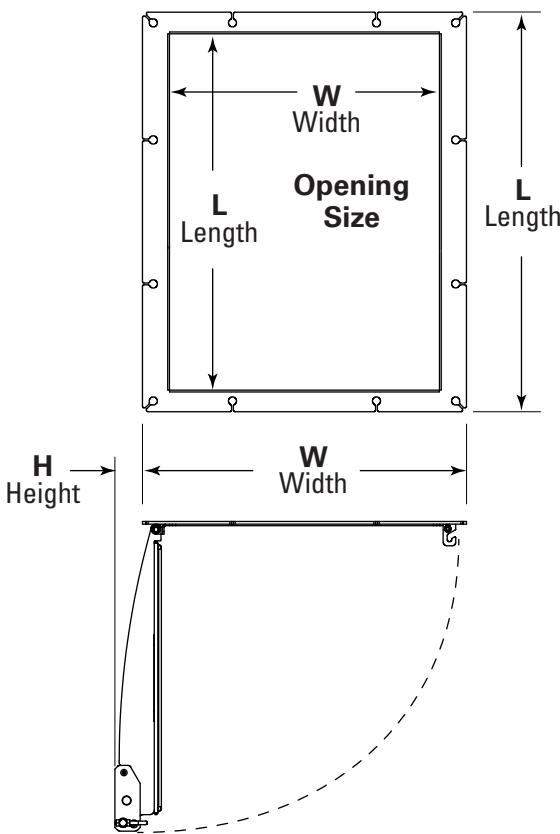

Screen (Optional)

Screen serves as a guard that helps keep hands and tools from being placed into the chute/enclosure, but still allows visual access. Screen is hinged on the same side as the door and bolted in place on the other side so it does not require full removal for accessing the chute/enclosure. A wrench is required to remove the bolt that holds the screen in place as a safety feature.
(Holes are sized per ANSI B11 and ISO 1819.)

Specifications:

- Temperature Rating -70 to 350°F (-55 to 175°C)

Product Ordering Information

Water Spray Pole Systems Belt Cleaner Accessories

Spray Pole Kits*


Standard & Heavy-Duty

BELT WIDTH	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm		
18	450	SPK18	23.0
24	600	SPK24	23.0
30	750	SPK30	24.0
36	900	SPK36	24.0
42	1050	SPK42	25.5
42	1050	SPKHD42	26.5
48	1200	SPK48	26.0
48	1200	SPKHD48	27.0
54	1350	SPK54	27.0
54	1350	SPKHD54	28.0
60	1500	SPK60	28.0
60	1500	SPKHD60	29.0
72	1800	SPK72	30.0
72	1800	SPKHD72	32.0
84	2100	SPKHD84	34.0
96	2400	SPKHD96	36.0
120	3000	SPKHD120	40.0

*Includes Spray Pole, Mounting Brackets, and 10' (3 m) Hose.
Standard-duty is for use on P-Type®, R-Type®, U-Type® 18–60" (450–1500 mm), Y-Type®SD, and EZS2 cleaners; Heavy-duty is for use on H-Type®, U-Type® 72–96" (1800–2400 mm), Y-Type®HD, FMS, CBS, MHS, and MDWS cleaners.

Other sizes available upon request.

Lead time: 1 working day

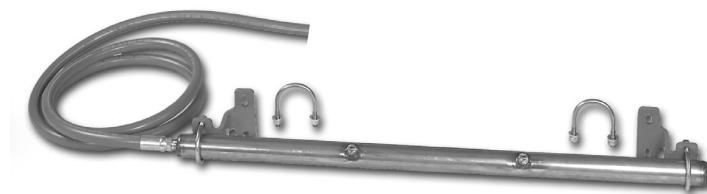

Spray Pole



Spray Pole Control Panel


Replacement Parts

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Standard Spray Pole Mounting Kit	SPMK2	75578	3.6
HD Spray Pole Mounting Kit	SPMK3	75579	3.7
SP Ball Valve	SPBV	74742	0.6
SP Y Strainer	SPYS	74743	1.5
SP Pressure Regulator	SPPR	74744	1.2
SP Hose 10'	SPH10	74745	2.9
Spray Pole Nozzle	SPN	74746	0.1
Spray Pole Gauge	SPG	74747	0.5
SP SS Pipe Nipple	SPPN	74748	0.1

Lead time: 1 working day

Spray Nozzles Per Cleaner Size

in.	18	24	30	36	42	48	54	60	72	84	96	120
mm	450	600	750	900	1050	1200	1350	1500	1800	2100	2400	3000
No. Spray Nozzles	1	2	2	3	3	4	4	5	6	7	8	10

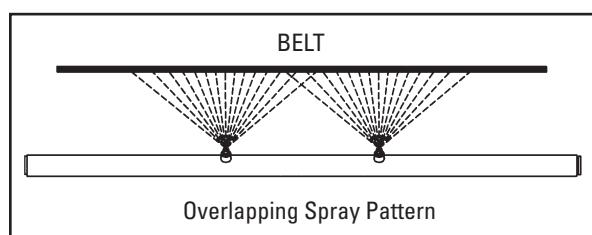

Control Assembly

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
SP Control Panel with Regulator, Strainer and Pressure Gauge	SPCP	74734	16.5


Lead time: 1 working day

Specifications:

- Stainless steel pole with powder coated steel clamping brackets.
- Spray nozzles are spaced on 12" (300 mm) centers.
- Delivers .98 gallons (3.7 liters) per minute at 60 PSI (414 kPa).
- Generally will affect moisture content of material by less than ½%.
- Maximum inlet pressure is 300 PSI (2069 kPa).
- Typical pressure setting is 40–60 PSI (276–414 kPa).

Product Ordering Information

Wash Box

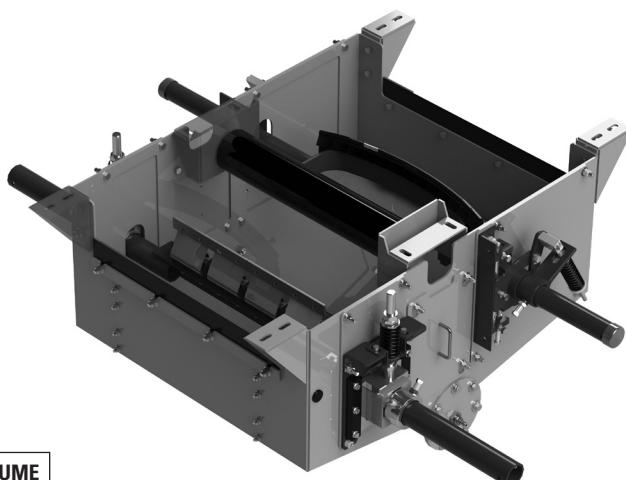

Wash Box

BELT WIDTH		DRAIN	ORDERING NUMBER	ITEM CODE	WT. LBS.	FLUSH HOLES PER BELT WIDTH	VOLUME CU. FT.
in.	mm						
24	600	Rear	WB24-2-S/S	K2546	484.91	5	22.66
30	750	Rear	WB30-2-S/S	K2547	532.57	5	26.39
36	900	Rear	WB36-2-S/S	K2548	574.70	6	30.11
42	1050	Rear	WB42-2-S/S	K2549	616.83	6	33.84
48	1200	Rear	WB48-2-S/S	K2550	658.96	7	37.56
54	1350	Rear	WB54-2-S/S	K2551	701.09	7	41.29
60	1500	Rear	WB60-2-S/S	K2552	743.22	8	45.01
72	1800	Rear	WB72-2-S/S	K2553	827.48	9	52.46
84	2100	Rear	WB84-2-S/S	K2554	911.74	10	59.91
96	2400	Rear	WB96-2-S/S	K2555	996.00	11	67.36
24	600	Center	WB24C-2-S/S	K2686	462.72	9	20.71
30	750	Center	WB30C-2-S/S	K2687	504.00	9	24.12
36	900	Center	WB36C-2-S/S	K2688	544.17	11	27.52
42	1050	Center	WB42C-2-S/S	K2689	585.45	11	30.93
48	1200	Center	WB48C-2-S/S	K2690	626.73	13	34.33
54	1350	Center	WB54C-2-S/S	K2691	668.01	13	37.74
60	1500	Center	WB60C-2-S/S	K2692	709.29	15	41.14
72	1800	Center	WB72C-2-S/S	K2693	791.85	17	47.95
84	2100	Center	WB84C-2-S/S	K2694	874.41	19	54.76
96	2400	Center	WB96C-2-S/S	K2695	956.97	21	61.57

The dimensions, mass & volumes shown here are nominal for a standard Flexco Wash Box and will be confirmed to suit each specific application. Each flush hole's flow rate is approximately 0.13 gallon per minute at 60 PSI.

Lead-time: 4–6 weeks

Control Assembly

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
SP Control Panel with Regulator, Strainer and Pressure Gauge	SPCP	74734	16.5


Lead time: 1 working day

Product Notes:

- Flexco Wash Box system provides a high-efficiency customized belt cleaning solution for even the toughest applications.
- Fully enclosed to clean the belt and then contain the waste wash water.
- Washdown sprays flush material off the bottom pan and out the drain portal.
- Custom mounting plates match cleaner selection for optimal sealing.
- Hinged doors located on each side for easy inspection.
- Built-in belt spray bar enhances cleaning efficiency and simplifies cleaner service.

Specifications & Guidelines

Wash Box

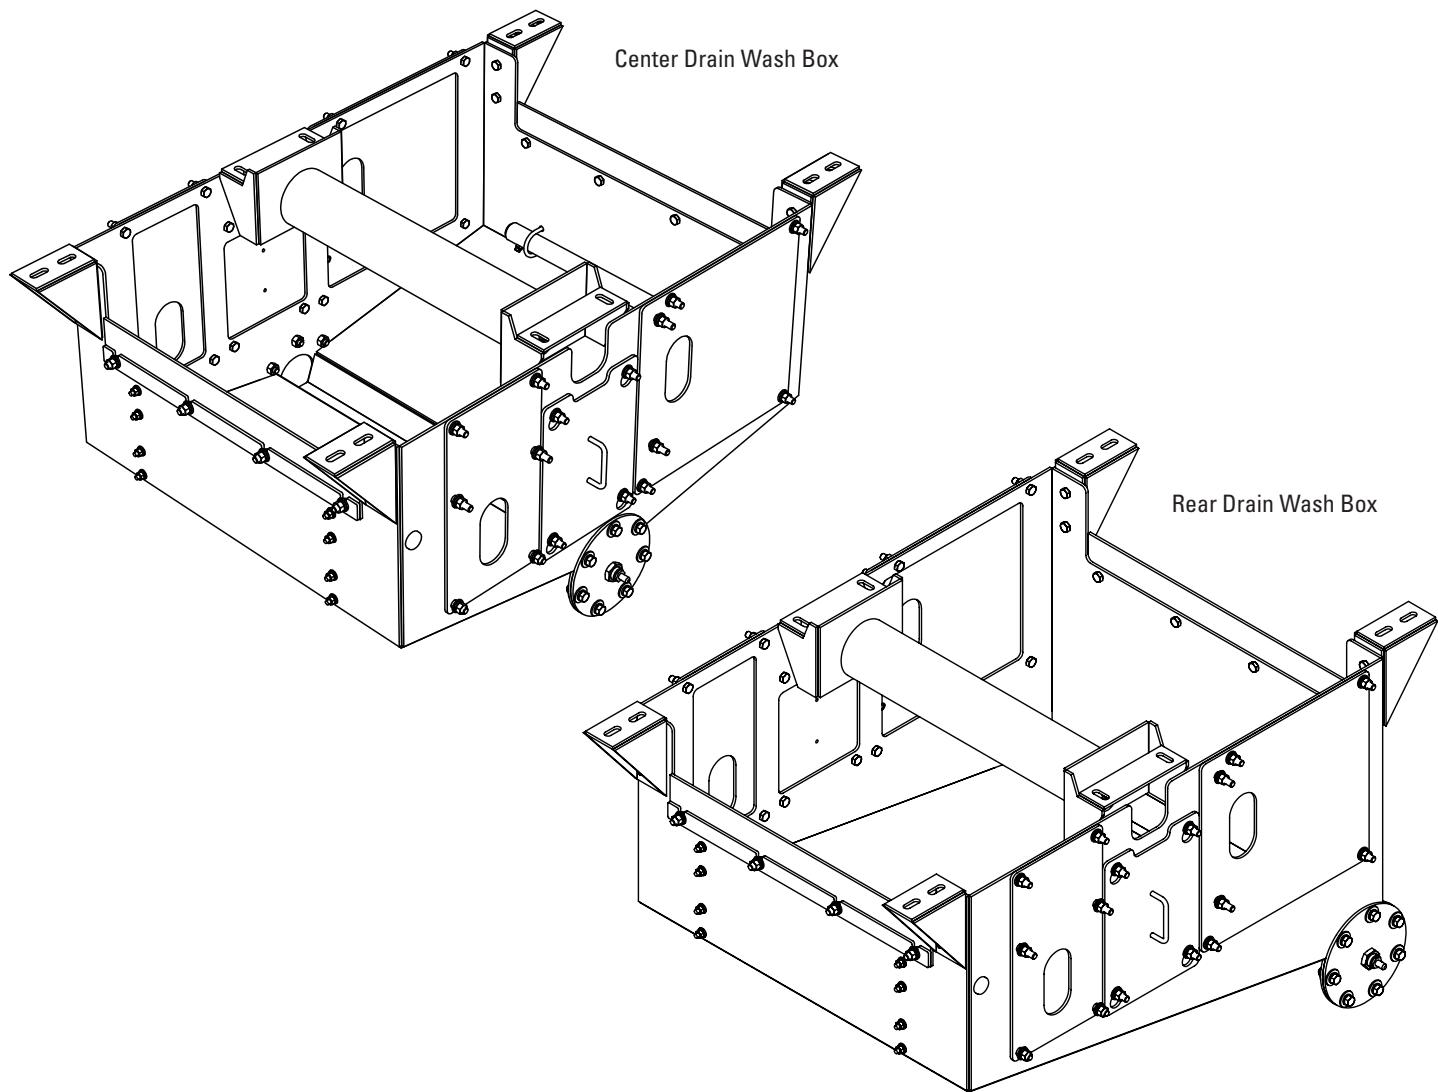

Specifications:

- Maximum Belt Speed 1500 FPM (7.6 m/s)
- Temperature Rating -30 to 180°F (-35 to 192°C)
- Available for Belt Widths 24 to 96" (600 to 2400 mm)
- Drain Options Rear Drain (suitable for most applications)
Center Drain (suitable for conveyors level to ground)
- Construction Materials 304 Stainless
- For Use With Any Flexco Secondary Cleaner Combination

Product Ordering Information

Stabilizing Roller Bracket Kit Belt Cleaner Accessories


Stabilizing Roller Bracket Kit*

Provides universal brackets to mount the user's return roller as a hold-down (stabilizing) roller on top of the return side belt. Holds the belt flat so the belt cleaner can maximize its cleaning performance.

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Stabilizing Roller Bracket Kit	SRBK	74941	34.0

*Works with most CEMA C and D rollers.

Lead time: 1 working day

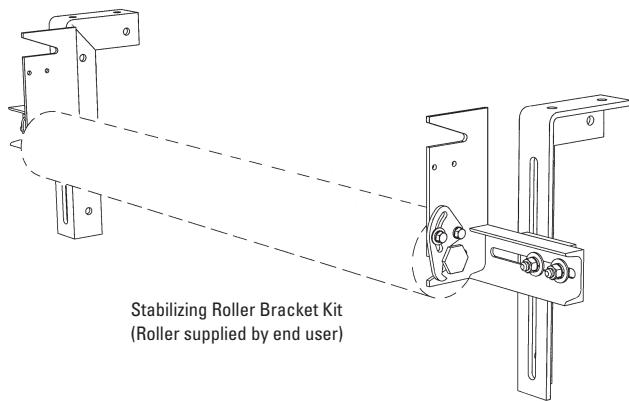

Product Ordering Information

Live-Shaft Hold-Down Roll Belt Cleaner Accessories


Live-Shaft Hold-Down Roll

BELT WIDTH	ROLL DIAMETER	ORDERING NUMBER	ITEM CODE	WT. LBS
in.	mm	in.	mm	
24	600	4 1/2	114	HDR24
30	750	4 1/2	114	HDR30
36	900	4 1/2	114	HDR36
42	1050	4 1/2	114	HDR42
48	1200	4 1/2	114	HDR48
54	1350	4 1/2	114	HDR54
60	1500	4 1/2	114	HDR60
72	1800	5	127	HDRS72*
84	2100	5	127	HDRS84*
				79018
				615.0

Includes roller bracket kit.

*72 and 84" (1800 and 2100 mm) feature solid roll.

Lead time: 1 working day

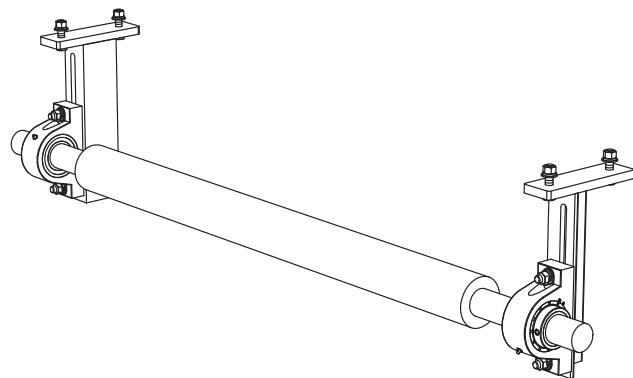

Replacement Roll

BELT WIDTH	ROLL DIAMETER	ORDERING NUMBER	ITEM CODE	WT. LBS
in.	mm	in.	mm	
24	600	4 1/2	114	HDRR24
30	750	4 1/2	114	HDRR30
36	900	4 1/2	114	HDRR36
42	1050	4 1/2	114	HDRR42
48	1200	4 1/2	114	HDRR48
54	1350	4 1/2	114	HDRR54
60	1500	4 1/2	114	HDRR60
72	1800	5	127	HDRRS72*
84	2100	5	127	HDRRS84*
				79027
				570.0

*72 and 84" (1800 and 2100 mm) feature solid roll.

Lead time: 1 working day

Roller Bracket Kit*

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS
Hold Down Roll Bracket Kit 24–60" (600–1500mm)	HDRBK	79009	45.0
HD Hold Down Roll Bracket Kit 72–84" (1800–2100mm)	HDRBK-HD	79072	45.0

*Includes Left and Right Bracket

Lead time: 1 working day

Add-On Grease Hose Extension Kit

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS
Grease Hose Extension Kit (incl. (2) ea. 16" hose w/fittings and tie-downs)	HDRGEK	79236	1.0

Lead time: 1 working day

Specifications:

- Overall Roll Length Belt Width +6" (150 mm)
- Overall Shaft Length Belt Width +30" (750 mm)
- Shaft Diameter 24–42" (600–1050 mm) – 1-15/16" diameter
48–60" (1200–1500 mm) – 2-7/16" diameter
72–84" (1800–2100 mm) – 2-15/16" diameter
- Shaft Construction 24–60" (600–1500 mm) – 1045 CD
72–84" (1800–2100 mm) turned from solid 4140 round stock

Product Notes:

- For use in applications with belt cup or belt flap.
- By preventing these issues secondary cleaner performance and blade/tip life is enhanced.


Product Ordering Information

Tip Tension Scale

For easy checking of blade tension on all H-Type® Precleaners.

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
H Tip Tension Scale	HTTS	74141	0.1

Lead time: 1 working day

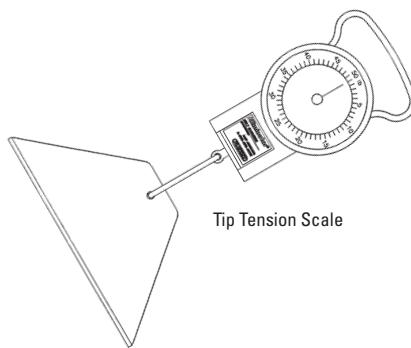

Tip Tension Scale

Spring Tension Chart

CLEANER	HXF	H V-Tip	H Protected V-Tip	High-Temp V-Tip
LBS.	28	18	18	18
KG.	12.7	8.2	8.2	8.2

For installation and for retensioning blades during maintenance.


Cleaner Location Tool

Handy 2-in-1 tool for measuring and leveling during cleaner installation.

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Location Tool	ELT	74774	0.3

Length - 24" (600 mm)

Lead time: 1 working day

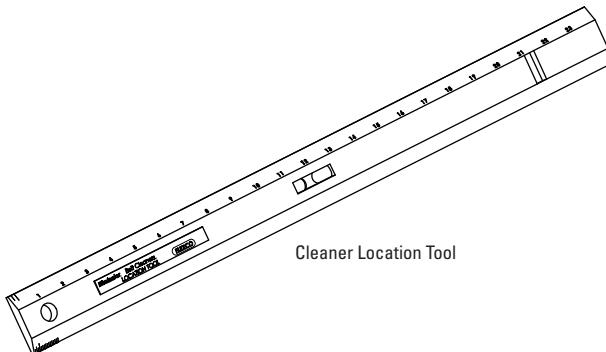


Cleaner Location Tool

Belt Cleaner Handy Wrench

A ratcheting wrench with 2 common socket sizes (11/16 & 3/4" (17 & 19 mm)) for belt cleaner installation and maintenance.

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Belt Cleaner Handy Wrench	HW-BC	74100	1.2


Lead time: 1 working day

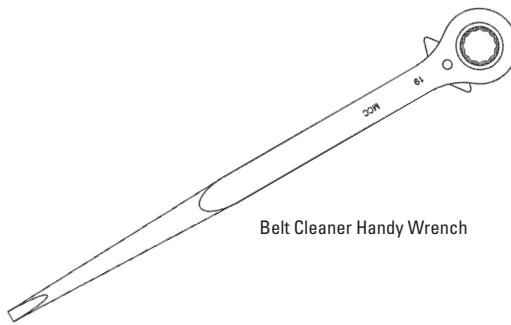

Belt Cleaner Handy Wrench

Product Ordering Information

Old-Style H-Type® Cleaners Legacy Belt Cleaner Parts

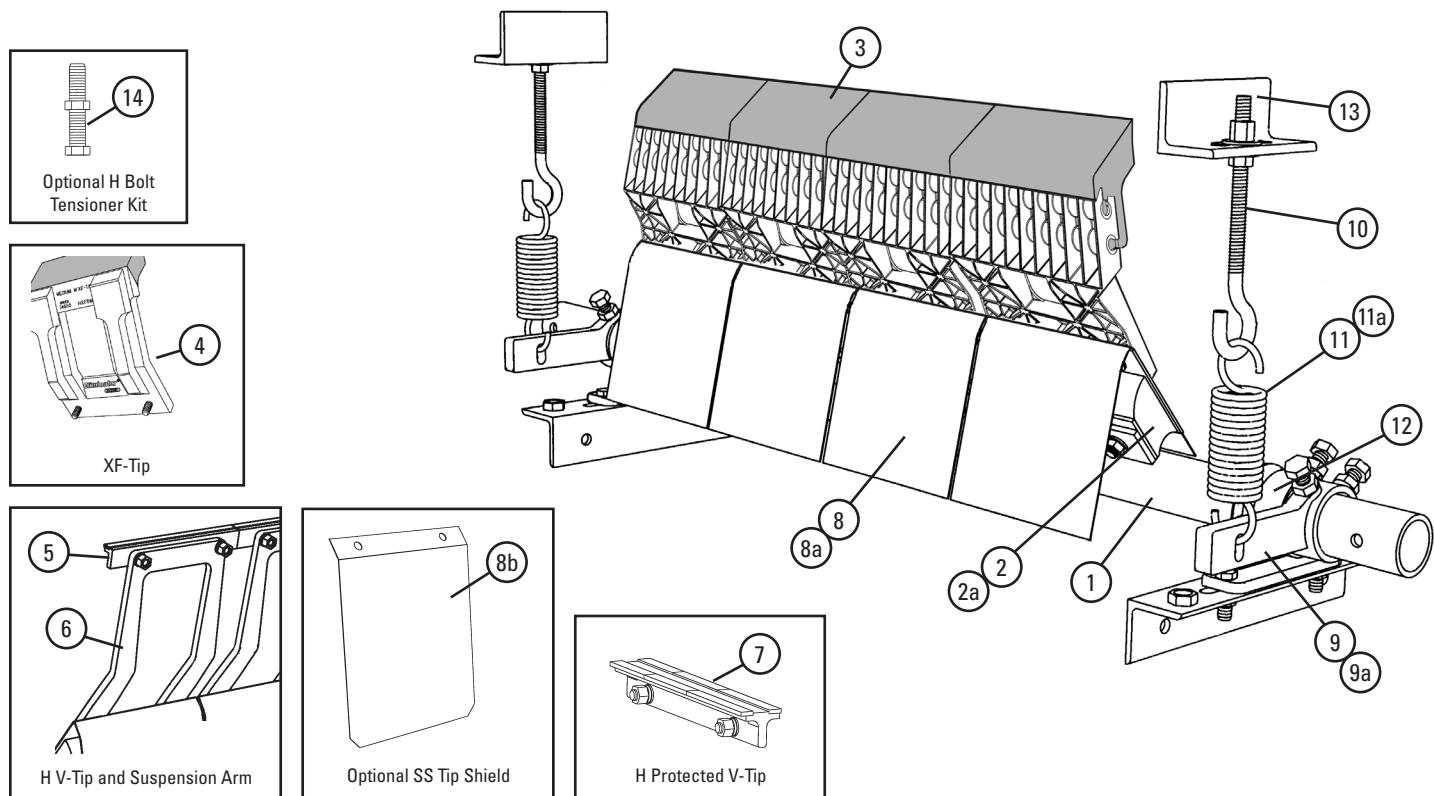

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	18" (450mm) Pole	HP-18	78990	23.0
	24" (600mm) Pole	HP-24	78991	27.0
	30" (750mm) Pole	HP-30	78992	29.0
	36" (900mm) Pole	HP-36	78993	33.0
	42" (1050mm) Pole	HP-42	78994	43.0
	48" (1200mm) Pole	HP-48	78995	47.0
	54" (1350mm) Pole	HP-54	78996	53.0
	60" (1500mm) Pole	HP-60	78997	59.0
	72" (1800mm) Pole	HP-72	78998	66.0
2	H2 XF-Tip Cushion* (for HXF2 & HV Tips)	HXFC2	75902	4.0
2a	H2 F-Tip Cushion* (for SS HXF2 & SS HV Tips)	HFC2	75901	4.0
3	HXF2-Tip Extra Small*	HXF2-SS	75979	3.0
	HXF2-Tip Small*	HXF2-S	75980	3.4
	HXF2-Tip Medium*	HXF2-M	75981	3.8
	HXF2-Tip Large*	HXF2-L	75982	4.1
4	H XF-Tip Extra Small*	HXF8SS	74307	3.4
	H XF-Tip Small*	HXF8S	74689	3.8
	H XF-Tip Medium*	HXF8M	74690	4.1
	H XF-Tip Large*	HXF8L	74691	4.5
5	H V-Tip (for vulcanized belts only)	HVT8-S/S	75419	1.0
6	H SSS Suspension Arm*	HSA8SSS	75565	0.4
	H SS Suspension Arm*	HSA8SS	73047	0.5
	H S Suspension Arm*	HSA8S	73048	1.0
	H M Suspension Arm*	HSA8M	73049	1.5
	H L Suspension Arm*	HSA8L	73063	2.0
	H LL Suspension Arm*	HSA8LL	73064	2.5
7	H Protected V-Tip* (for vulcanized belts only)	HVPT	73631	2.7

*Hardware included

Pole Diameter - 2-3/8" (60 mm)

Lead time: 1 working day



Shaded items are made to order.

Lead time: 10 working days

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
8	H Polyshield	HPS8	73050	0.5
8a	H SS Cushion Shield	HSSCS	74772	0.6
8b	H SS Tip Shield	HSSTS	74771	0.5
9	H Adjusting Arm Repair Kit* (incl. (1) adjusting arm)	HAR-K	78786	6.0
9a	H HD Adjusting Arm Repair Kit* (incl. (1) adjusting arm)	HDARK	74550	8.0
10	J-Bolt Kit* (1 ea.)	STJK	74417	0.7
11	Tension Spring (1 ea.) for 18" (450mm)	STTS	74419	1.4
11a	HD Tension Spring (1 ea.) for sizes 24-72" (600-1800mm)	HDT5	74502	2.0
12	Pole Lock (1 ea.)	EZP1PL	75641	1.1
13	Spring Tensioner J-Bolt Mount (1 ea.)	STJM	74775	3.0
-	H Mounting/J-Bolt Kit - Single (incl. (1) ea. items 9-13, (2) ea. bracket/bearing)	H-MK1	78987	20.0
-	H Mounting/J-Bolt Kit - Dual (incl. (2) ea. items 9-13, bracket/bearing)	H-MK2	78801	24.4
-	Spring Tension Kit - Single (incl. (1) ea. items 10, 11, 13, (2) ea. item 12)	STKS	74505	6.8
-	Spring Tension Kit - Dual (incl. (2) ea. items 10-13)	STKD	74504	11.2
-	Spring Tension Kit HS - Single (incl. (1) ea. items 10, 11a, 13, (2) ea. item 12)	STKHSS	74313	8.0
-	Spring Tension Kit HS - Dual (incl. (2) ea. items 10, 11a, 12, 13)	STKHSD	74316	16.0
14	H Bolt Tensioner Kit (incl. (2) adjusting bolts, (2) jam nuts)	HBTK	74776	0.5

Product Ordering Information

I-Type™
Legacy Belt Cleaner Parts

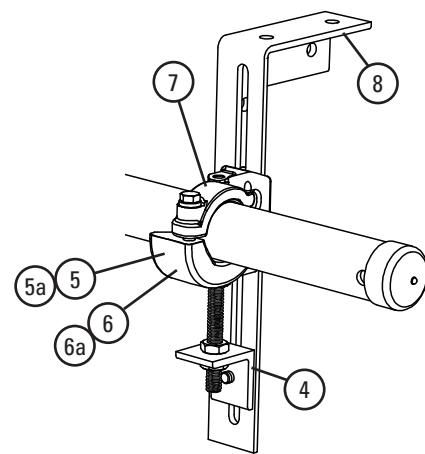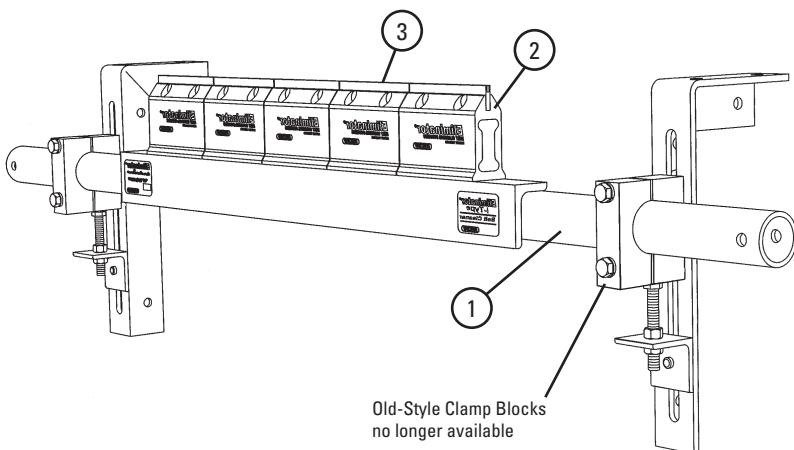

New Style Clamp Block

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	18" (450mm) Pole	EZS2P18	75652	25.0
	24" (600mm) Pole	EZS2P24	75653	28.0
	30" (750mm) Pole	EZS2P30	75654	30.0
	36" (900mm) Pole	EZS2P36	75655	34.0
	42" (1050mm) Pole	EZS2P42	75656	36.0
	48" (1200mm) Pole	EZS2P48	75657	39.0
	54" (1350mm) Pole	EZS2P54	75658	42.0
	60" (1500mm) Pole	EZS2P60	75659	77.0
	72" (1800mm) Pole	EZS2P72	75660	89.0
2	I Standard Cushion*	ISC	74534	2.1
3	I C-Tip* (for mechanically spliced and vulcanized belts)	ICT6	74535	0.7
4	Adjusting Bracket Kit (1 Right and 1 Left)	PAB	75513	1.5
5	Pole Clamp Kit - Left* (1 ea.) (incl. item 7) for sizes 18-54" (450-1350mm)	CCKL	79224	6.8
5a	HD Pole Clamp Kit - Left* (1 ea.) (incl. item 7a) for sizes 60-72" (1500-1800mm)	CCKHDL	79225	8.7
6	Pole Clamp Kit - Right* (1 ea.) (incl. item 7) for sizes 18-54" (450-1350mm)	CCKR	79228	6.8
6a	HD Pole Clamp Kit - Right* (1 ea.) (incl. item 7a) for sizes 60-72" (1500-1800mm)	CCKHDR	79229	8.7
7	Cradle Clamp Top Strap (1 ea.) for use on L or R Pole Clamp Kit	CCKTS	79232	1.1
7a	HD Cradle Clamp Top Strap (1 ea.) for use on L or R HD Pole Clamp Kit	CCKHDTs	79233	1.7
8	Mounting Bracket Kit (1 Right and 1 Left)	EZS2MBK	75666	13.0
-	Cradle Clamp Mounting Kit* (incl. (1) ea. items 5, 6, & 8, (2) ea. items 4 & 7) for sizes 18-54" (450-1350mm)	CCMK	78919	33.0
-	HD Cradle Clamp Mounting Kit* (incl. (1) ea. items 5a, 6a, & 8, (2) ea. items 4 & 7a) for sizes 60-72" (1500-1800mm)	CCMKHD	78920	36.7


*Hardware included.

Pole Diameter - 2-3/8" (60 mm)

Lead time: 1 working day

Part Number Cross-Reference Guide

ConShear™ Replacement Blades
for OEM Belt Cleaners

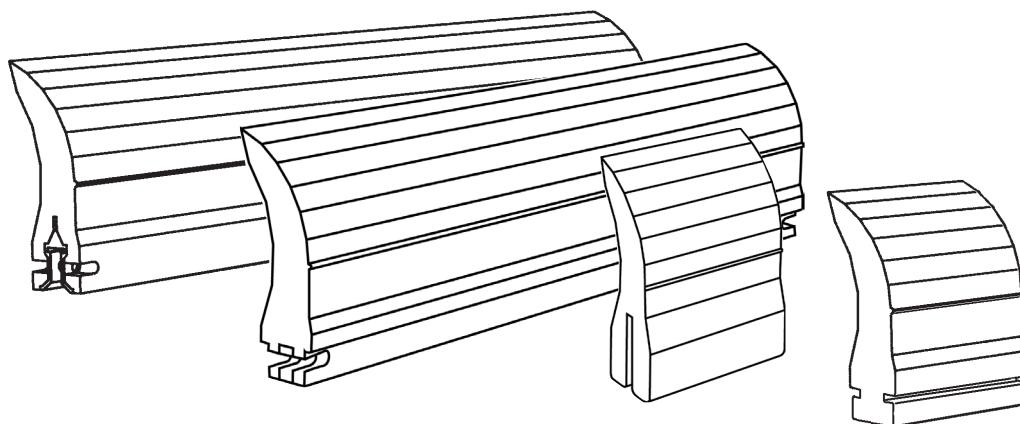

ConShear™ Blade Technology

The patented polyurethane blade design that delivers a conforming and shearing action to provide consistent belt cleaning.

- **Faceted Profile** – the blade forms a new cleaning edge each time the blade wears down to a new faceted section.
- **Long Wearing** – a proprietary polyurethane blend that provides up to 30% more wear life than conventional solid blades.
- **Material Path Option** – choose the blade size that spans just the material path on the belt. This minimizes differential wear between the ends and the center of the blade. It allows the blade to conform better to the belt for more cleaning power. See next page for more information.
- **Replacement Indicator** – a molded-in wear line provides easy visual notice when the blade is worn out and needs to be replaced.
- **Quick, Easy Change-Out** – simply pull one pin, remove the worn blade, insert the new blade and replace the pin.

For best cleaning and wear life results the ConShear™ blade must be located against the conveyor head pulley in the correct position and must be tensioned properly.

See next page for proper blade installation and tensioning instructions.

Installation and Tensioning Tips

ConShear™ Replacement Blades for OEM Belt Cleaners

For optimal cleaning efficiency and long wear life, the ConShear™ blade must be located and tensioned correctly on the belt head pulley. If the OEM cleaner pole is in the wrong location the performance of the new blade may be adversely affected. See "Possible Problems" below. For tensioning, please follow these instructions. Our recommended tensioning may be as much as 2 times more than the OEM recommendation, but the added tension is needed to take full advantage of the ConShear™ Blade Technology.

Correct Location:

When blade contact is made against the head pulley (prior to tensioning) there should be a 1/16" (1.5 mm) to 1/8" (3 mm) gap at the bottom of the blade face (Fig. 1).




Fig. 1

Possible Problems:

- **Pole location too far out** – The initial blade/belt contact gap will be larger than 1/8" (3 mm) (Fig. 2). If the blade is correctly tensioned it may flip through before it is fully worn. If tensioned too lightly, it will develop the "smile effect" quickly and not clean properly.
- **Pole location too far in** – If there is no gap at the initial blade/belt contact (Fig. 3), the tip of the blade may not be touching the belt. In this case, the blade will push away and lose its shearing (cleaning) effect. The blade may also develop a flap at the tip which may trap material.




Fig. 2




Fig. 3

Correct Tensioning:

The blade should be tensioned until the gap is gone (Fig. 4).





Fig. 4


The "Material Path" Option

For optimal cleaning and reduced blade retensioning, the cleaner blade width should be sized to fit the material path of the belt. The material path is typically the center 2/3 of the belt width. Choosing a blade only slightly wider than the material path can decrease differential blade wear which reduces blade retensioning maintenance, as well as reducing the frequency of blade replacement.


Match blade width to belt's material path

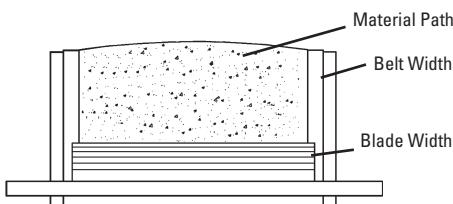

Belt Width Minus 2" (50 mm)

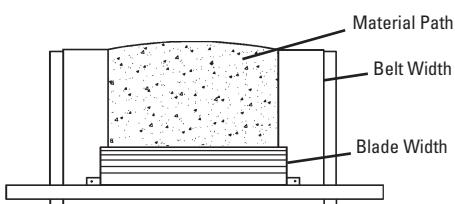

Belt Width Minus 8" (200 mm)

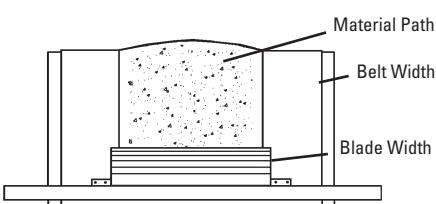

Belt Width Minus 14" (350 mm)

Part Number Cross-Reference Guide

Martin® QC1™ & Pit Viper™
Replacement Standard Blades

Ordering Information

BELT WIDTH		ACTUAL BLADE LENGTH		MARTIN® QC1™ PART NUMBER	MARTIN® PIT VIPER™ PART NUMBER	ORDERING NUMBER	CONSHEAR™ ITEM CODE	WT. LBS.
in.	mm	in.	mm					
12	300	10	250	32773-1211	PV1211100R	CRB10	75628	4.6
18	450	16	400	32773-1811	PV1811160R	CRB16	75629	7.3
24	600	22	550	32773-2411	PV2411220R	CRB22	75630	10.1
30	750	28	700	32773-3011	PV3011280R	CRB28	75631	12.8
36	900	34	850	32773-3611	PV3611340R	CRB34	75632	15.5
42	1050	40	1000	32773-4211	PV4211400R	CRB40	75633	18.3
48	1200	46	1150	32773-4811	PV4811460R	CRB46	75634	21.0
54	1350	52	1300	32773-5411	PV5411520R	CRB52	75635	23.8
60	1500	58	1450	32773-6011	PV6011580R	CRB58	75636	26.5
72	1800	70	1750	32773-7211	PV7211700R	CRB70	75773	32.0

Additional blade sizes are available upon request. Call for pricing.

NOTE: Blade coverage is 2" (50 mm) less than belt width.

Lead time: 1 working day

NOTE: Also works on Baker-Bohnert Yellow Jacket™ Primary Cleaners.

Replacement Blade Pin

ORDERING NUMBER	ITEM CODE	WT. LBS.
EZP1BP	75642	0.1





Lead time: 1 working day

Specifications

SLOT WIDTH	POLE PLATE THICKNESS	CONSHEAR™ BLADE HEIGHT	QC1™ BLADE HEIGHT
7/16" (11mm)	5/16" (8mm)	7-1/4" (184mm)	6-3/4" (171mm)

Usable Blade Volume Comparison

BLADE TYPE	BLADE LENGTH	USABLE BLADE AREA (cross-section)	USABLE BLADE VOLUME
Martin® QC1™	28" (711mm)	3.00in² (19cm²)	84.0in³ (1376cm³)
Martin® Pit Viper™	28" (711mm)	4.20in² (27cm²)	117.6in³ (1927cm³)
ConShear™	28" (711mm)	5.50in² (35cm²)	154.0in³ (2523cm³)

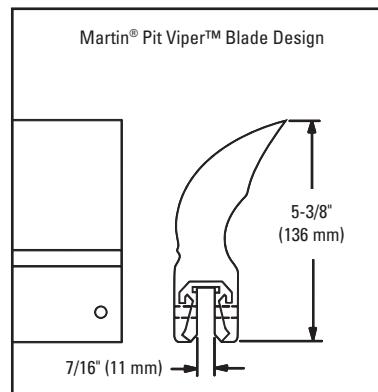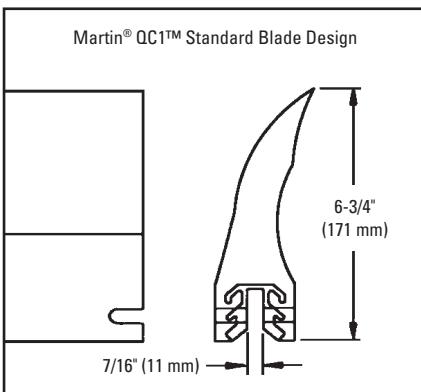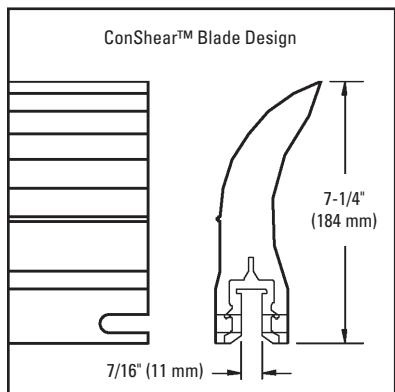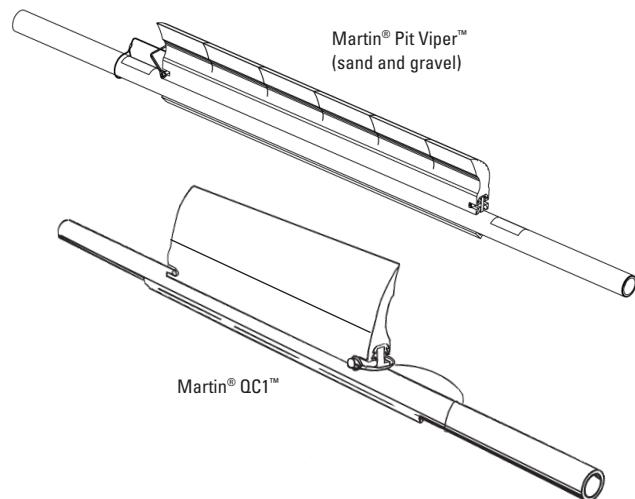

Martin® and QC1™ are registered trademarks, and Pit Viper™ is a trademark of Martin Engineering, Neponset, IL. Yellow Jacket™ is a trademark of Baker-Bohnert, Louisville, KY

Part Number Cross-Reference Guide

Martin® QC1™ Heavy-Duty Replacement Blades

Ordering Information

BELT WIDTH		ACTUAL BLADE LENGTH		MARTIN® QC1™ HD PART NUMBER	ORDERING NUMBER	CONSHEAR™ ITEM CODE	WT. LBS.
in.	mm	in.	mm				
18	450	12	300	35381-1811	RBQC1HD-12	75985	5.5
24	600	18	450	35381-2411	RBQC1HD-18	75986	8.3
30	750	24	600	35381-3011	RBQC1HD-24	75987	11.0
36	900	30	750	35381-3611	RBQC1HD-30	75988	13.8
42	1050	36	900	35381-4211	RBQC1HD-36	75989	16.6
48	1200	42	1050	35381-4811	RBQC1HD-42	75990	19.3
54	1350	48	1200	35381-5411	RBQC1HD-48	75991	22.1
60	1500	54	1350	35381-6011	RBQC1HD-54	75992	24.8
72	1800	66	1650	35381-7211	RBQC1HD-66	75993	30.4

Additional blade sizes are available upon request. Call for pricing.

NOTE: Blade coverage is 6" (150 mm) less than belt width.

Lead time: 1 working day


Replacement Blade Pin

ORDERING NUMBER	ITEM CODE	WT. LBS.
RB38BP	79481	0.2

Lead time: 1 working day



Specifications

SLOT WIDTH	POLE PLATE THICKNESS	CONSHEAR™ BLADE HEIGHT	QC1™ HD BLADE HEIGHT
9/16" (14mm)	1/2" (12.5mm)	7-1/4" (184mm)	7-1/4" (185mm)

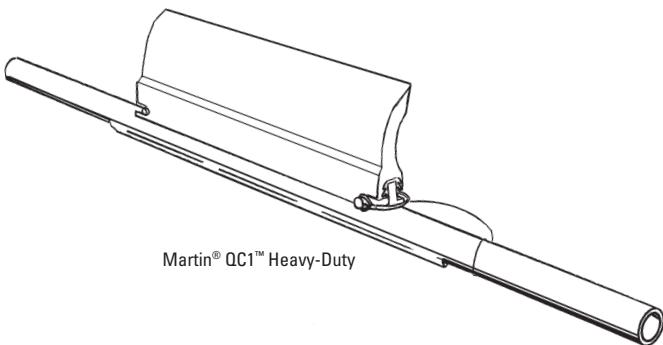

Usable Blade Volume Comparison

BLADE TYPE	BLADE LENGTH	USABLE BLADE AREA (cross-section)	USABLE BLADE VOLUME
Martin® QC1™ HD	28" (711mm)	6.65in ² (43cm ²)	186.2in ³ (3051cm ³)
ConShear™	28" (711mm)	5.50in ² (35cm ²)	154.0in ³ (2523cm ³)

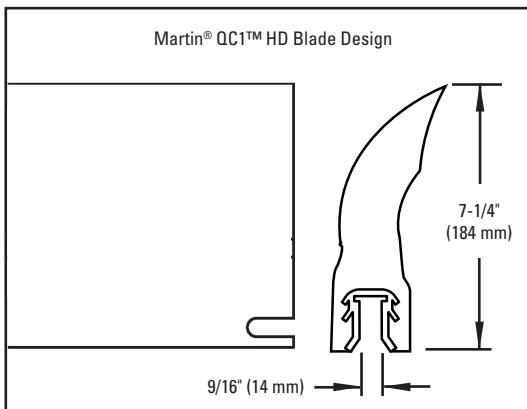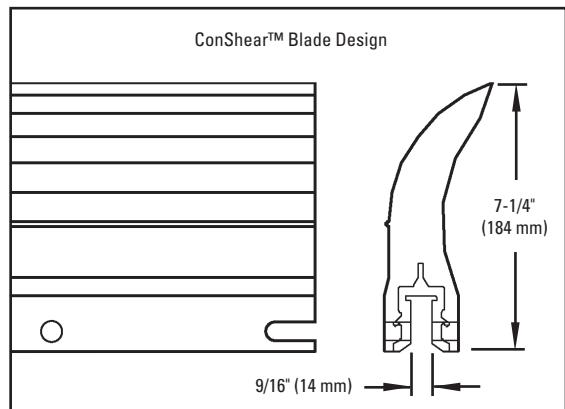

Martin® and QC1™ are registered trademarks of Martin Engineering, Neponset, IL.

Part Number Cross-Reference Guide

Martin® QB1™
Replacement Blades

Ordering Information

BELT WIDTH		ACTUAL BLADE LENGTH		MARTIN® QC1™ HD PART NUMBER	ORDERING NUMBER	CONSHEAR™ ITEM CODE	WT. LBS.
in.	mm	in.	mm				
18	450	16	400	39344-1811160R	RBQB1-16/400	90935	7.3
24	600	18	450	39344-2411180R	RBQB1-18/450	90936	8.2
		22	550	39344-2411220R	RBQB1-22/550	90937	10.1
30	750	24	600	39344-3011240R	RBQB1-24/600	90938	11.0
		28	700	39344-3011280R	RBQB1-28/700	90939	12.8
36	900	30	750	39344-3611300R	RBQB1-30/750	90940	13.7
		34	850	39344-3611340R	RBQB1-34/850	90941	15.5
42	1050	36	900	39344-4211360R	RBQB1-36/900	90942	16.5
		40	1000	39344-4211400R	RBQB1-40/1000	90943	18.3
48	1200	42	1050	39344-4811420R	RBQB1-42/1050	90944	19.2
		46	1150	39344-4811460R	RBQB1-46/1150	90945	21.0
54	1350	48	1200	39344-5411480R	RBQB1-48/1200	90946	21.9
		52	1300	39344-5411520R	RBQB1-52/1300	90947	23.8
60	1500	54	1350	39344-6011540R	RBQB1-54/1350	90948	24.7
		58	1450	39344-6011580R	RBQB1-58/1450	90949	26.5
66	1650	60	1500	39344-6611600R	RBQB1-60/1500	90950	27.4
72	1800	64	1600	39344-7211640R	RBQB1-64/1600	90951	29.2
		70	1750	39344-7211700R	RBQB1-70/1750	90952	32.0
78	1950	72	1800	39344-7811720R	RBQB1-72/1800	90953	32.9




Lead time: 1 working day

Specifications

SLOT WIDTH	CONSHEAR™ BLADE HEIGHT	QC1™ BLADE HEIGHT
3/4" (19mm)	7-1/4" (184mm)	6-1/2" (165mm)

Usable Blade Volume Comparison

BLADE TYPE	BLADE LENGTH	USABLE BLADE AREA (cross-section)	USABLE BLADE VOLUME
Martin® QC1™	28" (711mm)	5.75in² (37cm²)	161.0in³ (2638cm³)
ConShear™	28" (711mm)	5.50in² (35cm²)	154.0in³ (2523cm³)

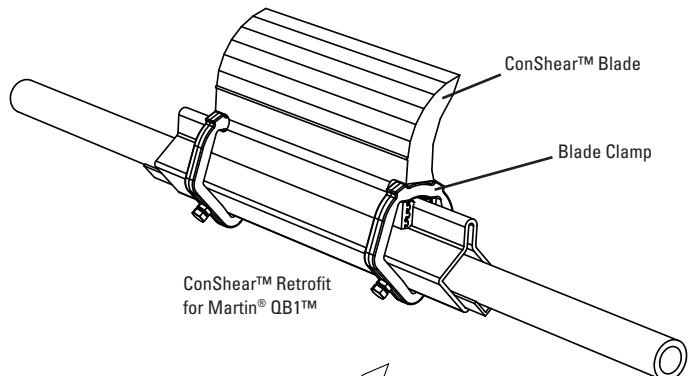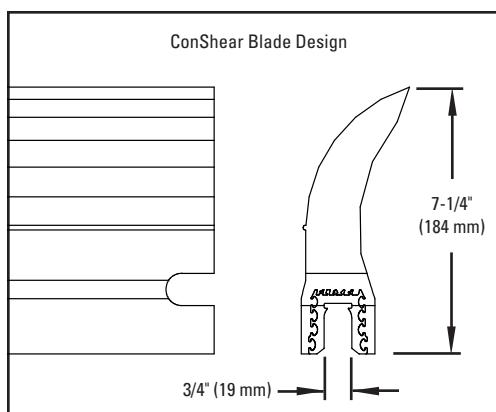

Martin® and QB1™ are registered trademarks of Martin Engineering, Neponset, IL.

Part Number Cross-Reference Guide

Martin® QC1™ Extra Heavy-Duty Replacement Blades

Ordering Information

BELT WIDTH		BLADE WIDTH		MARTIN® QC1™ XHD PART NUMBER	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm				
24	600	18	450	35897-2411	TRB18	76485	21.0
30	750	24	600	35897-3011	TRB24	76486	28.0
36	900	30	750	35897-3611	TRB30	76487	35.0
42	1050	36	900	35897-4211	TRB36	76488	42.0
48	1200	42	1050	35897-4811	TRB42	76489	49.0
54	1350	48	1200	35897-5411	TRB48	76490	56.0
60	1500	54	1350	35897-6011	TRB54	76491	63.0
66	1650	60	1500	35897-6611	TRB60	76492	70.0
72	1800	66	1650	35897-7211	TRB66	76493	77.0
78	1950	72	1800	35897-7811	TRB72	76494	87.0
84	2100	78	1950	35897-8411	TRB78	76697	91.0
90	2250	84	2100	35897-9011	TRB84	77047	98.0
96	2400	90	2250	35897-9611	TRB90	77048	105.0

Additional blade sizes are available upon request. Call for pricing.

NOTE: Blade coverage is 6" (150 mm) less than belt width.

Lead time: 1 working day


Replacement Blade Pin

ORDERING NUMBER	ITEM CODE	WT. LBS.
MMPBPK	76466	0.8

Lead time: 1 working day



Specifications

SLOT WIDTH	POLE PLATE THICKNESS	TUFFSHEAR™ BLADE HEIGHT	QC1™ XHD BLADE HEIGHT
13/16" (20mm)	3/4" (19mm)	10-1/8" (257mm)	12-3/8" (314mm)

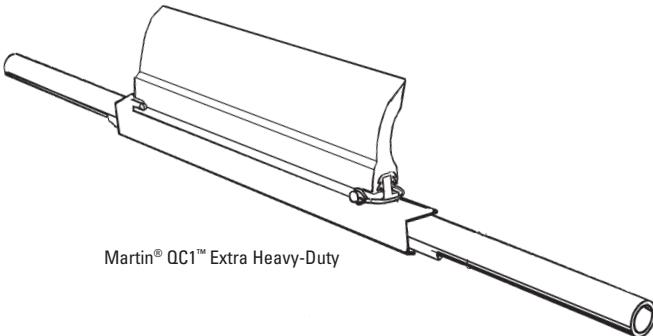

Usable Blade Volume Comparison

BLADE TYPE	BLADE LENGTH	USABLE BLADE AREA (cross-section)	USABLE BLADE VOLUME
Martin® QC1™ XHD	30" (762mm)	17.01in ² (109cm ²)	510.3in ³ (8362cm ³)
TuffShear™	30" (762mm)	12.08in ² (78cm ²)	362.7in ³ (5943cm ³)

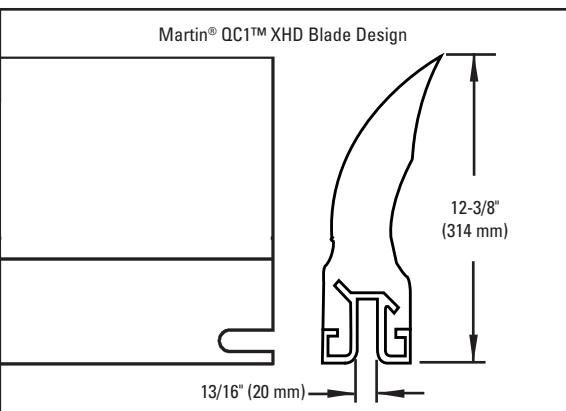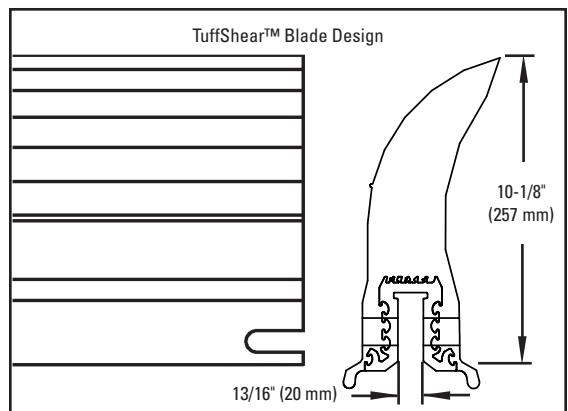

Martin® and QC1™ are registered trademarks of Martin Engineering, Neponset, IL.

Part Number Cross-Reference Guide

Arch/Gordon Saber®
Replacement Primary Blades

Ordering Information

BELT WIDTH		ACTUAL BLADE LENGTH		ARCH/GORDON® PART NUMBER	ORDERING NUMBER	CONSHEAR™ ITEM CODE	WT. LBS.
in.	mm	in.	mm				
18	450	16	400	MRBSB000180000	RBAGS-16	75995	7.3
		18	450	MRBSB00018F000	RBAGS-18	76967	8.2
24	600	22	550	MRBSB000240000	RBAGS-22	75996	10.1
		24	600	MRBSB00024F000	RBAGS-24	76968	11.0
30	750	28	700	MRBSB000300000	RBAGS-28	75997	12.8
		30	750	MRBSB00030F000	RBAGS-30	76969	13.7
36	900	34	850	MRBSB000360000	RBAGS-34	75998	15.5
		36	900	MRBSB00036F000	RBAGS-36	76970	16.5
42	1050	40	1000	MRBSB000420000	RBAGS-40	75999	18.3
		42	1050	MRBSB00042F000	RBAGS-42	76971	19.2
48	1200	46	1150	MRBSB000480000	RBAGS-46	76028	21.0
		48	1200	MRBSB00048F000	RBAGS-48	76972	21.9
54	1350	52	1300	MRBSB000540000	RBAGS-52	76029	23.8
		54	1350	MRBSB00054F000	RBAGS-54	76973	24.7
60	1500	58	1450	MRBSB000600000	RBAGS-58	76030	26.5
		60	1500	MRBSB00060F000	RBAGS-60	76974	27.4
72	1800	70	1750	MRBSB000720000	RBAGS-70	76031	32.0
		72	1800	MRBSB00072F000	RBAGS-72	76975	32.9
84	2100	84	2100	MRBSB00084F000	RBAGS-84	76976	38.4

Additional blade sizes are available upon request. Call for pricing.


Lead time: 1 working day

NOTE: Also works on Falcon Primary Cleaners (Canada).

Replacement Blade Pin

ORDERING NUMBER	ITEM CODE	WT. LBS.
EZP1BP	75642	0.1

Lead time: 1 working day

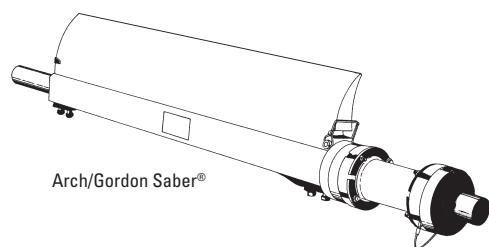


Arch/Gordon Saber®

ConShear™-LS for Arch/Gordon® Mini-Saber Blades

BELT WIDTH	BLADE WIDTH	ARCH/GORDON® PART NUMBER	ORDERING NUMBER	CONSHEAR™-LS ITEM CODE	WT. LBS.		
in.	mm	in.	mm				
18	450	16	400	MRBMN00018	RBAGM-16	77106	3.3
24	600	22	550	MRBMN00024	RBAGM-22	77107	4.6
30	750	28	700	MRBMN00030	RBAGM-28	77108	5.8
36	900	34	850	MRBMN00036	RBAGM-34	77109	7.1
42	1050	40	1000	MRBMN00042	RBAGM-40	77110	8.3
48	1200	46	1150	MRBMN00048	RBAGM-46	77111	9.6

Additional blade sizes are available upon request. Call for pricing.

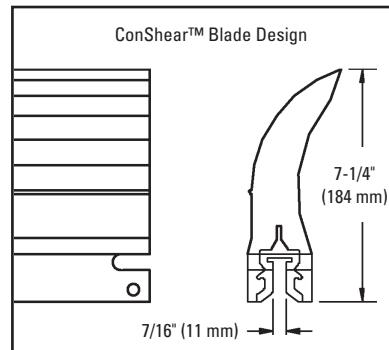


Specifications

SLOT WIDTH	POLE PLATE THICKNESS	CONSHEAR™ BLADE HEIGHT	SABER® BLADE HEIGHT
in.	mm	in.	mm
7/16" (11mm)	3/8" (9.5mm)	7-1/4" (184mm)	5-7/8" (149mm)

Usable Blade Volume Comparison

BLADE TYPE	BLADE LENGTH	USABLE BLADE AREA (cross-section)	USABLE BLADE VOLUME
Arch/Gordon Saber®	28" (711mm)	3.06in² (19cm²)	85.7in³ (1404cm³)
ConShear™	28" (711mm)	5.50in² (35cm²)	154.0in³ (2523cm³)

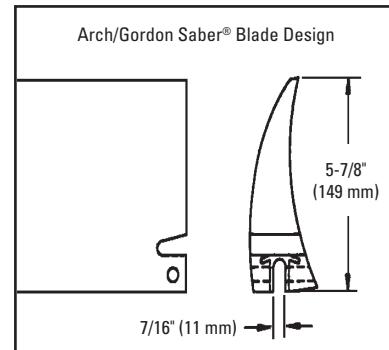

Saber® is a registered trademark of Arch Environmental Equipment Inc., Paducah, KY.

Part Number Cross-Reference Guide

Arch/Gordon Saber® (SCM)
Replacement Channel Mount Blades

Ordering Information

BELT WIDTH		ACTUAL BLADE LENGTH		ARCH/GORDON® PART NUMBER	ARCH/GORDON® OLD PART NUMBER	ORDERING NUMBER	CONSHEAR™ ITEM CODE	WT. LBS.
in.	mm	in.	mm					
18	450	16	400	MRBCM00018	SCM-016-18	RBAGSCM-16	76572	7.3
24	600	22	550	MRBCM00024	SCM-016-24	RBAGSCM-22	76573	10.1
30	750	28	700	MRBCM00030	SCM-016-30	RBAGSCM-28	76574	12.8
36	900	34	850	MRBCM00036	SCM-016-36	RBAGSCM-34	76575	15.5
42	1050	40	1000	MRBCM00042	SCM-016-42	RBAGSCM-40	76576	18.3
48	1200	46	1150	MRBCM00048	SCM-016-48	RBAGSCM-46	76577	21.0
54	1350	52	1300	MRBCM00054	SCM-016-54	RBAGSCM-52	76578	23.8
60	1500	58	1450	MRBCM00060	SCM-016-60	RBAGSCM-58	76579	26.5
72	1800	70	1750	MRBCM00072	SCM-016-72	RBAGSCM-70	76581	32.0


Additional blade sizes are available upon request. Call for pricing.

NOTE: Blade coverage is 2" (50mm) less than belt width.

Replacement Blade Pin

ORDERING NUMBER	ITEM CODE	WT. LBS.
EZP1BP	75642	0.1

Lead time: 1 working day


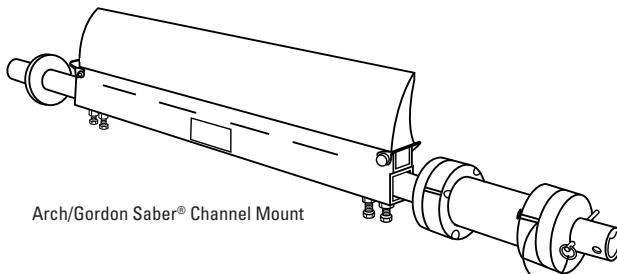


Specifications

BASE WIDTH	CONSHEAR™ BLADE HEIGHT	CHANNEL MOUNT BLADE HEIGHT
1-7/16" (36mm)	7-1/4" (184mm)	5-3/4" (146mm)

Usable Blade Volume Comparison

BLADE TYPE	BLADE LENGTH	USABLE BLADE AREA (cross-section)	USABLE BLADE VOLUME
Arch/Gordon Saber® Channel Mount	28" (711mm)	3.06in ² (19cm ²)	85.7in ³ (1404cm ³)
ConShear™	28" (711mm)	5.50in ² (35cm ²)	154.0in ³ (2523cm ³)

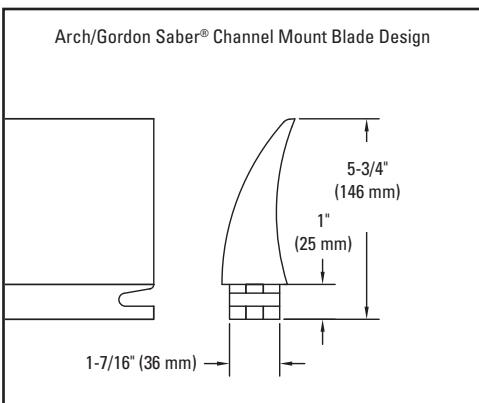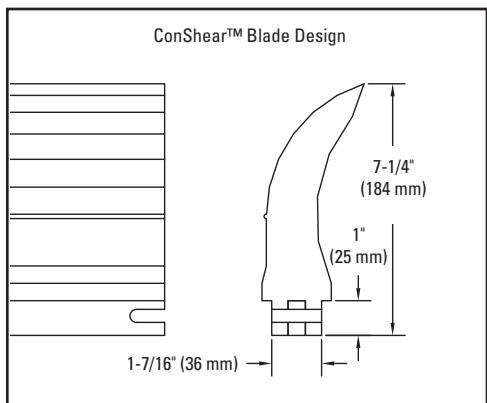

Saber® is a registered trademark of Arch Environmental Equipment Inc., Paducah, KY.

Part Number Cross-Reference Guide

**Superior Exterra®
Replacement Blades**


Ordering Information

BELT WIDTH		ACTUAL BLADE LENGTH		SUPERIOR EXTERRA® PART NUMBER	ORDERING NUMBER	CONSHEAR™ ITEM CODE	WT. LBS.
in.	mm	in.	mm				
12	300	10	250	07-00540	RBSE-10	79861	4.6
18	450	16	400	07-00541	RBSE-16	79862	7.3
24	600	22	550	07-00542	RBSE-22	79863	10.1
30	750	28	700	07-00543	RBSE-28	79864	12.8
36	900	34	850	07-00544	RBSE-34	79865	15.5
42	1050	40	1000	07-00545	RBSE-40	79866	18.3
48	1200	46	1150	07-00546	RBSE-46	79867	21.0
54	1350	52	1300	07-00547	RBSE-52	79868	23.8
60	1500	58	1450	07-00549	RBSE-58	79869	26.5
66	1650	64	1600	07-00548	RBSE-64	79870	29.3
72	1800	70	1750	07-00550	RBSE-70	79871	32.0

Additional blade sizes are available upon request. Call for pricing.


NOTE: Blade coverage is 2" (50 mm) less than belt width.

Lead time: 3 working days

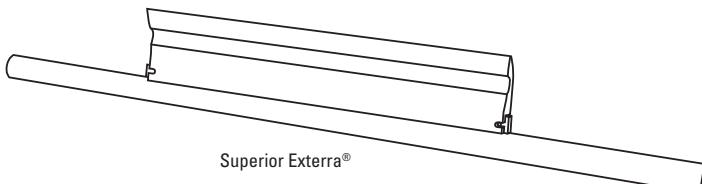

Specifications

SLOT WIDTH	POLE PLATE THICKNESS	CONSHEAR™ BLADE HEIGHT	EXTERRA® BLADE HEIGHT
7/16" (11mm)	3/8" (9.5mm)	7-1/4" (184mm)	6-11/16" (170mm)

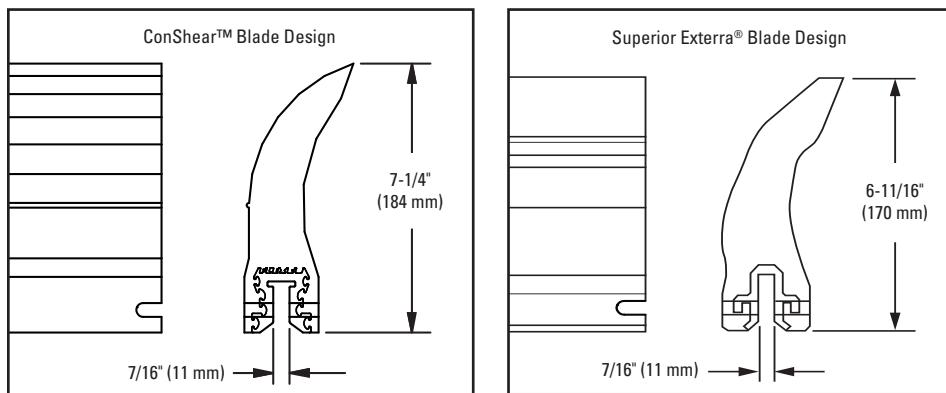

Exterra® is a registered trademark of Superior Industries, Inc. Morris, MN

Part Number Cross-Reference Guide

ASGCO® Skalper®
Replacement Blades
III and IV*

Ordering Information

BELT WIDTH		ACTUAL BLADE LENGTH		ASGCO® PART NUMBER	ORDERING NUMBER	CONSHEAR™ ITEM CODE	WT. LBS.
in.	mm	in.	mm				
18	450	18	450	ASG-SK4-18A	RBAS4-18	76032	8.3
24	600	24	600	ASG-SK4-24A	RBAS4-24	76033	11.0
30	750	30	750	ASG-SK4-30A	RBAS4-30	76034	13.8
36	900	36	900	ASG-SK4-36A	RBAS4-36	76035	16.6
42	1050	42	1050	ASG-SK4-42A	RBAS4-42	76036	19.3
48	1200	48	1200	ASG-SK4-48A	RBAS4-48	76037	22.1
54	1350	54	1350	ASG-SK4-54A	RBAS4-54	76038	24.8
60	1500	60	1500	ASG-SK4-60A	RBAS4-60	76039	27.6
72	1800	72	1800	ASG-SK4-72A	RBAS4-72	76040	33.1

Additional blade sizes are available upon request. Call for pricing.

NOTE: Blade coverage is the same as the belt width.

Blade design is identical to Argonics replacement blade, except for length. Can be interchanged.


*Also interchangeable with ASGCO® Skalper® III Blades.

Lead time: 1 working day

Replacement Blade Pin

ORDERING NUMBER	ITEM CODE	WT. LBS.
RB38BP	79481	0.2

Lead time: 1 working day


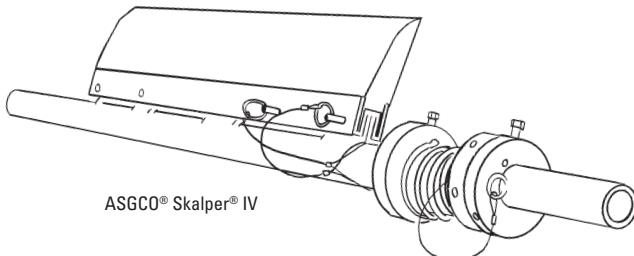


Specifications

SLOT WIDTH	POLE PLATE THICKNESS	CONSHEAR™ BLADE HEIGHT	SKALPER® BLADE HEIGHT
9/16" (14mm)	1/2" (12.5mm)	7-1/4" (184mm)	6-5/8" (168mm)

Usable Blade Volume Comparison

BLADE TYPE	BLADE LENGTH	USABLE BLADE AREA (cross-section)	USABLE BLADE VOLUME
ASGCO® Skalper® IV	28" (711mm)	3.29in² (21cm²)	92.1in³ (1509cm³)
ConShear™	28" (711mm)	5.50in² (35cm²)	154.0in³ (2523cm³)

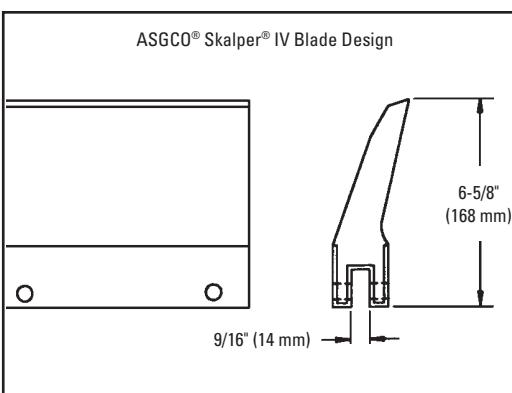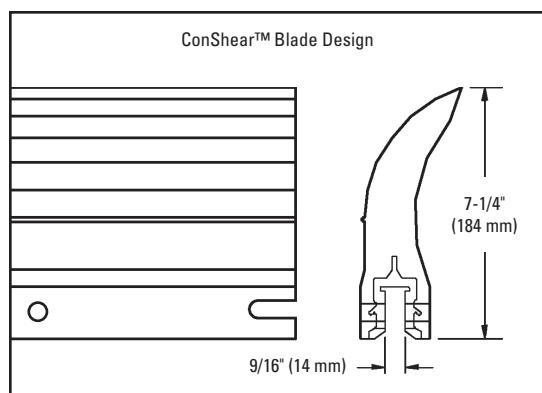

ASGCO® and Skalper® are registered trademarks of ASGCO Mfg, Inc., Allentown, PA.

Part Number Cross-Reference Guide

Argonics™ Raptor™
Replacement Blades

Ordering Information

BELT WIDTH		ACTUAL BLADE LENGTH		ARGONICS™ PART NUMBER	ORDERING NUMBER	CONSHEAR™ ITEM CODE	WT. LBS.
in.	mm	in.	mm				
12	300	10	250	CP-RE-10-G83	RBAER-10	76041	4.6
18	450	16	400	CP-RE-16-G83	RBAER-16	76042	7.3
24	600	22	550	CP-RE-22-G83	RBAER-22	76043	10.1
30	750	28	700	CP-RE-28-G83	RBAER-28	76044	12.8
36	900	34	850	CP-RE-34-G83	RBAER-34	76045	15.5
42	1050	40	1000	CP-RE-40-G83	RBAER-40	76046	18.3
46	1150	44	1100	CP-RE-44-G83	RBAER-44	76655	20.1
48	1200	46	1150	CP-RE-46-G83	RBAER-46	76047	21.0
54	1350	52	1300	CP-RE-52-G83	RBAER-52	76048	23.8
60	1500	58	1450	CP-RE-58-G83	RBAER-58	76049	26.5
72	1800	70	1750	CP-RE-70-G83	RBAER-70	76050	32.0

Additional blade sizes are available upon request. Call for pricing.

NOTE: Blade coverage is 2" (50 mm) less than the belt width.

Blade design is identical to ASGCO replacement blade, except for length. Can be interchanged.

Lead time: 1 working day


Replacement Blade Pin

ORDERING NUMBER	ITEM CODE	WT. LBS.
RB38BP	79481	0.2

Lead time: 1 working day



Specifications

SLOT WIDTH	POLE PLATE THICKNESS	CONSHEAR™ BLADE HEIGHT	RAPTOR™ BLADE HEIGHT
9/16" (14mm)	1/2" (12.5mm)	7-1/4" (184mm)	7-1/4" (184mm)

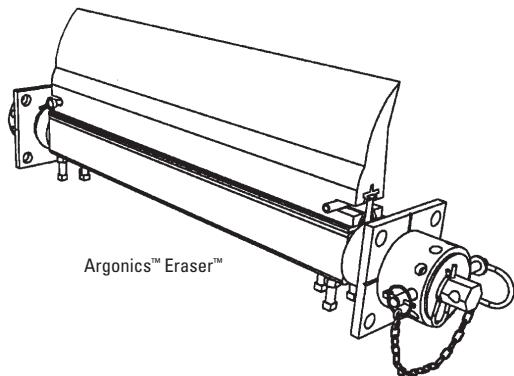

Usable Blade Volume Comparison

BLADE TYPE	BLADE LENGTH	USABLE BLADE AREA (cross-section)	USABLE BLADE VOLUME
Argonics™ Raptor™	28" (711mm)	4.25in² (27cm²)	119.0in³ (1950cm³)
ConShear™	28" (711mm)	5.50in² (35cm²)	154.0in³ (2523cm³)

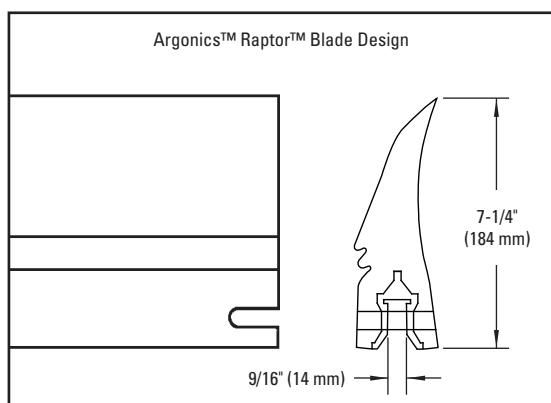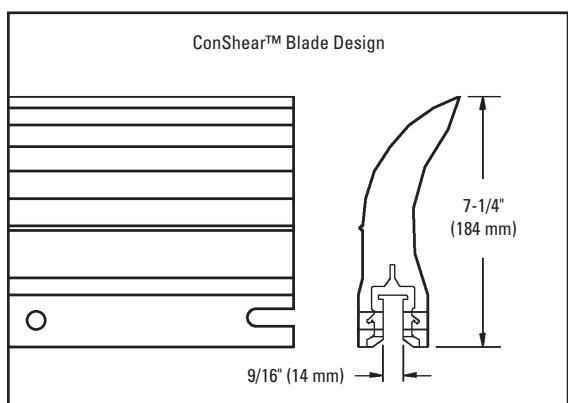

Eraser™ and Raptor™ are registered trademarks of Argonics, Inc., Marquette, MI.

Part Number Cross-Reference Guide


Stephens-Adamson Metso/Trellex
Replacement Blades

Ordering Information

ACTUAL BLADE LENGTH	S-A PART NUMBER	ORDERING NUMBER	CONSHEAR™ ITEM CODE	WT. LBS.
in.	mm			
6	150	ABC90	RB6SA	3.1

Blades fit into cartridge that mounts on the pole.

Lead time: 1 working day

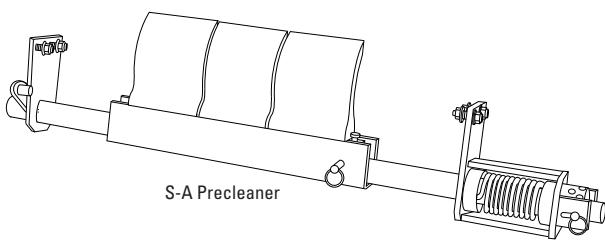

Cleaner Blades Required Per Belt Width

in.	18	24	30	36	42	48	54	60	72
mm	450	600	750	900	1050	1200	1350	1500	1800
No. Blades Required	2	3	4	5	6	7	8	9	11



NOTE: Blade coverage is 6" (150 mm) less than the belt width.

Specifications

BASE WIDTH	BASE HEIGHT	CONSHEAR™ BLADE HEIGHT	S-A BLADE HEIGHT
1.96" (50mm)	.78" (20mm)	8" (203mm)	8" (203mm)

Usable Blade Volume Comparison

BLADE TYPE	BLADE LENGTH	USABLE BLADE AREA (cross-section)	USABLE BLADE VOLUME
S-A Metso/Trellex	6" (152mm)	3.88in ² (25cm ²)	22.8in ³ (373cm ³)
ConShear™	6" (152mm)	5.50in ² (35cm ²)	33.0in ³ (540cm ³)

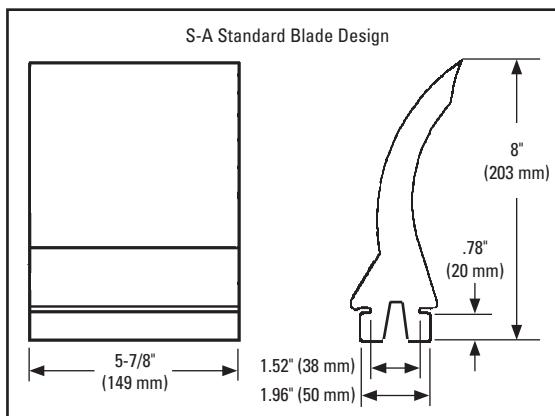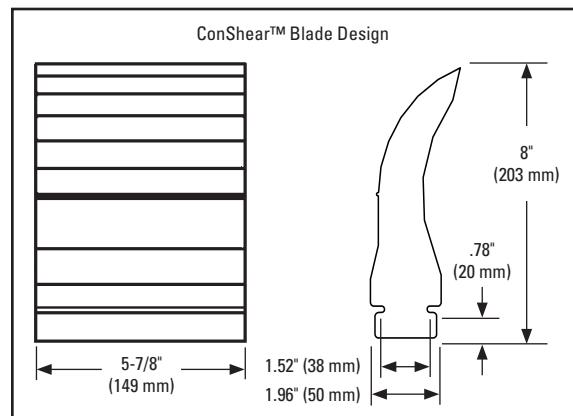

Part Number Cross-Reference Guide

Martin® Durt Hawg®
Replacement Precleaner Blades

Ordering Information


ACTUAL BLADE LENGTH		MARTIN® PART NUMBER	ORDERING NUMBER	CONSHEAR™ ITEM CODE	WT. LBS.
in.	mm				
6	150	27987-C	RB6DH	76571	3.3

Lead time: 1 working day

Cleaner Blades Required Per Belt Width

in.	18	24	30	36	42	48	54	60	72
mm	450	600	750	900	1050	1200	1350	1500	1800
No. Blades Required	2	3	4	5	6	7	8	9	11

NOTE: Blade coverage is 6" (150 mm) less than the belt width.

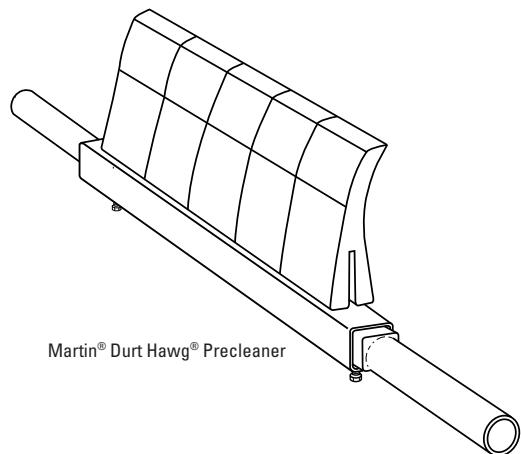


Martin® Durt Hawg® Precleaner

Specifications

SLOT WIDTH	CONSHEAR™ BLADE HEIGHT	DURT HAWG® BLADE HEIGHT
1/4" (6mm)	8" (203mm)	8-1/4" (209.5mm)

Usable Blade Volume Comparison

BLADE TYPE	BLADE LENGTH	USABLE BLADE AREA (cross-section)	USABLE BLADE VOLUME
Martin® Durt Hawg®	6" (152mm)	3.80in ² (24.5cm ²)	22.2in ³ (363cm ³)
ConShear™	6" (152mm)	5.50in ² (35cm ²)	33.0in ³ (540cm ³)

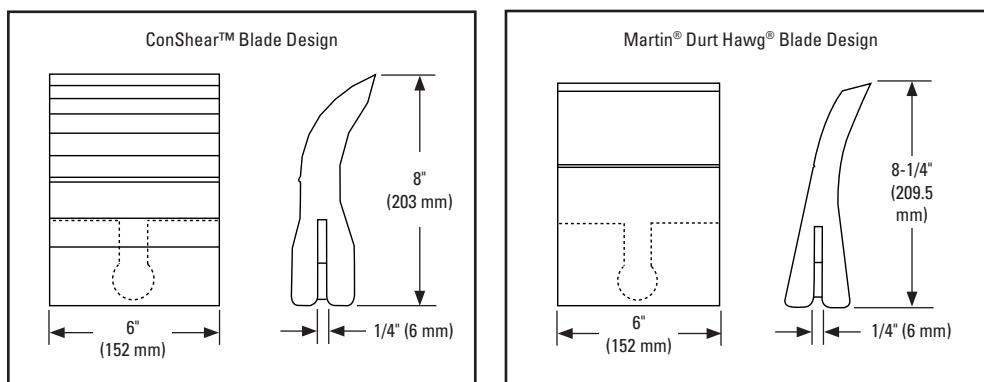

Martin® and Durt Hawg® are registered trademarks of Martin Engineering, Neponset, IL.


Part Number Cross-Reference Guide

Martin® Durt Tracker® Replacement Precleaner Blades SD 6

Ordering Information

ACTUAL BLADE LENGTH	MARTIN® PART NUMBER	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
6	150	30333-06XX	RBDT-6C	90614
				3.2

Lead time: 1 working day

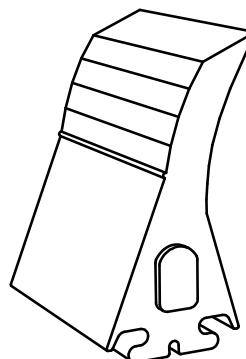


Martin® Durt Tracker®
Replacement Blade

Specifications

BLADE TYPE	BLADE WIDTH	BLADE HEIGHT
SD 6	6" (152mm)	7-1/2" (190mm)

Usable Blade Volume

BLADE TYPE	BLADE LENGTH	USABLE BLADE AREA (cross-section)	USABLE BLADE VOLUME
Martin® Durt Hawg® SD 6 Retrofit Blade	6" (152mm)	3.7in ² (45cm ²)	22.3in ³ (365cm ³)

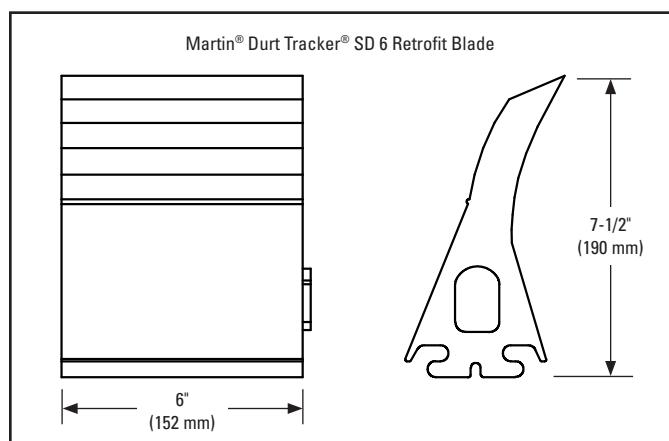

Martin® and Durt Tracker® are registered trademarks of Martin Engineering, Neponset, IL.


Part Number Cross-Reference Guide

Martin® Durt Tracker® XHD Replacement Precleaner Blades XHD 6.5 & XHD 13


Ordering Information

BLADE WIDTH	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm		
6	150	RBDTXHD-6.5C	77517
13	330	RBDTXHD-13C	90615

Lead time: 1 working day



Martin® Durt Tracker® XHD 6.5 Replacement Blade

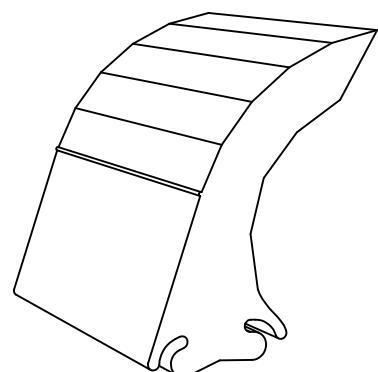


Martin® Durt Tracker® XHD 13 Replacement Blade

Specifications

BLADE TYPE	BLADE WIDTH	BLADE HEIGHT
XHD 6.5	6.5" (165mm)	
XHD 13	13" (330mm)	

Usable Blade Volume Comparison

BLADE TYPE	BLADE WIDTH	USABLE BLADE AREA (cross-section)	USABLE BLADE VOLUME
Martin® Durt Hawg® XHD 6.5 Retrofit Blade	6.5" (165mm)		78in³ (1278cm³)
Martin® Durt Hawg® XHD 13 Retrofit Blade	13" (330mm)	12.1in² (78cm²)	156in³ (2556cm³)

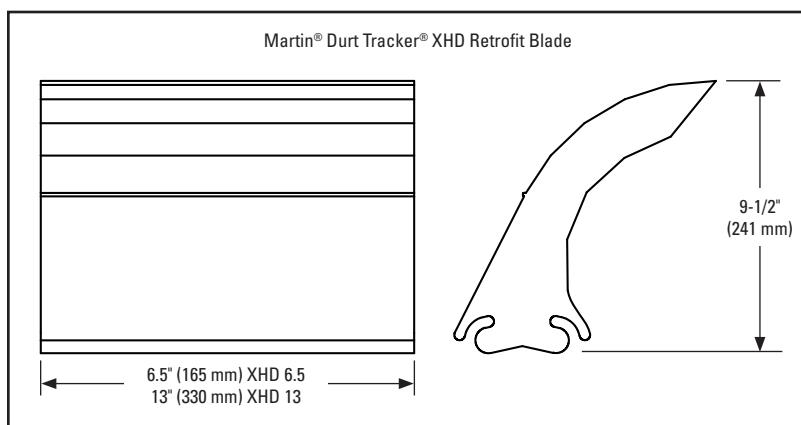

Martin® and Durt Tracker® are registered trademarks of Martin Engineering, Neponset, IL.

Product Ordering Information

V-Plow
Belt Plow

V-Plow*

SIZE	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm			
Extra Small	18–24	450–600	CBV-XS	73131	53.0
Small	30–36	750–900	CBV-S	73132	65.0
Medium	42–48	1050–1200	CBV-M	73133	74.0
Large	54–60	1350–1500	CBV-L	73134	84.0
72"	72	1800	CBV-72	74389	150.0
84"	84	2100	CBV-84	74390	175.0
96"	96	2400	CBV-96	74391	200.0

*Use next larger size for belt widths between ranges.

Lead time: 1 working day



Replacement Blade Kits**

SIZE	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm			
Extra Small	18–24	450–600	VBK-XS	73190	4.5
Small	30–36	750–900	VBK-S	73191	6.0
Medium	42–48	1050–1200	VBK-M	73192	7.5
Large	54–60	1350–1500	VBK-L	73193	9.0
72"	72	1800	VBK-72	74457	13.0
84"	84	2100	VBK-84	74458	15.0
96"	96	2400	VBK-96	74459	17.0

**Kit includes blades and replacement blade bolts.

Lead time: 1 working day



Optional Polyurethane Blade Kits**

SIZE	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm			
Extra Small	18–24	450–600	VUBK-XS	75570	5.4
Small	30–36	750–900	VUBK-S	75571	8.0
Medium	42–48	1050–1200	VUBK-M	75572	10.5
Large	54–60	1350–1500	VUBK-L	75573	13.0
72"	72	1800	VUBK-72	75574	15.9
84"	84	2100	VUBK-84	75575	18.5
96"	96	2400	VUBK-96	75576	21.0

Typically provides 3 to 5 times longer wear life. PU blades are blue in color.

**Kit includes blades and replacement blade bolts.

Lead time: 1 working day

 Shaded items are made to order.
Lead time: 10 working days

Product Notes:

- Exclusive blade design – 20° slant on leading edge spirals debris off the belt.
- Self-adjusting blade – the blade floats on the belt and self-adjusts as it wears.
- Unique blade adjuster – turnbuckle-type adjuster allows the blade to be accurately positioned to the belt.
- Easy to install – comes fully assembled and can be placed right into position on the conveyor.

Product Ordering Information

RDP1
Diagonal Plow

Diagonal Plows*

SIZE	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm			
Small	18–30	450–750	RDP1-S	74692	45.0
Medium	36–42	900–1050	RDP1-M	74693	56.0
Large	48–60	1200–1500	RDP1-L	74694	70.0
Extra Large	72–84	1800–2100	RDP1-XL	74695	96.0

*Use next larger size for belt widths between ranges.

Lead time: 1 working day




Replacement Blade Kits**

SIZE	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm			
Small	18–30	450–750	RDPBK-S	74699	4.0
Medium	36–42	900–1050	RDPBK-M	74700	5.6
Large	48–60	1200–1500	RDPBK-L	74701	8.4
Extra Large	72–84	1800–2100	RDPBK-XL	74702	12.0

**Kit includes blade and replacement blade bolts.

Lead time: 1 working day

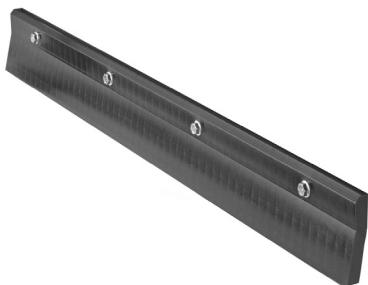

Product Notes:

- A belt cleaner for the tail pulley. Prevents damage to the belt, pulley, lagging, and belt splice.
- Keeps fugitive materials off the inside of the belt and out of the tail pulley.
- Installed at a 45° angle across the belt to discharge material to one predetermined side.
- The blade is installed in a fixed position, eliminating any bouncing problems.
- Exclusive 20° angled blade quickly spirals material off the belt.

Specifications & Guidelines


V-Plow & RDP1 Diagonal Plow Belt Plows

V-Plow

Belt Width Specifications

SIZE	BELT WIDTH (Min-Max)	
	in.	mm
Extra Small	18-24	450-600
Small	30-36	750-900
Medium	42-48	1050-1200
Large	54-60	1350-1500
72"	72	1800
84"	84	2100
96"	96	2400

Use next larger size for belt widths between ranges.

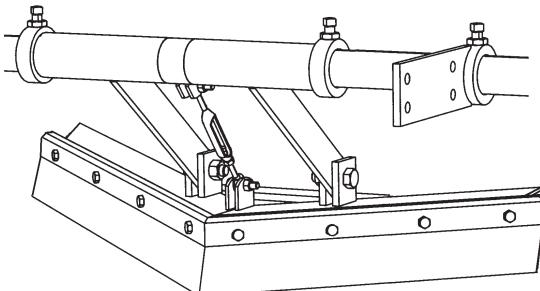


Diagonal Plow

Belt Width Specifications


SIZE	BELT WIDTH (Min-Max)	
	in.	mm
Small	18-30	450-750
Medium	36-42	900-1050
Large	48-60	1200-1500
Extra Large	72-84	1800-2100

Use next larger size for belt widths between ranges.

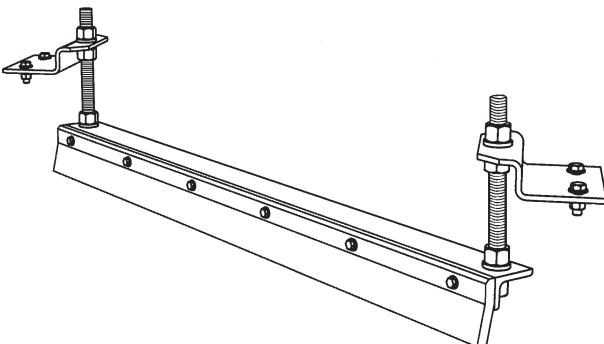

V-Plow & Diagonal Plow Blade Specifications:

- Material.....UHMWPE
- Durometer.....67-D
- Working Temperature.....-40 to 160°F (-40 to 71°C)
- Grease & Chemical ResistanceExcellent
- Sticky Material PerformanceExcellent



Application Guidelines:


- Belt SpliceMechanically Fastened/Vulcanized
- Belt Speed1000 FPM (5 m/s) for V-Plow; 700 FPM (3.5 m/s) for Diagonal Plow
- Belt DirectionOne-Way

Replacement Parts Lists

V-Plow & RDP1 Diagonal Plow Belt Plows

Replacement Parts - V-Plow

REF	DESCRIPTION	BELT WIDTH (Min-Max)		ORDERING NUMBER	ITEM CODE	WT. LBS.
		in.	mm			
1	V-Plow Pole XS	18-24	450-600	VPXS	73400	13.0
	V-Plow Pole S	30-36	750-900	VPS	73408	15.0
	V-Plow Pole M	42-48	1050-1200	VPM	73409	18.0
	V-Plow Pole L	54-60	1350-1500	VPL	73410	21.0
	V-Plow Pole 72"	72	1800	VP72	74395	24.0
	V-Plow Pole 84"	84	2100	VP84	74396	27.0
	V-Plow Pole 96"	96	2400	VP96	74397	30.0
2	V-Plow Mainframe XS	18-24	450-600	VMFXS	73535	12.0
	V-Plow Mainframe S	30-36	750-900	VMFS	73549	15.0
	V-Plow Mainframe M	42-48	1050-1200	VMFM	74037	22.0
	V-Plow Mainframe L	54-60	1350-1500	VMFL	74038	28.0
	V-Plow Mainframe 72"	72	1800	VMF72	74398	35.0
	V-Plow Mainframe 84"	84	2100	VMF84	74399	42.0
	V-Plow Mainframe 96"	96	2400	VMF96	74440	50.0
3	VP Main Linkage Kit* (1 ea.)			VMLK	74982	5.0
4	VP Center Sleeve			VCS	73533	1.0
5	V-Plow Adjuster Kit*			VAK	76416	0.5
6	VP Stop Collar* (1 ea.)			VSC	74983	1.0
7	VP Mounting Bracket Kit* (1 ea.)			VMBK	73399	5.0

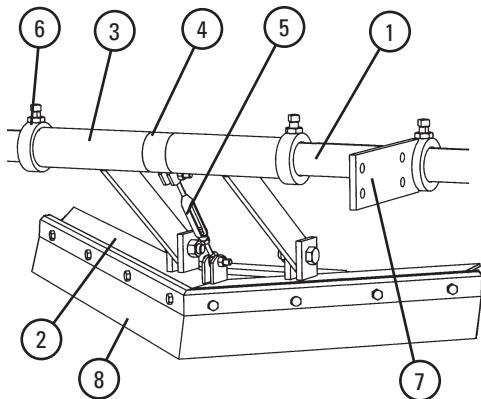

Replacement Blade Kits**

8	Replacement Blade Kit XS	18-24	450-600	VBK-XS	73190	4.5
	Replacement Blade Kit S	30-36	750-900	VBK-S	73191	6.0
	Replacement Blade Kit M	42-48	1050-1200	VBK-M	73192	7.5
	Replacement Blade Kit L	54-60	1350-1500	VBK-L	73193	9.0
	Replacement Blade Kit 72"	72	1800	VBK-72	74457	13.0
	Replacement Blade Kit 84"	84	2100	VBK-84	74458	15.0
	Replacement Blade Kit 96"	96	2400	VBK-96	74459	17.0

*Hardware included


**Kit includes blades and replacement blade bolts.

Lead time: 1 working day

Shaded items are made to order.
Lead time: 10 working days

Replacement Parts - Diagonal Plow

REF	DESCRIPTION	BELT WIDTH (Min-Max)		ORDERING NUMBER	ITEM CODE	WT. LBS.
		in.	mm			
1	Small Plow Frame	18-30	450-750	RDPF-S	75566	18.1
	Medium Plow Frame	36-42	900-1050	RDPF-M	75567	26.3
	Large Plow Frame	48-60	1200-1500	RDPF-L	75568	38.4
	Extra Large Plow Frame	72-84	1800-2100	RDPF-XL	75569	60.7
2	Mounting Bracket Kit* (1 ea.)			RDPMBK	74698	6.1
3	Mounting Shaft Kit* (1 ea.)			RDPMSK	74705	3.6

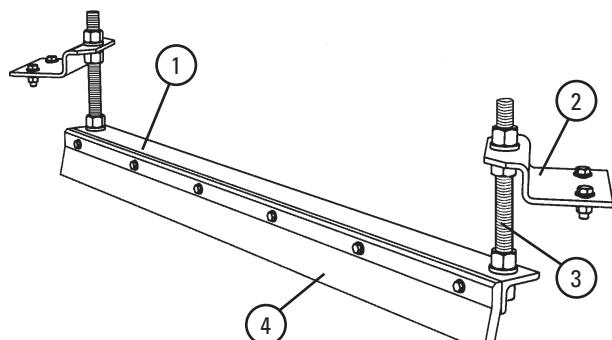

Replacement Blade Kits**

4	Small Plow Blade Kit	18-30	450-750	RDPBK-S	74699	4.0
	Medium Plow Blade Kit	36-42	900-1050	RDPBK-M	74700	5.6
	Large Plow Blade Kit	48-60	1200-1500	RDPBK-L	74701	8.4
	Extra Large Plow Blade Kit	72-84	1800-2100	RDPBK-XL	74702	12.0

*Hardware included

**Kit includes blades and replacement blade bolts.

Lead time: 1 working day

Product Ordering Information

Belt Support Bar
Belt Support Systems

Belt Support Bar

SIZE	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	BSB-1	112918	50.1
2	BSB-2	112919	52.4
3	BSB-3	112920	53.6
4	BSB-4	112921	61.3
5	BSB-5	112922	67.2
6	BSB-6	112923	83.5

ADJUSTMENT RANGE					
SIZE	MIN. DISTANCE		MAX. DISTANCE		
	in.	mm	in.	mm	
1	11-3/4	298	14-3/4	375	
2	13-3/16	335	17-1/2	445	
3	14-1/8	359	19-1/2	495	
4	15-15/16	405	23-1/4	591	
5	19-9/16	497	30-1/2	775	
6	23-13/16	605	38-1/2	978	

Refer to the charts for correct size.

NOTE: Based on standard width CEMA troughing idler.

NOTE: For Class B or Class F, please contact Flexco.



CEMA Class C

BELT WIDTH		TROUGH ANGLE		
in.	mm	20°	35°	45°
18	450	SIZE 1*	SIZE 1*	SIZE 1*
24	600	SIZE 1	SIZE 1	SIZE 1
30	750	SIZE 1	SIZE 1	SIZE 2
36	900	SIZE 2	SIZE 2	SIZE 3
42	1050	SIZE 3	SIZE 3	SIZE 4
48	1200	SIZE 3	SIZE 4	SIZE 4
54	1350	SIZE 4	SIZE 4	SIZE 4
60	1500	SIZE 4	SIZE 4	SIZE 5

*Mount on the vertical face of the stringer.

CEMA Class D

BELT WIDTH		TROUGH ANGLE		
in.	mm	20°	35°	45°
24	600	SIZE 1	SIZE 1	SIZE 1
30	750	SIZE 1	SIZE 2	SIZE 2
36	900	SIZE 2	SIZE 2	SIZE 3
42	1050	SIZE 3	SIZE 3	SIZE 4
48	1200	SIZE 3	SIZE 4	SIZE 4
54	1350	SIZE 4	SIZE 4	SIZE 4
60	1500	SIZE 4	SIZE 4	SIZE 5
72	1800	SIZE 5	SIZE 5	SIZE 6

CEMA Class E

BELT WIDTH		TROUGH ANGLE		
in.	mm	20°	35°	45°
36	900	SIZE 2	SIZE 3	SIZE 3
42	1050	SIZE 3	SIZE 4	SIZE 4
48	1200	SIZE 4	SIZE 4	SIZE 4
54	1350	SIZE 4	SIZE 4	SIZE 4
60	1500	SIZE 5	SIZE 5	SIZE 5
72	1800	SIZE 5	SIZE 5	SIZE 6
84	2100	SIZE 6	SIZE 6	SIZE 6
96	2400	SIZE 6	SIZE 6	SIZE 6

Replacement Parts


REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	Bar Replacement	BSB-BR	112960	1.7
2	Bar Replacement Kit	BSB-BRK	112956	2.0

Specifications:

- Maximum Belt Speed 1000 FPM (5 m/s)
- Temperature Rating -20 to 180°F (-28 to 82°C)
- Horizontal Clearance Required 16 to 30" (406 to 750 mm)
- Available for Belt Widths 18 to 96" (450 to 2400 mm)

Product Notes:

- Intended to be located near load zone, skirting and idlers. Not intended for impact area.

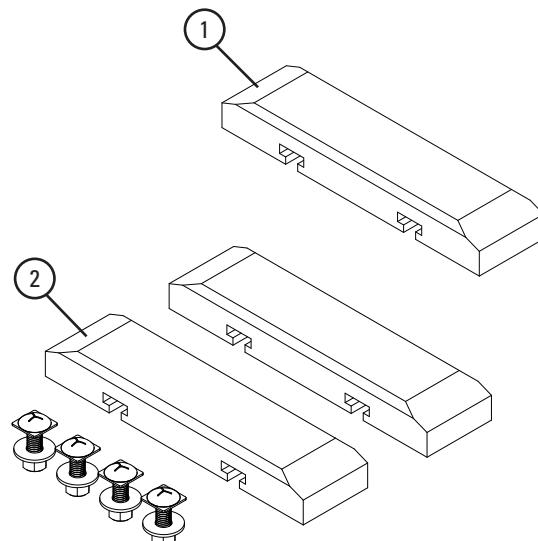

Easy Solution for Load Zone Problems

- Complete load zone offering with slider beds through impact beds for up to 750 ft-lbs of force.
- No specifying trough angle; each bed is adjustable for 20°, 35° and 45° trough settings (ships at 35° setting).
- Low-profile installation. Because EZ Series beds feature trough wings that are adjustable, they lay flat during installation, providing more clearance.
- Full UHMW slider bars included on outside bar to provide proper sealing and long life.
- Unique Impact Bar Supports protect the impact bars from damage, extending service life. An Anti-Migratory Tab on each support secures the bar and prevents it from sliding in the direction of belt travel.
- All beds are manufactured for mounting holes belt width +9" (225 mm), per CEMA. For wider structure, contact Customer Service for special quote.

<p>How to spec the correct slider/impact bed for your conveyor transfer point</p> <p>Impact Energy Calculation Chart</p>	<p>Roller Size and CEMA Rating</p> <p>5" (125 mm) <input type="checkbox"/> 6" (150 mm) <input type="checkbox"/> CEMA C <input type="checkbox"/> D <input type="checkbox"/> E <input type="checkbox"/></p> <p>Belt Width: _____</p> <p>Bed Length: 4' (1.2 m) <input type="checkbox"/> 5' (1.5 m) <input type="checkbox"/></p> <p>Impact Energy</p> <p>Lump Weight (w) _____ Drop Height (h) x _____</p> <hr/> <p>Total = lb-ft See Below</p> <div style="background-color: #f0e68c; color: black; padding: 5px; margin-top: 10px;"> 0 lb-ft—EZSB-C 0 - 200 lb-ft—EZSB-I or EZIB-L (25kg-m) 200 - 750 lb-ft—EZIB-M (25-100 kg-m) </div>
--	---

Product Ordering Information

EZSB-C
Flexco Slider Beds

4' (1.2 m) Length

BELT WIDTH		TONNAGE RATING (ton/hr)	ORDERING NUMBER	ITEM CODE	WT. LBS
in.	mm				
24	600	—	EZSB24-4C	78855	244.1
30	750	—	EZSB30-4C	78856	263.2
36	900	—	EZSB36-4C	78857	289.0
42	1050	—	EZSB42-4C	78858	358.8
48	1200	—	EZSB48-4C	78859	385.7
54	1350	—	EZSB54-4C	78860	455.1
60	1500	—	EZSB60-4C	78861	478.7
72	1800	—	EZSB72-4C	78862	513.0

For non-impact areas.

Lead time: 1 working day



5' (1.5 m) Length

BELT WIDTH		TONNAGE RATING (ton/hr)	ORDERING NUMBER	ITEM CODE	WT. LBS
in.	mm				
24	600	—	EZSB24-5C	78863	261.1
30	750	—	EZSB30-5C	78864	279.7
36	900	—	EZSB36-5C	78865	305.5
42	1050	—	EZSB42-5C	78866	382.9
48	1200	—	EZSB48-5C	78867	410.4
54	1350	—	EZSB54-5C	78868	488.0
60	1500	—	EZSB60-5C	78869	511.6
72	1800	—	EZSB72-5C	78870	545.9

For non-impact areas.

Lead time: 1 working day

Product Notes:

- CEMA D construction
- No need to specify troughing angle – designed to adjust to 20°, 35°, 45°.
- Designed for containment in the load zone, but not intended for impact zones.
- Slider bars are solid 1" (25 mm) UHMW providing longer wear life and consistent load zone sealing.
- Product ships with two rollers. Additional rollers can be added by purchasing an EZRMK and the appropriate corresponding roller.

Adjustable Idler Set

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS
in.	mm			
24	600	EZAI-24	79000	79.9
30	750	EZAI-30	79001	90.0
36	900	EZAI-36	79002	100.7
42	1050	EZAI-42	79003	110.0
48	1200	EZAI-48	79004	123.3
54	1350	EZAI-54	79005	132.5
60	1500	EZAI-60	79006	141.3
72	1800	EZAI-72	79007	163.6

For non-impact areas.

For placement in between 3 or more beds or in transitions;

Adjusts from 10–45° in 5° increments.






SHIM-KIT-EZAI 91857 - includes two 1/4" (6 mm) and two 1/2" (12.5 mm) shims.

Lead time: 1 working day



Specifications and Guidelines


EZSB-C
Flexco Slider Beds

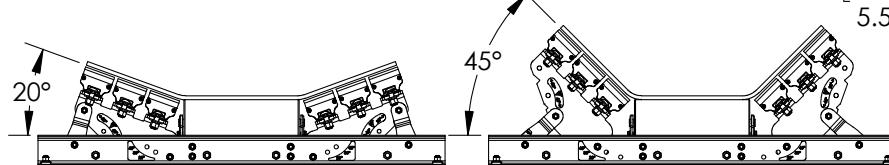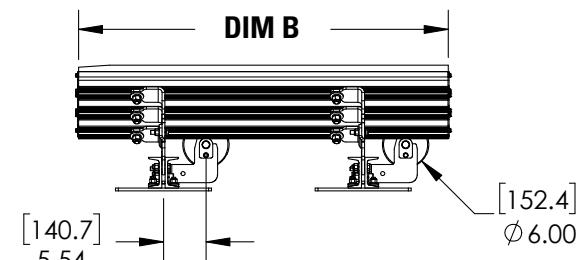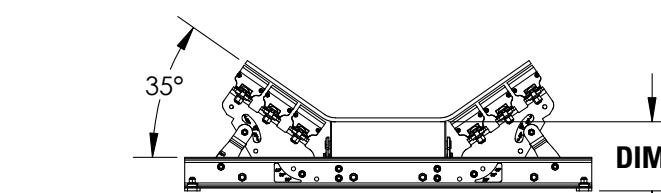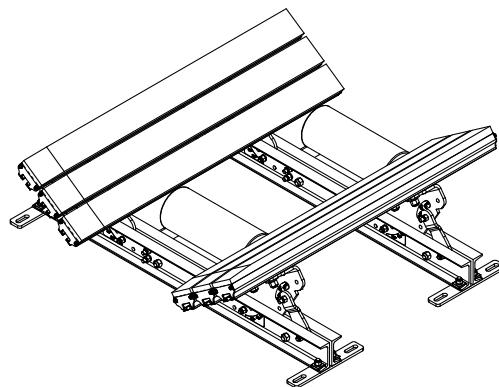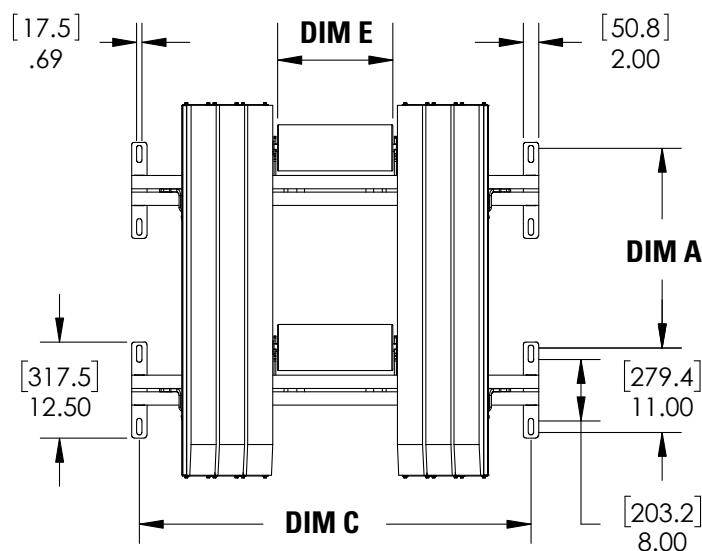

Bed Length 4' (1.2 m)				Bed Length 5' (1.5 m)				Bed Width		Dim C		Dim D		Dim E	
Dim A		Dim B		Dim A		Dim B		in.	mm	in.	mm	in.	mm	in.	mm
26	660.4	48.82	1240	34	863.6	59.06	1500	24	600	33	838	9	229	9	229
								30	750	39	991	9	229	11	279
								36	900	45	1143	9	229	13	330
								42	1050	51	1295	9	229	15	381
								48	1200	57	1448	9	229	17	432
								54	1350	63	1600	9.25	235	19	483
								60	1500	69	1753	9.25	235	21	533
								72	1800	81	2057	9.5	241	25	635

Replacement Parts List

EZSB-C
Flexco Slider Beds

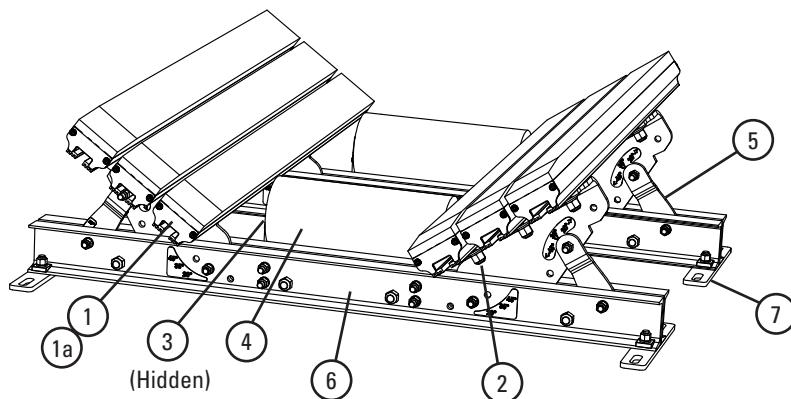

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	Slider Bar, 4' (1.2m)	SB4	78789	20.0
1a	Slider Bar, 5' (1.5m)	SB5	78790	24.1
2	Bar Bolt Kit (incl. 1 ea. 5/8" (15mm) carriage bolt, square washer, flat washer, lock washer, Nylock nut)	IBBK	76928	0.5
3	Slider Roll Mount Kit*	EZRMK	78952	5.1
4	24" (600mm) Roll	N6D3T-24-9-A45	26107	9.1
	30" (750mm) Roll	N6D3T-30-11-A45	26108	10.6
	36" (900mm) Roll	N6D3T-36-13-A45	26109	12.3
	42" (1050mm) Roll	N6D3T-42-15-A45	26110	13.9
	48" (1200mm) Roll	N6D3T-48-17-A45	26111	16.1
	54" (1350mm) Roll	N6D3T-54-19-A45	26112	17.0
	60" (1500mm) Roll	N6D3T-60-21-A45	26113	18.1
	72" (1800mm) Roll	N6D3T-72-25-A45	26114	21.6
5	24" (600mm) Wing Plate Kit*	EZWPK-24	78970	16.9
	30" (750mm) Wing Plate Kit*	EZWPK-30	78971	17.4
	36" (900mm) Wing Plate Kit*	EZWPK-36	78972	21.2
	42" (1050mm) Wing Plate Kit*	EZWPK-42	78973	26.2
	48" (1200mm) Wing Plate Kit*	EZWPK-48	78974	30.1
	54" (1350mm) Wing Plate Kit*	EZWPK-54	78975	35.6
	60" (1500mm) Wing Plate Kit*	EZWPK-60	78976	39.0
	72" (1800mm) Wing Plate Kit*	EZWPK-72	78977	46.7
6	24" (600mm) Cross Stringer Kit*	EZCSK-24	78978	49.2
	30" (750mm) Cross Stringer Kit*	EZCSK-30	78979	56.5
	36" (900mm) Cross Stringer Kit*	EZCSK-36	78980	63.8
	42" (1050mm) Cross Stringer Kit*	EZCSK-42	78981	70.8
	48" (1200mm) Cross Stringer Kit*	EZCSK-48	78982	78.5
	54" (1350mm) Cross Stringer Kit*	EZCSK-54	78983	85.8
	60" (1500mm) Cross Stringer Kit*	EZCSK-60	78984	93.1
	72" (1800mm) Cross Stringer Kit*	EZCSK-72	78985	99.1
7	Shim Kit Light Duty (incl. 4 shims)	SHIM-KITL	77548	13.6

*Hardware Included

Replacement Quantities for EZSB-C

in.	24	30	36	42	48	54	60	72
mm	600	750	900	1050	1200	1350	1500	1800
ROLLS REQUIRED	2	2	2	2	2	2	2	2
BARS REQUIRED	4	4	4	6	6	8	8	8
BAR BOLT KITS REQUIRED	8	8	8	12	12	16	16	16

Shim Requirements

IMPACT BED SIZE	CEMA C OR D 5" (125mm) IDLERS	CEMA C OR D 6" (150mm) IDLERS
24–36" (600–900mm)	Shim idler up .5" (12.5mm)	No Kits Required
42–72" (1050–1800mm)	No Kits Required	Use (1) SHIM-KITL; Shim up .5" (12.5mm)

IMPACT BED SIZE	CEMA E 6" (150mm) IDLERS	CEMA E 7" (175mm) IDLERS
36–60" (900–1500mm)	Use (3) SHIM-KITL; Shim up 1.5" (37.5mm)	Use (4) SHIM-KITL; Shim up 2" (50mm)
72" (1800mm)	Use (4) SHIM-KITL; Shim up 2" (50mm)	Use (5) SHIM-KITL; Shim up 2.5" (62.5mm)

Product Ordering Information

EZSB-I
Flexco Slider Beds
with Impact Rolls

4' (1.2 m) Length

BELT WIDTH	TONNAGE RATING (ton/hr)	ORDERING NUMBER	ITEM CODE	WT. LBS
in.	mm			
24	600	3,500	EZSB24-4I	78871
30	750	3,500	EZSB30-4I	78872
36	900	4,100	EZSB36-4I	78873
42	1050	4,500	EZSB42-4I	78874
48	1200	4,500	EZSB48-4I	78875
54	1350	4,500	EZSB54-4I	78876
60	1500	4,500	EZSB60-4I	78877
72	1800	4,500	EZSB72-4I	78878
				586.0

For impact zones with less than 200 lb-ft energy.

Lead time: 1 working day



5' (1.5 m) Length

BELT WIDTH	TONNAGE RATING (ton/hr)	ORDERING NUMBER	ITEM CODE	WT. LBS
in.	mm			
24	600	3,500	EZSB24-5I	78879
30	750	3,500	EZSB30-5I	78880
36	900	4,100	EZSB36-5I	78881
42	1050	4,500	EZSB42-5I	78882
48	1200	4,500	EZSB48-5I	78883
54	1350	4,500	EZSB54-5I	78884
60	1500	4,500	EZSB60-5I	78885
72	1800	4,500	EZSB72-5I	78886
				620.2

For impact zones with less than 200 lb-ft energy.

* 5' (1.5 m) beds come with 5 impact rolls.

Lead time: 1 working day

Product Notes:

- CEMA D construction
- No need to specify troughing angle – designed to adjust to 20°, 35°, 45°.
- Outermost trough bar features 1" (25 mm) solid UHMW slider bar to provide longer wear life and consistent load zone sealing where impact is not present.

Adjustable Idler Set with Impact Rolls


BELT WIDTH	ORDERING NUMBER	ITEM CODE	WT. LBS
in.	mm		
24	EZAI-24I	79091	89.9
30	EZAI-30I	79092	100.0
36	EZAI-36I	79093	110.7
42	EZAI-42I	79094	120.0
48	EZAI-48I	79095	133.3
54	EZAI-54I	79096	142.5
60	EZAI-60I	79097	151.3
72	EZAI-72I	79098	173.6

For placement in between 3 or more beds or in transitions;

Adjusts from 10–45° in 5° increments.


SHIM-KIT-EZAI 91857 - includes two 1/4" (6 mm) and two 1/2" (12.5 mm) shims.

Lead time: 1 working day

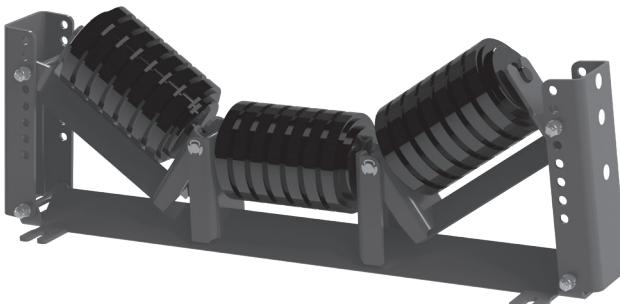

Specifications and Guidelines

EZSB-I
Flexco Slider Beds
with Impact Rolls


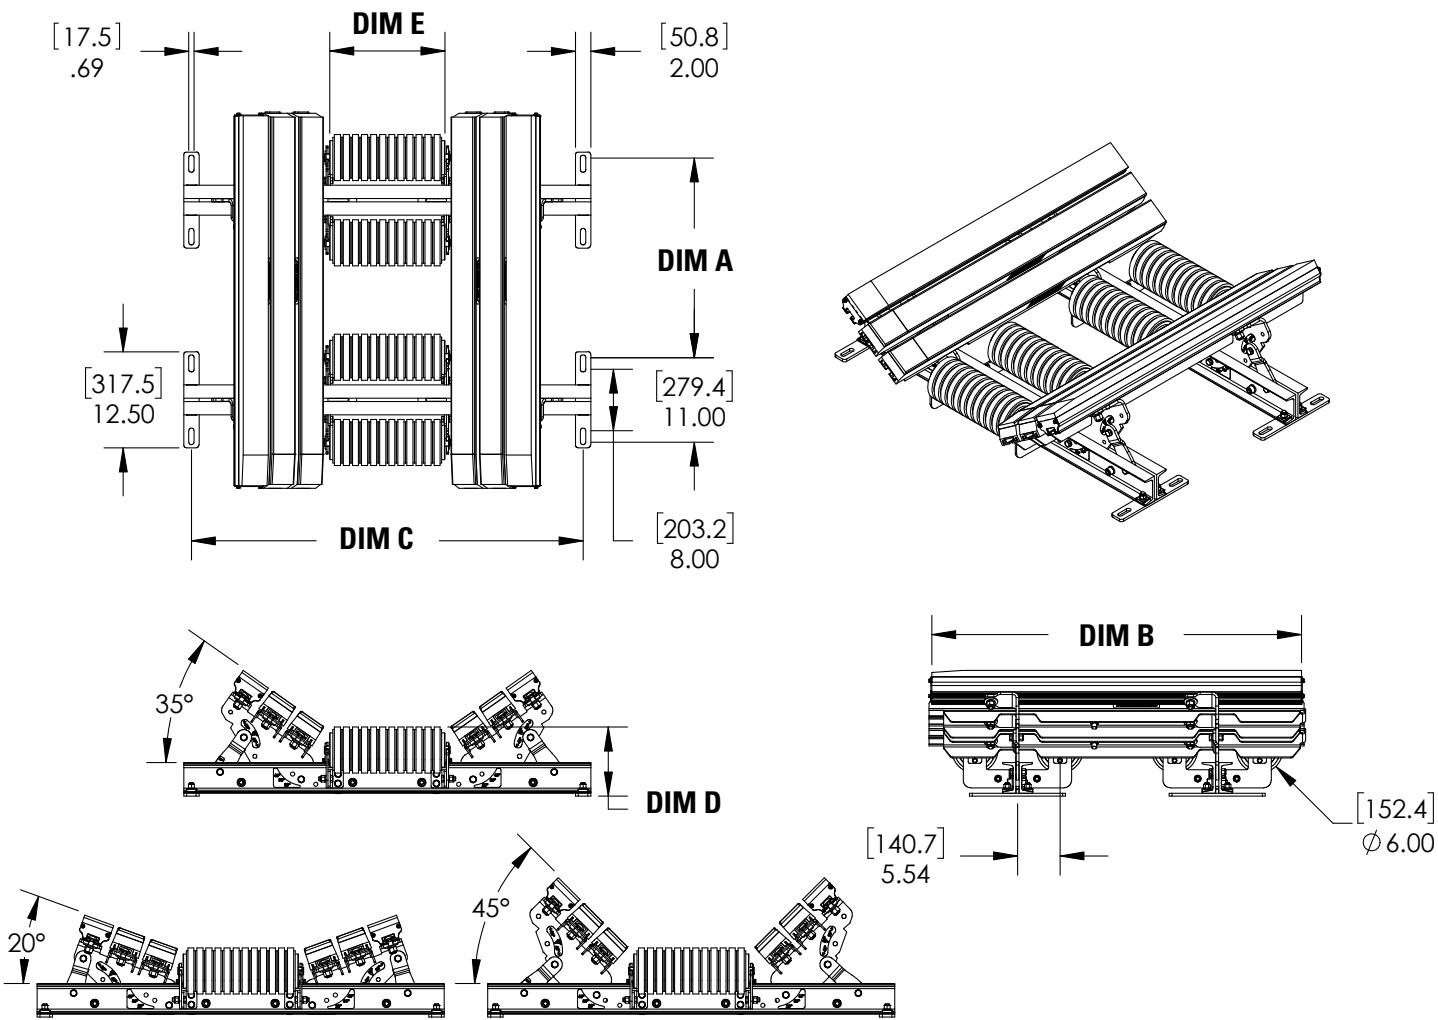


Bed Length 4' (1.2 m)				Bed Length 5' (1.5 m)*				Bed Width		Dim C		Dim D		Dim E	
Dim A		Dim B		Dim A		Dim B		in.	mm	in.	mm	in.	mm	in.	mm
26	660.4	48.14	1222.8	34	863.6	58.38	1482.9	24	600	33	838	9	229	9	229
								30	750	39	991	9	229	11	279
								36	900	45	1143	9	229	13	330
								42	1050	51	1295	9	229	15	381
								48	1200	57	1448	9	229	17	432
								54	1350	63	1600	9.25	235	19	483
								60	1500	69	1753	9.25	235	21	533
								72	1800	81	2057	9.5	241	25	635

* 5' (1.5 m) beds come with 5 impact rolls

Replacement Parts List

EZSB-I
Flexco Slider Beds
with Impact Rolls

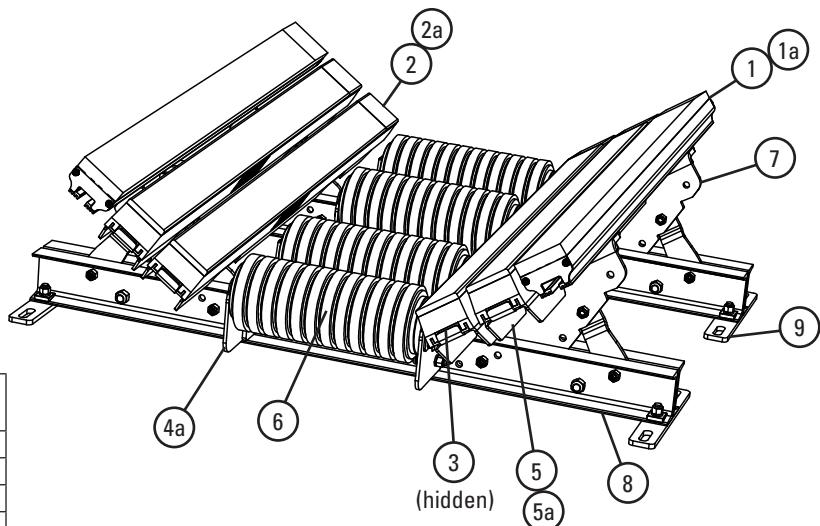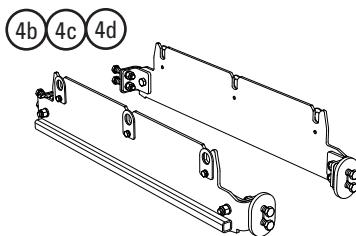

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	Slider Bar, 4' (1.2m)	SB4	78789	20.0
1a	Slider Bar, 5' (1.5m)	SB5	78790	24.1
2	Impact Bar, 4' (1.2m)	IB4	76926	17.0
2a	Impact Bar, 5' (1.5m)	IB5	76927	21.0
3	Bar Bolt Kit (incl. 1 ea. 5/8" (15mm) carriage bolt, square washer, flat washer, lock washer, Nylock nut)	IBBK	76928	0.5
4a	Impact Roller Mount Kit*	EZIRMK	79318	5.1
4b	Center Roller Mount Kit for 5' (1.5M) x 24-48" (600-1200mm)**	EZCRMK24-48	90434	43.5
4c	Center Roller Mount Kit for 5' (1.5M) x 54-60" (1350-1500mm)**	EZCRMK54-60	90261	43.5
4d	Center Roller Mount Kit for 5' (1.5M) x 72" (1800mm)**	EZCRMK72	90262	43.7
5	Impact Bar Support - L 4' (1.2m)*	EZBS-L4	78953	16.1
5a	Impact Bar Support - L 5' (1.5m)*	EZBS-L5	78954	20.4
6	24" (600mm) Impact Roll	NI6D3T-24-9-A45	26184	10.1
	30" (750mm) Impact Roll	NI6D3T-30-11-A45	26185	12.0
	36" (900mm) Impact Roll	NI6D3T-36-13-A45	26186	13.9
	42" (1050mm) Impact Roll	NI6D3T-42-15-A45	26187	16.0
	48" (1200mm) Impact Roll	NI6D3T-48-17-A45	26188	17.9
	54" (1350mm) Impact Roll	NI6D3T-54-19-A45	26189	19.8
	60" (1500mm) Impact Roll	NI6D3T-60-21-A45	26190	21.7
	72" (1800mm) Impact Roll	NI6D3T-72-25-A45	26191	25.6
7	24" (600mm) Wing Plate Kit*	EZWPK-24	78970	16.9
	30" (750mm) Wing Plate Kit*	EZWPK-30	78971	17.4
	36" (900mm) Wing Plate Kit*	EZWPK-36	78972	21.2
	42" (1050mm) Wing Plate Kit*	EZWPK-42	78973	26.2
	48" (1200mm) Wing Plate Kit*	EZWPK-48	78974	30.1
	54" (1350mm) Wing Plate Kit*	EZWPK-54	78975	35.6
	60" (1500mm) Wing Plate Kit*	EZWPK-60	78976	39.0
	72" (1800mm) Wing Plate Kit*	EZWPK-72	78977	46.7
8	24" (600mm) Cross Stringer Kit*	EZCSK-24	78978	49.2
	30" (750mm) Cross Stringer Kit*	EZCSK-30	78979	56.5
	36" (900mm) Cross Stringer Kit*	EZCSK-36	78980	63.8
	42" (1050mm) Cross Stringer Kit*	EZCSK-42	78981	70.8
	48" (1200mm) Cross Stringer Kit*	EZCSK-48	78982	78.5
	54" (1350mm) Cross Stringer Kit*	EZCSK-54	78983	85.8
	60" (1500mm) Cross Stringer Kit*	EZCSK-60	78984	93.1
	72" (1800mm) Cross Stringer Kit*	EZCSK-72	78985	99.1
9	Shim Kit Light Duty (incl. 4 shims)	SHIM-KITL	77548	13.6

* 4' beds require 2 ea. item 4a;

§ 5' beds require 1 ea. item 4a and 1 ea. item 4b, 4c or 4d as needed for bed length.

** 5' (1.5 m) beds come with 5 impact rolls.

*Hardware included.

Lead time: 1 working day

Shim Requirements

IMPACT BED SIZE	CEMA C OR D 5" (125mm) IDLERS	CEMA C OR D 6" (150mm) IDLERS
24-36" (600-900mm)	Shim idler up .5" (12.5mm)	No Kits Required
42-72" (1050-1800mm)	No Kits Required	Use (1) SHIM-KITL; Shim up .5" (12.5mm)

IMPACT BED SIZE	CEMA E 6" (150mm) IDLERS	CEMA E 7" (175mm) IDLERS
36-60" (900-1500mm)	Use (3) SHIM-KITL; Shim up 1.5" (37.5mm)	Use (4) SHIM-KITL; Shim up 2" (50mm)
72" (1800mm)	Use (4) SHIM-KITL; Shim up 2" (50mm)	Use (5) SHIM-KITL; Shim up 2.5" (62.5mm)

Replacement Quantities for EZSB-I

	in.	24	30	36	42	48	54	60	72
	mm	600	750	900	1050	1200	1350	1500	1800
ROLLS REQUIRED	4' BEDS	4	4	4	4	4	4	4	4
	5' BEDS	5	5	5	5	5	5	5	5
BARS REQUIRED	SLIDER	2	2	2	2	2	2	2	2
	IMPACT	2	2	2	4	4	6	6	6
BAR BOLT KITS REQUIRED		10	10	10	16	16	22	22	22
BAR SUPPORTS REQUIRED		2	2	2	4	4	6	6	6

Product Ordering Information

EZIB-L
Flexco Impact Beds
All Bars – Light Duty

4' (1.2 m) Length

BELT WIDTH		TONNAGE RATING (ton/hr)	ORDERING NUMBER	ITEM CODE	WT. LBS
in.	mm				
24	600	3,500	EZIB24-4L	78887	304.3
30	750	3,500	EZIB30-4L	78888	320.9
36	900	4,100	EZIB36-4L	78889	384.8
42	1050	5,200	EZIB42-4L	78890	454.4
48	1200	5,800	EZIB48-4L	78891	518.4
54	1350	7,000	EZIB54-4L	78892	589.0
60	1500	7,600	EZIB60-4L	78893	652.0
72	1800	8,100	EZIB72-4L	78894	721.5

Lead time: 1 working day



5' (1.5 m) Length

BELT WIDTH		TONNAGE RATING (ton/hr)	ORDERING NUMBER	ITEM CODE	WT. LBS
in.	mm				
24	600	3,500	EZIB24-5L	78895	338.8
30	750	3,500	EZIB30-5L	78896	355.5
36	900	4,100	EZIB36-5L	78897	428.1
42	1050	5,200	EZIB42-5L	78898	506.5
48	1200	5,800	EZIB48-5L	78899	579.3
54	1350	7,000	EZIB54-5L	78900	658.8
60	1500	7,600	EZIB60-5L	78901	729.9
72	1800	8,100	EZIB72-5L	78902	808.7





Lead time: 1 working day

Product Notes:

- CEMA D construction
- No need to specify troughing angle—designed to adjust to 20°, 35°, 45°.
- Outermost trough bar features 1" (25 mm) solid UHMW slider bar to provide longer wear life and consistent load zone sealing where impact is not present.

Specifications and Guidelines


EZIB-L
Flexco Impact Beds
All Bars - Light Duty

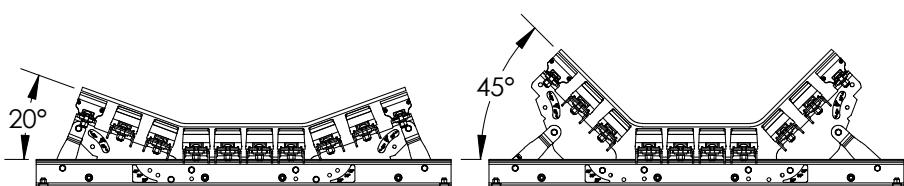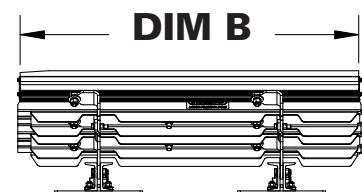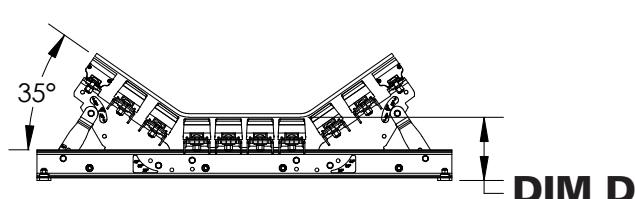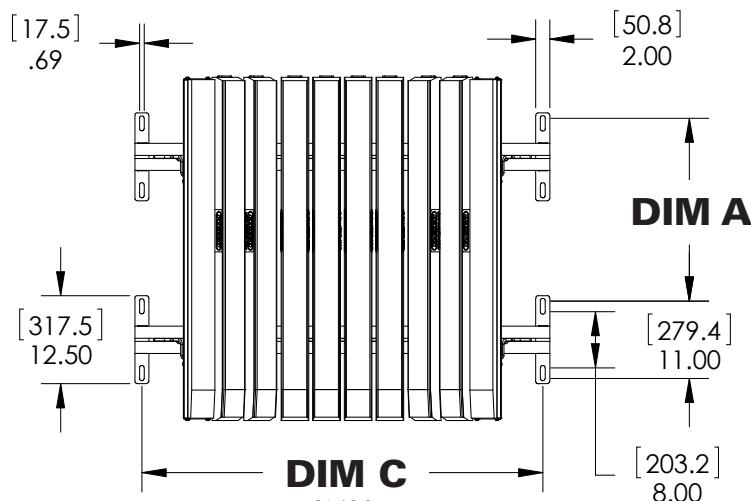

Bed Length 4' (1.2 m)				Bed Length 5' (1.5 m)				Bed Width		Dim C		Dim D	
Dim A		Dim B		Dim A		Dim B				in.	mm	in.	mm
26	660.4	48.14	1222.8	34	863.6	58.38	1482.9	in.	mm	in.	mm	in.	mm
								24	600	33	838	9	229
								30	750	39	991	9	229
								36	900	45	1143	9	229
								42	1050	51	1295	9	229
								48	1200	57	1448	9	229
								54	1350	63	1600	9.25	235
								60	1500	69	1753	9.25	235
								72	1800	81	2057	9.5	241

Replacement Parts List

EZIB-L
Flexco Impact Beds
All Bars – Light Duty

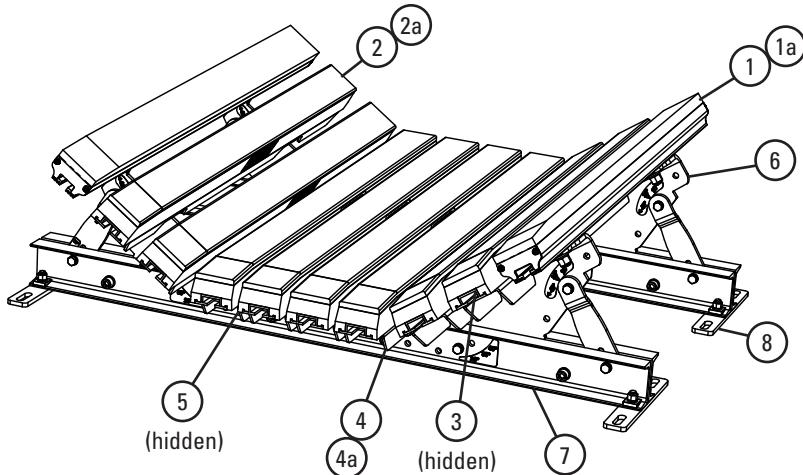

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	Slider Bar, 4' (1.2m)	SB4	78789	20.0
1a	Slider Bar, 5' (1.5m)	SB5	78790	24.1
2	Impact Bar, 4' (1.2m)	IB4	76926	17.0
2a	Impact Bar, 5' (1.5m)	IB5	76927	21.0
3	Bar Bolt Kit (incl. 1 ea. 5/8" (15mm) carriage bolt, square washer, flat washer, lock washer, Nylock nut)	IBBK	76928	0.5
4	Impact Bar Support - L 4' (1.2m)*	EZBS-L4	78953	16.1
4a	Impact Bar Support - L 5' (1.5m)*	EZBS-L5	78954	20.4
	24" (600mm) Center Bar Mount Kit	EZBMK-24	78944	5.2
	30" (750mm) Center Bar Mount Kit	EZBMK-30	78945	5.7
	36" (900mm) Center Bar Mount Kit	EZBMK-36	78946	7.5
5	42" (1050mm) Center Bar Mount Kit	EZBMK-42	78947	8.0
	48" (1200mm) Center Bar Mount Kit	EZBMK-48	78948	9.8
	54" (1350mm) Center Bar Mount Kit	EZBMK-54	78949	10.5
	60" (1500mm) Center Bar Mount Kit	EZBMK-60	78950	12.3
	72" (1800mm) Center Bar Mount Kit	EZBMK-72	78951	14.6
	24" (600mm) Wing Plate Kit*	EZWPK-24	78970	16.9
	30" (750mm) Wing Plate Kit*	EZWPK-30	78971	17.4
	36" (900mm) Wing Plate Kit*	EZWPK-36	78972	21.2
6	42" (1050mm) Wing Plate Kit*	EZWPK-42	78973	26.2
	48" (1200mm) Wing Plate Kit*	EZWPK-48	78974	30.1
	54" (1350mm) Wing Plate Kit*	EZWPK-54	78975	35.6
	60" (1500mm) Wing Plate Kit*	EZWPK-60	78976	39.0
	72" (1800mm) Wing Plate Kit*	EZWPK-72	78977	46.7
	24" (600mm) Cross Stringer Kit*	EZCSK-24	78978	49.2
	30" (750mm) Cross Stringer Kit*	EZCSK-30	78979	56.5
	36" (900mm) Cross Stringer Kit*	EZCSK-36	78980	63.8
7	42" (1050mm) Cross Stringer Kit*	EZCSK-42	78981	70.8
	48" (1200mm) Cross Stringer Kit*	EZCSK-48	78982	78.5
	54" (1350mm) Cross Stringer Kit*	EZCSK-54	78983	85.8
	60" (1500mm) Cross Stringer Kit*	EZCSK-60	78984	93.1
	72" (1800mm) Cross Stringer Kit*	EZCSK-72	78985	99.1
8	Shim Kit Light Duty (incl. 4 shims)	SHIM-KITL	77548	13.6

*Hardware Included

Lead time: 1 working day

Shim Requirements

IMPACT BED SIZE	CEMA C ORD	CEMA C ORD
	5" (125mm) IDLERS	6" (150mm) IDLERS
24–36" (600–900mm)	Shim idler up .5" (12.5mm)	No Kits Required
42–72" (1050–1800mm)	No Kits Required	Use (1) SHIM-KITL; Shim up .5" (12.5mm)

IMPACT BED SIZE	CEMA E	CEMA E
	6" (150mm) IDLERS	7" (175mm) IDLERS
36–60" (900–1500mm)	Use (3) SHIM-KITL; Shim up 1.5" (37.5mm)	Use (4) SHIM-KITL; Shim up 2" (50mm)
72" (1800mm)	Use (4) SHIM-KITL; Shim up 2" (50mm)	Use (5) SHIM-KITL; Shim up 2.5" (62.5mm)

Replacement Quantities for EZIB-L

	in.	24	30	36	42	48	54	60	72
	mm	600	750	900	1050	1200	1350	1500	1800
BARS REQUIRED	SLIDER	2	2	2	2	2	2	2	2
	IMPACT	4	4	5	7	8	10	11	12
BAR BOLT KITS REQUIRED		16	16	19	25	28	34	37	40
BAR SUPPORTS REQUIRED		4	4	5	7	8	10	11	12

Product Ordering Information

EZIB-M
Flexco Impact Beds
All Bars – Medium Duty

4' (1.2 m) Length

BELT WIDTH in.	TONNAGE RATING (ton/hr) mm	ORDERING NUMBER	ITEM CODE	WT. LBS
24	600	8,100	EZIB24-4M	78903
30	750	8,100	EZIB30-4M	78904
36	900	9,500	EZIB36-4M	78905
42	1050	12,200	EZIB42-4M	78906
48	1200	13,600	EZIB48-4M	78907
54	1350	16,300	EZIB54-4M	78908
60	1500	17,600	EZIB60-4M	78909
72	1800	19,000	EZIB72-4M	78910

Lead time: 1 working day



5' (1.5 m) Length

BELT WIDTH in.	TONNAGE RATING (ton/hr) mm	ORDERING NUMBER	ITEM CODE	WT. LBS
24	600	8,100	EZIB24-5M	78911
30	750	8,100	EZIB30-5M	78912
36	900	9,500	EZIB36-5M	78913
42	1050	12,200	EZIB42-5M	78914
48	1200	13,600	EZIB48-5M	78915
54	1350	16,300	EZIB54-5M	78916
60	1500	17,600	EZIB60-5M	78917
72	1800	19,000	EZIB72-5M	78918





Lead time: 1 working day

Product Notes:

- CEMA D construction
- No need to specify troughing angle—designed to adjust to 20°, 35°, 45°.
- Outermost trough bar features 1" (25 mm) solid UHMW slider bar to provide longer wear life and consistent load zone sealing where impact is not present.

Specifications and Guidelines


EZIB-M
Flexco Impact Beds
All Bars - Medium Duty

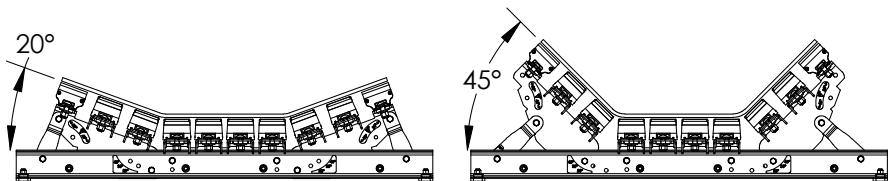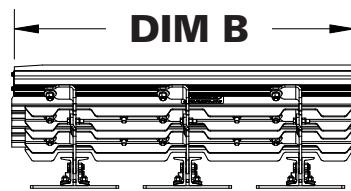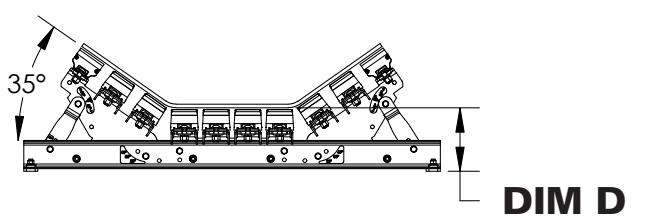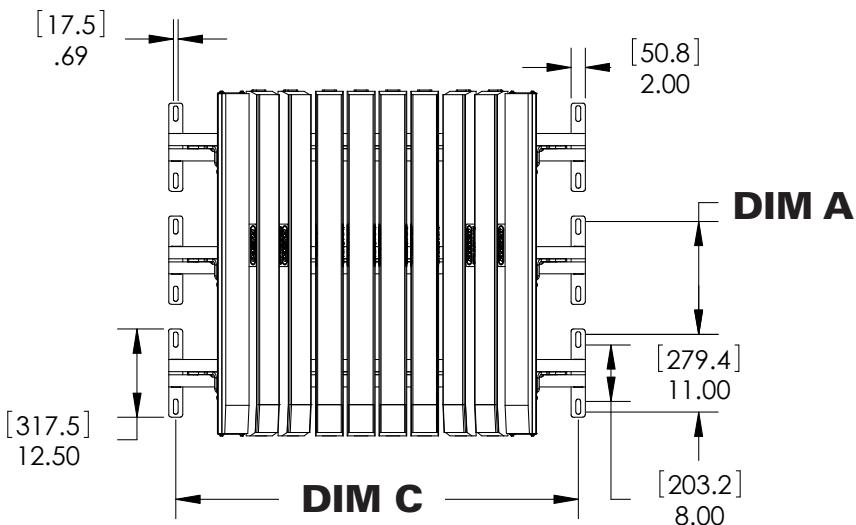

Bed Length 4' (1.2 m)				Bed Length 5' (1.5 m)				Bed Width		Dim C		Dim D	
Dim A		Dim B		Dim A		Dim B		in.	mm	in.	mm	in.	mm
16	406.4	48.14	1222.8	22	558.8	58.38	1482.9	24	600	33	838	9	229
								30	750	39	991	9	229
								36	900	45	1143	9	229
								42	1050	51	1295	9	229
								48	1200	57	1448	9	229
								54	1350	63	1600	9.25	235
								60	1500	69	1753	9.25	235
								72	1800	81	2057	9.5	241

Replacement Parts List

EZIB-M
Flexco Impact Beds
All Bars – Medium Duty

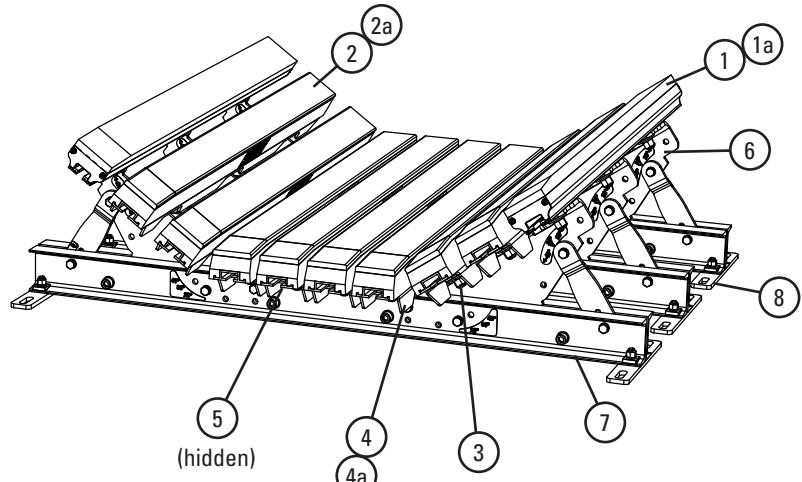

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	Slider Bar, 4' (1.2m)	SB4	78789	20.0
1a	Slider Bar, 5' (1.5m)	SB5	78790	24.1
2	Impact Bar, 4' (1.2m)	IB4	76926	17.0
2a	Impact Bar, 5' (1.5m)	IB5	76927	21.0
3	Bar Bolt Kit (incl. 1 ea. 5/8" (15mm) carriage bolt, square washer, flat washer, lock washer, Nylock nut)	IBBK	76928	0.5
4	Impact Bar Support - M 4' (1.2m)*	IBS-M4	76931	16.9
4a	Impact Bar Support - M 5' (1.5m)*	IBS-M5	76932	21.2
5	24" (600mm) Center Bar Mount Kit	EZBMK-24	78944	5.2
	30" (750mm) Center Bar Mount Kit	EZBMK-30	78945	5.7
	36" (900mm) Center Bar Mount Kit	EZBMK-36	78946	7.5
	42" (1050mm) Center Bar Mount Kit	EZBMK-42	78947	8.0
	48" (1200mm) Center Bar Mount Kit	EZBMK-48	78948	9.8
	54" (1350mm) Center Bar Mount Kit	EZBMK-54	78949	10.5
	60" (1500mm) Center Bar Mount Kit	EZBMK-60	78950	12.3
	72" (1800mm) Center Bar Mount Kit	EZBMK-72	78951	14.6
6	24" (600mm) Wing Plate Kit*	EZWPK-24	78970	16.9
	30" (750mm) Wing Plate Kit*	EZWPK-30	78971	17.4
	36" (900mm) Wing Plate Kit*	EZWPK-36	78972	21.2
	42" (1050mm) Wing Plate Kit*	EZWPK-42	78973	26.2
	48" (1200mm) Wing Plate Kit*	EZWPK-48	78974	30.1
	54" (1350mm) Wing Plate Kit*	EZWPK-54	78975	35.6
	60" (1500mm) Wing Plate Kit*	EZWPK-60	78976	39.0
	72" (1800mm) Wing Plate Kit*	EZWPK-72	78977	46.7
7	24" (600mm) Cross Stringer Kit*	EZCSK-24	78978	49.2
	30" (750mm) Cross Stringer Kit*	EZCSK-30	78979	56.5
	36" (900mm) Cross Stringer Kit*	EZCSK-36	78980	63.8
	42" (1050mm) Cross Stringer Kit*	EZCSK-42	78981	70.8
	48" (1200mm) Cross Stringer Kit*	EZCSK-48	78982	78.5
	54" (1350mm) Cross Stringer Kit*	EZCSK-54	78983	85.8
	60" (1500mm) Cross Stringer Kit*	EZCSK-60	78984	93.1
	72" (1800mm) Cross Stringer Kit*	EZCSK-72	78985	99.1
8	Shim Kit Medium Duty (incl. 4 shims)	SHIM-KITM	77549	20.4

*Hardware Included

Lead time: 1 working day

Shim Requirements

IMPACT BED SIZE	CEMA C ORD 5" (125mm) IDLERS	CEMA C ORD 6" (150mm) IDLERS
24–36" (600–900mm)	Shim idler up .5" (12.5mm)	No Kits Required
42–72" (1050–1800mm)	No Kits Required	Use (1) SHIM-KITM; Shim up .5" (12.5mm)

IMPACT BED SIZE	CEMA E 6" (150mm) IDLERS	CEMA E 7" (175mm) IDLERS
36–60" (900–1500mm)	Use (3) SHIM-KITM; Shim up 1.5" (37.5mm)	Use (4) SHIM-KITM; Shim up 2" (50mm)
72" (1800mm)	Use (4) SHIM-KITM; Shim up 2" (50mm)	Use (5) SHIM-KITM; Shim up 2.5" (62.5mm)

Replacement Quantities for EZIB-M

	in.	24	30	36	42	48	54	60	72
	mm	600	750	900	1050	1200	1350	1500	1800
BARS REQUIRED	SLIDER	2	2	2	2	2	2	2	2
	IMPACT	4	4	5	7	8	10	11	12
BAR BOLT KITS REQUIRED		26	26	31	41	46	56	61	66
BAR SUPPORTS REQUIRED		4	4	5	7	8	10	11	12

Product Ordering Information

MSB
Modular Slider Beds
with Impact Rolls

2' (600 mm) Sections

BELT WIDTH		TONNAGE RATING (ton/hr)	ORDERING NUMBER	ITEM CODE	WT. LBS
in.	mm				
24	600	3,500	MSB24-2I	79979	246.8
30	750	3,500	MSB30-2I	79980	263.5
36	900	4,100	MSB36-2I	79981	297.9
42	1050	4,500	MSB42-2I	79982	373.2
48	1200	4,500	MSB48-2I	79983	393.4
54	1350	4,500	MSB54-2I	79984	493.2
60	1500	4,500	MSB60-2I	79985	513.9
72	1800	4,500	MSB72-2I	79986	557.9

For impact zones with less than 200 lb-ft energy.

Lead time: 1 working day




Add-on Impact Roller Kit

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS
in.	mm			
24	600	MSB24RMK	79991	17.0
30	750	MSB30RMK	79992	18.5
36	900	MSB36RMK	79993	20.2
42	1050	MSB42RMK	79994	21.8
48	1200	MSB48RMK	79995	24.0
54	1350	MSB54RMK	79996	24.9
60	1500	MSB60RMK	79997	26.0
72	1800	MSB72RMK	79998	29.5

For placement between 2 beds to reduce the space between impact rollers.

Lead time: 1 working day

Add-on Impact Roller installed
between 2 Modular Slider Beds

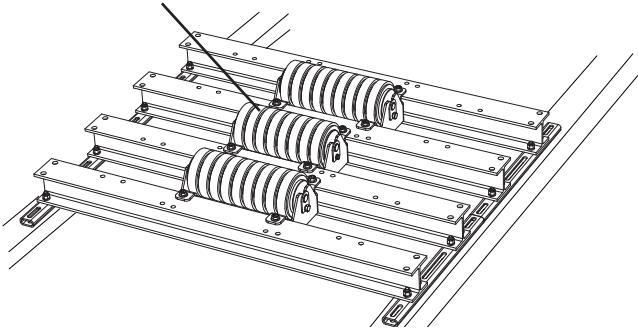

Adjustable Idler Set with Impact Rolls

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS
in.	mm			
24	600	EZAI-24I	79091	89.9
30	750	EZAI-30I	79092	100.0
36	900	EZAI-36I	79093	110.7
42	1050	EZAI-42I	79094	120.0
48	1200	EZAI-48I	79095	133.3
54	1350	EZAI-54I	79096	142.5
60	1500	EZAI-60I	79097	151.3
72	1800	EZAI-72I	79098	173.6

For placement in between 3 or more beds or in transitions;

Adjusts from 10–45° in 5° increments.

SHIM-KIT-EZAI 91857 - includes two 1/4" (6 mm) and two 1/2" (12.5 mm) shims.

Lead time: 1 working day








Product Notes:

- Modular design accommodates any length of load zone
- CEMA D construction
- No need to specify troughing angle – designed to adjust to 20°, 35°, 45°
- All bars feature 1" (25 mm) solid UHMW
- With removal of a few bolts, the wings and center sections slide out for service
- Optional add-on roller to join two beds and reduce the space between idlers from every 24" (600 mm) to every 12" (300 mm).

Specifications and Guidelines


MSB
*Modular Slider Beds
with Impact Rolls*

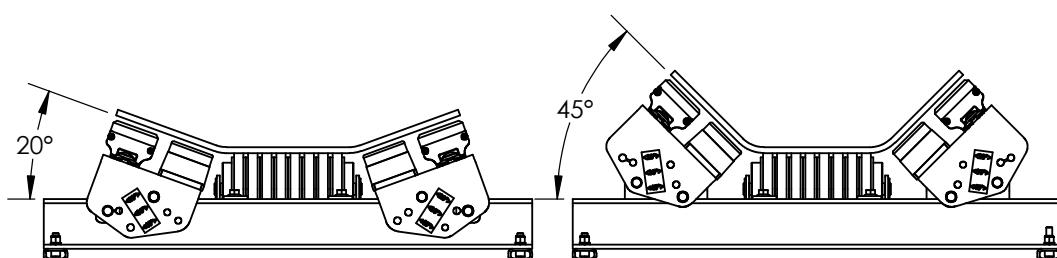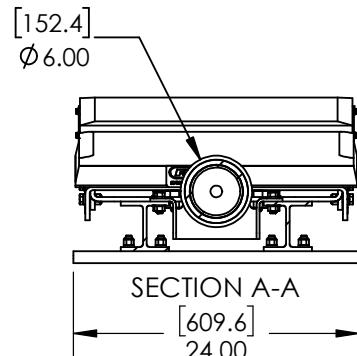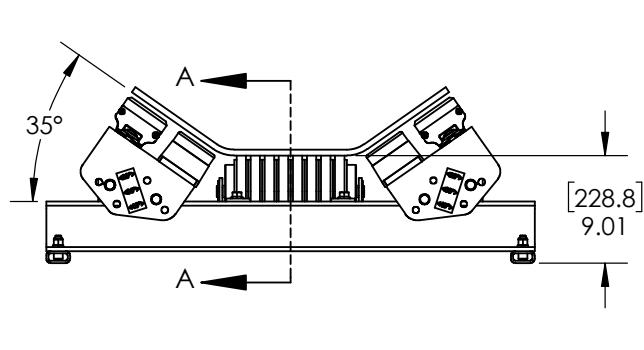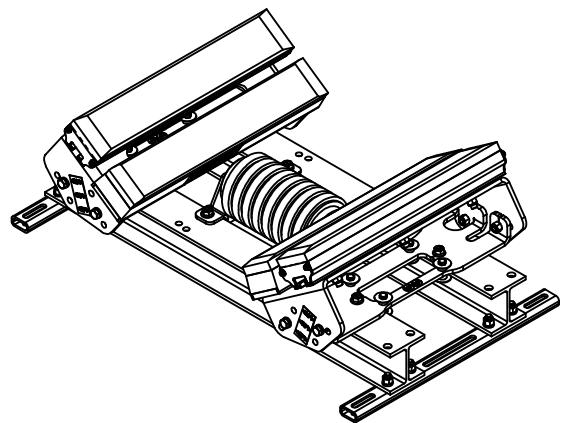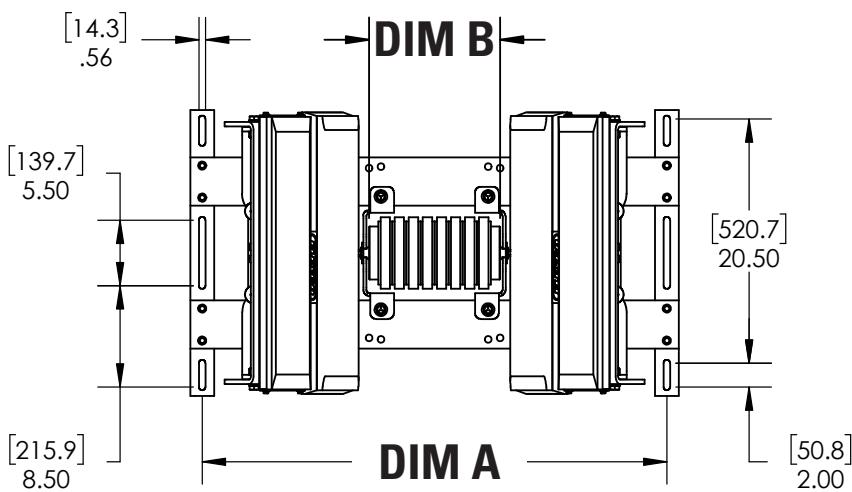

Bed Width		Dim A		Dim B	
in.	mm	in.	mm	in.	mm
24	600	33	838	9	229
30	750	39	991	11	279
36	900	45	1143	13	330
42	1050	51	1295	15	381
48	1200	57	1448	17	432
54	1350	63	1600	19	483
60	1500	69	1753	21	533
72	1800	81	2057	25	635

Replacement Parts List

MSB
Modular Slider Beds
with Impact Rolls

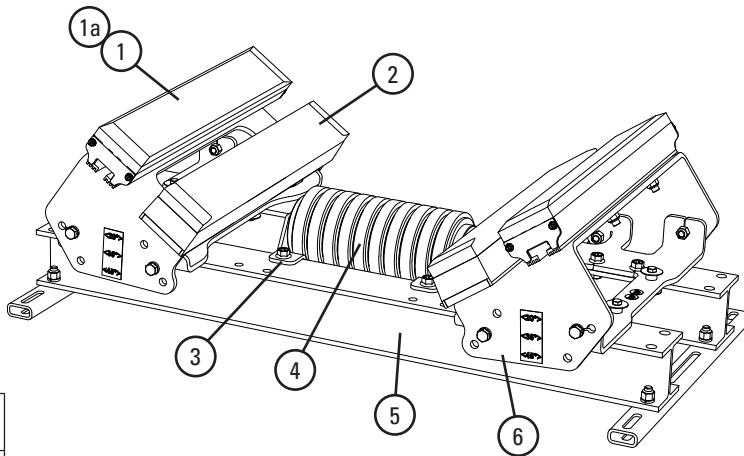

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	Slider Bar, 2' (600mm)	SB2	79970	10.0
1a	Slider Bar with hardware, 2' (600mm)	SB2F	79988	10.9
2	Impact Bar, 2' (600mm)	MIB2-1U	79379	19.7
2a	Impact Bar with hardware, 2' (600mm)	MIB2-1UF	79908	20.0
3	Roller Mount Kit*	MSBRMK	79987	7.9
4	24" (600mm) Impact Roll	NI6D3T-24-9-A45	26184	10.1
	30" (750mm) Impact Roll	NI6D3T-30-11-A45	26185	12.0
	36" (900mm) Impact Roll	NI6D3T-36-13-A45	26186	13.9
	42" (1050mm) Impact Roll	NI6D3T-42-15-A45	26187	16.0
	48" (1200mm) Impact Roll	NI6D3T-48-17-A45	26188	17.9
	54" (1350mm) Impact Roll	NI6D3T-54-19-A45	26189	19.8
	60" (1500mm) Impact Roll	NI6D3T-60-21-A45	26190	21.7
5	72" (1800mm) Impact Roll	NI6D3T-72-25-A45	26191	25.6
	24" (600mm) Cross Stringer Kit*	MIB24CSK	90237	86.7
	30" (750mm) Cross Stringer Kit*	MIB30CSK	90238	99.6
	36" (900mm) Cross Stringer Kit*	MIB36CSK	90239	112.5
	42" (1050mm) Cross Stringer Kit*	MIB42CSK	90240	125.4
	48" (1200mm) Cross Stringer Kit*	MIB48CSK	90241	138.4
	54" (1350mm) Cross Stringer Kit*	MIB54CSK	90242	153.7
6	60" (1500mm) Cross Stringer Kit*	MIB60CSK	90243	166.6
	72" (1800mm) Cross Stringer Kit*	MIB72CSK	90244	194.7
	24" (600mm) Wing Plate Kit*	MIB24WPK	90245	38.9
	30" (750mm) Wing Plate Kit*	MIB30WPK	90246	39.8
	36" (900mm) Wing Plate Kit*	MIB36WPK	90247	49.6
	42" (1050mm) Wing Plate Kit*	MIB42WPK	90248	59.7
	48" (1200mm) Wing Plate Kit*	MIB48WPK	90249	62.4
7	54" (1350mm) Wing Plate Kit*	MIB54WPK	90250	83.8
	60" (1500mm) Wing Plate Kit*	MIB60WPK	90251	86.7
	72" (1800mm) Wing Plate Kit*	MIB72WPK	90252	92.8
	Shim Kit (incl. 4 shims)	SHIM-KITMOD	79989	11.8

*Hardware Included

Lead time: 1 working day

Shim Requirements

IMPACT BED SIZE	CEMA C OR D 5" (125mm) IDLERS	CEMA C OR D 6" (150mm) IDLERS
24–36" (600–900mm)	Shim idler up .5" (12.5mm)	No Kits Required
42–72" (1050–1800mm)	No Kits Required	Use (1) shim kit; Shim up .5" (12.5mm)
IMPACT BED SIZE	CEMA E 6" (150mm) IDLERS	CEMA E 7" (175mm) IDLERS
36–60" (900–1500mm)	Use (3) shim kits; Shim up 1.5" (37.5mm)	Use (4) shim kits; Shim up 2" (50mm)
72" (1800mm)	Use (4) shim kits; Shim up 2" (50mm)	Use (5) shim kits; Shim up 2.5" (62.5mm)

Replacement Quantities for MSB

in.	24	30	36	42	48	54	60	72
mm	600	750	900	1050	1200	1350	1500	1800
BARS REQUIRED	SLIDER	2	2	2	2	2	2	2
IMPACT		2	2	2	4	4	6	6

Product Ordering Information

MIB
Modular Impact Beds
All Bars

2' (600 mm) Sections

BELT WIDTH	TONNAGE RATING (ton/hr)	ORDERING NUMBER	ITEM CODE	WT. LBS
in.	mm			
24	600	12,800	MIB24-2H	79971
30	750	12,800	MIB30-2H	79972
36	900	14,900	MIB36-2H	79973
42	1050	19,200	MIB42-2H	79974
48	1200	21,300	MIB48-2H	79975
54	1350	25,600	MIB54-2H	79976
60	1500	27,700	MIB60-2H	79977
72	1800	29,900	MIB72-2H	79978
				698.3

For impact zones with less than 1500 lb-ft energy.

Lead time: 1 working day



Adjustable Idler Set with Impact Rolls


BELT WIDTH	ORDERING NUMBER	ITEM CODE	WT. LBS
in.	mm		
24	EZAI-24I	79091	89.9
30	EZAI-30I	79092	100.0
36	EZAI-36I	79093	110.7
42	EZAI-42I	79094	120.0
48	EZAI-48I	79095	133.3
54	EZAI-54I	79096	142.5
60	EZAI-60I	79097	151.3
72	EZAI-72I	79098	173.6

For placement in between 3 or more beds or in transitions;

Adjusts from 10–45° in 5° increments.

SHIM-KIT-EZAI 91857 - includes two 1/4" (6 mm) and two 1 1/2" (12.5 mm) shims.

Lead time: 1 working day

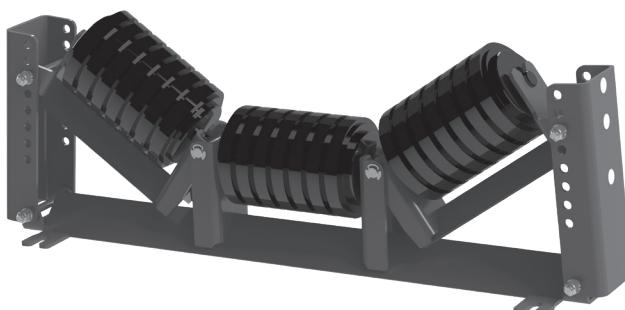


Product Notes:

- Modular design accommodates any length of load zone.
- CEMA D construction.
- No need to specify troughing angle—designed to adjust to 20°, 35°, 45°.
- All bars feature 1" (25 mm) solid UHMW.
- With removal of a few bolts, the wings and center sections slide out for service.

Specifications and Guidelines


MIB
Modular Impact Beds
All Bars

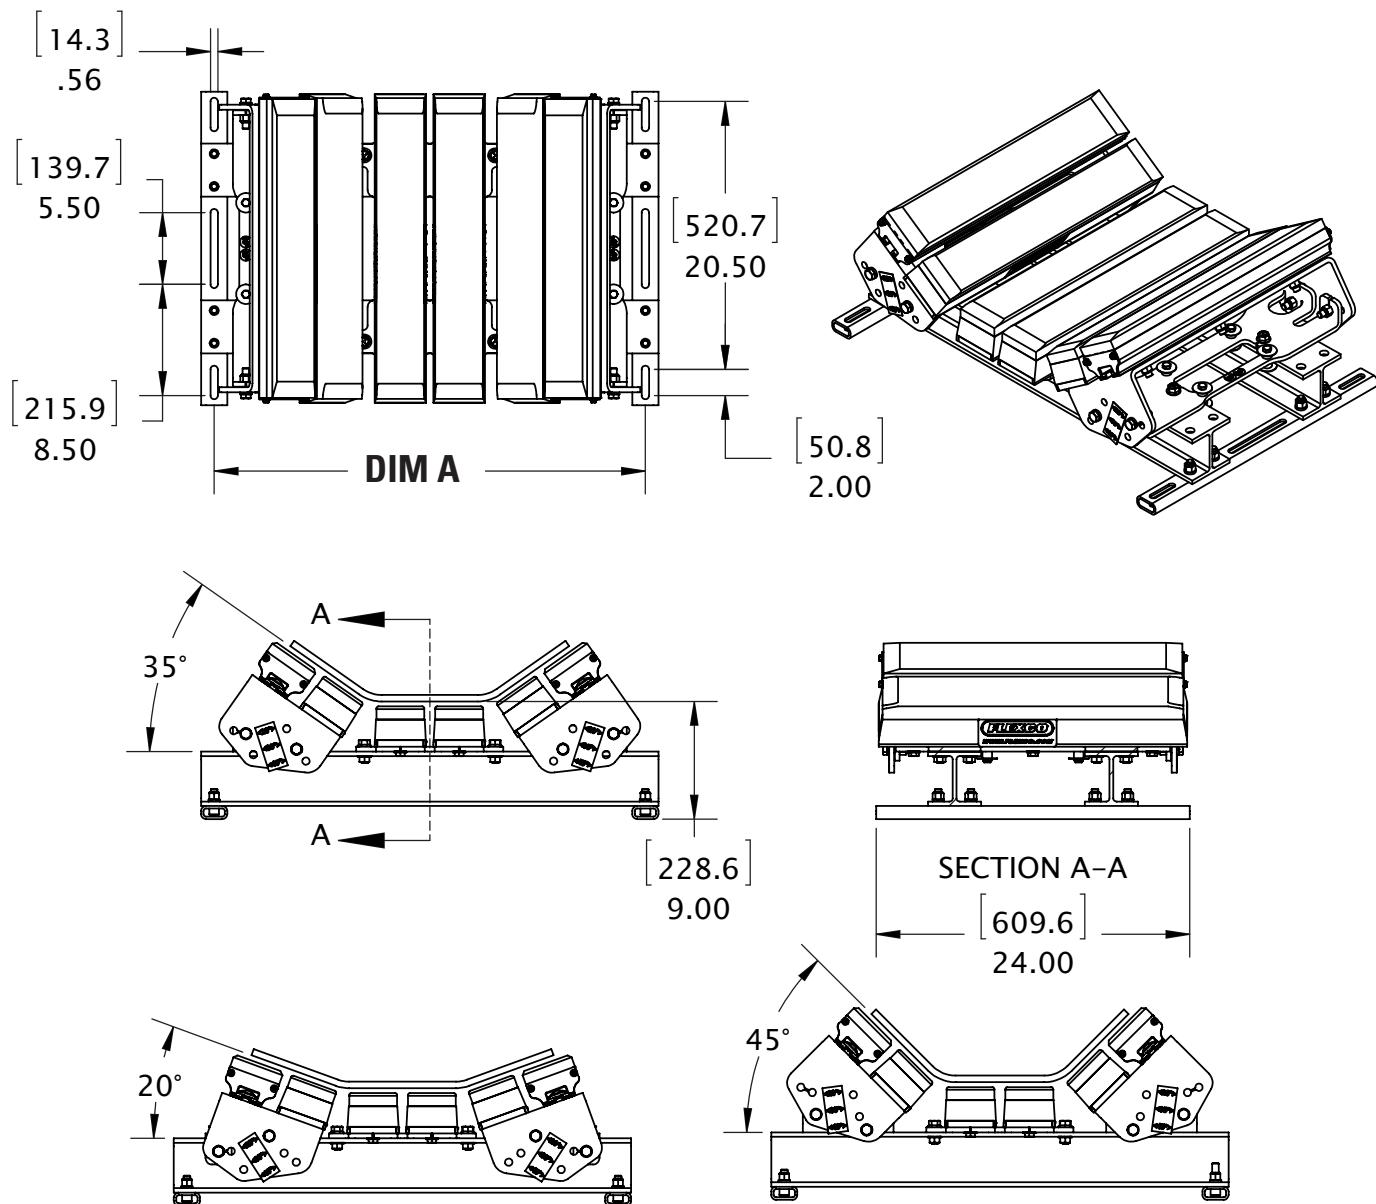

Bed Width		Dim A	
in.	mm	in.	mm
24	600	33	838
30	750	39	991
36	900	45	1143
42	1050	51	1295
48	1200	57	1448
54	1350	63	1600
60	1500	69	1753
72	1800	81	2057

Replacement Parts List

MIB
Modular Impact Beds
All Bars

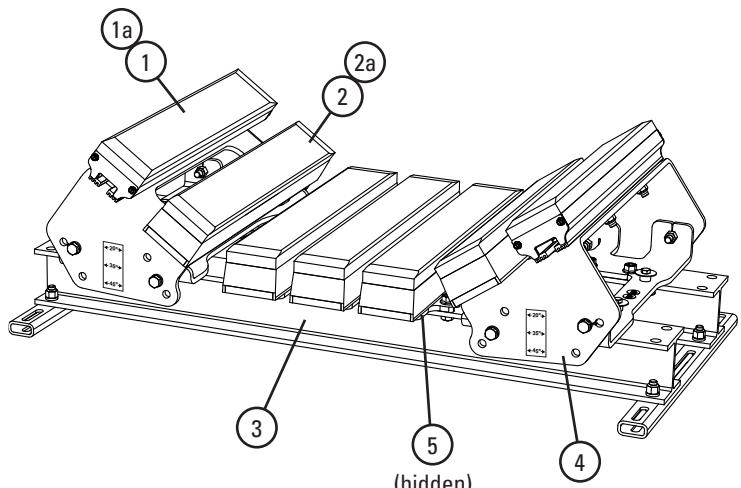

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	Slider Bar, 2' (600mm)	SB2	79970	10.0
1a	Slider Bar with hardware, 2' (600mm)	SB2F	79988	10.9
2	Impact Bar, 2' (600mm)	MIB2-1U	79379	19.7
2a	Impact Bar with hardware, 2' (600mm)	MIB2-1UF	79908	20.0
3	24" (600mm) Cross Stringer Kit*	MIB24CSK	90237	86.7
	30" (750mm) Cross Stringer Kit*	MIB30CSK	90238	99.6
	36" (900mm) Cross Stringer Kit*	MIB36CSK	90239	112.5
	42" (1050mm) Cross Stringer Kit*	MIB42CSK	90240	125.4
	48" (1200mm) Cross Stringer Kit*	MIB48CSK	90241	138.4
	54" (1350mm) Cross Stringer Kit*	MIB54CSK	90242	153.7
	60" (1500mm) Cross Stringer Kit*	MIB60CSK	90243	166.6
	72" (1800mm) Cross Stringer Kit*	MIB72CSK	90244	194.7
4	24" (600mm) Wing Plate Kit*	MIB24WPK	90245	38.9
	30" (750mm) Wing Plate Kit*	MIB30WPK	90246	39.8
	36" (900mm) Wing Plate Kit*	MIB36WPK	90247	49.6
	42" (1050mm) Wing Plate Kit*	MIB42WPK	90248	59.7
	48" (1200mm) Wing Plate Kit*	MIB48WPK	90249	62.4
	54" (1350mm) Wing Plate Kit*	MIB54WPK	90250	83.8
	60" (1500mm) Wing Plate Kit*	MIB60WPK	90251	86.7
	72" (1800mm) Wing Plate Kit*	MIB72WPK	90252	92.8
5	24" (600mm) Center Plate Kit*	MIB24CPK	90253	19.3
	30" (750mm) Center Plate Kit*	MIB30CPK	90254	20.4
	36" (900mm) Center Plate Kit*	MIB36CPK	90255	29.2
	42" (1050mm) Center Plate Kit*	MIB42CPK	90256	29.9
	48" (1200mm) Center Plate Kit*	MIB48CPK	90257	37.0
	54" (1350mm) Center Plate Kit*	MIB54CPK	90258	38.5
	60" (1500mm) Center Plate Kit*	MIB60CPK	90259	45.4
	72" (1800mm) Center Plate Kit*	MIB72CPK	90260	54.2
-	Shim Kit (incl. 4 shims)	SHIM-KITMOD	79989	11.8

*Hardware Included

Lead time: 1 working day

Replacement Quantities for MIB

in.	24	30	36	42	48	54	60	72
mm	600	750	900	1050	1200	1350	1500	1800
BARS REQUIRED	SLIDER	2	2	2	2	2	2	2
REQUIRED	IMPACT	4	4	5	7	8	10	12

Shim Requirements

IMPACT BED SIZE	CEMA C OR D 5" (125mm) IDLERS	CEMA C OR D 6" (150mm) IDLERS
24–36" (600–900mm)	Shim idler up .5" (12.5mm)	No Kits Required
42–72" (1050–1800mm)	No Kits Required	Use (1) shim kit; Shim up .5" (12.5mm)

IMPACT BED SIZE	CEMA E 6" (150mm) IDLERS	CEMA E 7" (175mm) IDLERS
36–60" (900–1500mm)	Use (3) shim kits; Shim up 1.5" (37.5mm)	Use (4) shim kits; Shim up 2" (50mm)
72" (1800mm)	Use (4) shim kits; Shim up 2" (50mm)	Use (5) shim kits; Shim up 2.5" (62.5mm)

Specifications & Guidelines

DRX™ Impact Beds

It's the Structure, not the bars

It absorbs more impact to save your belt. Our exclusive Velocity Reduction Technology™ provides two levels of impact relief.

Level 1: Impact Bars first absorb impact energy. Unique Impact Bar Supports on all DRX™ Impact Beds allow the impact bars to function properly - expanding and absorbing more impact energy.

Level 2: On DRX™ 200, 750, and 1500 impact beds, Isolation Mounts provide a second level of reaction force reduction, absorbing additional impact energy and minimizing transmission back to the belt. The DRX™ 3000 and 4500 Dynamic have Impact Energy Absorbers to disperse an immense amount of impact, even in extremely severe applications.

User-Friendly Slide-Out Service™


- All DRX™ Impact Beds separate in the middle to slide apart and out.
- Can be easily and safely converted from the run position to the service position.
- Impact bars are easy to get to for changeout. A complete changeout can be done in one or two hours.

Unique Impact Bar Supports protect the impact bars from damage, extending service life. An Anti-Migratory Tab on each support secures the bar and prevents it from sliding in the direction of the belt.

Other Features and Benefits

- Uses exclusive anti-spin square washers. Allows use of carriage bolts to secure impact bars instead of expensive T bolts.

How to spec the correct impact bed for your conveyor transfer point

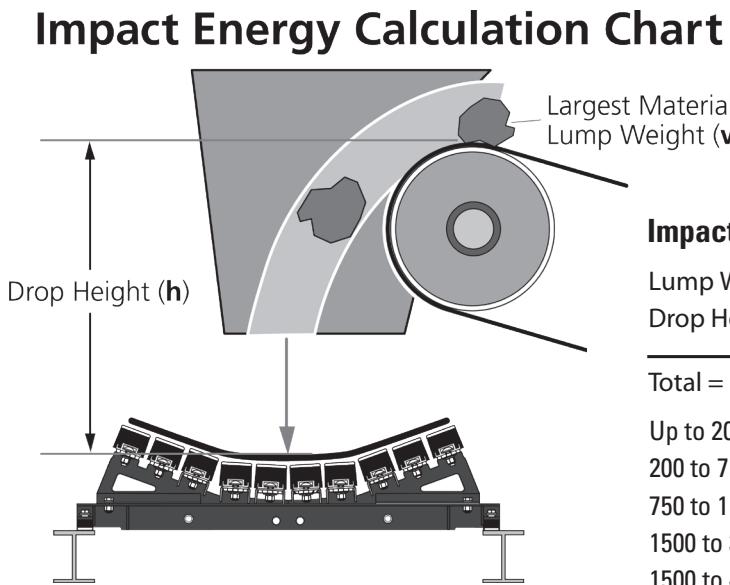

Roller Size and CEMA Rating

5" (125 mm) 6" (150 mm)

CEMA C D E

Belt Width _____

Troughing Angle: 20° 35°

Bed Length: 4' (1.2 m) 5' (1.5 m)

Impact Energy

Lump Weight (w) _____

Drop Height (h) x _____

Total = lb-ft _____ See Below

Up to 200 lb-ft (25 kg-m)—DRX200

200 to 750 lb-ft (25 to 100 kg-m)—DRX750

750 to 1500 lb-ft (100 to 200 kg-m)—DRX1500

1500 to 3000 lb-ft (200 to 400 kg-m)—DRX3000

1500 to 4500 lb-ft (200 to 600 kg-m)—DRX4500

DRX™
Impact Beds

Product Ordering Information

DRX™ 200
Impact Beds

4' (1.2 m) Bed CEMA D construction

BELT WIDTH in.	TONNAGE RATING (ton/hr) mm	20° TROUGH		35° TROUGH		WT. LBS
		ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	
24	600	3,500	DRXL-24-420	76816	DRXL-24-435	76832
30	750	3,500	DRXL-30-420	76817	DRXL-30-435	76833
36	900	4,100	DRXL-36-420	76818	DRXL-36-435	76834
42	1050	5,200	DRXL-42-420	76819	DRXL-42-435	76835
48	1200	5,800	DRXL-48-420	76820	DRXL-48-435	76836
54	1350	7,000	DRXL-54-420	76821	DRXL-54-435	76837
60	1500	7,600	DRXL-60-420	76822	DRXL-60-435	76838
72	1800	8,100	DRXL-72-420	76823	DRXL-72-435	76839
						615.0

Lead time: 3 weeks

5' (1.5 m) Bed CEMA D construction

BELT WIDTH in.	TONNAGE RATING (ton/hr) mm	20° TROUGH		35° TROUGH		WT. LBS
		ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	
24	600	3,500	DRXL-24-520	76824	DRXL-24-535	76840
30	750	3,500	DRXL-30-520	76825	DRXL-30-535	76841
36	900	4,100	DRXL-36-520	76826	DRXL-36-535	76842
42	1050	5,200	DRXL-42-520	76827	DRXL-42-535	76843
48	1200	5,800	DRXL-48-520	76828	DRXL-48-535	76844
54	1350	7,000	DRXL-54-520	76829	DRXL-54-535	76845
60	1500	7,600	DRXL-60-520	76830	DRXL-60-535	76846
72	1800	8,100	DRXL-72-520	76831	DRXL-72-535	76847
						679.0

Lead time: 3 weeks

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	Impact Bar, 4' (1.2m)	IB4	76926	17.0
1a	Impact Bar, 5' (1.5m)	IB5	76927	21.0
2	Slider Bar, 4' (1.2m)	SB4	78789	20.0
2a	Slider Bar, 5' (1.5m)	SB5	78790	24.1
3	Impact Bar Bolt Kit (incl. (1) ea. 5/8" (15mm) carriage bolt, square washer, flat washer, lock washer, Nylock nut)	IBBK	76928	0.5
4	Impact Bar Support - L 4' (1.2m) (incl. (1) ea. bar support, carriage bolt, square washer, lock washer, Nylock nut)	IBS-L4	76929	16.8
4a	Impact Bar Support - L 5' (1.5m) (incl. (1) ea. bar support, carriage bolt, square washer, lock washer, Nylock nut)	IBS-L5	76930	21.0
5	Sliding Support Arm Bolt Kit (incl. (2) ea. 2" bolts, lock washers, Nylock nuts)	ISABK-LMH	77529	2.0
6	Isolation Mount Kit	IMK	76936	3.8
7	DRX200 Shim Kit (incl. 4 shims)	SHIM-KITL	77548	13.6


Lead time: 1 working day

Replacement Quantities per Belt Width for DRX200

	24	30	36	42	48	54	60	72
in.	600	750	900	1050	1200	1350	1500	1800
Slider Bars Required	2	2	2	2	2	2	2	4
Impact Bars Required	4	4	5	7	8	10	11	12
Impact Bar Supports Required	4	4	5	7	8	10	11	12
Impact Bar Bolt Kits Required	16	16	19	25	28	34	37	44

Product Notes:

- Rated for impacts up to 200 lb-ft (25 kg-m)
- Rated for belt speeds up to 1000 FMP (5 m/s)
- Slide-out serviceability
- Velocity Reduction Technology provides multiple points of protection
- Alternative trough angles or picking idler profiles available by special quote

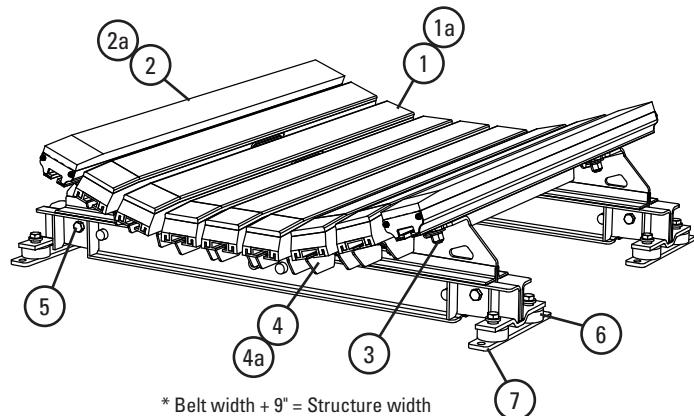


Shim Requirements

IMPACT BED SIZE	CEMA C OR D 5" (125mm) IDLERS	CEMA C OR D 6" (150mm) IDLERS
24-36" (600-900mm)	Shim idler up .5" (12.5mm)	No Kits Required
42-72" (1050-1800mm)	No Kits Required	Use (1) SHIM-KITL; Shim up 5" (12.5mm)

IMPACT BED SIZE	CEMA E 6" (150mm) IDLERS	CEMA E 7" (175mm) IDLERS
36-60" (900-1500mm)	Use (3) SHIM-KITL; Shim up 1.5" (37.5mm)	Use (4) SHIM-KITL; Shim up 2" (50mm)
72" (1800mm)	Use (4) SHIM-KITL; Shim up 2" (50mm)	Use (5) SHIM-KITL; Shim up 2.5" (62.5mm)

Specifications and Guidelines

DRX™ 200
Impact Beds

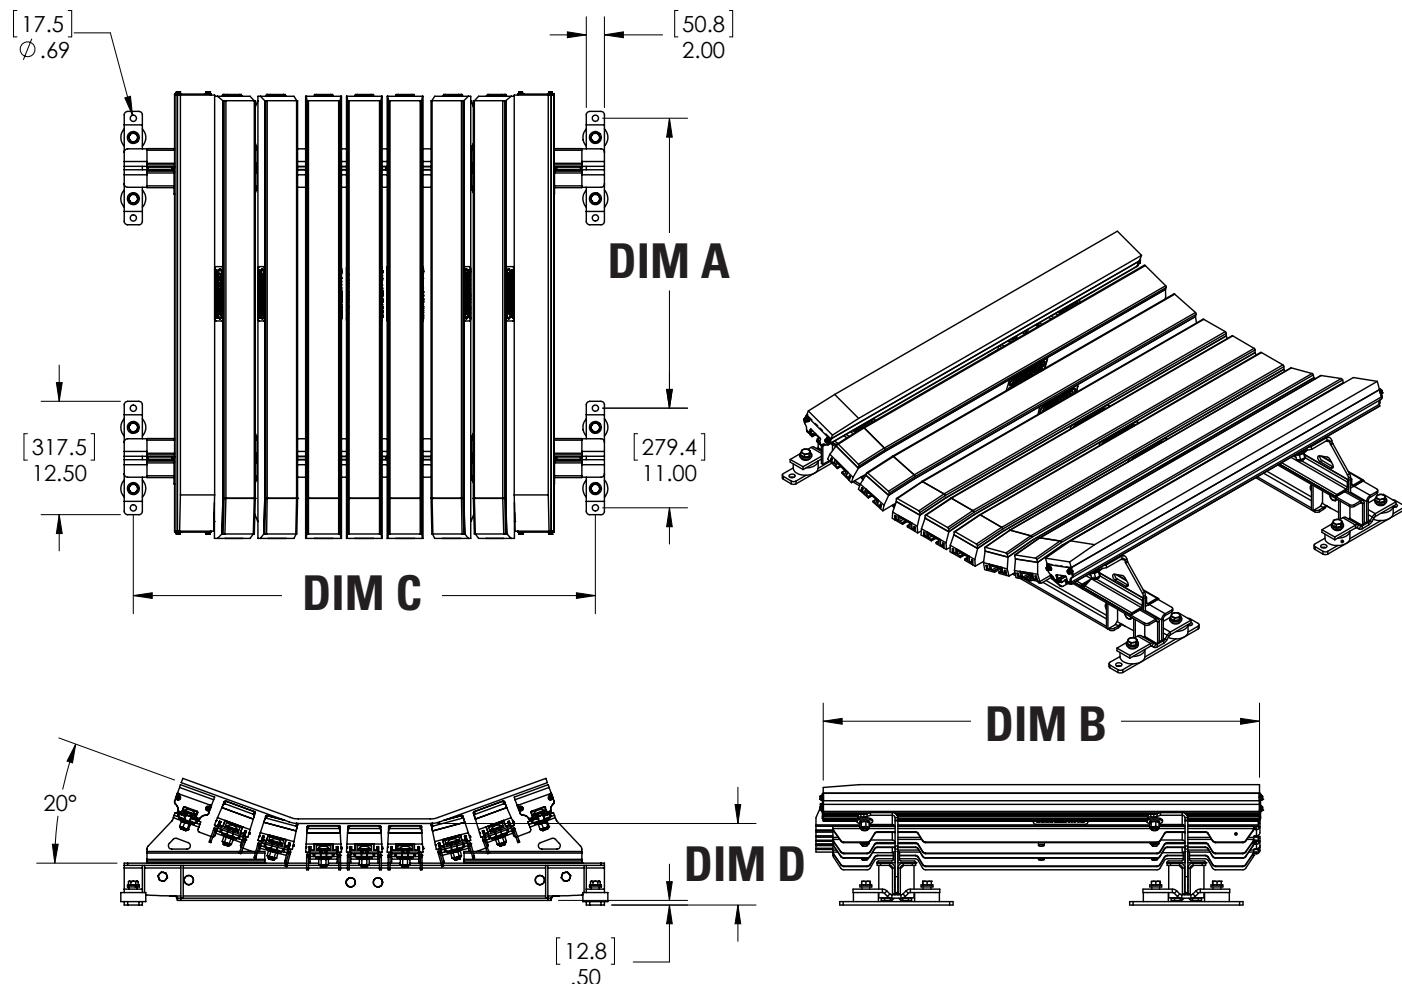

Bed Length 4' (1.2 m)				Bed Length 5' (1.5 m)				Bed Width		Dim C		Dim D	
Dim A		Dim B		Dim A		Dim B		in.	mm	in.	mm	in.	mm
32	812.8	48.14	1222.8	44	1117.6	58.38	1482.9	24	600	33	838	9	229
								30	750	39	991	9	229
								36	900	45	1143	9	229
								42	1050	51	1295	9	229
								48	1200	57	1448	9	229
								54	1350	63	1600	9.25	235
								60	1500	69	1753	9.25	235
								72	1800	81	2057	9.5	241

Product Ordering Information

DRX™ 750
Impact Beds

4' (1.2 m) Bed CEMA D construction

BELT WIDTH in.	TONNAGE RATING (ton/hr) mm	20° TROUGH		35° TROUGH		WT. LBS
		ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	
24	600	8,100	DRXM-24-420	76848	DRXM-24-435	76864
30	750	8,100	DRXM-30-420	76849	DRXM-30-435	76865
36	900	9,500	DRXM-36-420	76850	DRXM-36-435	76866
42	1050	12,200	DRXM-42-420	76851	DRXM-42-435	76867
48	1200	13,600	DRXM-48-420	76852	DRXM-48-435	76868
54	1350	16,300	DRXM-54-420	76853	DRXM-54-435	76869
60	1500	17,600	DRXM-60-420	76854	DRXM-60-435	76870
72	1800	19,000	DRXM-72-420	76855	DRXM-72-435	76871
						896.0

Lead time: 3 weeks

5' (1.5 m) Bed CEMA D construction

BELT WIDTH in.	TONNAGE RATING (ton/hr) mm	20° TROUGH		35° TROUGH		WT. LBS
		ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	
24	600	8,100	DRXM-24-520	76856	DRXM-24-535	76872
30	750	8,100	DRXM-30-520	76857	DRXM-30-535	76873
36	900	9,500	DRXM-36-520	76858	DRXM-36-535	76874
42	1050	12,200	DRXM-42-520	76859	DRXM-42-535	76875
48	1200	13,600	DRXM-48-520	76860	DRXM-48-535	76876
54	1350	16,300	DRXM-54-520	76861	DRXM-54-535	76877
60	1500	17,600	DRXM-60-520	76862	DRXM-60-535	76878
72	1800	19,000	DRXM-72-520	76863	DRXM-72-535	76879
						985.0

Lead time: 3 weeks

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	Impact Bar, 4' (1.2m)	IB4	76926	17.0
1a	Impact Bar, 5' (1.5m)	IB5	76927	21.0
2	Slider Bar, 4' (1.2m)	SB4	78789	20.0
2a	Slider Bar, 5' (1.5m)	SB5	78790	24.1
3	Impact Bar Bolt Kit (incl. (1) ea. 5/8" (15mm) carriage bolt, square washer, flat washer, lock washer, Nylock nut)	IBBK	76928	0.5
4	Impact Bar Support - M 4' (1.2m) (incl. (1) bar support, (2) ea. carriage bolt, square washer, lock washer, Nylock nut)	IBS-M4	76931	16.9
4a	Impact Bar Support - M 5' (1.5m) (incl. (1) bar support, (2) ea. carriage bolt, square washer, lock washer, Nylock nut)	IBS-M5	76932	21.2
5	Sliding Support Arm Bolt Kit (incl. (2) ea. 2" bolt, lock washer, Nylock nut)	ISABK-LMH	77529	2.0
6	Isolation Mount Kit	IMK	76936	3.8
7	DRX750 Shim Kit (incl. 6 shims)	SHIM-KITM	77549	20.4


Lead time: 1 working day

Replacement Quantities per Belt Width for DRX750

	in.	24	30	36	42	48	54	60	72
	mm	600	750	900	1050	1200	1350	1500	1800
Slider Bars Required		2	2	2	2	2	2	2	4
Impact Bars Required		4	4	5	7	8	10	11	12
Impact Bar Supports Required		4	4	5	7	8	10	11	12
Impact Bar Bolt Kits Required		26	26	31	41	46	56	61	72

Product Notes:

- Rated for impacts up to 750 lb-ft (100 kg-m)
- Rated for belt speeds up to 1000 FPM (5 m/s)
- Slide-out serviceability
- Velocity Reduction Technology provides multiple points of protection
- Alternative trough angles or picking idler profiles available by special quote

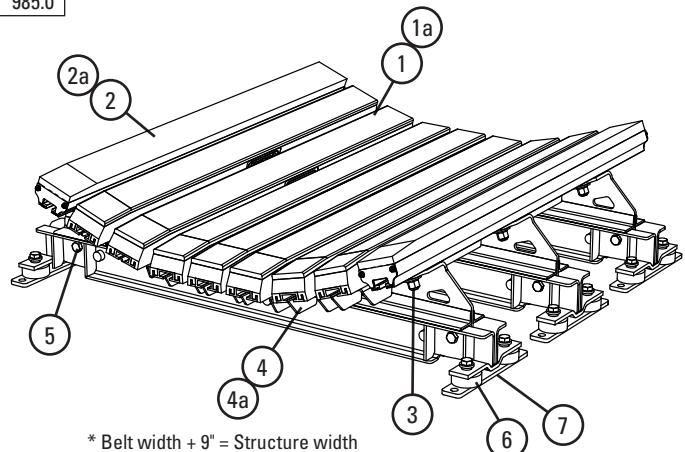

* Belt width + 9" = Structure width





Shim Requirements

IMPACT BED SIZE	CEMA C OR D 5" (125mm) IDLERS	CEMA C OR D 6" (150mm) IDLERS
24–36" (600–900mm)	Shim idler up .5" (12.5mm)	No Kits Required
42–72" (1050–1800mm)	No Kits Required	Use (1) SHIM-KITM; Shim up .5" (12.5mm)

IMPACT BED SIZE	CEMA E 6" (150mm) IDLERS	CEMA E 7" (175mm) IDLERS
36–60" (900–1500mm)	Use (3) SHIM-KITM; Shim up 1.5" (37.5mm)	Use (4) SHIM-KITM; Shim up 2" (50mm)
72" (1800mm)	Use (4) SHIM-KITM; Shim up 2" (50mm)	Use (5) SHIM-KITM; Shim up 2.5" (62.5mm)

Specifications and Guidelines

DRX™ 750
Impact Beds

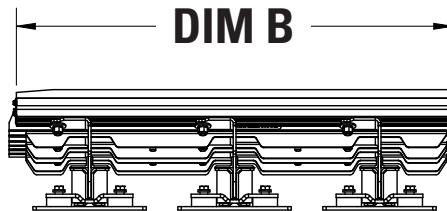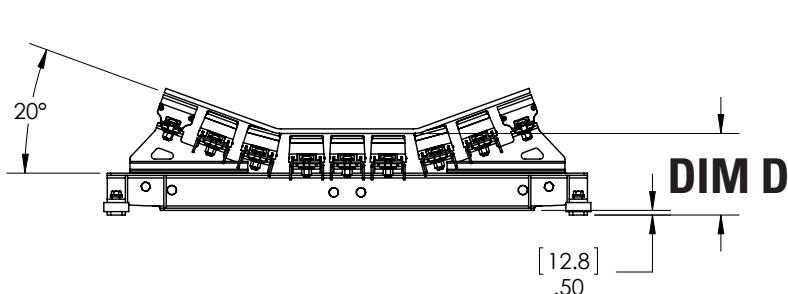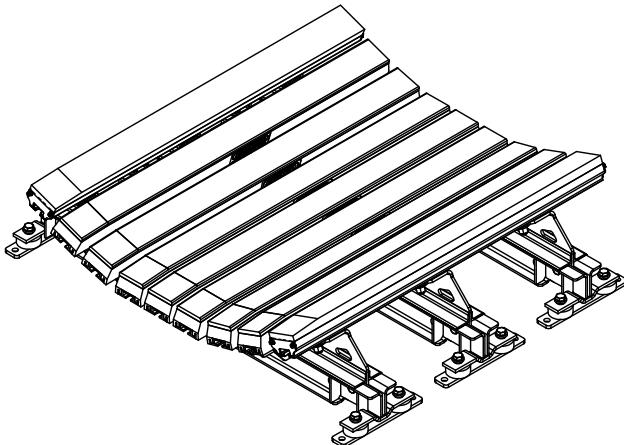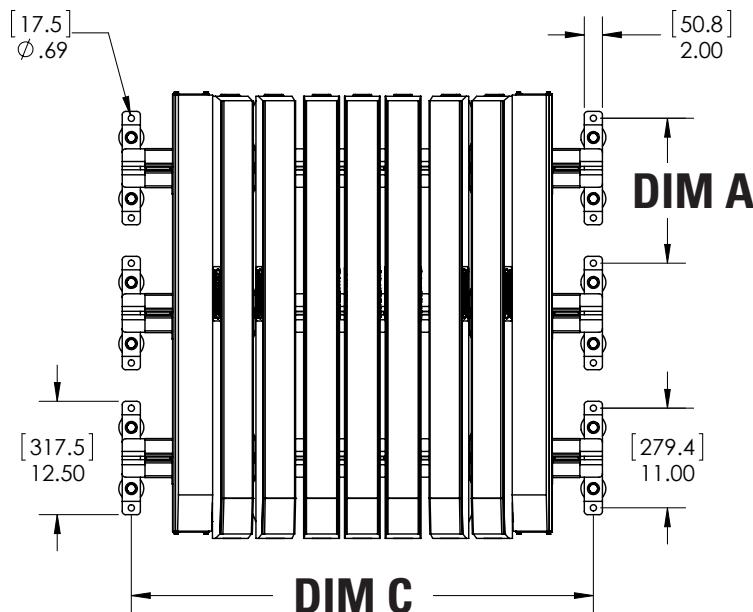

Bed Length 4' (1.2 m)				Bed Length 5' (1.5 m)				Bed Width		Dim C		Dim D	
Dim A		Dim B		Dim A		Dim B		in.	mm	in.	mm	in.	mm
16	406.4	48.14	1222.8	22	558.8	58.38	1482.9	24	600	33	838	9	229
								30	750	39	991	9	229
								36	900	45	1143	9	229
								42	1050	51	1295	9	229
								48	1200	57	1448	9	229
								54	1350	63	1600	9.25	235
								60	1500	69	1753	9.25	235
								72	1800	81	2057	9.5	241

Product Ordering Information

DRX™ 1500
Impact Beds

4' (1.2 m) Bed CEMA D construction

BELT WIDTH in.	TONNAGE RATING (ton/hr) mm	20° TROUGH		35° TROUGH		WT. LBS
		ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	
24	600	12,800	DRXH-24-420	76880	DRXH-24-435	76896
30	750	12,800	DRXH-30-420	76881	DRXH-30-435	76897
36	900	14,900	DRXH-36-420	76882	DRXH-36-435	76898
42	1050	19,200	DRXH-42-420	76883	DRXH-42-435	76899
48	1200	21,300	DRXH-48-420	76884	DRXH-48-435	76900
54	1350	25,600	DRXH-54-420	76885	DRXH-54-435	76901
60	1500	27,700	DRXH-60-420	76886	DRXH-60-435	76902
72	1800	29,900	DRXH-72-420	76887	DRXH-72-435	76903
						1,210.0

Lead time: 3 weeks

5' (1.5 m) Bed CEMA D construction

BELT WIDTH in.	TONNAGE RATING (ton/hr) mm	20° TROUGH		35° TROUGH		WT. LBS
		ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	
24	600	12,800	DRXH-24-520	76888	DRXH-24-535	76904
30	750	12,800	DRXH-30-520	76889	DRXH-30-535	76905
36	900	14,900	DRXH-36-520	76890	DRXH-36-535	76906
42	1050	19,200	DRXH-42-520	76891	DRXH-42-535	76907
48	1200	21,300	DRXH-48-520	76892	DRXH-48-535	76908
54	1350	25,600	DRXH-54-520	76893	DRXH-54-535	76909
60	1500	27,700	DRXH-60-520	76894	DRXH-60-535	76910
72	1800	29,900	DRXH-72-520	76895	DRXH-72-535	76911
						1,334.0

Lead time: 3 weeks

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	Impact Bar, 4' (1.2m)	IB4	76926	17.0
1a	Impact Bar, 5' (1.5m)	IB5	76927	21.0
2	Slider Bar, 4' (1.2m)	SB4	78789	20.0
2a	Slider Bar, 5' (1.5m)	SB5	78790	24.1
3	Impact Bar Bolt Kit (incl. (1) ea. 5/8" (15mm) carriage bolt, square washer, flat washer, lock washer, Nylock nut)	IBBK	76928	0.5
4	Impact Bar Support - H 4' (1.2m) (incl. (1) bar support, (2) ea. carriage bolt, square washer, lock washer, Nylock nut)	IBS-H4	76933	16.6
4a	Impact Bar Support - H 5' (1.5m) (incl. (1) bar support, (2) ea. carriage bolt, square washer, lock washer, Nylock nut)	IBS-H5	76934	21.0
5	Sliding Support Arm Bolt Kit (incl. (2) ea. 2" bolt, lock washer, Nylock nut)	ISABK-LMH	77529	2.0
6	Isolation Mount Kit	IMK	76936	3.8
7	DRX1500 Shim Kit (incl. 8 shims)	SHIM-KITH	77550	27.2


Lead time: 1 working day

Replacement Quantities per Belt Width for DRX1500

	in.	24	30	36	42	48	54	60	72
	mm	600	750	900	1050	1200	1350	1500	1800
Slider Bars Required		2	2	2	2	2	2	2	4
Impact Bars Required		4	4	5	7	8	10	11	12
Impact Bar Supports Required		4	4	5	7	8	10	11	12
Impact Bar Bolt Kits Required		32	32	38	50	56	68	74	88

Product Notes:

- Rated for impacts up to 1500 lb-ft (200 kg-m)
- Rated for belt speeds up to 1000 FPM (5 m/s)
- Slide-out serviceability
- Velocity Reduction Technology provides multiple points of protection
- Alternative trough angles or picking idler profiles available by special quote

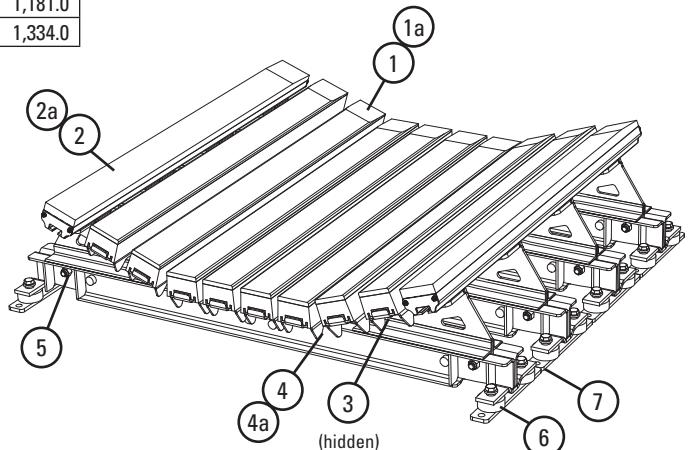

* Belt width + 9" = Structure width


Shim Requirements

IMPACT BED SIZE	CEMA C OR D 5" (125mm) IDLERS	CEMA C OR D 6" (150mm) IDLERS
24–36" (600–900mm)	Shim idler up .5" (12.5mm)	No Kits Required
42–72" (1050–1800mm)	No Kits Required	Use (1) SHIM-KITH; Shim up 5" (12.5mm)

IMPACT BED SIZE	CEMA E 6" (150mm) IDLERS	CEMA E 7" (175mm) IDLERS
36–60" (900–1500mm)	Use (3) SHIM-KITH; Shim up 1.5" (37.5mm)	Use (4) SHIM-KITH; Shim up 2" (50mm)
72" (1800mm)	Use (4) SHIM-KITH; Shim up 2" (50mm)	Use (5) SHIM-KITH; Shim up 2.5" (62.5mm)

Specifications and Guidelines

DRX™ 1500
Impact Beds

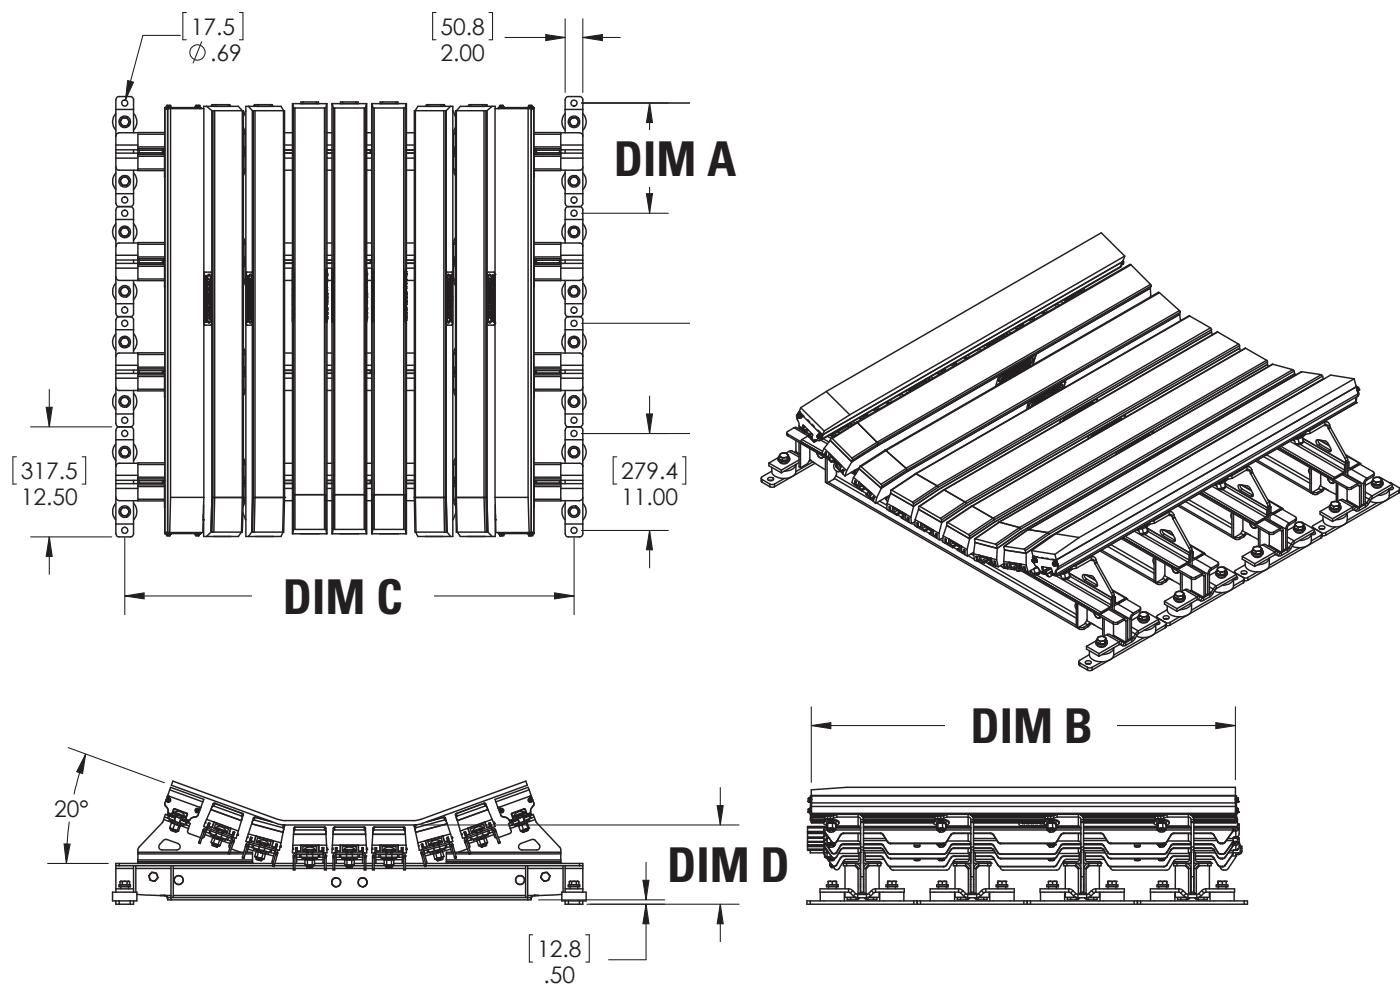

Bed Length 4' (1.2 m)				Bed Length 5' (1.5 m)									
Dim A		Dim B		Dim A		Dim B		Bed Width		Dim C		Dim D	
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
12.5	317.5	48.14	1222.8	16	406.4	58.38	1482.9	24	600	33	838	9	229
								30	750	39	991	9	229
								36	900	45	1143	9	229
								42	1050	51	1295	9	229
								48	1200	57	1448	9	229
								54	1350	63	1600	9.25	235
								60	1500	69	1753	9.25	235
								72	1800	81	2057	9.5	241

Product Ordering Information

DRX™ 3000
Dynamic Beds

5' (1.5 m) Bed CEMA E construction


BELT WIDTH in.	TONNAGE RATING (ton/hr) mm	20° TROUGH		35° TROUGH		WT. LBS
		ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	
36	900	22,300	DRXD-36-520	115010	DRXD-36-535	115011 1,286.0
42	1050	28,700	DRXD-42-520	76912	DRXD-42-535	76919 1,351.0
48	1200	31,900	DRXD-48-520	76913	DRXD-48-535	76920 1,407.0
54	1350	38,300	DRXD-54-520	76914	DRXD-54-535	76921 1,568.0
60	1500	41,500	DRXD-60-520	76915	DRXD-60-535	76922 1,676.0
72	1800	44,700	DRXD-72-520	76916	DRXD-72-535	76923 2,098.0
84	2100	51,100	DRXD-84-520	76917	DRXD-84-535	76924 2,261.0
96	2400	63,900	DRXD-96-520	76918	DRXD-96-535	76925 2,609.0

Lead time: 4 weeks

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	Impact Bar, 5' (1.5m) (1/2" (12.5 mm) UHMW)	IB5	76927	21.2
2	Slider Bar, 5' (1.5m)	SB5	78790	24.1
3	Impact Bar Bolt Kit (incl. (1) ea. 5/8" (15mm) carriage bolt, square washer, flat washer, lock washer, Nylock nut)	IBBK	76928	0.5
4	Impact Bar Support - D 5' (1.5m) (incl. (1) bar support, (2) ea. carriage bolt, square washer, lock washer, Nylock nut)	IBS-D5	77530	21.0
5	Sliding Support Arm Bolt Kit (incl. (4) 1-1/2" bolt, (2) 2" bolt, (6) ea. lock washer, Nylock nut)	ISABK	76935	2.0
6	Impact Energy Absorber for sizes 36-60" (900-1500mm)	IEA-36-60	76937	42.0
6a	Impact Energy Absorber for sizes 72-96" (1800-2400mm)	IEA-72-96	76938	66.0

Lead time: 1 working day

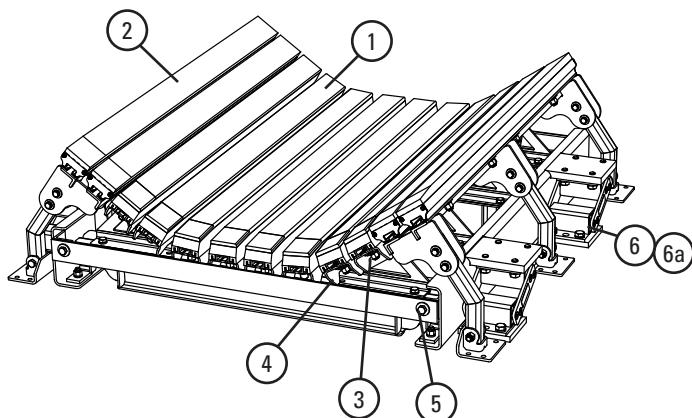

* Belt width + 9" = Structure width

Replacement Quantities per Belt Width for DRX3000






in.	36	42	48	54	60	72	84	96
mm	900	1050	1200	1350	1500	1800	2100	2400
Slider Bars Required	2	2	2	4	4	4	4	4
Impact Bars Required	5	8	8	8	9	12	12	16
Impact Bar Supports Required	5	8	8	8	9	12	12	16
Impact Bar Bolt Kits Required	43	56	56	64	70	88	88	112

Product Notes:

- For extreme impact applications up to 3000 lb-ft (lump size x drop height).
- Rated for belt speeds up to 1000 FPM (5 m/s).
- Impact Energy Absorbers compress up to 3" (75 mm) to absorb extreme impact energy to minimize damaging forces and protect the belt.
- Alternative trough angles or picking idler profiles available by special quote.

Specifications and Guidelines

DRX™ 3000
Dynamic Beds

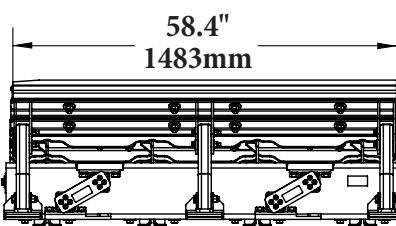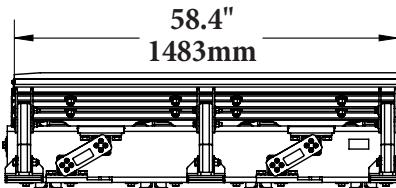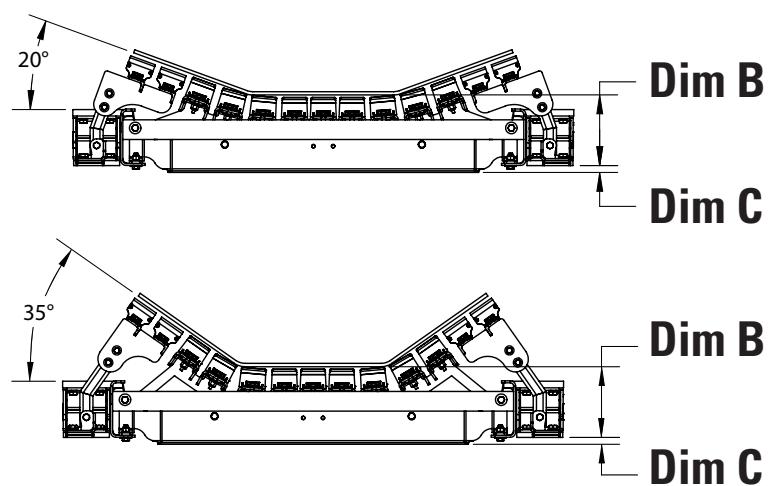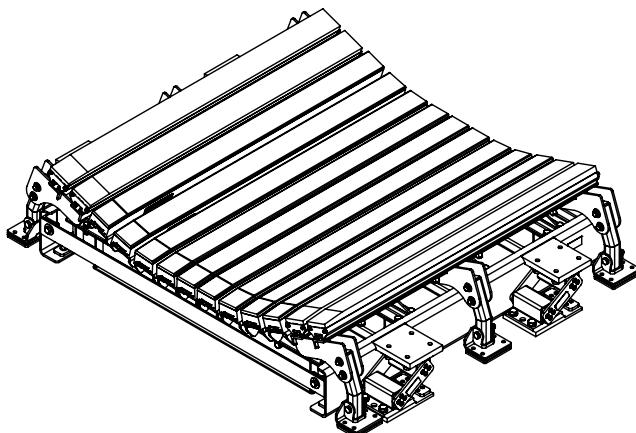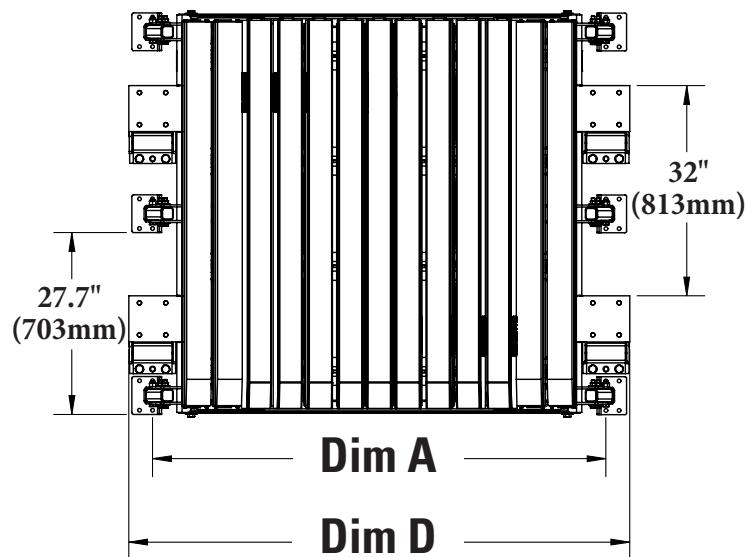

Bed Width		Dim A		Dim B		Dim C		Dim D	
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
36	900	45	1143.0	10.75	273	1.05	26.6	52.25	1327.2
42	1050	51	1295.4	10.75	273	1.09	27.7	58.25	1479.6
48	1200	57	1447.8	10.75	273	1.09	27.7	64.25	1632.0
54	1350	63	1600.2	10.75	273	1.09	27.7	70.25	1784.4
60	1500	69	1752.6	10.75	273	1.09	27.7	76.25	1936.8
72	1800	81	2057.4	11.50	292.1	1.15	29.1	90.25	2292.4
84	2100	93	2362.2	11.75	298.5	1.15	29.1	102.25	2597.2
96	2400	105	2667.0	11.75	298.5	1.15	29.1	114.25	2902.0

Product Ordering Information

DRX™ 4500
Dynamic Beds

5' (1.5 m) Bed CEMA E construction


BELT WIDTH in.	TONNAGE RATING (ton/hr) mm	20° TROUGH		35° TROUGH		WT. LBS
		ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	
36	900	22,300	DRDXD-36-520	107569	DRDXD-36-535	107570 1,642.2
42	1050	28,700	DRDXD-42-520	107572	DRDXD-42-535	107573 1,923.1
48	1200	31,900	DRDXD-48-520	107575	DRDXD-48-535	107576 1,996.3
54	1350	38,300	DRDXD-54-520	107578	DRDXD-54-535	107579 2,174.0
60	1500	41,500	DRDXD-60-520	107581	DRDXD-60-535	107582 2,317.1
72	1800	44,700	DRDXD-72-520	107584	DRDXD-72-535	107585 2,927.5
84	2100	51,100	DRDXD-84-520	107587	DRDXD-84-535	107588 3,124.4
96	2400	63,900	DRDXD-96-520	107590	DRDXD-96-535	107591 3,576.3

Lead time: 4 weeks

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	Impact Bar, 5' (1.5m) (1/2" (12.5 mm) UHMW)	IB5	76927	21.2
2	Slider Bar, 5' (1.5m)	SB5	78790	24.1
3	Impact Bar Bolt Kit (incl. (1) ea. 5/8" (15mm) carriage bolt, square washer, flat washer, lock washer, Nylock nut)	IBBK	76928	0.5
4	Impact Bar Support - DX 5' (1.5m) (incl. (1) bar support, (2) ea. carriage bolt, square washer, lock washer, Nylock nut)	IBS-DX5	111728	21.0
5	Sliding Support Arm Bolt Kit (incl. (4) 1-1/2" bolt, (2) 2" bolt, (6) ea. lock washer, Nylock nut)	ISABK	76935	2.0
6	Impact Energy Absorber for sizes 36-60" (900-1500mm)	IEA-36-60	76937	42.0
6a	Impact Energy Absorber for sizes 72-96" (1800-2400mm)	IEA-72-96	76938	66.0

Lead time: 1 working day

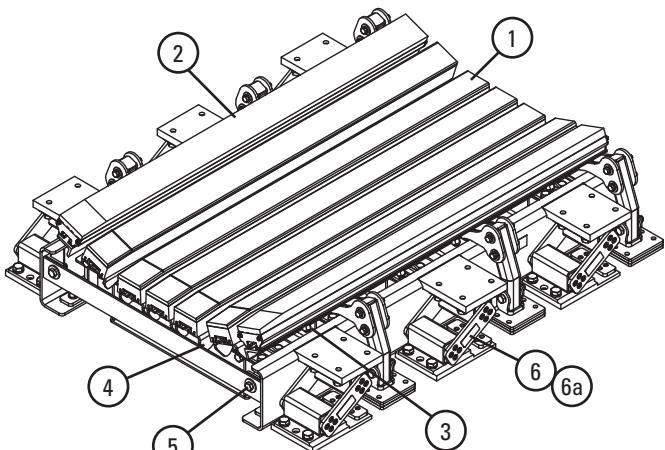

* Belt width + 9" = Structure width

Replacement Quantities per Belt Width for DRX4500






in.	36	42	48	54	60	72	84	96
mm	900	1050	1200	1350	1500	1800	2100	2400
Slider Bars Required	2	2	2	4	4	4	4	4
Impact Bars Required	5	8	8	8	9	12	12	16
Impact Bar Supports Required	5	8	8	8	9	12	12	16
Impact Bar Bolt Kits Required	48	72	80	88	112	112	144	112

Product Notes:

- For extreme impact applications up to 4500 lb-ft (lump size x drop height).
- Rated for belt speeds up to 1000 FPM (5 m/s).
- Impact Energy Absorbers compress up to 3" (75 mm) to absorb extreme impact energy to minimize damaging forces and protect the belt.
- Alternative trough angles or picking idler profiles available by special quote.

Specifications and Guidelines

DRX™ 4500
Dynamic Beds

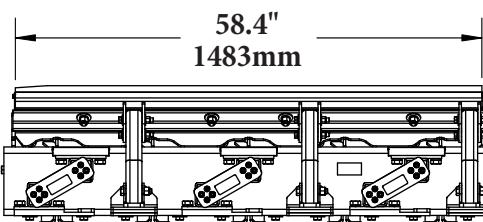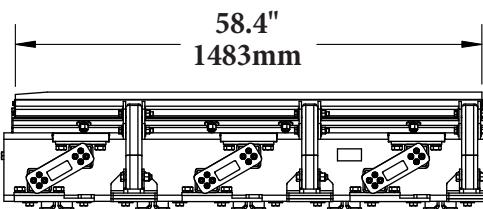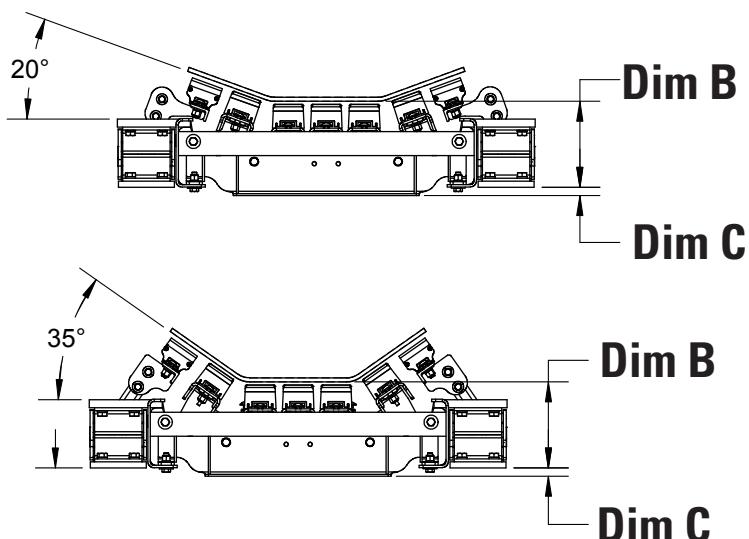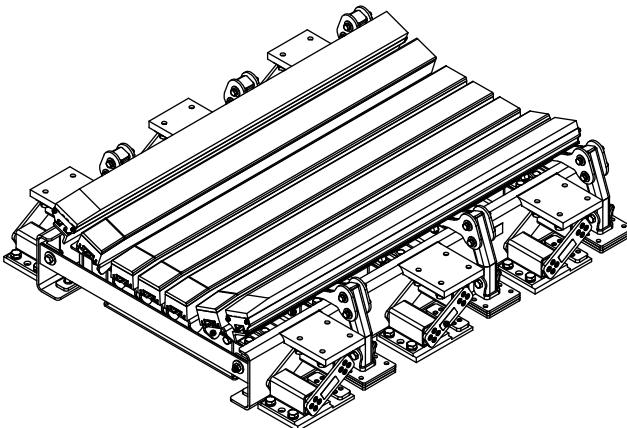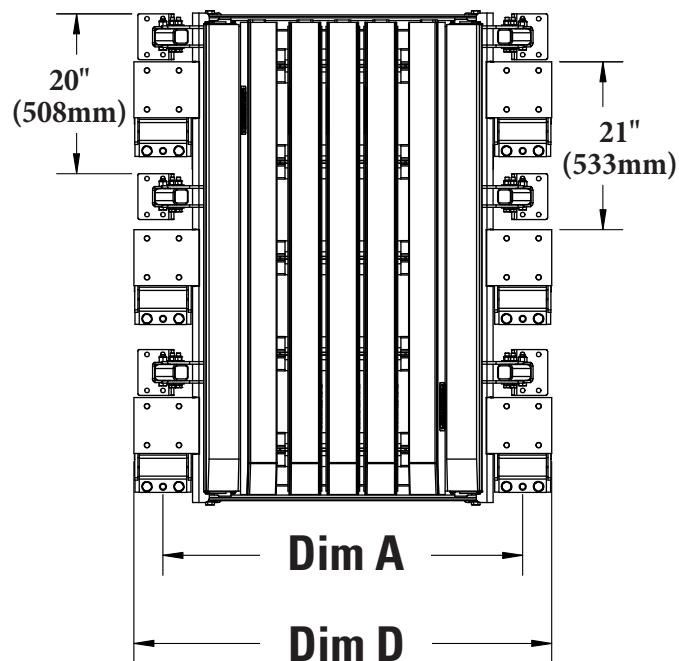

Bed Width		Dim A		Dim B		Dim C		Dim D	
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
36	900	45	1143.0	10.75	273.1	1.05	26.6	52.25	1327.2
42	1050	51	1295.4	10.75	273.1	1.05	26.6	58.25	1479.6
48	1200	57	1447.8	10.75	273.1	1.05	26.6	64.25	1632.0
54	1350	63	1600.2	10.75	273.1	1.05	26.6	70.25	1784.4
60	1500	69	1752.6	10.75	273.1	1.05	26.6	76.25	1936.8
72	1800	81	2057.4	11.50	292.1	1.10	27.9	90.25	2292.4
84	2100	93	2362.2	11.75	298.5	1.10	27.9	102.25	2597.2
96	2400	105	2667.0	11.75	298.5	1.10	27.9	114.25	2902.0

Product Ordering Information


DRX™ Impact Beds Optional Parts and Tools

Impact Bars with 1" UHMW

For impact beds that have heavy abrasive wear on the impact bars.

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
4' Impact Bar with 1" UHMW	IB4-1U	76965	17.0
5' Impact Bar with 1" UHMW	IB5-1U	76966	21.2

Lead time: 1 working day

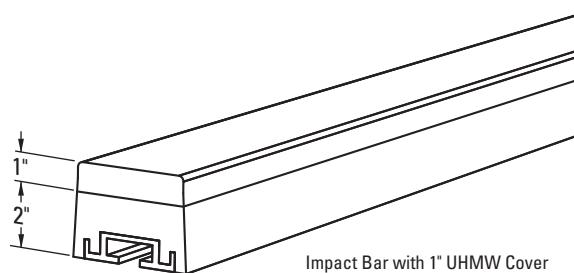

Impact Bar with 1" UHMW Cover

Impact Bar Bolt Kit for Other OEM Impact Beds*


1/2" carriage bolt, square washer, flat washer and Nylock nut to mount DRX Impact Bars on other OEM beds that use 1/2" T-bolts.

Count cross stringers on OEM bed (example: 3 cross stringers require 3 Bolt Kits per impact bar)

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
OEM Impact Bar Bolt Kit	OIBBK	76950	0.5

*Kit includes (1) ea. bolt, square washer, flat washer, and Nylock nut.

Lead time: 1 working day




Optional Impact Bar Bolt Kit

Impact Bed Handy Wrench

A ratcheting wrench with 2 common socket sizes: 3/4 & 15/16" (19 & 24 mm) for installation and maintenance of impact beds.

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Impact Bed Handy Wrench	HW-IMPB	76939	1.6

Lead time: 1 working day

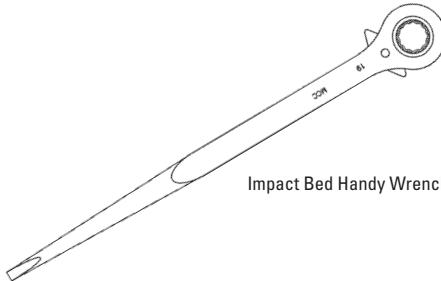


Impact Bed Handy Wrench

Selection Guidelines

Belt Tracking Products

MODEL	APPLICATION RANGE
Belt Positioner™	Return side only, 800 PIW max tension on Small, Medium, and Large; 1200 PIW max tension on Extra Large. Also works on reversing belts.
PTEZ™	Medium-duty belts up to 1600 PIW max tension. Also works on reversing belts. Belt width 18–48" (450–1200 mm).
PT Smart™	Medium-duty belts up to 1600 PIW max tension. Belt width 42–84" (1050–2100 mm). Belt thickness 1" (25 mm) maximum.
HD PTEZ™	Medium-duty belts up to 2400 PIW max tension. Belt widths + 9" (225 mm) idler. Belt thickness 1" (25 mm) maximum. Also works on reversing belts.
PT Max™	Heavy-duty belts up to 3000 PIW max. Generally 3/4–1" thick (19–25 mm). Belt width 24–60" (600–1500 mm).
HD PT Max™	Heavy-duty belts up to 6000 PIW max tension. Belt width 54–84" (1350–2100 mm).

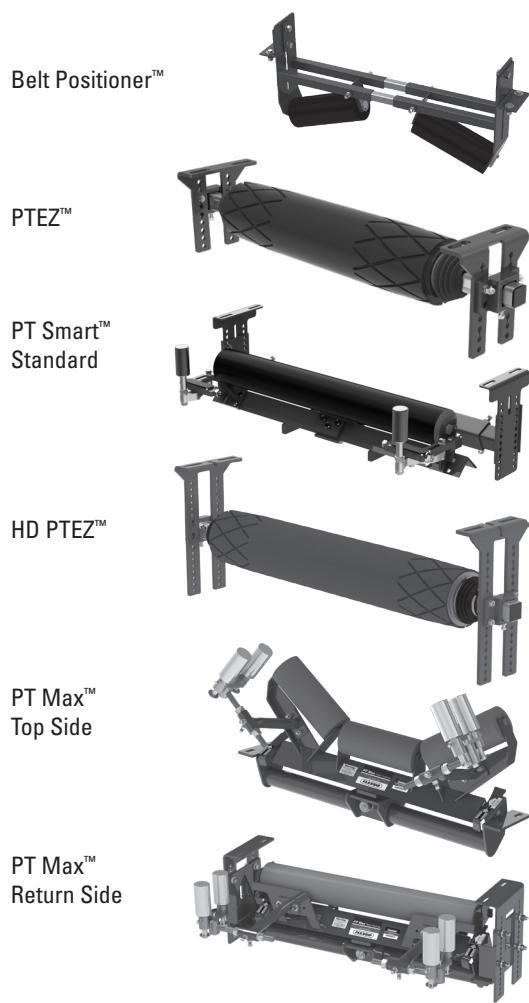

Conveyor Criteria	Belt Positioner™	PTEZ™	Heavy Duty PTEZ™	PT Smart™	PT Max™	Heavy Duty PT Max™	Super Duty PT Max™
Top side mistracking	No	No	No	No	Yes	Yes	Yes
Return side mistracking	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Reversing	Yes	Yes	Yes	No	No	No	No
Belt mistracking to one side	Better	Better	Better	Better	Better	Better	Better
Belt mistracking to both sides	Acceptable	Better	Better	Best	Best	Best	Best
Inconsistent tracking problem	Good	Better	Better	Best	Best	Best	Best
Belt is cupped (heavy)	Best‡	Better‡	Better‡	Better	Better	Better	Better
Belt has edge damage	Best	Best	Best	Good	Good	Good	Good
Ease of Installation	Best	Better	Better	Good	Good	Good	Good
Belt has low running tension (150–300 PIW)	Good	Good	Good	Good	Good	N/A	N/A
Belt has medium running tension (300–1600 PIW)	Better	Better	Better	Better	Best	Best	Best
Belt has high running tension (1600+ PIW)	N/A	N/A	N/A	N/A	Better	Best	Best
Approx. "upstream" effect*Δ	50' (15 m)	20' (6 m)	20' (6 m)	20' (6 m)	50' (15 m)	50' (15 m)	50' (15 m)
Approx. "downstream" effect*Δ	50' (15 m)	100–120' (30–36 m)	100–120' (30–36 m)	120–150' (36–45 m)	150–200' (45–61 m)	150–200' (45–61 m)	150–200' (45–61 m)

‡ Installed on the clean side of the return belt

* Typical results; actual results may vary

Δ Disc idlers have the potential to reduce these numbers

Product Ordering Information

Belt Positioner™



Belt Positioner™

SIZE	BELT WIDTH (Min-Max)		POSITIONER WIDTH (Min-Max)		RUBBER ROLLERS			STEEL ROLLERS		
	in.	mm	in.	mm	ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.
Small	18-24	450-600	24-34	600-850	RBP1R-S	90646	60.5	RBP1S-S	74558	69.8
Medium	30-48	750-1200	34-56	850-1400	RBP1R-M	90647	73.5	RBP1S-M	74559	84.6
Large	54-72	1350-1800	56-83	1400-2075	RBP1R-L	90648	94.0	RBP1S-L	74560	109.5
Extra Large	72-96	1800-2400	72-120	1800-3000	RBP1R-XL	90649	182.0	RBP1S-XL	74561	199.6

Lead time: 1 working day

Use next larger size for belt widths between ranges.

NOTE: Idler Rollers on sizes S, M, and L are 5" (125 mm) diameter and rated CEMA D,
Idler Rollers on the XL size are 6" (150 mm) diameter and rated CEMA E.

Product Notes:

- The Positioner should be centered between two standard return rollers. For general applications – standard belts up to 72" (1800 mm): position the unit no closer than 3' (.9 m) to a return roller and no farther than 6' (1.8 m).
- Works on the return side of the conveyor using simple angled rollers mounted in a fixed position to quickly and continuously funnel the belt into the correct path.
- A "quick fix" solution for belts that consistently wander to one side.
- Typically installed before the tail pulley to keep the belt centered at the critical loading point. Center loading is the key to solving many top side tracking problems.
- Idler rollers make smooth contact with the return belt's bottom cover, eliminating excessive wear and damage to the belt's edges.
- Has no pivoting mechanism to freeze up and cause the unit to stop working.
- Once installed, no further adjustment is required.


Specifications & Guidelines

Belt Positioner™

Belt Width Specifications


SIZE	BELT WIDTH (Min-Max)		POSITIONER WIDTH (Min-Max)	
	in.	mm	in.	mm
Small	18–24	450–600	24–34	600–850
Medium	30–48	750–1200	34–56	850–1400
Large	54–72	1350–1800	56–83	1400–2075
Extra Large	72–96	1800–2400	72–120	1800–3000

Use next larger size for belt widths between ranges.

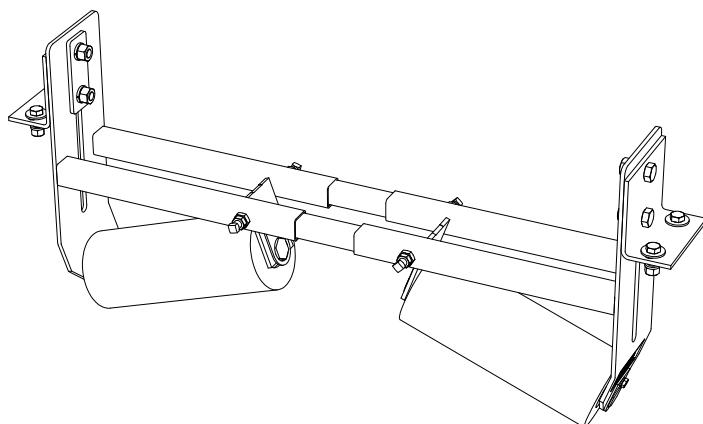

Application Guidelines:

- Belt Splice Mechanically Fastened/Vulcanized
- Belt Speed 1000 FPM (5 m/s)
- Belt Direction Reversing



Roller Specifications

SPECIFICATION	Rubber	Steel
Material	STEEL and 3/8" RUBBER	STEEL
Durometer	60	N/A
Rating	CEMA D (XL is CEMA E)	CEMA D (XL is CEMA E)
Bearings	6305 Sealed Ball Bearing	6305 Sealed Ball Bearing
Shaft Diameter	1" (25mm)	1" (25mm)
Wall Thickness	9 Gauge (.148) (XL - 1/4")	9 Gauge (.148) (XL - 1/4")
Specific Gravity	Over 1	Over 1
Working Temperature	-4 to 220°F -20 to 104°C	-4 to 220°F -20 to 104°C
Grease & Chemical Resistance	Good	Good
Sticky Material Performance	Excellent	Good

Roller Dimensions


SIZE	LENGTH		DIAMETER	
	in.	mm	in.	mm
Small	9	225	5	125
Medium	13	325	5	125
Large	19	475	5	125
Extra Large	21	525	6	150

Product Notes:

- Optimal location: no closer than 3' (.9 m) and no further than 6' (1.8 m) from a return roller.
- All rollers are "sealed for life". No regreasing maintenance is required.
- MSHA approved.

Replacement Parts List

Belt Positioner™

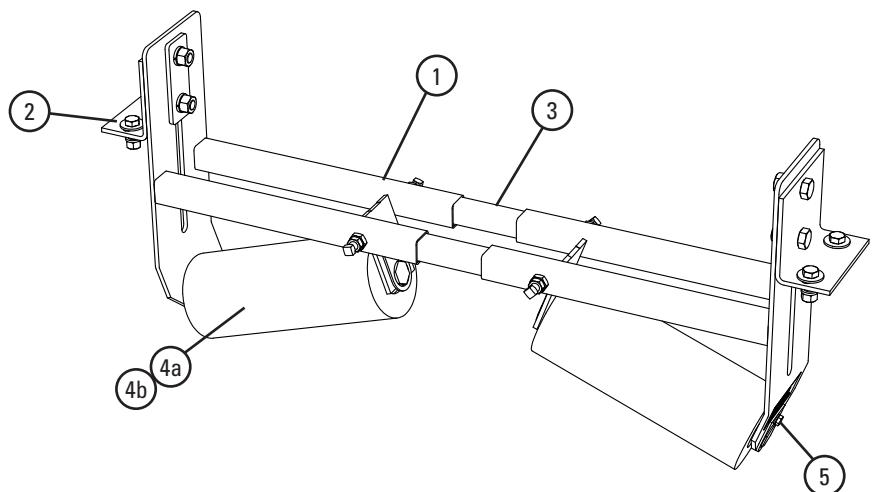

Replacement Parts

REF	DESCRIPTION	BELT WIDTH (Min-Max)		ORDERING NUMBER	ITEM CODE	WT. LBS.
		in.	mm			
1	Small Frame Kit* (1 ea.)	18-24	450-600	RBPFK-S	75522	12.5
	Medium Frame Kit* (1 ea.)	30-48	750-1200	RBPFK-M	75523	14.5
	Large Frame Kit* (1 ea.)	54-72	1350-1800	RBPFK-L	75524	19.5
	Extra Large Frame Kit* (1 ea.)	72-96	1800-2400	RBPFK-XL	75525	28.5
2	Mounting Bracket Kit* (1 ea.)			RBPMBK	75526	6.0
3	Small Inner Tube (1 ea.)	18-24	450-600	RBPIT-S	75527	3.0
	Medium Inner Tube (1 ea.)	30-48	750-1200	RBPIT-M	75528	4.5
	Large Inner Tube (1 ea.)	54-72	1350-1800	RBPIT-L	75529	6.5
	Extra Large Inner Tube (1 ea.)	72-96	1800-2400	RBPIT-XL	75530	9.0

*Hardware included

Lead time: 1 working day

Replacement Rollers

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
4a	Small Rubber Roller	RBPRR-S	90650	7.9
	Medium Rubber Roller	RBPRR-M	90651	11.0
	Large Rubber Roller	RBPRR-L	90652	15.5
	Extra Large Rubber Roller	RBPRR-XL	90653	27.8
4b	Small Steel Roller	RBPSR-S	74562	12.2
	Medium Steel Roller	RBPSR-M	74563	16.5
	Large Steel Roller	RBPSR-L	74564	23.2
	Extra Large Steel Roller	RBPSR-XL	74565	36.6
5	Roller Retainer Kit (incl. 1 retainer and hardware)	RBPRET	73163	0.5

Lead time: 1 working day

Idler rollers on sizes S, M, and L are 5" (125 mm) diameter and rated CEMA D.

Idler rollers on the XL size are 6" (150 mm) diameter and rated CEMA E.

*Roller Retainer Kit not required for XL rollers (SDX style).

Product Ordering Information

PTEZ™
Belt Trainers

PTEZ™


BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
18	450	PTEZ-18	90265	120.0
24	600	PTEZ-24	90266	130.0
30	750	PTEZ-30	90267	140.0
36	900	PTEZ-36	90268	150.0
42	1050	PTEZ-42	90269	160.0
48	1200	PTEZ-48	90270	170.0

Lead time: 1 working day

HD PTEZ™

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
42	1050	PTEZHD-42/1050	90616	228.0
48	1200	PTEZHD-48/1200	90617	252.0
54	1350	PTEZHD-54/1350	90618	277.0
56	1400	PTEZHD-56/1400	90795	285.0
60	1500	PTEZHD-60/1500	90619	301.0
64	1600	PTEZHD-64/1600	90796	317.0
72	1800	PTEZHD-72/1800	90620	349.0
80	2000	PTEZHD-80/2000	90797	382.0
84	2100	PTEZHD-84/2100	90621	398.0

Lead time: 1 working day

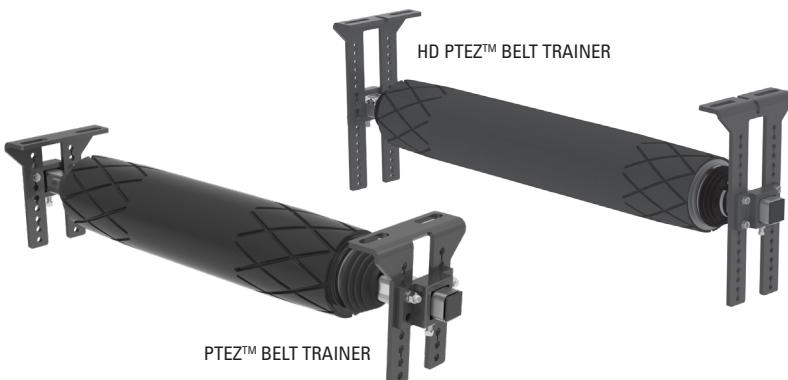

HD PTEZ™ Underground Structure


BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
42	1050	PTEZHD-42/1050-UG	90798	230.0
48	1200	PTEZHD-48/1200-UG	90799	254.0
54	1350	PTEZHD-54/1350-UG	90800	279.0
60	1500	PTEZHD-60/1500-UG	90801	303.0
72	1800	PTEZHD-72/1800-UG	90802	351.0

Lead time: 1 working day

Product Notes:

- Simple adjustable mounting brackets ensure quick and accurate installation.
- Urethane roller cover ensures long-lasting performance.
- Works in multiple applications, yet economical. Single-direction and reversing belts. Wet or dry conditions. Belts with edge damage or wear. Belts mistracking to one or both sides.
- Easy ordering and installation. Enhanced to meet instant demands for training solutions, the PTEZ™ is available on a one-working-day lead time. The simple brackets and component construction also ensure a quick and easy installation.
- Uses tapered and patterned roller to activate the trainer movement. Pivot influences direction while Tilt increases the tension on the mistracked side – the result is two forces quickly moving the belt back to center.
- Works with mechanically fastened or vulcanized belts.

Replacement Parts List

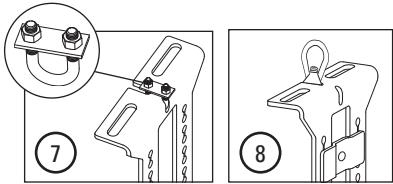


PTEZ™ Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	PTEZ Mounting Bracket Kit (2 ea.)	PTEZMB	90351	8.0
2	PTEZ Pole Bracket Kit (2 ea.)	PTEZPB	90352	6.0
3	PTEZ Dust Cover Kit (2 ea.)	PTEZDC	90353	1.0
4	PTEZ HD Mount Bracket Kit (2 ea.)	PTEZHD-MBK	90803	19.0
5	PTEZ HD Pole Bracket Kit (2 ea.)	PTEZHD-PBK	90804	8.0
6	PTEZ HD Dust Cover Kit (2 ea.)	PTEZHD-DCK	90805	1.0
7	PTEZ HD Wire Rope Bolt Kit (2 ea.)	PTEZHD-WRBK	90806	1.0
8	PTEZ HD J Bolt Bracket Kit (2 ea.)	PTEZHD-JBBK	90807	2.0

Lead time: 1 working day


*Bracket set for 1 roller

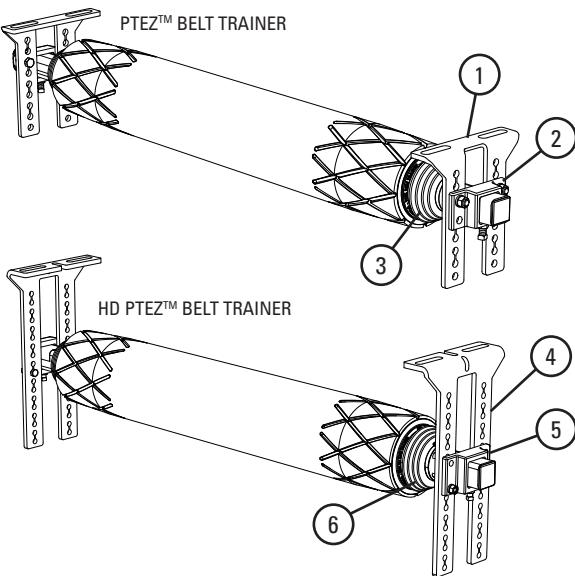

Specifications & Guidelines

PTEZ™
Belt Trainer


PART NUMBER	BELT WIDTH	DIM "A"	DIM "B"
90265	18"	18.75" [476mm]	36" [914mm]
90266	24"	24.75" [629mm]	42" [1067mm]
90267	30"	30.75" [781mm]	48" [1219mm]
90268	36"	36.75" [933mm]	54" [1372mm]
90269	42"	42.75 [1086mm]	60" [1524mm]
90270	48"	48.75 [1238mm]	66" [1676mm]

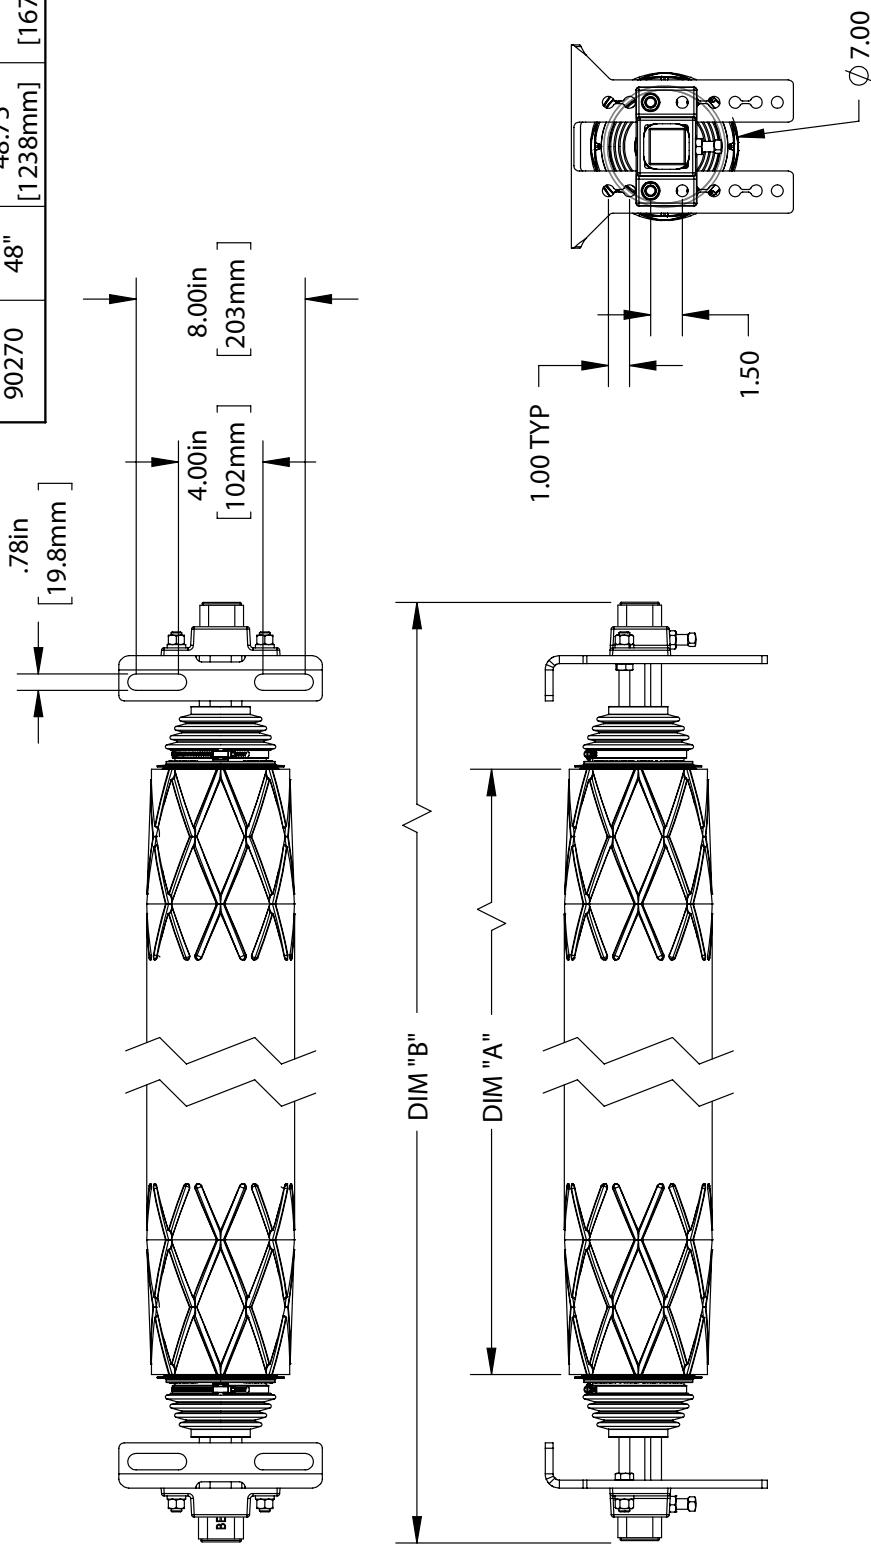

Specifications & Guidelines

HD PTEZ™
Belt Trainer


SPECIFICATIONS					
BELT WIDTH (in)	ROLL LENGTH 'A' (in)	ROLL LENGTH 'B' (in)	SHAFT LENGTH 'B' (mm)	ORDERING NUMBER	ITEM CODE
42	1050	42.75	1086	60	PTEZHD-42/1050
48	1200	48.75	1238	66	PTEZHD-48/1200
54	1350	54.75	1391	72	PTEZHD-54/1350
56	1400	56.75	1441	74	PTEZHD-56/1400
60	1500	60.75	1543	78	PTEZHD-60/1500
64	1600	64.75	1645	82	PTEZHD-64/1600
72	1800	72.75	1848	90	PTEZHD-72/1800
80	2000	80.75	2051	98	PTEZHD-80/2000
84	2100	84.75	2153	102	PTEZHD-84/2100
				2591	PTEZHD-84/2100
				90621	

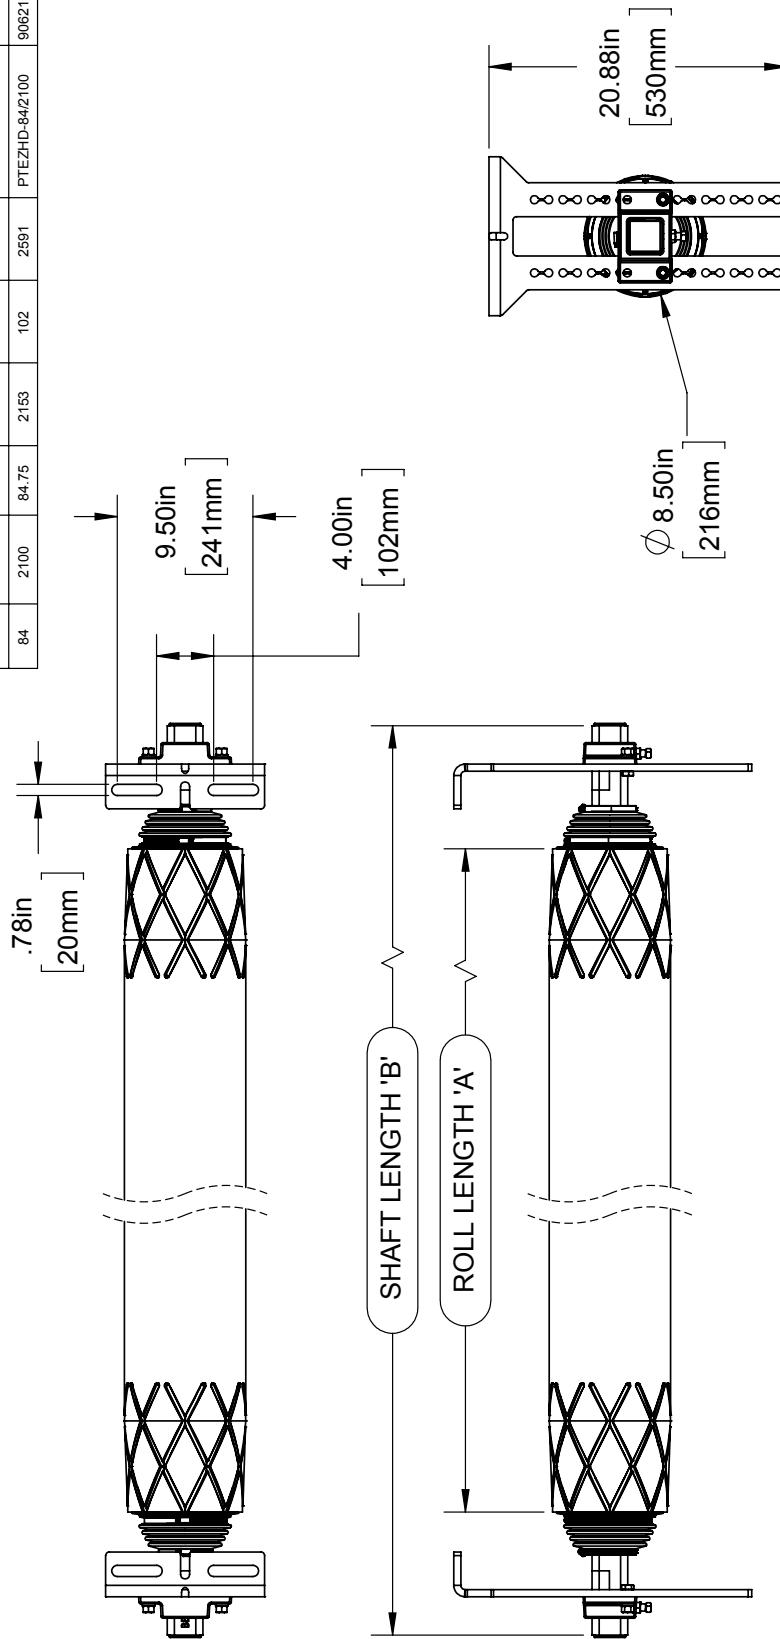

Specifications & Guidelines


HD PTEZ™ Underground Belt Trainer

SPECIFICATIONS					
BELT WIDTH (in)	ROLL LENGTH 'A' (mm)	SHAFT LENGTH 'B' (mm)	ITEM CODE	ORDERING NUMBER	ITEM CODE
42	1050	4275	1086	60	1524
48	1200	4875	1238	66	1676
54	1350	5475	1391	72	1829
60	1500	6075	1543	78	1981
72	1800	7275	1848	90	2286
					PTEZHD-72/1800-UG
					90802

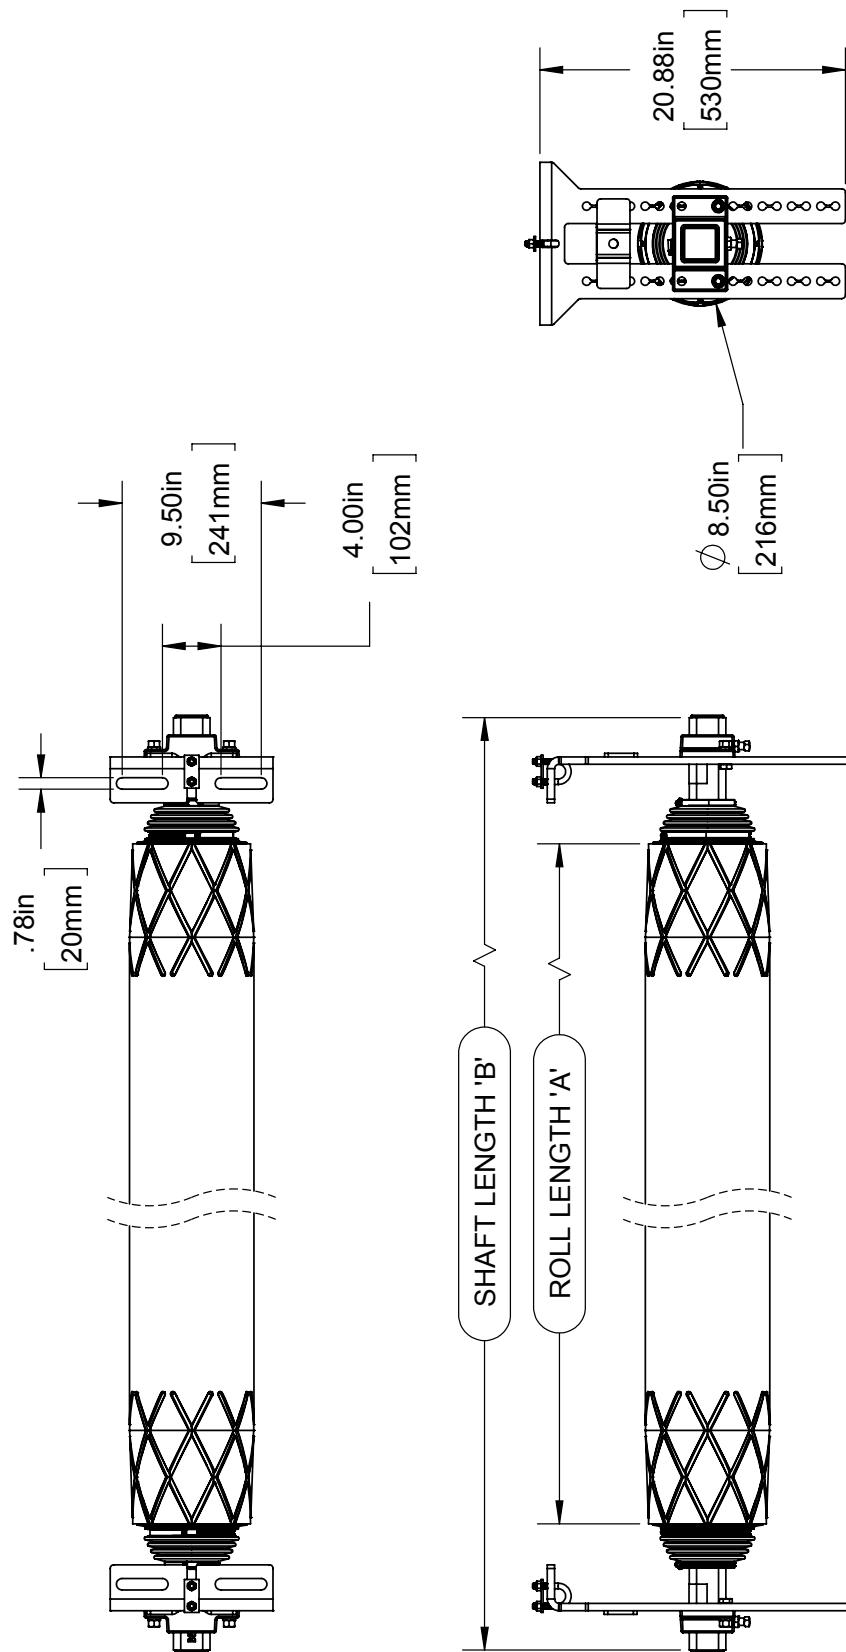

Product Ordering Information

**PT Smart™
Belt Trainers**

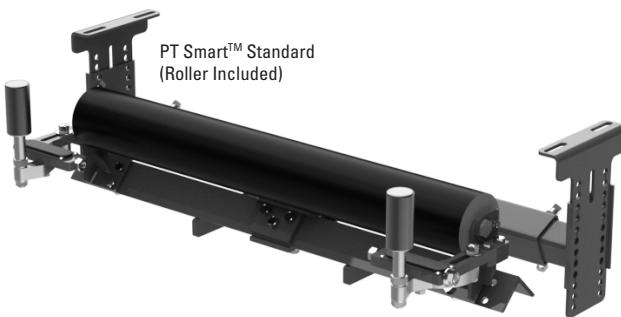

PT Smart™

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
18	450	PTS-18R	77664	121.0
24	600	PTS-24R	77665	141.0
30	750	PTS-30R	77666	154.0
36	900	PTS-36R	77667	169.0
42	1050	PTS-42R	77668	186.0
48	1200	PTS-48R	77669	197.0
54	1350	PTS-54R	77670	210.0
60	1500	PTS-60R	77671	224.0
72	1800	PTS-72R	77672	242.0

Lead time: 1 working day

Replacement Rollers

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
18	450	PTS-RR21	77680	22.0
24	600	PTS-RR27	77681	27.0
30	750	PTS-RR33	77682	32.2
36	900	PTS-RR39	77683	36.0
42	1050	PTS-RR45	77684	41.5
48	1200	PTS-RR51	77685	45.0
54	1350	PTS-RR57	77686	47.5
60	1500	PTS-RR63	77687	53.0
72	1800	PTS-RR75	77689	57.0


Lead time: 1 working day

PT Smart™ Underground

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
30	750	PTS-30R-UG	77673	174.0
36	900	PTS-36R-UG	77674	188.0
42	1050	PTS-42R-UG	77675	196.0
48	1200	PTS-48R-UG	77676	208.0
54	1350	PTS-54R-UG	77677	220.0
60	1500	PTS-60R-UG	77678	255.0
72	1800	PTS-72R-UG	77679	265.0

Lead time: 1 working day

PT Smart™ Underground Structure
(Roller Included)

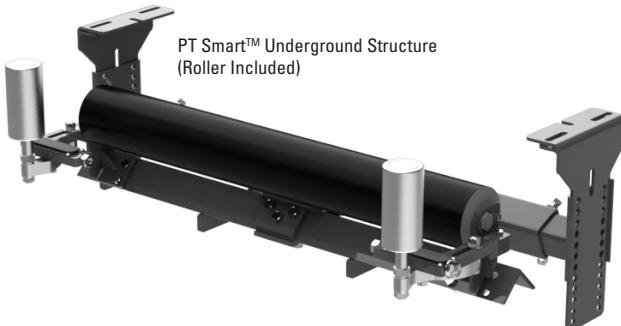




Replacement Rollers

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
30	750	PTS-RR39	77683	36.0
36	900	PTS-RR45	77684	41.5
42	1050	PTS-RR51	77685	45.0
48	1200	PTS-RR57	77686	47.5
54	1350	PTS-RR63	77687	53.0
60	1500	PTS-RR69	77688	57.0
72	1800	PTS-RR81	77690	81.0

Lead time: 1 working day




Specifications & Guidelines

PT Smart™
Belt Trainers

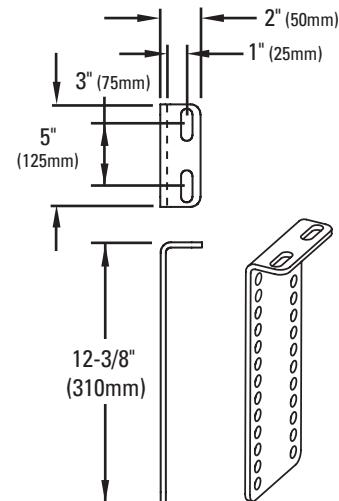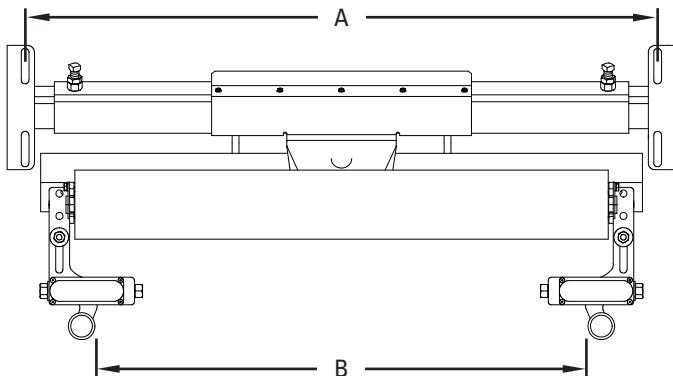

PT Smart™ Standard

Belt Width		Item Code	A		B		C		D (vertical adjustment)	
in.	mm		in.	mm	in.	mm	in.	mm	in.	mm
18	450	77664	23-35	575-875	10-23	250-575	10	250	0-10	0-250
24	600	77665	29-41	725-1025	16-29	400-725				
30	750	77666	35-47	875-1175	22-35	550-875				
36	900	77667	41-53	1025-1325	28-41	700-1025				
42	1050	77668	47-59	1175-1475	33-47	825-1175				
48	1200	77669	53-65	1325-1625	40-53	1000-1325				
54	1350	77670	59-71	1475-1775	46-59	1150-1475				
60	1500	77671	65-77	1625-1925	52-65	1300-1625				
72	1800	77672	77-89	1925-2225	64-77	1600-1925				

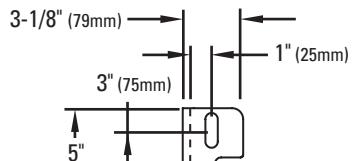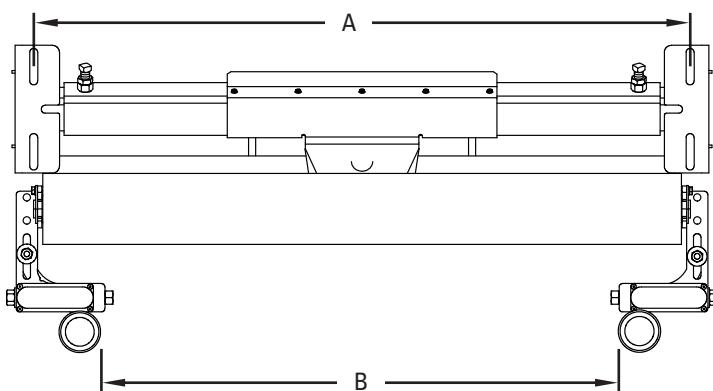


PT Smart™ Underground Structure

Belt Width		Item Code	A		B		C		D (vertical adjustment)	
in.	mm		in.	mm	in.	mm	in.	mm	in.	mm
30	750	77673	35-47	875-1175	27-40	675-1000	10	250	2-3/4-13-1/4	695-331
36	900	77674	41-53	1025-1325	33-46	825-1150				
42	1050	77675	47-59	1175-1475	39-52	975-1300				
48	1200	77676	53-65	1025-1625	45-58	1125-1450				
54	1350	77677	59-71	1475-1775	51-64	1275-1600				
60	1500	77678	65-77	1625-1925	57-70	1425-1750				
72	1800	77679	77-89	1925-2225	69-82	1725-2050				

Replacement Parts List

PT Smart™
Belt Trainers


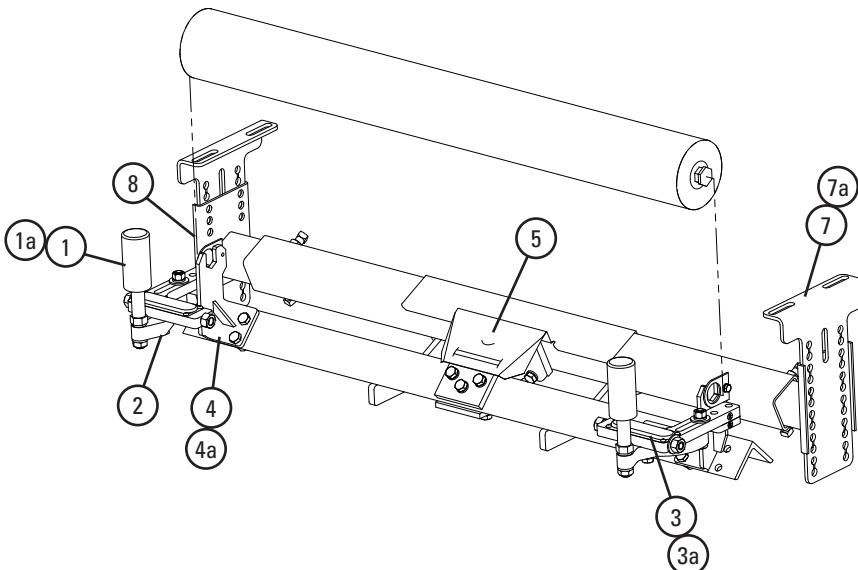


Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	PTS STD Sensor Roller (2")	PTS-SR	77691	3.6
1a	PTS HD Sensor Roller (3")	PTS-HDSR	77692	12.0
2	PTS Sensor Arm Kit (1 ea.)	PTS-SAK	77694	2.5
3	PTS RH Sensor Adjuster Assy	PTS-RHSAA	77755	4.7
3a	PTS LH Sensor Adjuster Assy	PTS-LHSAA	77756	4.7
4	PTS Idler Bracket Kit (incl. L & R)	PTS-IBK	77696	5.9
4a	PTS HD Idler Bracket Kit (incl. L & R)	PTS-HIBK	77697	6.2
5	PTS Pivot Shield	PTS-PS	77698	1.8
6	PTS Pivot Assy (Axle and housing)	PTS-PA	77699	6.9
7	PTS Mounting Bracket Kit	PTS-MBK	77700	8.8
7a	PTS Mounting Bracket Kit U/G	PTS-MBKUG	77701	11.4
8	PTS Extending Bracket Kit (incl. L & R)	PTS-EBK	77702	12.9
9	Roller Retainer Kit	RBPRET	73163	1.0
10	Delrin Roll Kit* (2 kits)	PTS-DRK	90100	1.5
-	Wire Mount Kit	PTS-WMK	78767	11.5

*Hardware included

Lead time: 1 working day

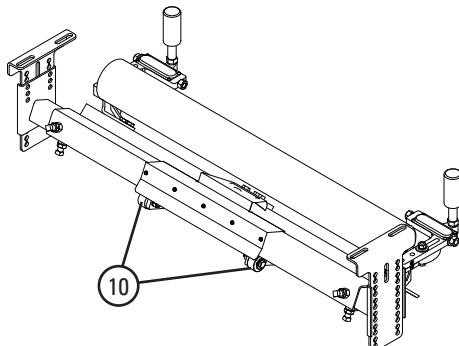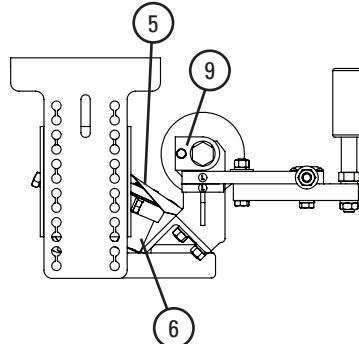

Product Ordering Information

PT Max™ Adjustable Belt Trainers

PT Max™ Adjustable Top Side

VERSION	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm			
Standard	36	900	PTMA36T	90362	355.0
	42	1050	PTMA42T	90363	375.0
	48	1200	PTMA48T	90364	405.0
	54	1350	PTMA54T	90365	425.0
	60	1500	PTMA60T	90366	445.0
Heavy-Duty	54	1350	PTMAHD54T	90377	505.0
	60	1500	PTMAHD60T	90378	530.0
	72	1800	PTMAHD72T	90379	610.0
	84	2100	PTMAHD84T	90380	670.0

Lead time: 1 working day



PT Max™ Adjustable Top Side Belt Trainer

PT Max™ Adjustable Return Side

VERSION	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm			
Standard	36	900	PTMA36R	90367	340.0
	42	1050	PTMA42R	90368	375.0
	48	1200	PTMA48R	90369	395.0
	54	1350	PTMA54R	90370	415.0
	60	1500	PTMA60R	90371	430.0
Heavy-Duty	54	1350	PTMAHD54R	90381	520.0
	60	1500	PTMAHD60R	90382	540.0
	72	1800	PTMAHD72R	90383	615.0
	84	2100	PTMAHD84R	90384	665.0

Lead time: 1 working day




PT Max™ Adjustable Return Side Belt Trainer

PT Max™ Adjustable V-Return

VERSION	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm			
Standard	36	900	PTMA36VR	90372	430.0
	42	1050	PTMA42VR	90373	450.0
	48	1200	PTMA48VR	90374	475.0
	54	1350	PTMA54VR	90375	495.0
	60	1500	PTMA60VR	90376	520.0
Heavy-Duty	54	1350	PTMAHD54VR	90385	610.0
	60	1500	PTMAHD60VR	90386	635.0
	72	1800	PTMAHD72VR	90387	725.0
	84	2100	PTMAHD84VR	90388	770.0

Lead time: 1 working day

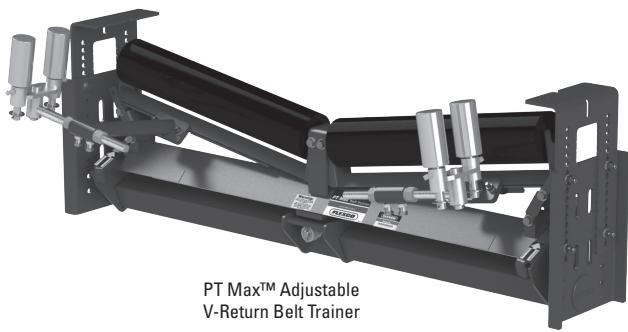

PT Max™ Adjustable V-Return Belt Trainer

Shaded items are made to order.
Lead time: 15 working days

Product Ordering Information

PT Max™ Original Belt Trainers

PT Max™ Top Side

VERSION	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm			
Standard	24	600	PTM24T	75583	280.0
	30	750	PTM30T	74885	295.0
	36	900	PTM36T	74886	310.0
	42	1050	PTM42T	74887	325.0
	48	1200	PTM48T	74888	340.0
	54	1350	PTM54T	74889	355.0
	60	1500	PTM60T	74890	370.0
Heavy-Duty	54	1350	PTMHD54T	74891	390.0
	60	1500	PTMHD60T	74892	410.0
	72	1800	PTMHD72T	74893	430.0
	84	2100	PTMHD84T	74894	450.0
Super-Duty	72	1800	PTMSD72T	74895	828.1
	84	2100	PTMSD84T	74896	876.8
	96	2400	PTMSD96T	74897	925.5
	120	3000	PTMSD120T	74898	1,022.9



PT Max™ Top Side Belt Trainer
(Rollers supplied by end user)

PT Max™ Return Side

VERSION	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm			
Standard	24	600	PTM24R	75584	330.0
	30	750	PTM30R	74899	340.0
	36	900	PTM36R	74900	350.0
	42	1050	PTM42R	74901	370.0
	48	1200	PTM48R	74902	380.0
	54	1350	PTM54R	74903	400.0
	60	1500	PTM60R	74904	420.0
Heavy-Duty	54	1350	PTMHD54R	74905	510.0
	60	1500	PTMHD60R	74906	520.0
	72	1800	PTMHD72R	74907	580.0
	84	2100	PTMHD84R	74908	610.0
Super-Duty	72	1800	PTMSD72R	74909	992.7
	84	2100	PTMSD84R	74910	1,051.1
	96	2400	PTMSD96R	74911	1,109.5
	120	3000	PTMSD120R	74912	1,226.3



PT Max™ Return Side Belt Trainer
(Rollers supplied by end user)

PT Max™ V-Return

VERSION	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm			
Standard	24	600	PTM24VR	79669	310.0
	30	750	PTM30VR	79670	320.0
	36	900	PTM36VR	79671	330.0
	42	1050	PTM42VR	79672	350.0
	48	1200	PTM48VR	79673	360.0
	54	1350	PTM54VR	79674	370.0
	60	1500	PTM60VR	79675	390.0
Heavy-Duty	54	1350	PTMHD54VR	79665	470.0
	60	1500	PTMHD60VR	79666	480.0
	72	1800	PTMHD72VR	79667	560.0
	84	2100	PTMHD84VR	79668	600.0
Super-Duty	72	1800	PTMSD72VR	90051	935.0
	84	2100	PTMSD84VR	90052	990.0
	96	2400	PTMSD96VR	90053	1,045.0
	120	3000	PTMSD120VR	90054	1,155.0



PT Max™ V-Return Belt Trainer
(Rollers supplied by end user)

All items are made to order.
Lead time: 15 working days (after data sheets are approved)

All items are made to order.
Lead time: 25 working days (after data sheets are approved)

Product Ordering Information

PT Max™ Stainless Steel Belt Trainers

PT Max™ Top Side


VERSION	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm			
Standard	24	600	PTM24T-S/S	90001	302.4
	30	750	PTM30T-S/S	90002	318.6
	36	900	PTM36T-S/S	90003	334.8
	42	1050	PTM42T-S/S	90004	351.0
	48	1200	PTM48T-S/S	90005	367.2
	54	1350	PTM54T-S/S	90006	383.4
	60	1500	PTM60T-S/S	90007	399.6
Heavy-Duty	54	1350	PTMHD54T-S/S	90008	421.2
	60	1500	PTMHD60T-S/S	90009	442.8
	72	1800	PTMHD72T-S/S	90010	464.4
	84	2100	PTMHD84T-S/S	90011	486.0
Super-Duty	72	1800	PTMSD72T-S/S	90034	894.3
	84	2100	PTMSD84T-S/S	90035	946.9
	96	2400	PTMSD96T-S/S	90036	999.5
	120	3000	PTMSD120T-S/S	90037	1,104.8



PT Max™ Top Side Belt Trainer
(Rollers supplied by end user)

PT Max™ Return Side


VERSION	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm			
Standard	24	600	PTM24R-S/S	90012	356.4
	30	750	PTM30R-S/S	90013	367.2
	36	900	PTM36R-S/S	90014	378.0
	42	1050	PTM42R-S/S	90015	399.6
	48	1200	PTM48R-S/S	90016	410.4
	54	1350	PTM54R-S/S	90017	432.0
	60	1500	PTM60R-S/S	90018	453.6
Heavy-Duty	54	1350	PTMHD54R-S/S	90019	550.8
	60	1500	PTMHD60R-S/S	90020	561.6
	72	1800	PTMHD72R-S/S	90021	626.4
	84	2100	PTMHD84R-S/S	90022	658.8
Super-Duty	72	1800	PTMSD72R-S/S	90038	1,072.1
	84	2100	PTMSD84R-S/S	90039	1,135.2
	96	2400	PTMSD96R-S/S	90040	1,198.3
	120	3000	PTMSD120R-S/S	90041	1,324.4

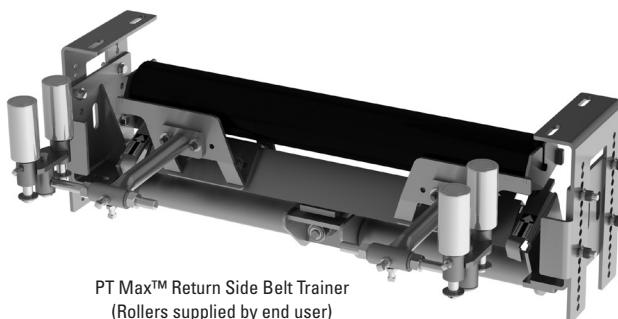

PT Max™ Return Side Belt Trainer
(Rollers supplied by end user)

PT Max™ V-Return

VERSION	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm			
Standard	24	600	PTM24VR-S/S	90023	334.8
	30	750	PTM30VR-S/S	90024	345.6
	36	900	PTM36VR-S/S	90025	356.4
	42	1050	PTM42VR-S/S	90026	378.0
	48	1200	PTM48VR-S/S	90027	388.8
	54	1350	PTM54VR-S/S	90028	399.6
	60	1500	PTM60VR-S/S	90029	421.2
Heavy-Duty	54	1350	PTMHD54VR-S/S	90030	507.6
	60	1500	PTMHD60VR-S/S	90031	518.4
	72	1800	PTMHD72VR-S/S	90032	604.8
	84	2100	PTMHD84VR-S/S	90033	648.0
Super-Duty	72	1800	PTMSD72VR-S/S	90042	1,009.8
	84	2100	PTMSD84VR-S/S	90043	1,069.2
	96	2400	PTMSD96VR-S/S	90044	1,128.6
	120	3000	PTMSD120VR-S/S	90045	1,247.4

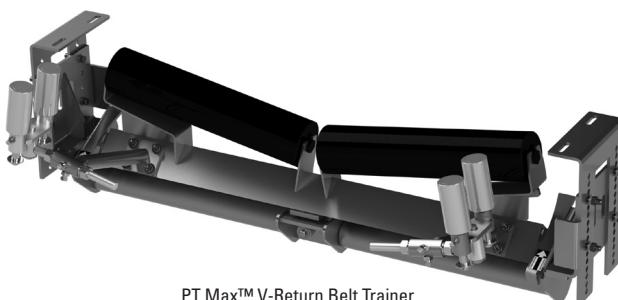

PT Max™ V-Return Belt Trainer
(Rollers supplied by end user)


All items are made to order.
Lead time: 25 working days (after data sheets are approved)

Specifications & Guidelines


PT Max™
Belt Trainers

Top of Roller to Bottom of PT Max™ Minimum Clearance Needed


ROLL DIAMETER		TOPSIDE						RETURN SIDE						V-RETURN					
		Standard		Heavy-Duty		Super-Duty		Standard		Heavy-Duty		Super-Duty		Standard		Heavy-Duty		Super-Duty	
		in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
5	127	16	406	17	432	22.25	570	17	432	18	457	22.75	580	16	406	17	432	22.25	570
6	152	17	432	18	457	23.25	590	18	457	19	483	23.75	600	17	432	18	457	23.25	590
7	178	18	457	19	483	24.25	620	19	483	20	508	24.75	630	18	457	19	483	24.25	620



Topside Clearance




Return Side Clearance



V-Return Clearance

Replacement Parts List

PT Max™ Adjustable Belt Trainers

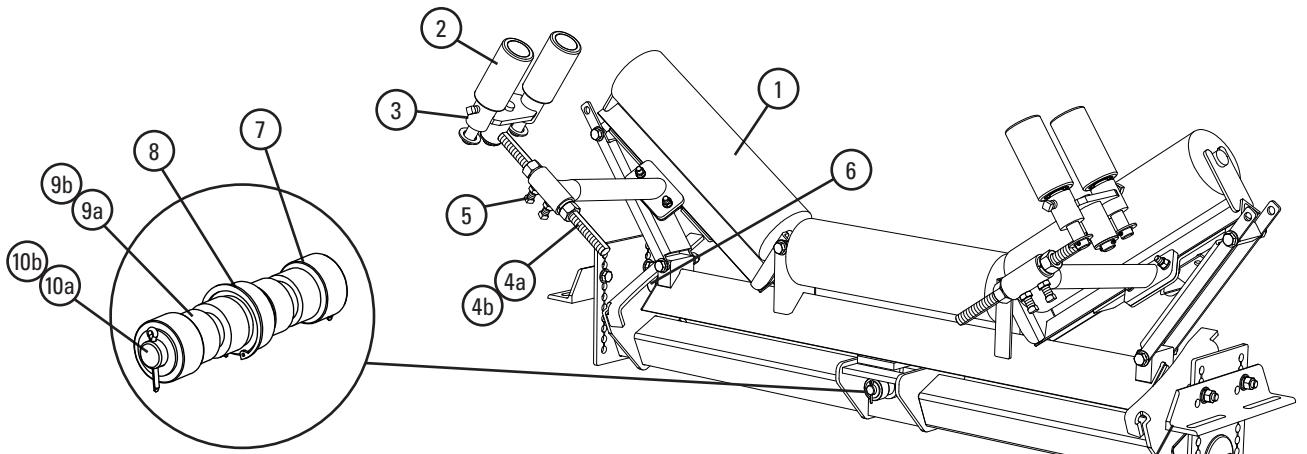


Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	CEMA E 6" Roller - Topside 36" (900mm) (1 roll)	SE6-T36	90227	23.0
	CEMA E 6" Roller - Topside 42" (1050mm) (1 roll)	SE6-T42	90228	26.0
	CEMA E 6" Roller - Topside 48" (1200mm) (1 roll)	SE6-T48	90229	30.0
	CEMA E 6" Roller - Topside 54" (1350mm) / V-Return 36" (900mm) (1 roll)	SE6-T54/VR36	90230	32.0
	CEMA E 6" Roller - Topside 60" (1500mm) / V-Return 42" (1050mm) (1 roll)	SE6-T60/VR42	90231	35.0
	CEMA E 6" Roller - Topside 72" (1800mm) / V-Return 48" (1200mm) (1 roll)	SE6-T72/VR48	90232	40.0
	CEMA E 6" Roller - Topside 84" (2100mm) (1 roll)	SE6-T84	90233	45.0
	CEMA E 6" Roller - Flat-Return 36" (900mm) (1 roll)	SE6-R36	90220	54.0
	CEMA E 6" Roller - Flat-Return 42" (1050mm) (1 roll)	SE6-R42	90221	60.0
	CEMA E 6" Roller - Flat-Return 48" (1200mm) (1 roll)	SE6-R48	90222	66.0
	CEMA E 6" Roller - Flat-Return 54" (1350mm) (1 roll)	SE6-R54	90223	72.0
	CEMA E 6" Roller - Flat-Return 60" (1500mm) (1 roll)	SE6-R60	90224	78.0
	CEMA E 6" Roller - Flat-Return 72" (1800mm) (1 roll)	SE6-R72	90225	90.0
	CEMA E 6" Roller - Flat-Return 84" (2100mm) (1 roll)	SE6-R84	90226	102.0
	CEMA E 6" Roller - V-Return 54" (1350mm) (1 roll)	SE6-VR54	90234	43.0
	CEMA E 6" Roller - V-Return 60" (1500mm) (1 roll)	SE6-VR60	90235	47.0
	CEMA E 6" Roller - V-Return 72" (1800mm) (1 roll)	SE6-VR72	90236	54.0
	CEMA E 6" Roller - V-Return 84" (2100mm) (1 roll)	SE6-VR84	90319	57.0
2	Sensor Roller 2.0* (3" solid roller) (1 ea.)	MSR2	79378	7.0
3	Swivel Mount Kit 2.0*	PMSMK2	79380	5.5
4a	PT Max Adjusting Arm Kit	PTMAAK	90194	6.0
4b	PT Max Adjusting Arm Kit - HD	PTMAAKHD	90195	9.0
5	Frame Arm Screw Kit (incl. (4) ea. screw, jam nut)	PTMAFASK	90196	1.2
6	Outer Roller Kit* (incl. (2) rollers, roller thimbles)	PTMAORK	90197	1.0
7	Center Roller Kit (incl. (2) ea. roller, washer, cotter pin)	MCRK	74923	1.2
8	Center Bearing	MCB	74925	1.7
9a	Center Shaft Spacer Kit (incl. (2) spacer)	MCSK	74927	0.3
9b	Center Shaft Spacer Kit - HD (incl. (2) spacer)	MCSKHD	74928	0.5
10a	Center Shaft	MCS	74930	4.0
10b	Center Shaft - HD	MCSHD	74931	13.0
11a	Frame Mount Kit - Topside	PTMAFMKT	90185	14.6
11b	Frame Mount Kit - Flat / V-Return	PTMAFMKR	90186	42.0
11c	Frame Mount Kit - Flat / V-Return HD	PTMAFMHDR	90187	49.4
12a	Extender Kit - Topside	PTMAEKT	90188	33.9
12b	Extender Kit - Topside HD	PTMAEKHDT	90191	49.9
12c	Extender Kit - Flat-Return	PTMAEKR	90189	57.1
12d	Extender Kit - Flat-Return HD	PTMAEKHDR	90192	86.4
12e	Extender Kit - V-Return	PTMAEKVR	90190	76.0
12f	Extender Kit - V-Return HD	PTMAEKHDRV	90193	112.1
-	Center Bearing Kit (incl. (1) ea. items 7, 8, 9a, 10a)	MCBK	76025	8.0
-	Center Bearing Kit - HD (incl. (1) ea. items 7, 8, 9b, 10b)	MCBKHD	76026	17.0


*Hardware included

Lead time: 1 working day

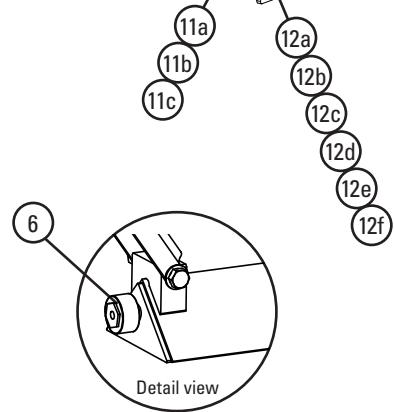

Replacement Parts List

**PT Max™ Original
Belt Trainers**

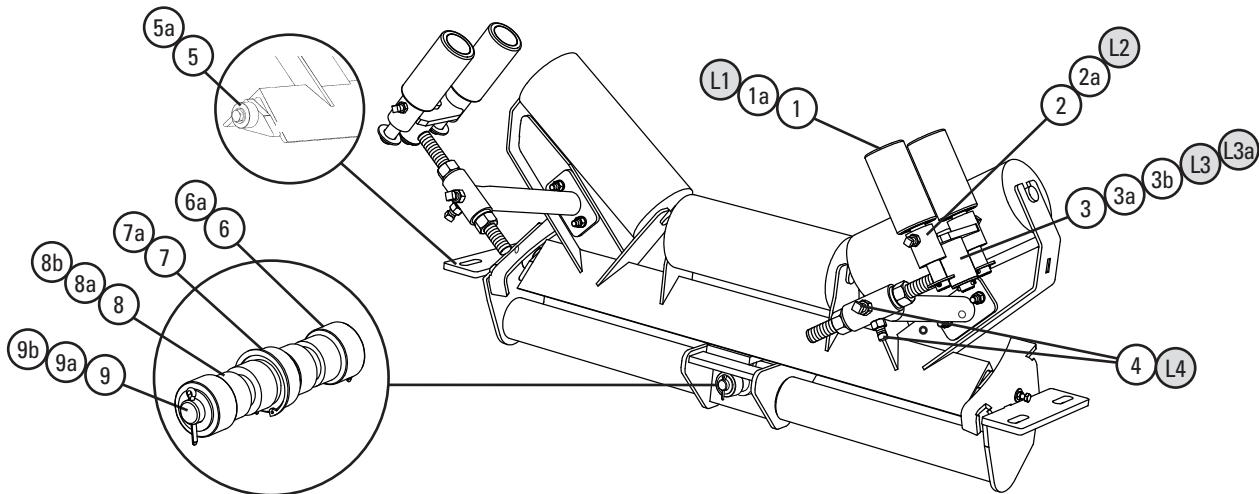

Replacement Parts

REF	DESCRIPTION	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
		in.	mm			
1	Sensor Roller 2.0* (3" solid roller) (1 ea.)	30-84	750-2100	MSR2	79378	7.0
1a	Sensor Roller Super Duty* (1 ea.)	72-120	1800-3000	MSRSD	74915	9.9
2	Swivel Mount Kit 2.0*	30-84	750-2100	PMSMK2	79380	5.5
2a	Swivel Mount Kit Super Duty*	72-120	1800-3000	PMSMKS	74917	7.5
3	Adjusting Arm Kit 2.0*	30-60	750-1500	MAK2	79381	7.9
3a	Adjusting Arm Kit Heavy Duty 2.0*	54-84	1350-2100	MAKHD2	79382	14.7
3b	Adjusting Arm Kit Super Duty*	72-120	1800-3000	MAKSD	74920	21.0
4	Frame Arm Set Screw Kit HD (incl. 2 set screws and 2 jam nuts)	30-120	750-3000	MFASKHD	79571	0.8
5	Outer Roller Kit* (incl. 2 rollers, roller thimbles and bolts, nuts and washers)	30-84	750-2100	MORK	74921	2.6
5a	Outer Roller Kit Super Duty* (incl. 2 rollers, roller thimbles and bolts, nuts and washers)	72-120	1800-3000	MORKSD	74922	4.0
6	Center Roller Kit* (incl. 2 rollers, 2 washers, and 2 cotter pins)	30-84	750-2100	MCRK	74923	1.2
6a	Center Roller Kit Super Duty* (incl. 2 rollers, 2 washers, and 2 cotter pins)	72-120	1800-3000	MCRKSD	74924	1.8
7	Center Bearing*	30-84	750-2100	MCB	74925	1.7
7a	Center Bearing Super Duty*	72-120	1800-3000	MCBSD	74926	3.0
8	Center Shaft Spacer Kit (incl. 2 spacers)	30-60	750-1500	MCSK	74927	0.3
8a	Center Shaft Spacer Kit Heavy Duty (incl. 2 spacers)	54-84	1350-2100	MCSKHD	74928	0.5
8b	Center Shaft Spacer Kit Super Duty (incl. 2 spacers)	72-120	1800-3000	MCSKSD	74929	2.4
9	Center Shaft	30-60	750-1500	MCS	74930	4.0
9a	Center Shaft Heavy Duty	54-84	1350-2100	MCSHD	74931	13.0
9b	Center Shaft Super Duty	72-120	1800-3000	MCSSD	74932	14.5
-	Center Bearing Kit (incl. 1 ea. items 6, 7, 8, 9)	30-60	750-1500	MCBK	76025	8.0
-	Center Bearing Kit Heavy Duty (incl. 1 ea. items 6, 7, 8a, 9a)	54-84	1350-2100	MCBKHD	76026	17.0
-	Center Bearing Kit Super Duty (incl. 1 ea. items 6a, 7a, 8b, 9b)	72-120	1800-3000	MCBKSD	114404	19.0

*Hardware included

Lead time: 1 working day

Note: All replacement parts offered are common to all three PT Max models: Top Side, Return Side, and V-Return.

For PT Max™ Units
Shipped after
March 17, 2014 ONLY.

See below for legacy
replacement parts.

Shaded items are made to order.

Lead time: 15 working days

Legacy Replacement Parts - Units Shipped Prior to March 17, 2014


REF	DESCRIPTION	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
		in.	mm			
L1	Sensor Roller* (3" solid roller) (1 ea.)	30-84	750-2100	MSR	74914	7.0
L2	Swivel Mount Kit*	30-84	750-2100	PMSMK	74916	5.5
L3	Adjusting Arm Kit*	30-60	750-1500	MAK	74918	7.9
L3a	HD Adjusting Arm Kit*	54-84	1350-2100	MAKHD	74919	14.7
L4	Frame Arm Set Screw Kit (incl. 2 set screws and 2 jam nuts)	30-120	750-3000	MFASK	75531	0.8

*Hardware included

Lead time: 1 working day

Replacement Parts List

PT Max™ Stainless Steel Belt Trainers

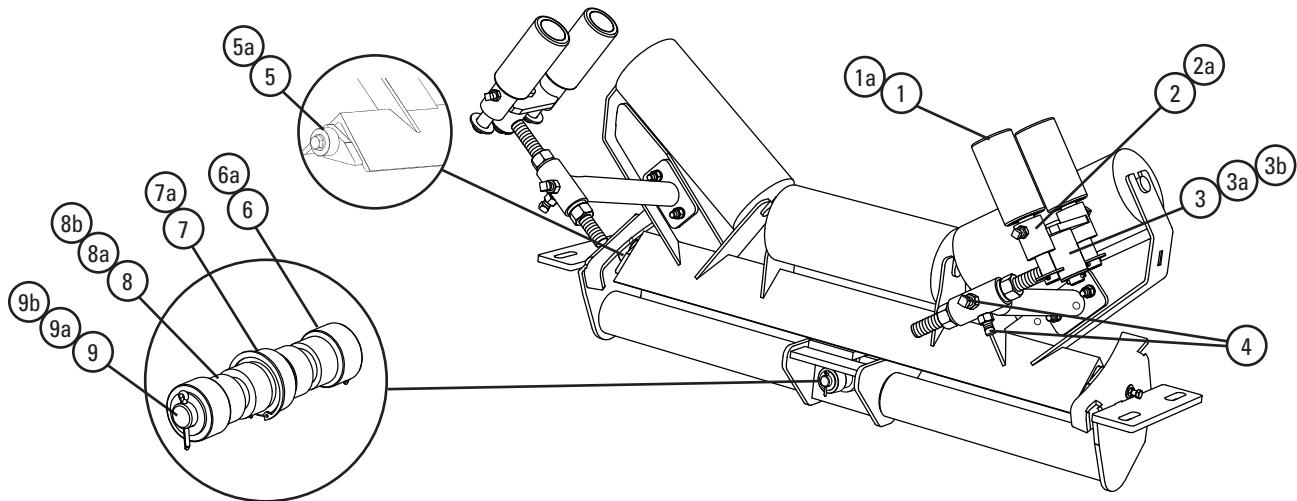

Replacement Parts

REF	DESCRIPTION	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
		in.	mm			
1	Sensor Roller 2.0* (3" solid roller) (1 ea.)	30-84	750-2100	MSR2-S/S	90046	7.6
1a	Sensor Roller Super Duty	72-120	1800-3000	MSRSD-S/S	90055	10.7
2	Swivel Mount Kit 2.0*	30-84	750-2100	PMSMK2-S/S	90047	5.9
2a	Swivel Mount Kit Super Duty*	72-120	1800-3000	PMSMKS-S/S	90056	8.1
3	Adjusting Arm Kit 2.0*	30-60	750-1500	MAK2-S/S	90048	8.5
3a	Adjusting Arm Kit Heavy Duty 2.0*	54-84	1350-2100	MAKHD2-S/S	90049	15.9
3b	Adjusting Arm Kit Super Duty*	72-120	1800-3000	MAKSD-S/S	90057	22.7
4	Frame Arm Set Screw Kit HD (incl. 2 set screws and 2 jam nuts)	30-120	750-3000	MFASKHD-S/S	90050	0.9
5	Outer Roller Kit* (incl. 2 rollers, roller thimbles and bolts, nuts and washers)	30-84	750-2100	MORK	74921	2.6
5a	Outer Roller Kit Super Duty* (incl. 2 rollers, roller thimbles and bolts, nuts and washers)	72-120	1800-3000	MORKSD	74922	4.0
6	Center Roller Kit* (incl. 2 rollers, 2 washers, and 2 cotter pins)	30-84	750-2100	MCRK	74923	1.2
6a	Center Roller Kit Super Duty* (incl. 2 rollers, 2 washers, and 2 cotter pins)	72-120	1800-3000	MCRKSD	74924	1.8
7	Center Bearing*	30-84	750-2100	MCB	74925	1.7
7a	Center Bearing Super Duty*	72-120	1800-3000	MCBSD	74926	3.0
8	Center Shaft Spacer Kit (incl. 2 spacers)	30-60	750-1500	MCSK	74927	0.3
8a	Center Shaft Spacer Kit Heavy Duty (incl. 2 spacers)	54-84	1350-2100	MCSKHD	74928	0.5
8b	Center Shaft Spacer Kit Super Duty (incl. 2 spacers)	72-120	1800-3000	MCSKSD	74929	2.4
9	Center Shaft	30-60	750-1500	MCS	74930	4.0
9a	Center Shaft Heavy Duty	54-84	1350-2100	MCSHD	74931	13.0
9b	Center Shaft Super Duty	72-120	1800-3000	MCSSD	74932	14.5
-	Center Bearing Kit (incl. 1 ea. items 6, 7, 8, 9)	30-60	750-1500	MCBK	76025	8.0
-	Center Bearing Kit Heavy Duty (incl. 1 ea. items 6, 7, 8a, 9a)	54-84	1350-2100	MCBKHD	76026	17.0
-	Center Bearing Kit Super Duty (incl. 1 ea. items 6a, 7a, 8b, 9b)	72-120	1800-3000	MCBKSD	114404	19.0

*Hardware included

Lead time: 1 working day

Note: All replacement parts offered are common to all three PT Max models: Top Side, Return Side, and V-Return.

Shaded items are made to order.

Lead time: 15 working days

Product Ordering Information

Enclosed Skirting

Enclosed Skirting Base Unit

Base unit configuration options: belt width, length, no cover or cover, standard or tangential seal. One Leg Kit included with each Base Unit.

Product Notes:

- Maximum span between support legs is 96" (or 8') and they are to be attached to the conveyor stringer or truss
 - For each run of Enclosed Skirting one additional Leg Kit is required to complete the installation. See Leg Kits on the Replacement Parts page.
- Skirting solutions do not include required skirt rubber; purchase from local Flexco distribution
- Straight skirt wall and tangential skirt wall available for different skirt rubber sealing options
- Product is built and sold to CEMA standards
- Skirt board liners made with AR400 abrasive resistant plate steel



Standard Base Unit

BELT WIDTH		UNIT LENGTH		NO COVER			COVERED		
in.	mm	ft.	mm	ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.
24	600	4	1200	ES24-4-SN	91653	176.6	ES24-4-SF	91664	218.4
30	750	4	1200	ES30-4-SN	91654	177.9	ES30-4-SF	91665	227.4
36	900	4	1200	ES36-4-SN	91655	179.3	ES36-4-SF	91666	236.5
42	1050	4	1200	ES42-4-SN	91656	181.9	ES42-4-SF	91667	247.2
48	1200	4	1200	ES48-4-SN	91657	183.3	ES48-4-SF	91668	256.6
54	1350	4	1200	ES54-4-SN	91658	184.6	ES54-4-SF	91669	265.6
60	1500	4	1200	ES60-4-SN	91659	187.3	ES60-4-SF	91670	276.1
66	1650	4	1200	ES66-4-SN	91660	188.6	ES66-4-SF	91671	285.1
72	1800	4	1200	ES72-4-SN	91661	189.9	ES72-4-SF	91672	294.5
84	2100	4	1200	ES84-4-SN	91662	193.9	ES84-4-SF	91673	314.0
96	2400	4	1200	ES96-4-SN	91663	197.9	ES96-4-SF	91674	333.7
24	600	8	2400	ES24-8-SN	91689	318.3	ES24-8-SF	91700	401.8
30	750	8	2400	ES30-8-SN	91690	319.6	ES30-8-SF	91701	418.6
36	900	8	2400	ES36-8-SN	91691	320.9	ES36-8-SF	91702	435.4
42	1050	8	2400	ES42-8-SN	91692	323.6	ES42-8-SF	91703	454.2
48	1200	8	2400	ES48-8-SN	91693	325.0	ES48-8-SF	91704	471.5
54	1350	8	2400	ES54-8-SN	91694	326.3	ES54-8-SF	91705	488.4
60	1500	8	2400	ES60-8-SN	91695	329.0	ES60-8-SF	91706	506.5
66	1650	8	2400	ES66-8-SN	91696	330.3	ES66-8-SF	91707	523.3
72	1800	8	2400	ES72-8-SN	91697	331.6	ES72-8-SF	91708	540.7
84	2100	8	2400	ES84-8-SN	91698	335.6	ES84-8-SF	91709	575.7
96	2400	8	2400	ES96-8-SN	91699	339.6	ES96-8-SF	91710	611.2

Lead time: 3 weeks

Tangential Base Unit

BELT WIDTH		UNIT LENGTH		NO COVER			COVERED		
in.	mm	ft.	mm	ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.
48	1200	4	1200	ES48-4-TN	91675	225.5	ES48-4-TF	91682	298.8
54	1350	4	1200	ES54-4-TN	91676	226.8	ES54-4-TF	91683	307.9
60	1500	4	1200	ES60-4-TN	91677	229.5	ES60-4-TF	91684	318.3
66	1650	4	1200	ES66-4-TN	91678	230.8	ES66-4-TF	91685	327.4
72	1800	4	1200	ES72-4-TN	91679	232.2	ES72-4-TF	91686	336.7
84	2100	4	1200	ES84-4-TN	91680	236.2	ES84-4-TF	91687	356.2
96	2400	4	1200	ES96-4-TN	91681	240.2	ES96-4-TF	91688	376.0
48	1200	8	2400	ES48-8-TN	91711	409.5	ES48-8-TF	91718	556.0
54	1350	8	2400	ES54-8-TN	91712	410.8	ES54-8-TF	91719	572.9
60	1500	8	2400	ES60-8-TN	91713	413.5	ES60-8-TF	91720	591.0
66	1650	8	2400	ES66-8-TN	91714	414.8	ES66-8-TF	91721	607.8
72	1800	8	2400	ES72-8-TN	91715	416.1	ES72-8-TF	91722	625.2
84	2100	8	2400	ES84-8-TN	91716	420.1	ES84-8-TF	91723	660.2
96	2400	8	2400	ES96-8-TN	91717	424.1	ES96-8-TF	91724	695.7

Lead time: 3 weeks

All items are made to order.
Lead time: 6 weeks

Product Ordering Information


Enclosed Skirting

Rear Seal

Used to enclose the rear of system while providing access into the system.

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
24	600	RS-24	91725	23.7
30	750	RS-30	91726	28.3
36	900	RS-36	91727	33.0
42	1050	RS-42	91728	38.1
48	1200	RS-48	91729	43.4
54	1350	RS-54	91730	48.6
60	1500	RS-60	91731	54.0
66	1650	RS-66	91732	59.3
72	1800	RS-72	91733	65.0
84	2100	RS-84	91734	78.1
96	2400	RS-96	91735	92.3

Lead time: 3 weeks

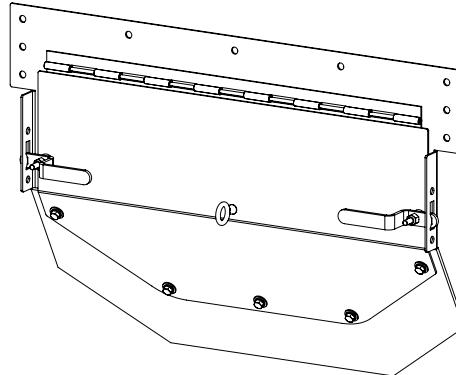


Dust Curtain

Can be located every two feet.

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
24	600	DC-24	91736	5.5
30	750	DC-30	91737	6.4
36	900	DC-36	91738	7.2
42	1050	DC-42	91739	8.0
48	1200	DC-48	91740	9.0
54	1350	DC-54	91741	9.6
60	1500	DC-60	91742	10.2
66	1650	DC-66	91743	11.0
72	1800	DC-72	91744	11.5
84	2100	DC-84	91745	12.7
96	2400	DC-96	91746	13.3

Lead time: 3 weeks

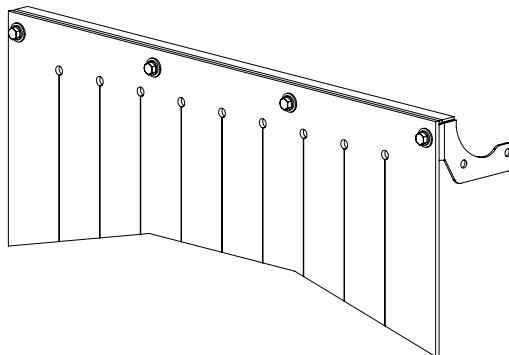


Spanners

Can be located every two feet.

BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm			
24	600	SP-24	91747	5.5
48	1200	SP-48	91748	10.9
72	1800	SP-72	91749	16.2
96	2400	SP-96	91750	21.5

Lead time: 3 weeks

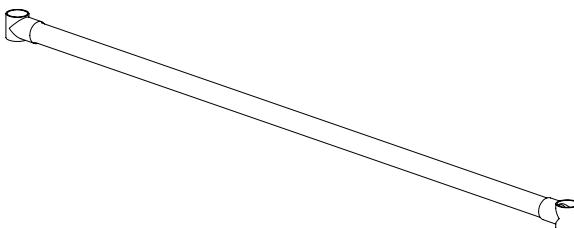

Shaded items are made to order.
Lead time: 6 weeks


Product Notes:

- Add-on items attach to base unit to provide custom arrangement for your application

Specifications & Guidelines

Enclosed Skirting





4' (1.2 m) Base Unit

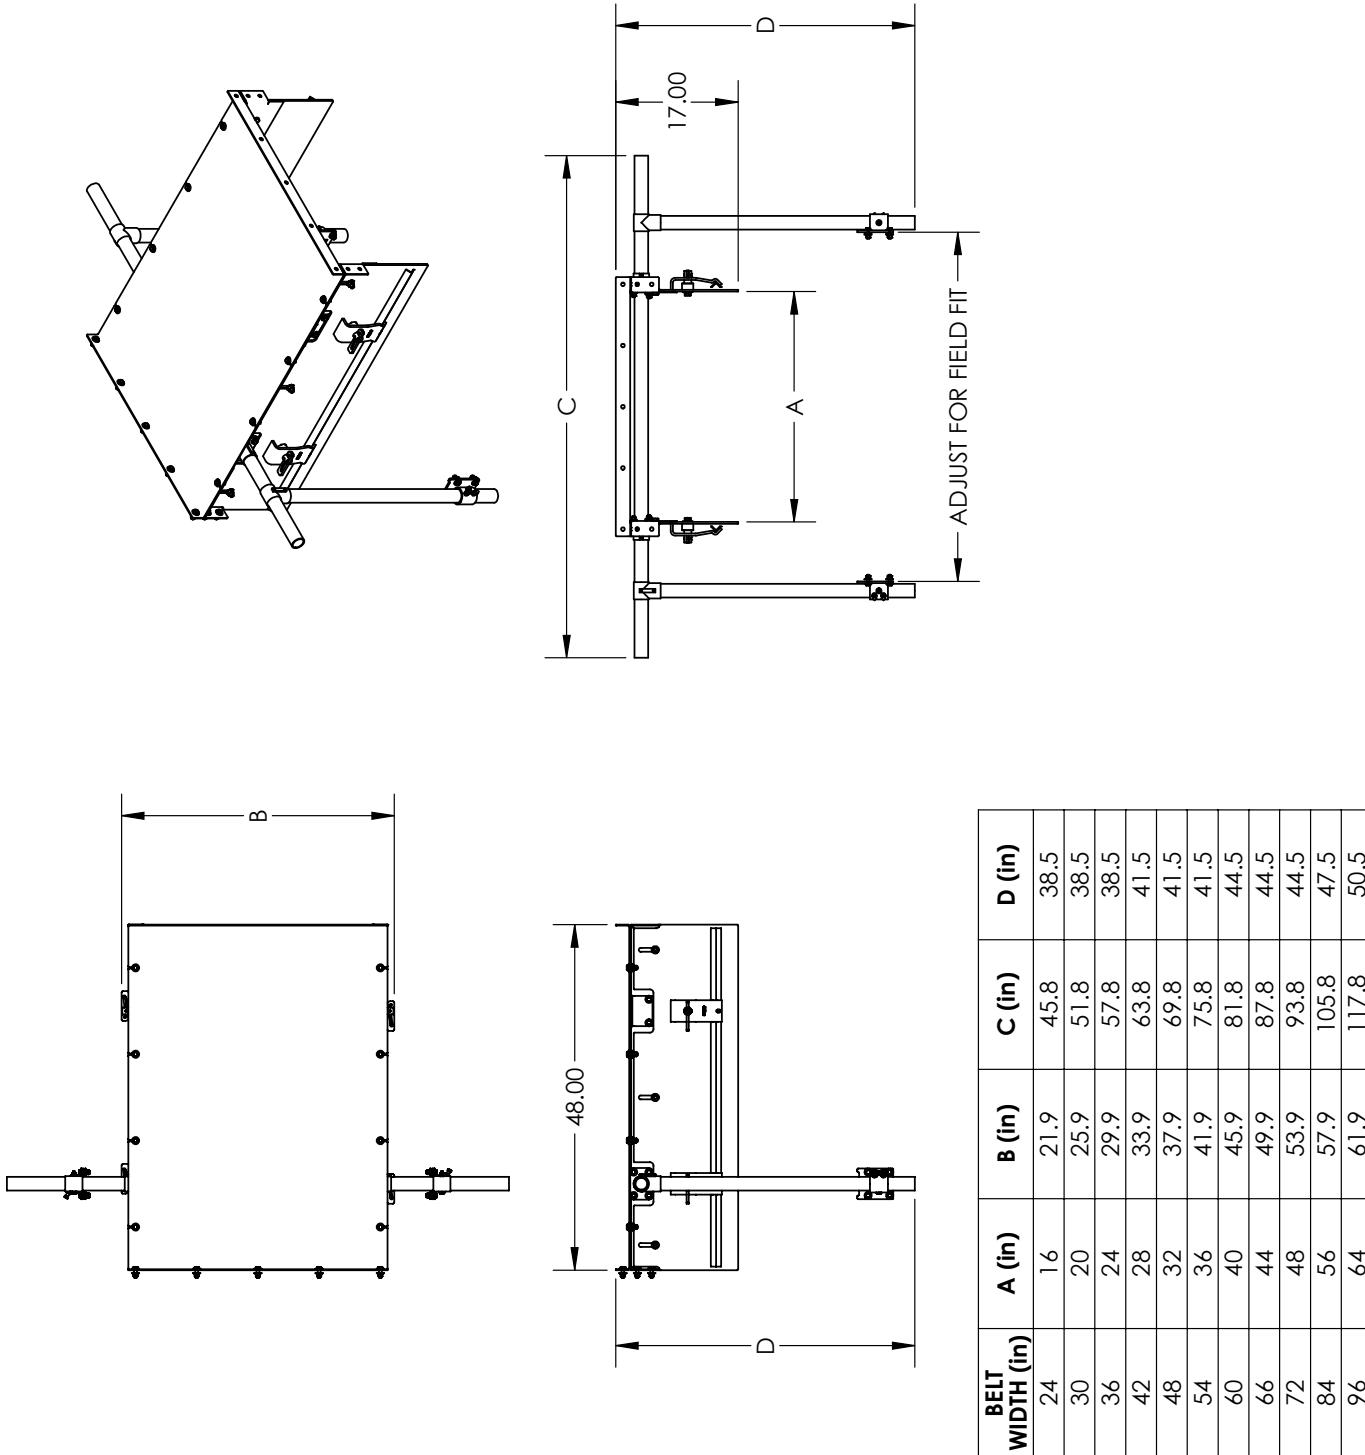

Specifications & Guidelines

Enclosed Skirting


8' (2.4 m) Base Unit

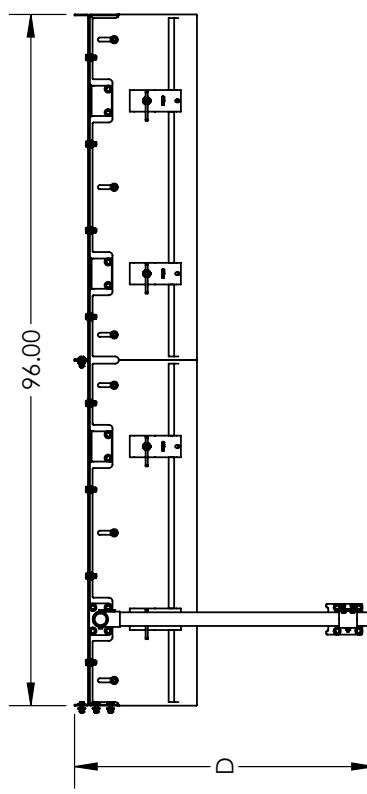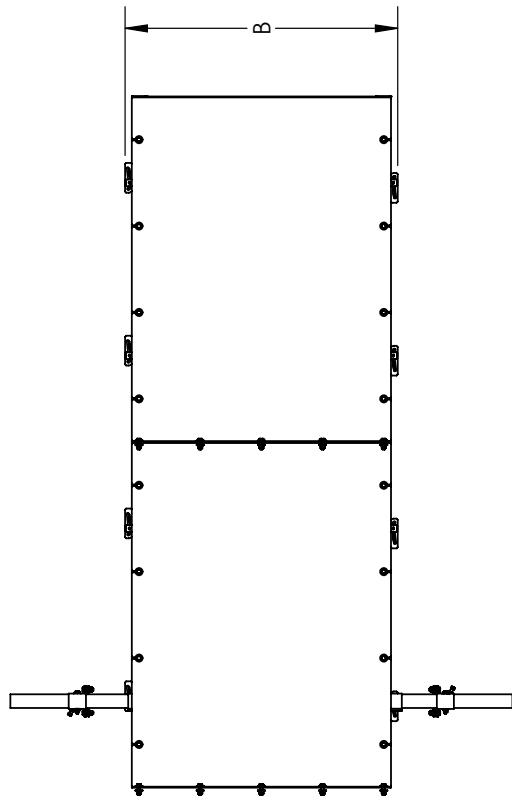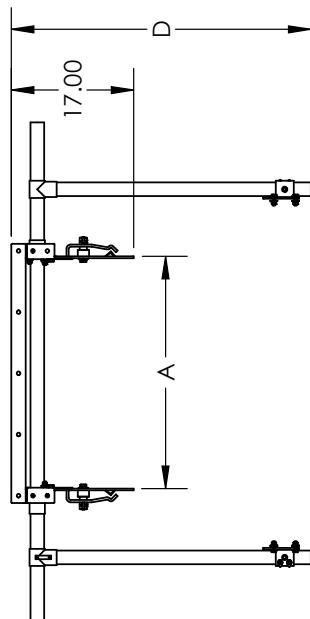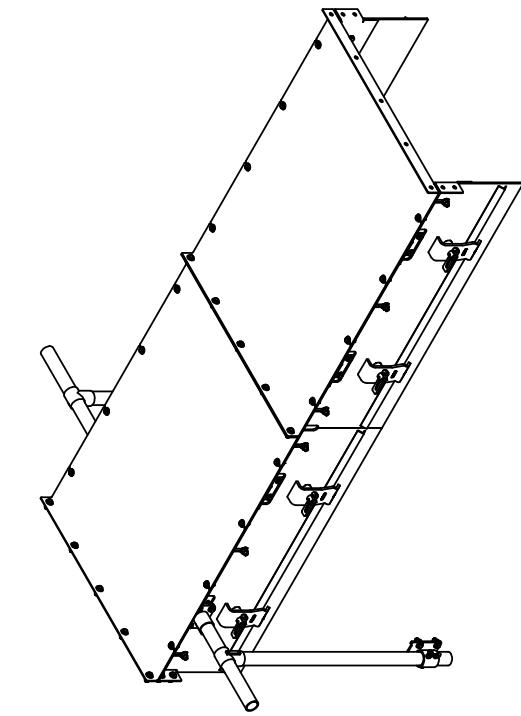

BELT WIDTH (in)	A (in)	B (in)	C (in)	D (in)
24	16	21.9	45.8	38.5
30	20	25.9	51.8	38.5
36	24	29.9	57.8	38.5
42	28	33.9	63.8	41.5
48	32	37.9	69.8	41.5
54	36	41.9	75.8	41.5
60	40	45.9	81.8	44.5
66	44	49.9	87.8	44.5
72	48	53.9	93.8	44.5
84	56	57.9	105.8	47.5
96	64	61.9	117.8	50.5

Replacement Parts

Enclosed Skirting

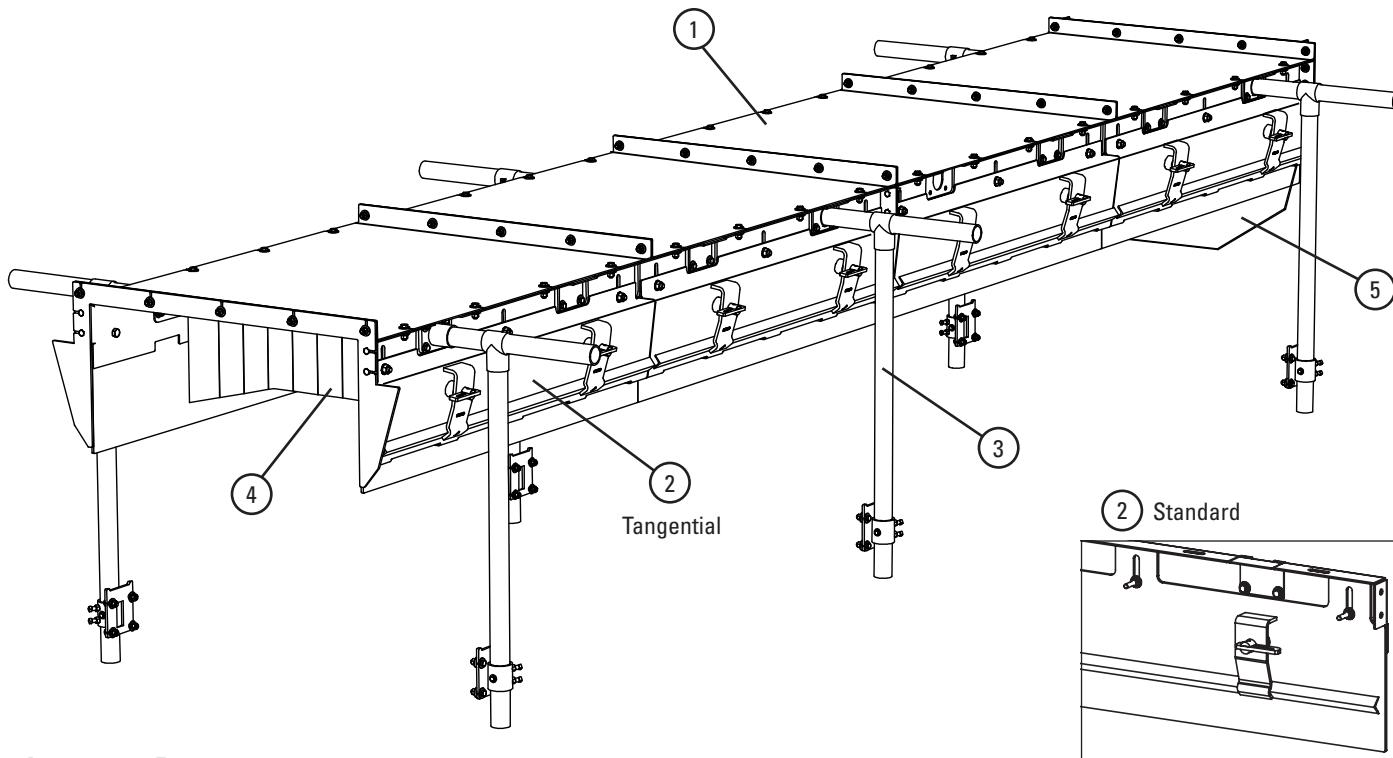

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	24" (600mm) Cover	SKC-24	91751	41.8
	30" (750mm) Cover	SKC-30	91752	49.5
	36" (900mm) Cover	SKC-36	91753	57.3
	42" (1050mm) Cover	SKC-42	91754	65.3
	48" (1200mm) Cover	SKC-48	91755	73.3
	54" (1350mm) Cover	SKC-54	91756	81.0
	60" (1500mm) Cover	SKC-60	91757	88.8
	66" (1650mm) Cover	SKC-66	91758	96.5
	72" (1800mm) Cover	SKC-72	91759	104.6
	84" (2100mm) Cover	SKC-84	91760	120.0
2	96" (2400mm) Cover	SKC-96	91761	135.8
	Standard AR400 Wear Plate*	SL-48	91841	45.4
3	Tangential AR400 Wear Plate*	TL-48	91842	45.6
	24" (600mm) Leg Kit**	LA-24	91762	36.0
	30" (750mm) Leg Kit**	LA-30	91763	37.4
	36" (900mm) Leg Kit**	LA-36	91764	38.7
	42" (1050mm) Leg Kit**	LA-42	91765	41.4
	48" (1200mm) Leg Kit**	LA-48	91766	42.7
	54" (1350mm) Leg Kit**	LA-54	91835	44.0
	60" (1500mm) Leg Kit**	LA-60	91836	46.7
	66" (1650mm) Leg Kit**	LA-66	91837	48.0
	72" (1800mm) Leg Kit**	LA-72	91838	49.4
4	84" (2100mm) Leg Kit**	LA-84	91839	53.4
	96" (2400mm) Leg Kit**	LA-96	91840	57.4

Hardware Included:

*Item is single plate; two plates are required for every 4' (1200 mm) base unit and four plates are required for every 8' (2400 mm) base unit

**Kit includes 2 vertical legs, 1 crossmember, joints/mounts, and hardware

Lead time: 1 working day

Replacement Rubber

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
4	24" (600mm) Dust Curtain Rubber	DCRR-24	92159	4.1
	30" (750mm) Dust Curtain Rubber	DCRR-30	92160	4.8
	36" (900mm) Dust Curtain Rubber	DCRR-36	92161	5.4
	42" (1050mm) Dust Curtain Rubber	DCRR-42	92162	6.0
	48" (1200mm) Dust Curtain Rubber	DCRR-48	92163	6.8
	54" (1350mm) Dust Curtain Rubber	DCRR-54	92164	7.2
	60" (1500mm) Dust Curtain Rubber	DCRR-60	92165	7.7
	66" (1650mm) Dust Curtain Rubber	DCRR-66	92166	8.3
	72" (1800mm) Dust Curtain Rubber	DCRR-72	92167	8.6
	84" (2100mm) Dust Curtain Rubber	DCRR-84	92168	8.5
5	96" (2400mm) Dust Curtain Rubber	DCRR-96	92169	10.0
	24" (600mm) Rear Seal Rubber	RSRR-24	92170	3.6
	30" (750mm) Rear Seal Rubber	RSRR-30	92171	4.2
	36" (900mm) Rear Seal Rubber	RSRR-36	92172	5.0
	42" (1050mm) Rear Seal Rubber	RSRR-42	92173	5.7
	48" (1200mm) Rear Seal Rubber	RSRR-48	92174	6.5
	54" (1350mm) Rear Seal Rubber	RSRR-54	92175	7.3
	60" (1500mm) Rear Seal Rubber	RSRR-60	92176	8.1
	66" (1650mm) Rear Seal Rubber	RSRR-66	92177	8.9
	72" (1800mm) Rear Seal Rubber	RSRR-72	92178	9.8
	84" (2100mm) Rear Seal Rubber	RSRR-84	92179	11.7
	96" (2400mm) Rear Seal Rubber	RSRR-96	92180	13.8

Shaded items are made to order.

Lead time: 3 weeks

Lead time: 6 weeks

Product Ordering Information

**Standard
Polyurethane Skirting**

With 35° Chamfer - 25' (7.6 m)

HEIGHT		THICKNESS		LENGTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm	ft.	m			
4	100	3/8	10	25	7.6	SKPU-4X3/8X25	91288	21.2
4	100	1/2	12	25	7.6	SKPU-4X1/2X25	91289	28.2
4	100	5/8	16	25	7.6	SKPU-4X5/8X25	91290	35.3
4	100	3/4	19	25	7.6	SKPU-4X3/4X25	91291	42.3
4	100	1	25	25	7.6	SKPU-4X1X25	91292	56.4
6	150	3/8	10	25	7.6	SKPU-6X3/8X25	91298	31.7
6	150	1/2	12	25	7.6	SKPU-6X1/2X25	90283	42.3
6	150	5/8	16	25	7.6	SKPU-6X5/8X25	91299	52.9
6	150	3/4	19	25	7.6	SKPU-6X3/4X25	90284	63.5
6	150	1	25	25	7.6	SKPU-6X1X25	91300	84.6
8	200	3/8	10	25	7.6	SKPU-8X3/8X25	91304	42.3
8	200	1/2	12	25	7.6	SKPU-8X1/2X25	90285	56.4
8	200	5/8	16	25	7.6	SKPU-8X5/8X25	91305	70.5
8	200	3/4	19	25	7.6	SKPU-8X3/4X25	90286	84.6
8	200	1	25	25	7.6	SKPU-8X1X25	91306	112.8
10	250	3/8	10	25	7.6	SKPU-10X3/8X25	91310	52.9
10	250	1/2	12	25	7.6	SKPU-10X1/2X25	91311	70.5
10	250	5/8	16	25	7.6	SKPU-10X5/8X25	91312	88.1
10	250	3/4	19	25	7.6	SKPU-10X3/4X25	91313	105.8
10	250	1	25	25	7.6	SKPU-10X1X25	91314	141.0
12	300	3/8	10	25	7.6	SKPU-12X3/8X25	91320	63.5
12	300	1/2	12	25	7.6	SKPU-12X1/2X25	91321	84.6
12	300	5/8	16	25	7.6	SKPU-12X5/8X25	91322	105.8
12	300	3/4	19	25	7.6	SKPU-12X3/4X25	91323	126.9
12	300	1	25	25	7.6	SKPU-12X1X25	91324	169.2

Price Per Inch for reference only; standard skirting is available in 25' (15.2 m) lengths.

Lead time: 1 working day

With 35° Chamfer - 50' (15.2 m)

HEIGHT		THICKNESS		LENGTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm	ft.	m			
4	100	3/8	10	50	15.2	SKPU-4X3/8X50	91293	42.3
4	100	1/2	12	50	15.2	SKPU-4X1/2X50	91294	56.4
4	100	5/8	16	50	15.2	SKPU-4X5/8X50	91295	70.5
4	100	3/4	19	50	15.2	SKPU-4X3/4X50	91296	84.6
4	100	1	25	50	15.2	SKPU-4X1X50	91297	112.8
6	150	3/8	10	50	15.2	SKPU-6X3/8X50	91301	63.5
6	150	1/2	12	50	15.2	SKPU-6X1/2X50	91222	84.6
6	150	5/8	16	50	15.2	SKPU-6X5/8X50	91302	105.8
6	150	3/4	19	50	15.2	SKPU-6X3/4X50	91223	126.9
6	150	1	25	50	15.2	SKPU-6X1X50	91303	169.2
8	200	3/8	10	50	15.2	SKPU-8X3/8X50	91307	84.6
8	200	1/2	12	50	15.2	SKPU-8X1/2X50	91224	112.8
8	200	5/8	16	50	15.2	SKPU-8X5/8X50	91308	141.0
8	200	3/4	19	50	15.2	SKPU-8X3/4X50	91225	169.2
8	200	1	25	50	15.2	SKPU-8X1X50	91309	225.6
10	250	3/8	10	50	15.2	SKPU-10X3/8X50	91315	105.8
10	250	1/2	12	50	15.2	SKPU-10X1/2X50	91316	141.0
10	250	5/8	16	50	15.2	SKPU-10X5/8X50	91317	176.3
10	250	3/4	19	50	15.2	SKPU-10X3/4X50	91318	211.5
10	250	1	25	50	15.2	SKPU-10X1X50	91319	282.0
12	300	3/8	10	50	15.2	SKPU-12X3/8X50	91325	126.9
12	300	1/2	12	50	15.2	SKPU-12X1/2X50	91326	169.2
12	300	5/8	16	50	15.2	SKPU-12X5/8X50	91327	211.5
12	300	3/4	19	50	15.2	SKPU-12X3/4X50	91328	253.8
12	300	1	25	50	15.2	SKPU-12X1X50	91329	338.4

Price Per Inch for reference only; standard skirting is available in 25' (15.2 m) lengths.

Lead time: 1 working day




Product Notes:

- Urethane skirting offers a more wear-resistant material than typical rubber, often providing as much as 3–4 times the wear life in similar applications. The lower coefficient of friction reduces strain on the system.
- Works with Flexco series of skirt clamps that offer simple serviceability: RMC1/PAL-Pak, Flex-Lok, and Flex-Seal.
- Uses soft durometer (65A) urethane with exceptional tear resistance to ensure a good seal and long belt life.
- 25' (7.6 m) roll size ensures easy transportation, while the 35° chamfer eliminates the typical skirting break-in period.
- Suitable for most applications: single direction or reversing belts, wet or dry conditions, old or new belts, vulcanized or mechanically-spliced systems.
- Rated for temperatures from -20 to 180°F (-30 to 82°C).

Shaded items are made to order.
Lead time: 1-2 weeks

Product Ordering Information

**Dual Seal
Polyurethane Skirting**

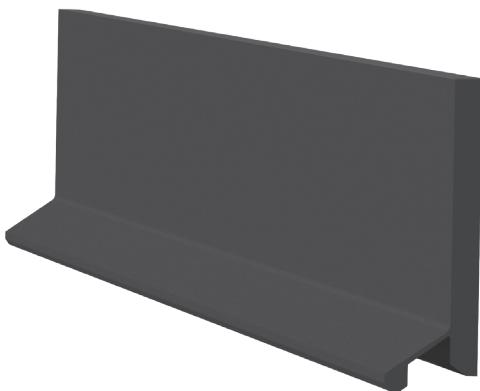

Dual Seal Polyurethane Skirting

HEIGHT		THICKNESS		LENGTH		CHAMFER	ORDERING NUMBER	ITEM CODE	WT. LBS.
in.	mm	in.	mm	ft.	m				
6	150	1/2	12	25	7.6	35°	SKPU-DUAL-6X1/2X25	91400	47.0
6	150	3/4	20				SKPU-DUAL-6X3/4X25	91401	67.8
8	200	1/2	12				SKPU-DUAL-8X1/2X25	91402	60.5
8	200	3/4	20				SKPU-DUAL-8X3/4X25	91403	88.1
6	150	1/2	12	50	15.2	35°	SKPU-DUAL-6X1/2X50	91404	94.0
6	150	3/4	20				SKPU-DUAL-6X3/4X50	91405	135.5
8	200	1/2	12				SKPU-DUAL-8X1/2X50	91406	121.0
8	200	3/4	20				SKPU-DUAL-8X3/4X50	91407	176.1

Price Per Inch for reference only; skirting is available standard in 25' (7.6 m) lengths.

Lead time: 1 working day

Shaded items are made to order.

Lead time: 1 week

Product Notes:

- Secondary seal provides a floating contact area behind the main slab to prevent spillage.
- Polyurethane skirting offers a more wear-resistant material than typical rubber, often providing as much as 3-4 times the wear life in similar applications. The lower coefficient of friction reduces strain on the system.
- Works with Flexco series of skirt clamps that offer simple serviceability: RMC1/PAL-Pak, Flex-Lok™, and Flex-Seal™.
- Uses soft durometer (65A) polyurethane with exceptional tear resistance to ensure a good seal and long belt life.
- 25' (7.6 m) roll size ensures easy transportation, while the 35° chamfer eliminates the typical skirting break-in period.
- Suitable for most applications: single direction or reversing belts, wet or dry conditions, old or new belts, vulcanized or mechanically-spliced systems.
- Rated for temperatures from -20 to 180°F (-30 to 82°C).

Product Ordering Information

RMC1
Skirt Clamps

RMC1 Skirt Clamps*

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Skirt Clamp	RMC1	75817	11.6
LS Skirt Clamp	RMC1-LS	75834	10.4
Skirt Clamp 50 Pack	RMC1-50	75833	580.0

*Includes two clamp plates (Standard or LS - Limited Space), two clamp pins, and one 4' (1.2 m) clamp bar.

Skirt board and rubber not included.

Skirt Rubber Thickness Range: 5/16 to 3/4" (8 to 19 mm).

Lead time: 1 working day



Anti-Vibration Clamp Pins




RMC1 Skirt Clamp (Standard)

Replacement Parts

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Clamp Pin	RMC1-CP	75819	1.1
Bolt-On Clamp Pin	RMC1-BCP	76414	1.0
Clamp Plate	RMC1-PL	75821	2.1
LS Clamp Plate	RMC1LS-PL	75835	1.5
Clamp Bar	RMC1-CB	75820	4.0

Lead time: 1 working day

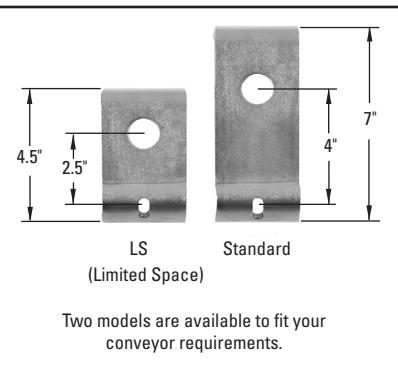

Two models are available to fit your conveyor requirements.

PAL PAKs

The Pick-A-Length (PAL) PAK contains (2) clamp plates and (2) clamp pins. You supply the clamp bar (1" x 1" x 1/8" angle) to your required length.

PAL PAKs per System Length

Skirting System Length	1-4' (0.3-1.2M)	5-8' (1.5-2.4M)	9-12' (2.8-3.8M)	13-16' (4.0-4.9M)	17-20' (5.2-6.1M)
PAL PAKs Needed	1	2	3	4	5

Replacement Parts

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
PAL PAK	RMC1-PP	75832	6.6
LS PAL PAK	RMC1-LSPP	75836	5.4
Bolt-On PAL PAK	RMC1-BPP	76415	6.5
Bolt-On LS PAL PAK	RMC1-LSBPP	76538	5.3

Lead time: 1 working day



PAL PAK (Standard)



Bolt-On PAL PAK (Standard)

Product Notes:

- Solves material spillage problems in the conveyor loading zone.
- Stops material loss, eliminates safety hazards, and reduces wear on conveyor components.
- LS (Limited Space) model for restricted space areas and for portable equipment.
- Pick-A-Length (PAL) PAK option for special or longer length requirements.
- Bolt-on Clamp Pins eliminate welding on applications where sparking can be a safety hazard.
- Anti-Vibration (standard) Clamp Pin stays locked even in applications with severe vibration.

Product Ordering Information


**Flex-Lok™
Skirt Clamps**

Flex-Lok™ Skirt Clamp

One Skirt Clamp includes (1) 6' (1.8 m) clamp runner, (4) clamp plates, (4) clamp pins, and (1) 6' (1.8 m) restraining bar.

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Skirt Clamp	FLSC-I	71052	31.1
Skirt Clamp 50 Pack	FLSC-I-50	71054	1,555.0

Lead time: 1 working day

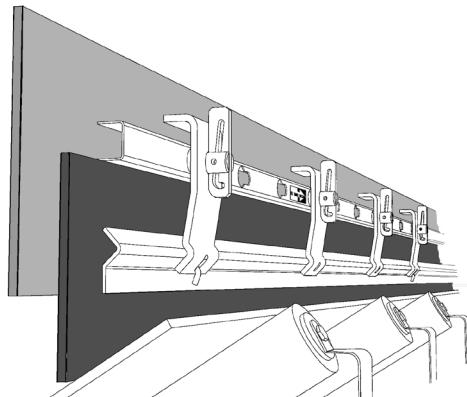


Mini Flex-Lok™ Skirt Clamp

One Mini Skirt Clamp includes (1) 6' (1.8 m) clamp runner, (3) mini clamp plates, (3) clamp pins, and (1) 6' (1.8 m) restraining bar.

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Mini Skirt Clamp	FLSCM-I	71055	27.6
Mini Skirt Clamp 50 Pack	FLSCM-I-50	71100	1,380.0

Lead time: 1 working day

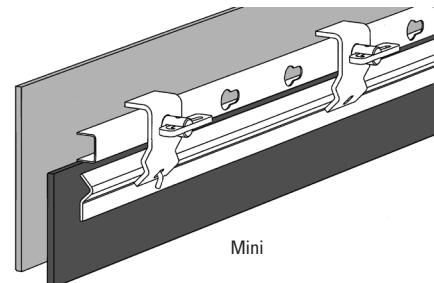

Stainless Steel Flex-Lok™ Skirt Clamp

One SS Skirt Clamp includes (1) 6' (1.8 m) clamp runner, (4) clamp plates, (4) clamp pins, and (1) 6' (1.8 m) restraining bar.

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
SS Skirt Clamp	FLSC-ISS	75778	25.0

Lead time: 1 working day

Replacement Parts


DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
FLEX-LOK™ SKIRT CLAMP			
Clamp Runner - 6' (1.8M)	FL-RPI	71058	7.3
Clamp Plate	FL-PC-I	71057	2.1
Clamp Pin	FL-CP-I	71141	1.9
Restraining Bar - 6' (1.8M)	FL-RBI	71060	11.3
MINI FLEX-LOK™ SKIRT CLAMP			
Clamp Runner - 6' (1.8M)	FL-RPI	71058	7.3
Mini Clamp Plate	FLM-PC	71140	1.5
Clamp Pin	FL-CP-I	71141	1.9
Restraining Bar - 6' (1.8M)	FL-RBI	71060	11.3
STAINLESS STEEL FLEX-LOK™ SKIRT CLAMP			
SS Clamp Plate	FL-PC-ISS	71168	1.9
Clamp Pin	FL-CP-ISS	71164	1.9

Skirt board & rubber not included.

Skirt rubber thickness range: 5/16–1" (8–25 mm)

Lead time: 1 working day

Shaded items are made to order.
Lead time: 5 working days

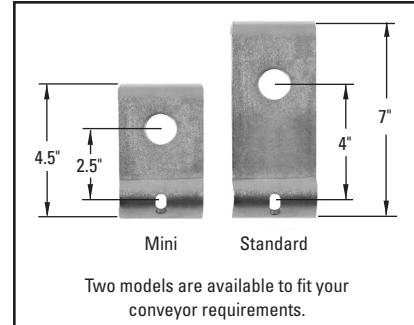

Anti-Vibration Clamp Pins
(Standard)

SERVICE MAINTENANCE:

- Inspection – Periodically inspect the clearance between the skirt rubber and the belt. If this gap is more than 1/4" (6 mm) or if excessive fines are escaping, readjust the skirt rubber.
- Adjustment – Unlock the wedges on the clamp pins and slide the skirt rubber down to the belt. Relock the clamp pins.

TROUBLESHOOTING:

Problem: Skirt rubber slips out of skirt clamp.

- Solution:
- Check to insure wedges in clamp pins are locked.
 - Check skirt rubber position. Skirt rubber must not fold and lie on top of belt.

Product Ordering Information

**Flex-Seal™
Skirt System**


Flex-Seal™ Skirt System*

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Flex-Seal Skirt System	RMC2-FS-1	76558	29.5
Flex-Seal Skirt System 50 Pack	RMC2-FS-50	77330	1,475.0

*Includes angle plate, one Bolt-On PAL PAK, and one 4' (1.2 m) clamp bar.

Skirt board and rubber not included.

Lead time: 1 working day

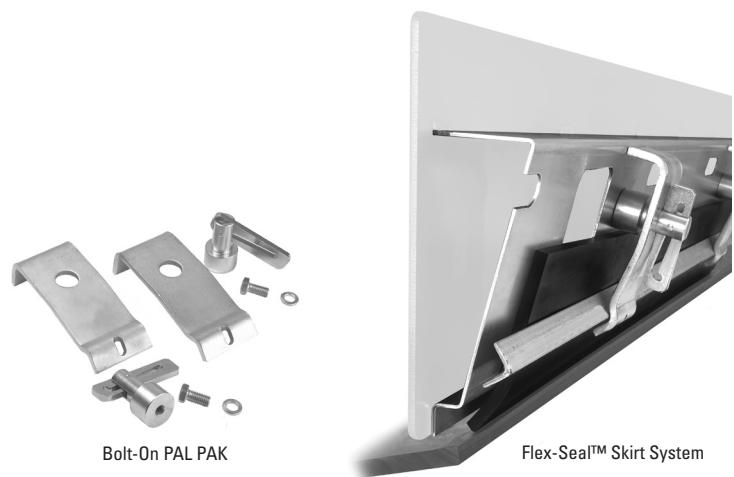

Replacement Parts


DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Angle Plate	RMC2-FSAPK	76559	19.0
Bolt-On PAL PAK*	RMC1-BPP	76415	6.5
Clamp Bar	RMC1-CB	75820	4.0

*Includes 2 bolt-on clamp pins and 2 clamp plates.

Lead time: 1 working day

Bolt-On PAL PAK

Flex-Seal™ Skirt System

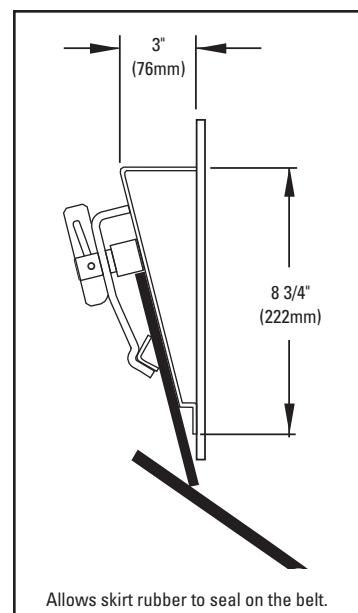

Specifications:

- Skirt Rubber Width Required.....6" (150 mm)
- Skirt Rubber Thickness Range5/16 to 3/4" (8 to 19 mm)

Product Notes:

- Solves material spillage problems in the conveyor loading zone.
- Stops material loss, eliminates safety hazards, and reduces wear on conveyor components.
- Anti-Vibration (standard) Clamp Pin with serrated wedge stays locked even in applications with severe vibration.

Product Ordering Information

Flex-Lifter™
Flexco Belt Maintenance Tools

Flex-Lifter™ Conveyor Belt Lifter

Easy and safe way to lift tensioned belts so mechanical splicing or other maintenance work can be done.

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Medium Flex-Lifter 36–60" (900–1500mm) (incl. return bar)	FL-M-SP	76981	91.0
Large Flex-Lifter 48–72" (1200–1800mm) (incl. return bar)	FL-L-SP	76982	128.0
XL Flex-Lifter 72–96" (1800–2400mm) (does not incl. return bar)	FL-XL-SP	77386	128.0
Flex-Lifter Cart	FLCK	77729	20.0

Lifts troughed or flat belts.


Lead time: 1 working day

Safe Lifting Capacity

Height		Max. Weight			
		Medium/Large		XL	
in.	mm	lbs.	kg.	lbs.	kg.
0–1	0–25	500	225	1100	500
1–2	25–50	1000	450	1800	815
2–3	50–75	1500	675	2500	1140
3–4	75–100	2000	900	3200	1450
4–5	100–125	2500	1150	3700	1680
5–6	125–150	3000	1350	4600	2090
6–7	150–175	3500	1600	5300	2400
>7	>175	4000	1800	6000	2725

Aluminum Content Flex-Lifter

ALUMINUM ALLOY TYPE	PERCENT	
	Mg Magnesium	Ti Titanium
4043	0.05%	0.2%
5356	5.5%	0.2%
6005	0.6%	0.1%
6061	1.0%	0.0%
6063	0.7%	0.0%
7075	2.5%	0.0%

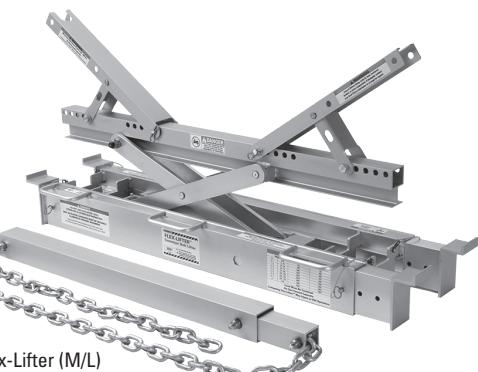

Flex-Lifter (M/L)



Flex-Lifter (XL)




Flex-Lifter Cart

Product Ordering Information

Flex-Lifter™
Flexco Belt Maintenance Tools

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1a	Extension Leg – Medium	FLEL-M	76472	3.1
1b	Extension Leg – Large	FLEL-L	76473	3.7
1c	Extension Leg Kit – XL (incl. 2 ext. legs)	FLEK-XL	76986	13.1
2	Extension Leg Pin (with lanyard)	FLELP	76474	0.1
3a	Trough Wing – Medium (with brace)	FLTW-M-SP	77408	1.2
3b	Trough Wing – Large (with brace)	FLTW-L-SP	77409	1.5
3c	Trough Wing – XL (with brace)	FLTW-XL-SP	77410	4.2
4	Retainer Pin Pack (incl. (4) pins)	FLRP	76478	1.0
5	Retainer Clip Pack (incl. (4) clips)	FLCP	76479	0.1
6a	Return Lift Bar – Medium	FLRLB-M-SP	77405	25.0
6b	Return Lift Bar – Large	FLRLB-L-SP	77406	50.0
6c	V-Return Lift Bar – XL	FLVRL-XL-SP	77407	63.0
7a	Shear Pin Kits – Medium/Large	FL-PKIT-ML	77250	0.3
7b	Shear Pin Kits – XL	FL-PKIT-XL	77251	0.5

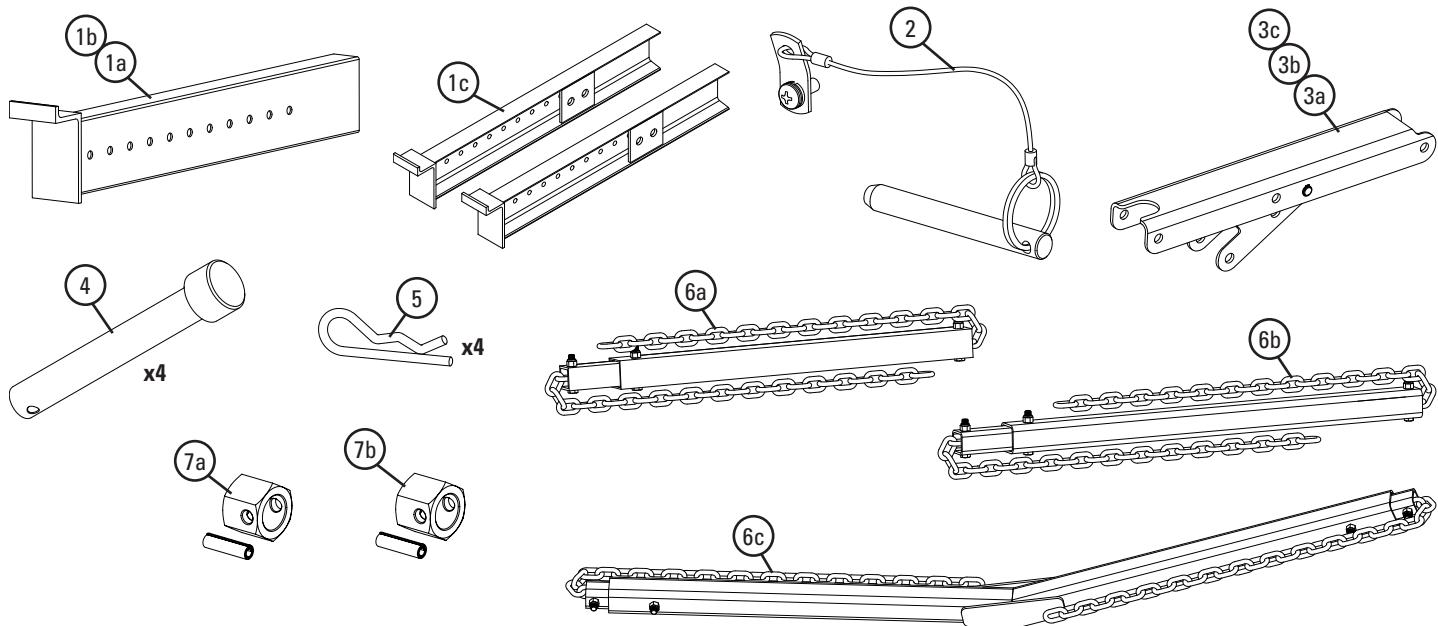

Product Ordering Information

900 Series Belt Cutter Flexco Belt Maintenance Tools

900 Series Belt Cutter

DESCRIPTION	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm			
Cutter Complete for belts up to 1.5" (38 mm)	24	600	900924	04200	34.0
	36	900	900936	04143	39.4
	48	1200	900948	04144	48.0
	60	1500	900960	04145	54.0
	72	1800	900972	04146	60.3
	84	2130	900984	04147	86.0


Lead time: 1 working day



Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	Knob 8 Point Kit	900CKK	106186	0.62
2	Replacement Blade Kit	900CBK	04149	0.15

Lead time: 1 working day

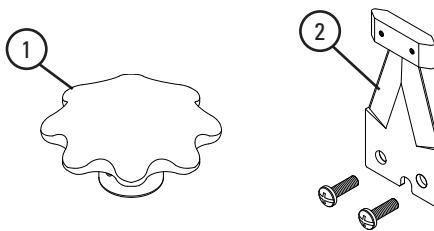

Aluminum Content

900 Series Belt Cutter

ALUMINUM ALLOY TYPE	PERCENT	
	Mg Magnesium	Ti Titanium
6005	0.60%	0.10%
6061	1.00%	0.00%
7075	2.50%	0.00%

Product Ordering Information

Electric Belt Cutter & Cordless Electric Belt Cutter Flexco Belt Maintenance Tools

Electric Belt Cutter

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
Electric Belt Cutter Complete	EBC1	30001	30.0
Electric Belt Cutter Complete	EBC2	30002	40.0
Cordless Electric Belt Cutter Complete	CEBC1	30018	30.0
Cordless Electric Belt Cutter Complete	CEBC2	30019	40.0
Electric Belt Cutter Complete 220V	EBC1-220	30011	30.0
Electric Belt Cutter Complete 220V	EBC2-220	30012	40.0
Cordless Electric Belt Cutter Complete 220V	CEBC1-220	30021	30.0
Cordless Electric Belt Cutter Complete 220V	CEBC2-220	30022	40.0

Lead time: 1 working day

Electric Belt Cutter – Tool Repair

DESCRIPTION	ITEM CODE
EBC1 – REFURBISH	30001RPR
EBC2 – REFURBISH	30002RPR
CEBC1 – REFURBISH	30018RPR
CEBC2 – REFURBISH	30019RPR


NOTE: PLEASE DO NOT SEND REPAIR TOOLS WITH BATTERIES.

Due to the US Dept of Transportation rules, Flexco is unable to ship used batteries back to customers and they will be disposed.

Contact Customer Experience to request a tool repair.

Additional charges may apply depending on the extent of the repair.

Flexco Customer Experience will advise prior to any work.

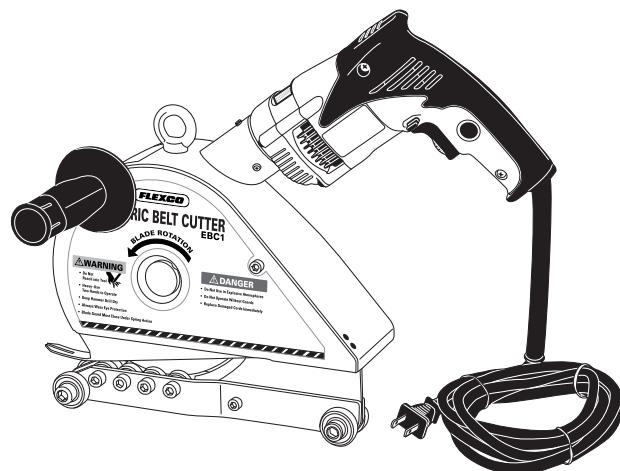

Cutting Capacity

BELT TYPE	EBC1/CEBC1	EBC2/CEBC2
Rubber	Up to 1" (25mm)	Up to 2" (50mm)
PVC	Up to 360 PIW (630 kN/m)	Up to 1140 PIW (2000 kN/m)


Product Ordering Information

Electric Belt Cutter & Cordless Electric Belt Cutter Flexco Belt Maintenance Tools

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	EBC1/CEBC1 Blade	EBC1/CEBC1-B	30003	2.0
2	EBC2/CEBC2 Blade	EBC2/CEBC2-B	30004	2.8
3	EBC1 Drill Milwaukee	EBC1-DR	30005	7.5
4	EBC2 Drill Metabo	EBC2-DR	30006	12.1
5	Eye Bolt	EBC/CEBC-EB	30007	0.9
6	Handle	EBC/CEBC-H	30008	0.4
7	EBC1 Coupling	EBC1-CPLGM	108047	0.2
8	EBC2 Coupling	EBC2-CPLGM	108048	0.2
9	Bearing RPLC Kit	EBC/CEBC-BK	30024	1.1
10	CEBC1/CEBC2 Battery Metabo	CEBC1/CEBC2-BATMET	111390	1.5
11	EBC1/CEBC1 Coupling	CEBC1-CPLGM	108045	0.2
12	EBC2/CEBC2 Coupling	CEBC2-CPLGM	108046	0.2
13	EBC1/CEBC1 Retro Fit Rail Kit	EBC1/CEBC1-RK	30033	1.3
14	EBC2/CEBC2 Retro Fit Rail Kit	EBC2/CEBC2-RK	30034	1.6
15	CEBC1/CEBC2 Metabo Drill	CEBC1/CEBC2-DRM	108043	4.0
16	CEBC1/CEBC2 Charger Metabo	METABO-CHGR110	30369	1.3
17	CEBC1-220/CEBC2-220 Charger Metabo	METABO-CHGR220	114974	1.3
18	EBC1-220 Drill Hitachi	EBC1-220-DR	30013	7.5
19	EBC2-220 Drill Metabo	EBC2-220-DR	30014	12.1
20	CEBC1 Makita XPH03MB to Metabo Upgrade (incl. (1) ea. item 15, 16 & (2) ea. item 10, coupling, & collar)	CEBC1-DUK	108384	4.5
21	CEBC2 Makita XFD03M to Metabo Upgrade (incl. (1) ea. item 15, 16 & (2) ea. item 10, coupling, & collar)	CEBC2-DUK	108385	4.5

Lead time: 1 working day

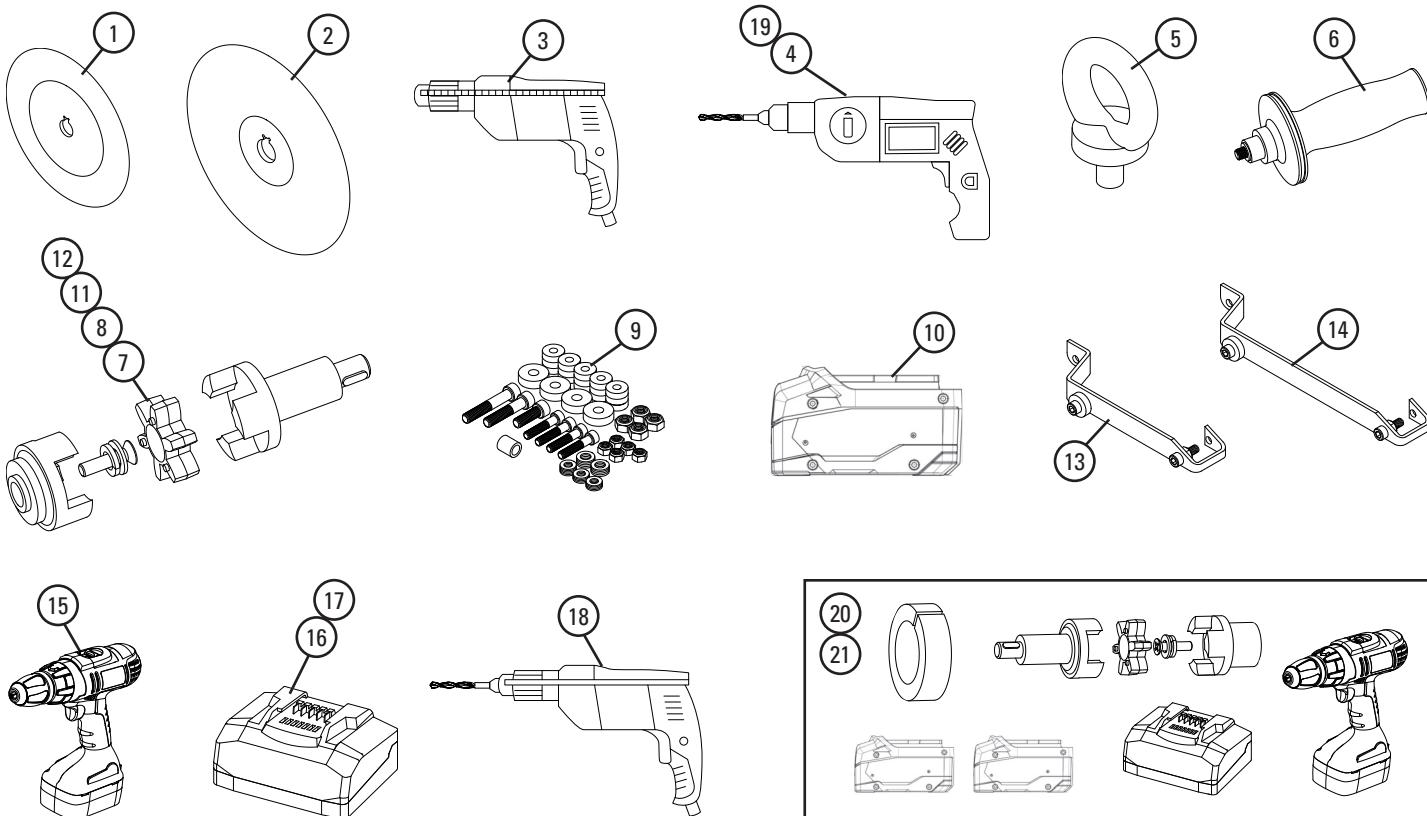

Product Ordering Information


Far-Pul™ HD® Belt Clamps
Flexco Belt Maintenance Tools

Far-Pul™ HD® Belt Clamps

Load Capacity up to 3 tons (2.7 metric tons) when used with two 1-1/2 ton (1.4 metric ton) come-alongs.

DESCRIPTION	BELT WIDTH		ORDERING NUMBER	ITEM CODE	WT. LBS.
	in.	mm			
Belt Clamp Complete includes: 4 Belt Clamp Bars, 4 Belt Clamp Scissors	Up to 30	Up to 750	LSHD30	30393	79.0
	Up to 36	Up to 900	LSHD36	30394	87.0
	Up to 42	Up to 1050	LSHD42	30395	91.0
	Up to 48	Up to 1200	LSHD48	30396	98.0
	Up to 54	Up to 1350	LSHD54	30397	103.0
	Up to 60	Up to 1500	LSHD60	30398	110.0
	Up to 72	Up to 1800	LSHD72	30399	121.0
30" Belt Clamp Bar Set*	Up to 30	Up to 750	LSHDB30-2	30418	20.0
36" Belt Clamp Bar Set*	Up to 36	Up to 900	LSHDB36-2	30414	23.0
42" Belt Clamp Bar Set*	Up to 42	Up to 1050	LSHDB42-2	30421	26.0
48" Belt Clamp Bar Set*	Up to 48	Up to 1200	LSHDB48-2	30423	30.0
54" Belt Clamp Bar Set*	Up to 54	Up to 1350	LSHDB54-2	30424	33.0
60" Belt Clamp Bar Set*	Up to 60	Up to 1500	LSHDB60-2	30430	36.0
72" Belt Clamp Bar Set*	Up to 72	Up to 1800	LSHDB72-2	30408	40.0

*Includes 2 bars per set
Bar length = belt width + 10" (250 mm)

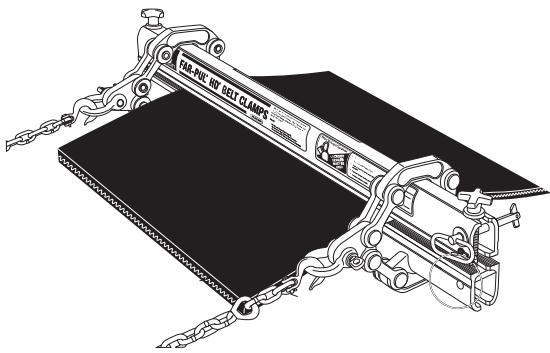

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	Steel Belt Clamp Scissor (1 ea.)	LSHDS	30392	10.5
2	Belt Locator Pin (incl. washer, locking nut)	LSHDP	30400	0.15
3	Retaining Pin Kit	LSHD-RPK	30390	2.0
4	Clamp Bar Screw	LSHDCBS	30373	1.0
5	Clamp Bar Pivot Pin (Pair) (incl. (2) roll pin)	LSHDPP	30052	1.0


Lead time: 1 working day

Shaded items are made to order.
Lead time: 5 working days

Aluminum Content

Far-Pul™ HD®

ALUMINUM ALLOY TYPE	PERCENT	
	Mg Magnesium	Ti Titanium
6061	1.0%	0.0%

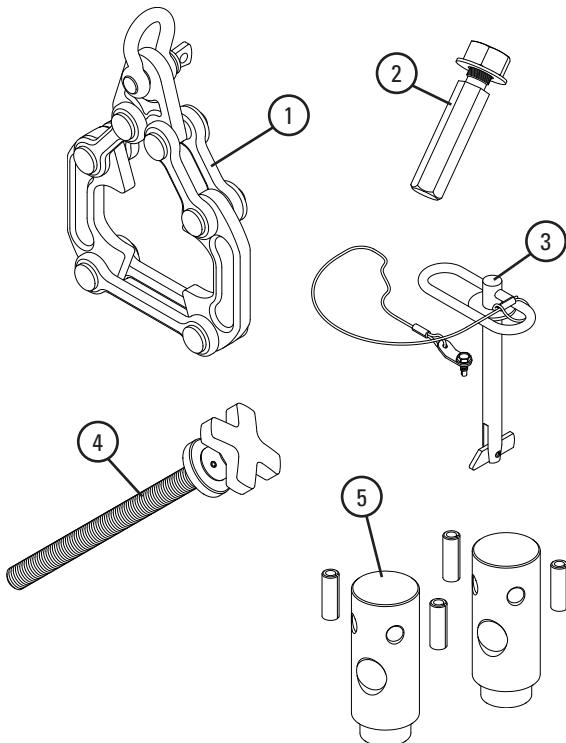


Product Ordering Information

TUG™ HD® Belt Clamps Flexco Belt Maintenance Tools

TUG™ HD® Belt Clamps

DESCRIPTION	MAX. BELT WIDTH		6 TON			8 TON		
	in.	mm	ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.
TUG™ HD® Belt Clamp set includes 4 aluminum clamp bars and steel clamp ends.	36	900	TUG6-36-AL	31700	134.0	TUG8-36-AL	31706	178.0
	42	1050	TUG6-42-AL	31701	141.0	TUG8-42-AL	31707	189.0
	48	1200	TUG6-48-AL	31702	148.0	TUG8-48-AL	31708	200.0
	54	1400	TUG6-54-AL	31703	155.0	TUG8-54-AL	31709	211.0
	60	1600	TUG6-60-AL	31704	162.0	TUG8-60-AL	31710	222.0
	72	1800	TUG6-72-AL	31705	176.0	TUG8-72-AL	31711	244.0
	84	2200	N/A		TUG8-84-AL	31712	266.0	
	96	2400	N/A		TUG8-96-AL	31713	288.0	


Lead time: 1 working day



Replacement Clamps - Pair

DESCRIPTION	MAX. BELT WIDTH		6 TON			8 TON		
	in.	mm	ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.
TUG™ HD® Belt Clamp pair includes 2 aluminum clamp bars and steel clamp ends.	36	900	TUG6P-36-AL	31714	67.0	TUG8P-36-AL	31720	89.0
	42	1050	TUG6P-42-AL	31715	71.0	TUG8P-42-AL	31721	95.0
	48	1200	TUG6P-48-AL	31716	74.0	TUG8P-48-AL	31722	100.0
	54	1400	TUG6P-54-AL	31717	78.0	TUG8P-54-AL	31723	106.0
	60	1600	TUG6P-60-AL	31718	81.0	TUG8P-60-AL	31724	111.0
	72	1800	TUG6P-72-AL	31719	88.0	TUG8P-72-AL	31725	122.0
	84	2200	N/A		TUG8P-84-AL	31726	133.0	
	96	2400	N/A		TUG8P-96-AL	31727	144.0	


Lead time: 1 working day



Replacement Bars - Pair

DESCRIPTION	MAX. BELT WIDTH		6 TON			8 TON		
	in.	mm	ORDERING NUMBER	ITEM CODE	WT. LBS.	ORDERING NUMBER	ITEM CODE	WT. LBS.
TUG™ HD® Belt Clamps pair replacement bars includes 2 aluminum clamp bars.	12	300	TUG6B-12-AL	31728	7.0	TUG8B-12-AL	31735	11.0
	36	900	TUG6B-36-AL	31729	21.0	TUG8B-36-AL	31736	33.0
	42	1050	TUG6B-42-AL	31730	25.0	TUG8B-42-AL	31737	39.0
	48	1200	TUG6B-48-AL	31731	28.0	TUG8B-48-AL	31738	44.0
	54	1400	TUG6B-54-AL	31732	32.0	TUG8B-54-AL	31739	50.0
	60	1600	TUG6B-60-AL	31733	35.0	TUG8B-60-AL	31740	55.0
	72	1800	TUG6B-72-AL	31734	42.0	TUG8B-72-AL	31741	66.0
	84	2200	N/A		TUG8B-84-AL	31742	77.0	
	96	2400	N/A		TUG8B-96-AL	31743	88.0	


Lead time: 1 working day



Replacement Clamp Ends

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
TUG™ HD® Clamp End replacement include 1 steel clamp end.	TUG6E	31744	23.0
	TUG8E	31747	28.0

Lead time: 1 working day



Aluminum Content TUG™ HD® Belt Clamps

ALUMINUM ALLOY TYPE	PERCENT	
	Mg Magnesium	Ti Titanium
6061	1.00%	0%


Product Ordering Information

TUG™ HD® Belt Clamps
Flexco Belt Maintenance Tools

Replacement Parts

REF	DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. LBS.
1	Tug Clamp Turn Handle	TUGH	31792	0.5
2	Tug 6 Clamp Screw	TUG6S	31793	3.0
3	Tug 8 Clamp Screw	TUG8S	31794	3.4
4	Tug 6 End Cap	TUG6C	31798	0.8
5	Tug 8 End Cap	TUG8C	31799	1.0

Lead time: 1 working day

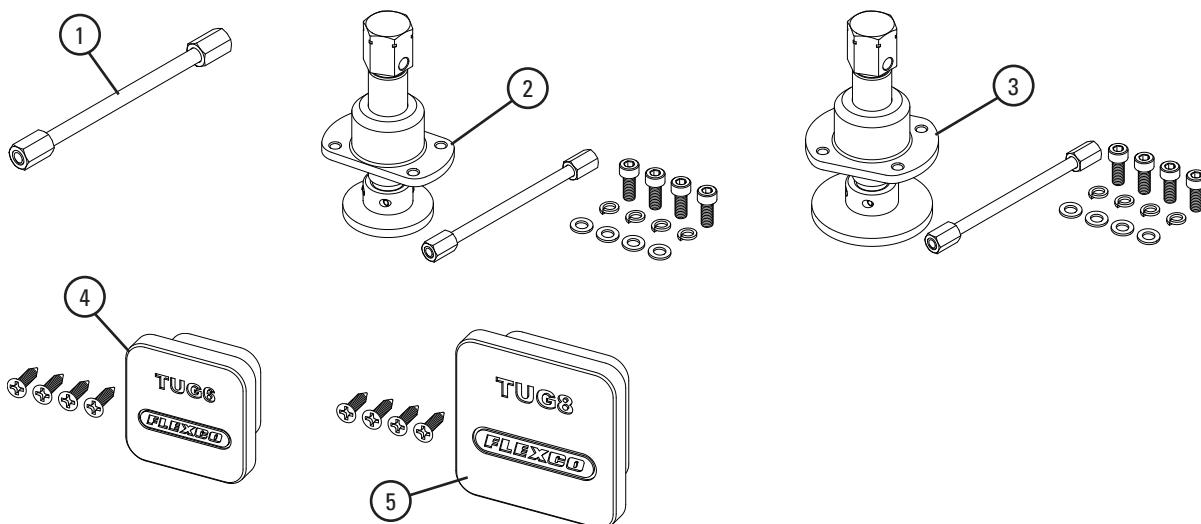

Product Ordering Information

Flex-Lag® Rubber Lagging Bondable Pulley Lagging

Flex-Lag® Light Duty Rubber*

PATTERN	THICKNESS		LENGTH		MATERIAL	ORDERING NUMBER	ITEM CODE
	in.	mm	ft.	m			
Light Duty	0.3	7.5	11	3.3	SBR	7.5NLD3.3/11	71077

Lead time: 1 working day

Flex-Lag® Roll Lagging - SBR Rubber**

PATTERN	THICKNESS		LENGTH		ORDERING NUMBER	ITEM CODE
	in.	mm	ft.	m		
Diamond	3/8	10	21	6.5	10ND6.5/21	71002
Diamond	1/2	12	21	6.5	12ND6.5/21	71004
Diamond	5/8	15	21	6.5	15ND6.5/21	71006
Diamond	3/4	20	21	6.5	20ND6.5/21	71008
Diamond	1	25	21	6.5	25ND6.5/21	71152
Plain	3/8	10	21	6.5	10NP6.5/21	71010
Plain	1/2	12	21	6.5	12NP6.5/21	71012
Plain	5/8	15	21	6.5	15NP6.5/21	71017
Plain	3/4	20	21	6.5	20NP6.5/21	71021
Plain	1	25	21	6.5	25NP6.5/21	71163
Diamond Ceramic	1/2	12	21	6.5	12NDC6.5/21	71155
Medium Ceramic	5/8	15	21	6.5	CLMN6.5/21-15	62216

Lead time: 1 working day

Flex-Lag® Roll Lagging - FRAS Rubber**

PATTERN	THICKNESS		LENGTH		ORDERING NUMBER	ITEM CODE
	in.	mm	ft.	m		
Diamond	3/8	10	21	6.5	10FRD6.5/21	71014
Diamond	1/2	12	21	6.5	12FRD6.5/21	71016
Diamond	5/8	15	21	6.5	15FRD6.5/21	71018
Diamond	3/4	20	21	6.5	20FRD6.5/21	71019
Plain	3/8	10	21	6.5	10FRP6.5/21	71020
Plain	1/2	12	21	6.5	12FRP6.5/21	71022
Plain	5/8	15	21	6.5	15FRP6.5/21	71015
Plain	3/4	20	21	6.5	20FRP6.5/21	72129
Diamond Ceramic	1/2	12	21	6.5	12FRDC6.5/21	71159
Medium Ceramic	5/8	15	21	6.5	CLMFR6.5/21-15	61319

FRAS (Fire Resistant Anti Static) MSHA Certification # - MSHA NO. IC-190

Ordering Number Key: **N** - SBR, **FR** - FRAS, **P** - Plain, **D** - Diamond, **DC** - Diamond Ceramic, **LD** - Light Duty

Lead time: 1 working day

Shaded items are made to order.

Lead time: 8 -10 weeks

Specifications:

- Temperature Rating 5 to 185°F (-15 to 85°C)
- Rubber Compound..... SBR (Styrene-Butadiene-Rubber)
- Rubber Hardness..... 68 ± 3 Shore A
- Ceramic Compound
(Diamond Ceramic Lagging) Aluminum Oxide (Al_2O_3)
- Ceramic Hardness
(Diamond Ceramic Lagging) 83 HRA Rockwell Hardness Scale A

Strips = Pulley Diameter (in) x 3.14 ÷ 8, then round up.

Rolls = Strips x (Face Width + 4")

A or B

A = Light Duty = 132"; B = All Others = 252"

*For Flex-Lag® Light Duty Rubber all material is 8" (200 mm) wide and 10.8' (3.3 m) rolls.

**For Flex-Lag® Natural and Flame-Resistant Rubber, all material is 8" (200 mm) wide in 21' (6.5 m) rolls.

Flex-Lag® Light Duty Rubber Lagging



Flex-Lag® Diamond Ceramic Lagging



Flex-Lag® Diamond Grooved Rubber Lagging



Flex-Lag® Plain Grooved Rubber Lagging



Strip Selection

PULLEY DIAMETER	STRIPS REQ'D	PULLEY DIAMETER	STRIPS REQ'D		
		in.	mm		
12.6–15.0	320–381	6	42.6–45.0	1083–1145	18
15.1–17.5	382–445	7	45.1–47.5	1146–1210	19
17.6–20.0	446–510	8	47.6–50.1	1211–1273	20
20.1–22.5	511–573	9	50.2–52.6	1274–1336	21
22.6–25.0	574–636	10	52.7–55.1	1337–1400	22
25.1–27.5	637–700	11	55.2–57.6	1403–1463	23
27.6–30.0	701–764	12	57.7–60.1	1466–1527	24
30.1–32.5	765–827	13	60.2–62.6	1529–1590	25
32.6–35.0	828–891	14	62.7–65.1	1593–1654	26
35.1–37.5	892–955	15	65.2–67.6	1656–1717	27
37.6–40.0	956–1018	16	67.7–70.1	1720–1781	28
40.1–42.5	1019–1082	17	70.2–72.6	1783–1844	29


Product Ordering Information

Flex-Lag® Medium Ceramic Bondable Pulley Lagging

Flex-Lag® Medium Ceramic Lagging - SBR Rubber

THICKNESS	BELT WIDTH		CERAMIC LENGTH		STRIP LENGTH		DIMPLED TILE		SMOOTH TILE		
	in.	mm	in.	mm	in.	mm	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	
5/8	15	18	450	18 5/8	474	35	880	CLMN450/18-15	61294	CLMN450/18-15S	62052
		24	600	24 5/8	626	41	1032	CLMN600/24-15	61295	CLMN600/24-15S	62053
		30	750	30 5/8	779	47	1185	CLMN750/30-15	61296	CLMN750/30-15S	62054
		36	900	36 5/8	931	53	1337	CLMN900/36-15	61297	CLMN900/36-15S	62055
		42	1050	42 5/8	1082	59	1488	CLMN1050/42-15	61298	CLMN1050/42-15S	62056
		48	1200	48 5/8	1235	65	1641	CLMN1200/48-15	61299	CLMN1200/48-15S	62057
		54	1350	54 5/8	1388	71	1794	CLMN1350/54-15	61300	CLMN1350/54-15S	62058
		60	1500	60 5/8	1541	77	1947	CLMN1500/60-15	61301	CLMN1500/60-15S	62059
		72	1800	72 5/8	1842	89	2248	CLMN1800/72-15	61302	CLMN1800/72-15S	62060
		84	2100	84 7/8	2155	101	2561	CLMN2100/84-15	61303	CLMN2100/84-15S	62061

Lead time: 1 working day

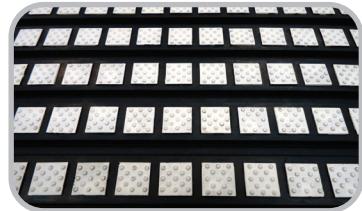

Flex-Lag® Medium Ceramic Lagging

Flex-Lag® Medium Ceramic Lagging - FRAS Rubber

THICKNESS	BELT WIDTH		CERAMIC LENGTH		STRIP LENGTH		DIMPLED TILE		SMOOTH TILE		
	in.	mm	in.	mm	in.	mm	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	
5/8	15	18	450	18 5/8	474	35	880	CLMFR450/18-15	61308	CLMFR450/18-15S	62063
		24	600	24 5/8	626	41	1032	CLMFR600/24-15	61309	CLMFR600/24-15S	62064
		30	750	30 5/8	779	47	1185	CLMFR750/30-15	61310	CLMFR750/30-15S	62065
		36	900	36 5/8	931	53	1337	CLMFR900/36-15	61311	CLMFR900/36-15S	62066
		42	1050	42 5/8	1082	59	1488	CLMFR1050/42-15	61312	CLMFR1050/42-15S	62067
		48	1200	48 5/8	1235	65	1641	CLMFR1200/48-15	61313	CLMFR1200/48-15S	62068
		54	1350	54 5/8	1388	71	1794	CLMFR1350/54-15	61314	CLMFR1350/54-15S	62069
		60	1500	60 5/8	1541	77	1947	CLMFR1500/60-15	61315	CLMFR1500/60-15S	62070
		72	1800	72 5/8	1842	89	2248	CLMFR1800/72-15	61316	CLMFR1800/72-15S	62071
		84	2100	84 7/8	2155	101	2561	CLMFR2100/84-15	61317	CLMFR2100/84-15S	62072

FRAS (Fire Resistant Anti Static) MSHA Certification # - MSHA NO. IC-190

Ordering Number Key: **N** - SBR, **FR** - FRAS

Shaded items are made to order.

Lead time: 8 - 10 weeks


Specifications:

- Temperature Rating 5 to 185°F (-15 to 85°C)
- Rubber Compound..... SBR (Styrene-Butadiene-Rubber)
- Rubber Hardness..... 68 ± 3 Shore A
- Ceramic Compound..... Aluminum Oxide (Al_2O_3)
- Ceramic Hardness..... 83 HRA Rockwell Hardness Scale A
- Ceramic Coverage..... 39%, strips are 8" (200 mm) wide

Product Notes:

- No wasted ceramic with easy-to-specify dimensions by using pulley or belt width.
- Constructed from individual ceramic tiles molded into high-durometer rubber for superior abrasion resistance.
- Horizontal grooves trap and deflect water.
- Molded ceramic buttons grip the belt's underside for positive traction and no slippage.

CERAMIC STRIP CONFIGURATION



Strips Required = Pulley Diameter (in) x 3.14 ÷ 8, then round up.

Strip Selection

PULLEY DIAMETER	STRIPS REQ'D	PULLEY DIAMETER		STRIPS REQ'D
		in.	mm	
12.6–15.0	320–381	6	42.6–45.0	1083–1145
15.1–17.5	382–445	7	45.1–47.5	1146–1210
17.6–20.0	446–510	8	47.6–50.1	1211–1273
20.1–22.5	511–573	9	50.2–52.6	1274–1336
22.6–25.0	574–636	10	52.7–55.1	1337–1400
25.1–27.5	637–700	11	55.2–57.6	1403–1463
27.6–30.0	701–764	12	57.7–60.1	1466–1527
30.1–32.5	765–827	13	60.2–62.6	1529–1590
32.6–35.0	828–891	14	62.7–65.1	1593–1654
35.1–37.5	892–955	15	65.2–67.6	1656–1717
37.6–40.0	956–1018	16	67.7–70.1	1720–1781
40.1–42.5	1019–1082	17	70.2–72.6	1783–1844

Product Ordering Information

Flex-Lag® Full Ceramic Bondable Pulley Lagging

Flex-Lag® Full Ceramic Lagging - SBR Rubber

THICKNESS	BELT WIDTH		CERAMIC LENGTH		STRIP LENGTH		DIMPLED TILE		SMOOTH TILE		
	in.	mm	in.	mm	in.	mm	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	
1/2	12	18	450	18 1/2	460	34	860	CLN460/18.4-12	71111	CLN460/18.4-12S	79383
1/2	12	24	600	24	600	40	1000	CLN600/24-12	71112	CLN600/24-12S	79384
1/2	12	30	750	30 1/2	760	46	1160	CLN760/30.4-12	71113	CLN760/30.4-12S	79385
1/2	12	36	900	36	900	52	1300	CLN900/36-12	71115	CLN900/36-12S	79387
1/2	12	42	1050	42 1/2	1060	60	1500	CLN1060/42.4-12	71116	CLN1060/42.4-12S	79388
1/2	12	48	1200	48	1200	64	1600	CLN1200/48-12	71039	CLN1200/48-12S	79389
1/2	12	54	1350	54 1/2	1360	72	1800	CLN1360/54.4-12	71126	CLN1360/54.4-12S	79390
1/2	12	60	1500	60 3/4	1520	80	2000	CLN1520/60.8-12	71127	CLN1520/60.8-12S	79392
1/2	12	72	1800	72	1800	92	2300	CLN1800/72-12	71042	CLN1800/72-12S	79395
1/2	12	84	2100	84	2100	104	2600	CLN2100/84-12	71044	CLN2100/84-12S	79398

Lead time: 1 working day

Flex-Lag® Full Ceramic Lagging - FRAS Rubber

THICKNESS	BELT WIDTH		CERAMIC LENGTH		STRIP LENGTH		DIMPLED TILE		SMOOTH TILE		
	in.	mm	in.	mm	in.	mm	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	
1/2	12	18	450	18 1/2	460	34	860	CLFR460/18.4-12	71118	CLFR460/18.4-12S	79406
1/2	12	24	600	24	600	40	1000	CLFR600/24-12	71119	CLFR600/24-12S	79407
1/2	12	30	750	30 1/2	760	46	1160	CLFR760/30.4-12	71120	CLFR760/30.4-12S	79408
1/2	12	36	900	36	900	52	1300	CLFR900/36-12	71122	CLFR900/36-12S	79410
1/2	12	42	1050	42 1/2	1060	60	1500	CLFR1060/42.4-12	71123	CLFR1060/42.4-12S	79411
1/2	12	48	1200	48	1200	64	1600	CLFR1200/48-12	71005	CLFR1200/48-12S	79412
1/2	12	54	1350	54 1/2	1360	72	1800	CLFR1360/54.4-12	A1636	CLFR1360/54.4-12S	79413
1/2	12	60	1500	60 3/4	1520	80	2000	CLFR1520/60.8-12	71009	CLFR1520/60.8-12S	79415
1/2	12	72	1800	72	1800	92	2300	CLFR1800/72-12	71079	CLFR1800/72-12S	79418
1/2	12	84	2100	84	2100	104	2600	CLFR2100/84-12	71082	CLFR2100/84-12S	79421

FRAS (Fire Resistant Anti Static) MSHA Certification # - MSHA NO. IC-190

Ordering Number Key: **N** - SBR, **FR** - FRAS

Lead time: 1 working day

Shaded items are made to order.
Lead time: 8 -10 weeks




Specifications:

- Temperature Rating 5 to 185°F (-15 to 85°C)
- Rubber Compound..... SBR (Styrene-Butadiene-Rubber)
- Rubber Hardness..... 68 ± 3 Shore A
- Ceramic Compound..... Aluminum Oxide (Al_2O_3)
- Ceramic Hardness..... 83 HRA Rockwell Hardness Scale A
- Ceramic Coverage..... 80%, strips are 8" (200 mm) wide

Special Offerings

LAGGING THICKNESS	PRICE COMPARED TO NATURAL RUBBER
5/8" (15mm)	+5%
3/4" (20mm)	+7 1/2%
1" (25mm)	+15%

CERAMIC STRIP CONFIGURATION



Strips Required = Pulley Diameter (in) x 3.14 ÷ 8, then round up.

Strip Selection

PULLEY DIAMETER	STRIPS REQ'D	PULLEY DIAMETER		STRIPS REQ'D		
		in.	mm			
12.6–15.0	6	320–381	820–955	42.6–45.0	1083–1145	18
15.1–17.5	7	382–445	970–1120	45.1–47.5	1146–1210	19
17.6–20.0	8	446–510	1120–1273	47.6–50.1	1211–1273	20
20.1–22.5	9	511–573	1273–1336	50.2–52.6	1274–1336	21
22.6–25.0	10	574–636	1336–1400	52.7–55.1	1337–1400	22
25.1–27.5	11	637–700	1403–1463	55.2–57.6	1403–1463	23
27.6–30.0	12	701–764	1466–1527	57.7–60.1	1466–1527	24
30.1–32.5	13	765–827	1529–1590	60.2–62.6	1529–1590	25
32.6–35.0	14	828–891	1593–1654	62.7–65.1	1593–1654	26
35.1–37.5	15	892–955	1656–1717	65.2–67.6	1656–1717	27
37.6–40.0	16	956–1018	1720–1781	67.7–70.1	1720–1781	28
40.1–42.5	17	1019–1082	1783–1844	70.2–72.6	1783–1844	29

Product Ordering Information

Flex-Lag®
Adhesives and Toolbox

Flex-Lag® Adhesive/Activator/Primer

ORDERING NUMBER	DESCRIPTION	ITEM CODE	WEIGHT	VOLUME
FL-ADH-0.8	Adhesive	75017	1.6 lb. (0.7 Kg)	27.1 oz (0.8L)
FL-ACT	Activator	70186	0.1 lb. (40 g)	-
FL-PR-0.75	Primer	70189	1.6 lb. (0.7 Kg)	25.4 oz (0.75L)

Each Flex-Lag® Adhesive is mixed with one Flex-Lag® Activator. Refer to the usage chart below to calculate the number of cans required for your pulley. For sizes not included in the chart please contact Flexco Customer Service for assistance.



ADHESIVE 0.8L / ACTIVATOR 40g (1:1 ratio) (Covers 1,000 in²/.645 m²)

PULLEY DIAMETER	In.	FACE WIDTH																				
		10	14	18	22	26	30	34	38	42	46	50	54	58	62	66	70	74	78	82	86	90
		mm	254	356	457	559	660	762	864	965	1067	1168	1270	1372	1473	1575	1676	1778	1880	1981	2083	2184
8	203	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3
12	305	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3	4	4	4
16	406	2	2	2	2	2	2	2	2	3	3	3	3	4	4	4	4	4	4	5	5	5
20	508	2	2	2	2	2	2	3	3	3	4	4	4	5	5	5	5	5	5	6	6	6
24	610	2	2	2	2	2	3	3	3	4	4	4	5	5	5	5	5	5	6	6	7	7
28	711	2	2	2	2	3	3	3	4	4	5	5	5	6	6	6	7	7	8	8	8	8
32	813	2	2	2	3	3	4	4	4	5	5	6	6	6	7	7	8	8	9	9	10	10
36	914	2	2	3	3	3	4	4	4	5	5	6	6	7	7	8	8	8	9	9	10	11
40	1016	2	2	3	3	4	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11
44	1118	2	2	3	4	4	5	5	6	6	7	7	8	9	9	10	10	11	11	12	12	13
48	1219	2	3	3	4	4	5	6	6	7	7	8	9	9	10	10	11	11	12	12	13	14
52	1321	2	3	3	4	5	5	6	7	7	8	9	9	10	11	11	12	13	13	14	15	15
56	1422	2	3	4	4	5	6	6	7	8	9	9	10	11	11	12	13	14	14	15	16	16
60	1524	2	3	4	5	5	6	7	8	8	9	10	11	11	12	13	14	14	15	16	17	17

PRIMER .75L (Covers 10,000 in²/6.45 m²)

PULLEY DIAMETER	In.	FACE WIDTH																				
		10	14	18	22	26	30	34	38	42	46	50	54	58	62	66	70	74	78	82	86	90
		mm	254	356	457	559	660	762	864	965	1067	1168	1270	1372	1473	1575	1676	1778	1880	1981	2083	2184
8	203	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
12	305	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
16	406	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
20	508	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
24	610	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
28	711	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
32	813	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
36	914	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2
40	1016	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2	2	2
44	1118	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2	2	2	2
48	1219	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2	2	2	2	2
52	1321	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2	2	2	2	2	2	2
56	1422	1	1	1	1	1	1	1	1	1	1	1	1	1	2	2	2	2	2	2	2	2
60	1524	1	1	1	1	1	1	1	1	1	1	1	1	2	2	2	2	2	2	2	2	2

Flex-Lag® Toolbox

DESCRIPTION	ORDERING NUMBER	ITEM CODE	WT. (LBS)
With Power Tools	LAGGING-TB	79080	32.0
Without Power Tools	LAGGING-TB2	79099	20.0

Both Include:

- 25-ft measuring tape
- HD knife and replacement blades
- BCP location tool
- Bench brush
- Chalk line
- Deadblow hammer
- Paint brushes (3)
- Lagging stichers (3)
- White paint marker

LAGGING-TB Also Includes:

- Air hammer kit
- 24-grit flap disc
- Metal grinding disc
- Rubber buffering disc
- Oscillating tool and accessories



Product Ordering Information

Flex-Lag® Rubber Lagging Weld-On™ Pulley Lagging

Strips Required = Pulley Diameter (in) ÷ 2, then round down.

Strip Selection Chart

PULLEY DIAMETER	STRIPS REQ'D
in.	mm
16	400
18	450
24	600
30	750
36	900
42	1050
48	1200
54	1350
60	1500
72	1800



Flex-Lag® Weld-On™ Rubber Lagging

Flex-Lag® Weld-On™ Diamond Lagging - SBR Rubber

BELT WIDTH		STRIP LENGTH		PULLEY DIAMETER 16-29" (400-725mm)		PULLEY DIAMETER 30" + (750mm +)	
in.	mm	in.	mm	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE
18	450	20	500	WND18-16	72169	WND18-30	72170
24	600	26	650	WND24-16	72171	WND24-30	72172
30	750	32	800	WND30-16	72173	WND30-30	72174
36	900	38	950	WND36-16	72175	WND36-30	72176
42	1050	44	1100	WND42-16	72177	WND42-30	72178
48	1200	51	1275	WND48-16	72179	WND48-30	72180
54	1350	57	1425	WND54-16	72181	WND54-30	72182
60	1500	63	1575	WND60-16	72183	WND60-30	72184
72	1800	75	1875	WND72-16	72185	WND72-30	72186

Flex-Lag® Weld-On™ Diamond Lagging - FRAS Rubber

BELT WIDTH		STRIP LENGTH		PULLEY DIAMETER 16-29" (400-725mm)		PULLEY DIAMETER 30" + (750mm +)	
in.	mm	in.	mm	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE
18	450	20	500	WFRD18-16	72187	WFRD18-30	72188
24	600	26	650	WFRD24-16	72189	WFRD24-30	72190
30	750	32	800	WFRD30-16	72191	WFRD30-30	72192
36	900	38	950	WFRD36-16	72193	WFRD36-30	72194
42	1050	44	1100	WFRD42-16	72195	WFRD42-30	72196
48	1200	51	1275	WFRD48-16	72197	WFRD48-30	72198
54	1350	57	1425	WFRD54-16	72199	WFRD54-30	72200
60	1500	63	1575	WFRD60-16	72201	WFRD60-30	72202
72	1800	75	1875	WFRD72-16	72203	WFRD72-30	72204

FRAS (Fire Resistant Anti Static) MSHA Certification # - MSHA NO. IC-190

Product Ordering Information

Flex-Lag® Ceramic Lagging Weld-On™ Pulley Lagging

Strips Required = Pulley Diameter (in) ÷ 2, then round down.

Strip Selection Chart

PULLEY DIAMETER		STRIPS REQ'D
in.	mm	
16	400	8
18	450	9
24	600	12
30	750	15
36	900	18
42	1050	21
48	1200	24
54	1350	27
60	1500	30
72	1800	36



Flex-Lag® Weld-On™ Ceramic Lagging

Flex-Lag® Weld-On™ Full Ceramic Lagging - SBR Rubber

BELT WIDTH		STRIP LENGTH		PULLEY DIAMETER 16–29" (400–725mm)		PULLEY DIAMETER 30" + (750mm +)	
in.	mm	in.	mm	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE
18	450	20	500	WCLN18-16	71131	-	-
24	600	26	650	WCLN24-16	71132	WCLN24-30	71150
30	750	32	800	WCLN30-16	71133	WCLN30-30	71134
36	900	38	950	WCLN36-16	71135	WCLN36-30	71136
42	1050	44	1100	WCLN42-16	71137	WCLN42-30	71138
48	1200	51	1275	WCLN48-16	71139	WCLN48-30	71144
54	1350	57	1425	WCLN54-16	71149	WCLN54-30	71145
60	1500	63	1575	WCLN60-16	71165	WCLN60-30	71146
72	1800	75	1875	WCLN72-16	71151	WCLN72-30	71147

INDEX By Ordering Number

Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #
900924	04200	222	CART-30/750	77901	110	CBS72PC	91557	122	CBSBP42F	90105	125
900936	04143	222	CART-36/900	77902	110	CBS72PF	79966	122	CBSBP48C	91543	125
900948	04144	222	CART-42/1050	77903	110	CBS72SC	91503	122	CBSBP48F	90106	125
900960	04145	222	CART-48/1200	77904	110	CBS72SF	79944	122	CBSBP54C	91544	125
900972	04146	222	CART-54/1350	77905	110	CBS84PC	91558	122	CBSBP54F	90107	125
900984	04147	222	CART-60/1500	77906	110	CBS84PF	79967	122	CBSBP60C	91545	125
10FRD6.5/21	71014	228	CART-72/1800	77907	110	CBS84SC	91504	122	CBSBP60F	90108	125
10FRP6.5/21	71020	228	CART2-120/3000	77912	110	CBS84SF	79945	122	CBSBP72C	91546	125
10ND6.5/21	71002	228	CART2-60/1500	77908	110	CBS96PC	91559	122	CBSBP72F	90109	125
10NP6.5/21	71010	228	CART2-72/1800	77909	110	CBS96PF	79968	122	CBSBP84C	91547	125
12FRD6.5/21	71016	228	CART2-84/2100	77910	110	CBS96SC	91505	122	CBSBP84F	90110	125
12FRDC6.5/21	71159	228	CART2-96/2400	77911	110	CBS96SF	79946	122	CBSBP96C	91548	125
12FRP6.5/21	71022	228	CBC18	76668	121	CBSBLD18C	91527	122	CBSBP96F	90111	125
12ND6.5/21	71004	228	CBC24	76669	121	CBSBLD18C	91527	128	CBSP18	91432	125
12NDC6.5/21	71155	228	CBC30	76670	121	CBSBLD18F	79947	122	CBSP24	91433	125
12NP6.5/21	71012	228	CBC36	76671	121	CBSBLD18F	79947	128	CBSP30	91434	125
15FRD6.5/21	71018	228	CBC3R	90641	121	CBSBLD24C	91528	122	CBSP36	91435	125
15FRP6.5/21	71015	228	CBC42	76672	121	CBSBLD24C	91528	128	CBSP42	91436	125
15ND6.5/21	71006	228	CBC48	76673	121	CBSBLD24F	79948	122	CBSP48	91437	125
15NP6.5/21	71017	228	CBC54	76674	121	CBSBLD24F	79948	128	CBSP54	91438	125
20FRD6.5/21	71019	228	CBC60	76675	121	CBSBLD30C	91529	122	CBSP60	91439	125
20FRP6.5/21	72129	228	CBC72	90762	121	CBSBLD30C	91529	128	CBSP72	91440	125
20ND6.5/21	71008	228	CBC84	90763	121	CBSBLD30F	79949	122	CBSP84	91441	125
20NP6.5/21	71021	228	CBCS18	90537	121	CBSBLD30F	79949	128	CBSP96	91442	125
25ND6.5/21	71152	228	CBCS24	90538	121	CBSBLD36C	91530	122	CBV-72	74389	156
25NP6.5/21	71163	228	CBCS30	90539	121	CBSBLD36C	91530	128	CBV-84	74390	156
7.5NLD3.3/11	71077	228	CBCS36	90540	121	CBSBLD36F	79950	122	CBV-96	74391	156
900CBK	04149	222	CBCS42	90541	121	CBSBLD36F	79950	128	CBV-L	73134	156
900CKK	106186	222	CBCS48	90542	121	CBSBLD42C	91531	122	CBV-M	73133	156
ABU	76788	113	CBCS54	90543	121	CBSBLD42C	91531	128	CBV-S	73132	156
ABU	76788	113	CBCS60	90544	121	CBSBLD42F	79951	122	CBV-XS	73131	156
AWTA	75907	47	CBCS72	90554	121	CBSBLD42F	79951	128	CCKHDL	79225	79
AWTA	75907	55	CBCS84	90555	121	CBSBLD48C	91532	122	CCKHDL	79225	140
AWTA	75907	60	CBS18PC	91549	122	CBSBLD48C	91532	128	CCKHDR	79229	79
AWTB	75905	47	CBS18PF	79958	122	CBSBLD48F	79952	122	CCKHDR	79229	140
AWTB	75905	55	CBS18SC	91495	122	CBSBLD48F	79952	128	CCKHTS	79233	79
AWTB	75905	60	CBS18SF	79936	122	CBSBLD54C	91533	122	CCKHTS	79233	140
AWTHK	75909	47	CBS24PC	91550	122	CBSBLD54C	91533	128	CCKL	79224	79
AWTHK	75909	55	CBS24PF	79959	122	CBSBLD54F	79953	122	CCKL	79224	91
AWTHK	75909	60	CBS24SC	91496	122	CBSBLD54F	79953	128	CCKL	79224	94
AWTMB	75906	47	CBS24SF	79937	122	CBSBLD60C	91534	122	CCKL	79224	140
AWTMB	75906	55	CBS30PC	91551	122	CBSBLD60C	91534	128	CCKR	79228	79
AWTMB	75906	60	CBS30PF	79960	122	CBSBLD60F	79954	122	CCKR	79228	91
AWTNCB	76069	47	CBS30SC	91497	122	CBSBLD60F	79954	128	CCKR	79228	94
AWTNCB	76069	55	CBS30SF	79938	122	CBSBLD72C	91535	122	CCKR	79228	140
AWTNCB	76069	58	CBS36PC	91552	122	CBSBLD72C	91535	128	CCKTS	79232	79
AWTNCB	76069	60	CBS36PF	79961	122	CBSBLD72F	79955	122	CCKTS	79232	91
AWTPBA	90000	47	CBS36SC	91498	122	CBSBLD72F	79955	128	CCKTS	79232	94
AWTPBA	90000	55	CBS36SF	79939	122	CBSBLD84C	91536	122	CCKTS	79232	140
AWTPBA	90000	60	CBS42PC	91553	122	CBSBLD84C	91536	128	CCMK	78919	79
AWTRK	79319	44	CBS42PF	79962	122	CBSBLD84F	79956	122	CCMK	78919	91
AWTRK	79319	51	CBS42SC	91499	122	CBSBLD84F	79956	128	CCMK	78919	94
AWTRK	79319	57	CBS42SF	79940	122	CBSBLD96C	91537	122	CCMK	78919	140
AWTRK	79319	101	CBS48PC	91554	122	CBSBLD96C	91537	128	CCMKHD	78920	79
AWTRK	79319	115	CBS48PF	79963	122	CBSBLD96F	79957	122	CCMKHD	78920	140
AWTRK	79319	123	CBS48SC	91500	122	CBSBLD96F	79957	128	CDWB24	75884	114
BSB-1	112918	160	CBS48SF	79941	122	CBSBP18C	91538	125	CDWB30	75885	114
BSB-2	112919	160	CBS54PC	91555	122	CBSBP18F	90101	125	CDWB36	75886	114
BSB-3	112920	160	CBS54PF	79964	122	CBSBP24C	91539	125	CDWB42	75887	114
BSB-4	112921	160	CBS54SC	91501	122	CBSBP24F	90102	125	CDWB48	75888	114
BSB-5	112922	160	CBS54SF	79942	122	CBSBP30C	91540	125	CDWB54	75889	114
BSB-6	112923	160	CBS60PC	91556	122	CBSBP30F	90103	125	CDWB60	75890	114
BSB-BR	112960	160	CBS60PF	79965	122	CBSBP36C	91541	125	CDWB72	75891	114
BSB-BRK	112956	160	CBS60SC	91502	122	CBSBP36F	90104	125	CDWB84	76942	114
CART-24/600	77900	110	CBS60SF	79943	122	CBSBP42C	91542	125	CDWB96	79062	114

INDEX By Ordering Number

Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #
CEBC1	30018	223	CLMFR600/24-15S	62064	229	CRB-HT10	76593	22	CRB-LS40HT	77556	31
CEBC1 – REFURBISH	30018RPR	223	CLMFR750/30-15	61310	229	CRB-HT10	76593	37	CRB-LS40W	77102	27
CEBC1-220	30021	223	CLMFR750/30-15S	62065	229	CRB-HT16	76594	16	CRB-LS40W	77102	31
CEBC1-CPLGM	108045	224	CLMFR900/36-15	61311	229	CRB-HT16	76594	22	CRB-LS46	77094	27
CEBC1-DUK	108384	224	CLMFR900/36-15S	62066	229	CRB-HT16	76594	37	CRB-LS46	77094	31
CEBC1/CEBC2-BATMET	111390	224	CLMN1050/42-15	61298	229	CRB-HT22	76595	16	CRB-LS46HT	77557	27
CEBC1/CEBC2-DRM	108043	224	CLMN1050/42-15S	62056	229	CRB-HT22	76595	22	CRB-LS46HT	77557	31
CEBC2	30019	223	CLMN1200/48-15	61299	229	CRB-HT22	76595	37	CRB-LS46W	77103	27
CEBC2 – REFURBISH	30019RPR	223	CLMN1200/48-15S	62057	229	CRB-HT28	76596	16	CRB-LS46W	77103	31
CEBC2-220	30022	223	CLMN1350/54-15	61300	229	CRB-HT28	76596	22	CRB-LS52	77095	27
CEBC2-CPLGM	108046	224	CLMN1350/54-15S	62058	229	CRB-HT28	76596	37	CRB-LS52	77095	31
CEBC2-DUK	108385	224	CLMN1500/60-15	61301	229	CRB-HT34	76597	16	CRB-LS52HT	77558	27
CFG-212	78838	21	CLMN1500/60-15S	62059	229	CRB-HT34	76597	22	CRB-LS52HT	77558	31
CFG-218	78839	21	CLMN1800/72-15	61302	229	CRB-HT34	76597	37	CRB-LS52W	77104	27
CFG-224	78840	21	CLMN1800/72-15S	62060	229	CRB-HT40	76598	16	CRB-LS52W	77104	31
CFG-230	78841	21	CLMN2100/84-15	61303	229	CRB-HT40	76598	22	CRB-LS58	77096	27
CFG-236	78842	21	CLMN2100/84-15S	62061	229	CRB-HT40	76598	37	CRB-LS58	77096	31
CFG-242	78843	21	CLMN450/18-15	61294	229	CRB-HT46	76599	16	CRB-LS58HT	77559	27
CFG-248	78844	21	CLMN450/18-15S	62052	229	CRB-HT46	76599	22	CRB-LS58HT	77559	31
CFG-254	78845	21	CLMN6.5/21-15	62216	228	CRB-HT46	76599	37	CRB-LS58W	77105	27
CFG-260	78846	21	CLMN600/24-15	61295	229	CRB-HT52	76600	16	CRB-LS58W	77105	31
CFG-818	78924	21	CLMN600/24-15S	62053	229	CRB-HT52	76600	22	CRB-UHT10	91253	16
CFG-824	78925	21	CLMN750/30-15	61296	229	CRB-HT52	76600	37	CRB-UHT10	91253	37
CFG-830	78926	21	CLMN750/30-15S	62054	229	CRB-HT58	76601	16	CRB-UHT16	91254	16
CFG-836	78927	21	CLMN900/36-15	61297	229	CRB-HT58	76601	22	CRB-UHT16	91254	37
CFG-842	78928	21	CLMN900/36-15S	62055	229	CRB-HT58	76601	37	CRB-UHT22	91255	16
CFG-848	78929	21	CLN1060/42.4-12	71116	230	CRB-HT64	76602	16	CRB-UHT22	91255	37
CFG-854	78930	21	CLN1060/42.4-12S	79388	230	CRB-HT64	76602	22	CRB-UHT28	91256	16
CFG-860	78931	21	CLN1200/48-12	71039	230	CRB-HT64	76602	37	CRB-UHT28	91256	37
CLFR1060/42.4-12	71123	230	CLN1200/48-12S	79389	230	CRB-HT70	76603	16	CRB-UHT34	91257	16
CLFR1060/42.4-12S	79411	230	CLN1360/54.4-12	71126	230	CRB-HT70	76603	22	CRB-UHT34	91257	37
CLFR1200/48-12	71005	230	CLN1360/54.4-12S	79390	230	CRB-HT70	76603	37	CRB-UHT40	91258	16
CLFR1200/48-12S	79412	230	CLN1520/60.8-12	71127	230	CRB-LS10	77088	27	CRB-UHT40	91258	37
CLFR1360/54.4-12	A1636	230	CLN1520/60.8-12S	79392	230	CRB-LS10	77088	31	CRB-UHT46	91259	16
CLFR1360/54.4-12S	79413	230	CLN1800/72-12	71042	230	CRB-LS10HT	77551	27	CRB-UHT46	91259	37
CLFR1520/60.8-12	71009	230	CLN1800/72-12S	79395	230	CRB-LS10HT	77551	31	CRB-UHT52	91260	16
CLFR1520/60.8-12S	79415	230	CLN2100/84-12	71044	230	CRB-LS10W	77097	27	CRB-UHT52	91260	37
CLFR1800/72-12	71079	230	CLN2100/84-12S	79398	230	CRB-LS10W	77097	31	CRB-UHT58	91261	16
CLFR1800/72-12S	79418	230	CLN460/18.4-12	71111	230	CRB-LS16	77089	27	CRB-UHT58	91261	37
CLFR2100/84-12	71082	230	CLN460/18.4-12S	79383	230	CRB-LS16	77089	31	CRB-UHT64	91262	16
CLFR2100/84-12S	79421	230	CLN600/24-12	71112	230	CRB-LS16HT	77552	27	CRB-UHT64	91262	37
CLFR460/18.4-12	71118	230	CLN600/24-12S	79384	230	CRB-LS16HT	77552	31	CRB-UHT70	91263	16
CLFR460/18.4-12S	79406	230	CLN760/30.4-12	71113	230	CRB-LS16W	77098	27	CRB-UHT70	91263	37
CLFR600/24-12	71119	230	CLN760/30.4-12S	79385	230	CRB-LS16W	77098	31	CRB-W10	78471	16
CLFR600/24-12S	79407	230	CLN900/36-12	71115	230	CRB-LS22	77090	27	CRB-W10	78471	22
CLFR760/30.4-12	71120	230	CLN900/36-12S	79387	230	CRB-LS22	77090	31	CRB-W10	78471	37
CLFR760/30.4-12S	79408	230	CLSFG-212	77144	30	CRB-LS22HT	77553	27	CRB-W16	78472	16
CLFR900/36-12	71122	230	CLSFG-218	77145	30	CRB-LS22HT	77553	31	CRB-W16	78472	22
CLFR900/36-12S	79410	230	CLSFG-224	77146	30	CRB-LS22W	77099	27	CRB-W16	78472	37
CLMFR1050/42-15	61312	229	CLSFG-230	77147	30	CRB-LS22W	77099	31	CRB-W22	78473	16
CLMFR1050/42-15S	62067	229	CLSFG-236	77148	30	CRB-LS28	77091	27	CRB-W22	78473	22
CLMFR1200/48-15	61313	229	CLSFG-242	77149	30	CRB-LS28	77091	31	CRB-W22	78473	37
CLMFR1200/48-15S	62068	229	CLSFG-248	77150	30	CRB-LS28HT	77554	27	CRB-W28	78474	16
CLMFR1350/54-15	61314	229	CLSFG-254	77151	30	CRB-LS28HT	77554	31	CRB-W28	78474	22
CLMFR1350/54-15S	62069	229	CLSFG-260	77152	30	CRB-LS28W	77100	27	CRB-W28	78474	37
CLMFR1500/60-15	61315	229	CLSFG-818	77153	30	CRB-LS28W	77100	31	CRB-W34	78475	16
CLMFR1500/60-15S	62070	229	CLSFG-824	77154	30	CRB-LS34	77092	27	CRB-W34	78475	22
CLMFR1800/72-15	61316	229	CLSFG-830	77155	30	CRB-LS34	77092	31	CRB-W34	78475	37
CLMFR1800/72-15S	62071	229	CLSFG-836	77156	30	CRB-LS34HT	77555	27	CRB-W40	78476	16
CLMFR2100/84-15	61317	229	CLSFG-842	77157	30	CRB-LS34HT	77555	31	CRB-W40	78476	22
CLMFR2100/84-15S	62072	229	CLSFG-848	77158	30	CRB-LS34W	77101	27	CRB-W40	78476	37
CLMFR450/18-15	61308	229	CLSFG-854	77159	30	CRB-LS34W	77101	31	CRB-W46	78477	16
CLMFR450/18-15S	62063	229	CLSFG-860	77160	30	CRB-LS40	77093	27	CRB-W46	78477	22
CLMFR6.5/21-15	61319	228	CPB	76692	121	CRB-LS40	77093	31	CRB-W46	78477	37
CLMFR600/24-15	61309	229	CRB-HT10	76593	16	CRB-LS40HT	77556	27	CRB-W52	78478	16

INDEX By Ordering Number

Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #
CRB-W52	78478	22	CST1HD-G	77875	110	DRXDX-96-520	107590	189	DRXL-72-535	76847	181
CRB-W52	78478	37	CST1HD-S	77873	110	DRXDX-96-535	107591	189	DRXM-24-420	76848	183
CRB-W58	78479	16	CST1HD-W	77872	110	DRXH-24-420	76880	185	DRXM-24-435	76864	183
CRB-W58	78479	22	CSTBK	77037	110	DRXH-24-435	76896	185	DRXM-24-520	76856	183
CRB-W58	78479	37	CSTHDMK	77871	110	DRXH-24-520	76888	185	DRXM-24-535	76872	183
CRB10	75628	16	CSTHDM	77869	110	DRXH-24-535	76904	185	DRXM-30-420	76849	183
CRB10	75628	22	CTS-B	77744	110	DRXH-30-420	76881	185	DRXM-30-435	76865	183
CRB10	75628	37	CTS-B/S/S	78387	33	DRXH-30-435	76897	185	DRXM-30-520	76857	183
CRB10	75628	143	CTS-G	77745	110	DRXH-30-520	76889	185	DRXM-30-535	76873	183
CRB16	75629	16	CTS-S	77743	83	DRXH-30-535	76905	185	DRXM-36-420	76850	183
CRB16	75629	22	CTS-S	77743	97	DRXH-36-420	76882	185	DRXM-36-435	76866	183
CRB16	75629	37	CTS-S	77743	110	DRXH-36-435	76898	185	DRXM-36-520	76858	183
CRB16	75629	143	CTS-W	77742	110	DRXH-36-520	76890	185	DRXM-36-535	76874	183
CRB22	75630	16	DC-24	91736	211	DRXH-36-535	76906	185	DRXM-42-420	76851	183
CRB22	75630	22	DC-30	91737	211	DRXH-42-420	76883	185	DRXM-42-435	76867	183
CRB22	75630	37	DC-36	91738	211	DRXH-42-435	76899	185	DRXM-42-520	76859	183
CRB22	75630	143	DC-42	91739	211	DRXH-42-520	76891	185	DRXM-42-535	76875	183
CRB28	75631	16	DC-48	91740	211	DRXH-42-535	76907	185	DRXM-48-420	76852	183
CRB28	75631	22	DC-54	91741	211	DRXH-48-420	76884	185	DRXM-48-435	76868	183
CRB28	75631	37	DC-60	91742	211	DRXH-48-435	76900	185	DRXM-48-520	76860	183
CRB28	75631	143	DC-66	91743	211	DRXH-48-520	76892	185	DRXM-48-535	76876	183
CRB34	75632	16	DC-72	91744	211	DRXH-48-535	76908	185	DRXM-54-420	76853	183
CRB34	75632	22	DC-84	91745	211	DRXH-54-420	76885	185	DRXM-54-435	76869	183
CRB34	75632	37	DC-96	91746	211	DRXH-54-435	76901	185	DRXM-54-520	76861	183
CRB34	75632	143	DCRR-24	92159	214	DRXH-54-520	76893	185	DRXM-54-535	76877	183
CRB40	75633	16	DCRR-30	92160	214	DRXH-54-535	76909	185	DRXM-60-420	76854	183
CRB40	75633	22	DCRR-36	92161	214	DRXH-60-420	76886	185	DRXM-60-435	76870	183
CRB40	75633	37	DCRR-42	92162	214	DRXH-60-435	76902	185	DRXM-60-520	76862	183
CRB40	75633	143	DCRR-48	92163	214	DRXH-60-520	76894	185	DRXM-60-535	76878	183
CRB46	75634	16	DCRR-54	92164	214	DRXH-60-535	76910	185	DRXM-72-420	76855	183
CRB46	75634	22	DCRR-60	92165	214	DRXH-72-420	76887	185	DRXM-72-435	76871	183
CRB46	75634	37	DCRR-66	92166	214	DRXH-72-435	76903	185	DRXM-72-520	76863	183
CRB46	75634	143	DCRR-72	92167	214	DRXH-72-520	76895	185	DRXM-72-535	76879	183
CRB52	75635	16	DCRR-84	92168	214	DRXH-72-535	76911	185	DWP-72	75883	117
CRB52	75635	22	DCRR-96	92169	214	DRXL-24-420	76816	181	DWP-84	76815	117
CRB52	75635	37	DRXD-36-520	115010	187	DRXL-24-435	76832	181	DWP-96	79060	117
CRB52	75635	143	DRXD-36-535	115011	187	DRXL-24-520	76824	181	EBC/CEBC-BK	30024	224
CRB58	75636	16	DRXD-42-520	76912	187	DRXL-24-535	76840	181	EBC/CEBC-EB	30007	224
CRB58	75636	22	DRXD-42-535	76919	187	DRXL-30-420	76817	181	EBC/CEBC-H	30008	224
CRB58	75636	37	DRXD-48-520	76913	187	DRXL-30-435	76833	181	EBC1	30001	223
CRB58	75636	143	DRXD-48-535	76920	187	DRXL-30-520	76825	181	EBC1 - REFURBISH	30001RPR	223
CRB64	75775	16	DRXD-54-520	76914	187	DRXL-30-535	76841	181	EBC1-220	30011	223
CRB64	75775	22	DRXD-54-535	76921	187	DRXL-36-420	76818	181	EBC1-220-DR	30013	224
CRB64	75775	37	DRXD-60-520	76915	187	DRXL-36-435	76834	181	EBC1-CPLGM	108047	224
CRB70	75773	16	DRXD-60-535	76922	187	DRXL-36-520	76826	181	EBC1-DR	30005	224
CRB70	75773	22	DRXD-72-520	76916	187	DRXL-36-535	76842	181	EBC1/CEBC1-B	30003	224
CRB70	75773	37	DRXD-72-535	76923	187	DRXL-42-420	76819	181	EBC1/CEBC1-RK	30033	224
CRB70	75773	143	DRXD-84-520	76917	187	DRXL-42-435	76835	181	EBC2	30002	223
CRB76	76940	16	DRXD-84-535	76924	187	DRXL-42-520	76827	181	EBC2 - REFURBISH	30002RPR	223
CRB76	76940	22	DRXD-96-520	76918	187	DRXL-42-535	76843	181	EBC2-220	30012	223
CRB76	76940	37	DRXD-96-535	76925	187	DRXL-48-420	76820	181	EBC2-220-DR	30014	224
CRB82	76941	16	DRXDX-36-520	107569	189	DRXL-48-435	76836	181	EBC2-CPLGM	108048	224
CRB82	76941	22	DRXDX-36-535	107570	189	DRXL-48-520	76828	181	EBC2-DR	30006	224
CRB82	76941	37	DRXDX-42-520	107572	189	DRXL-48-535	76844	181	EBC2/CEBC2-B	30004	224
CRDF18	90631	121	DRXDX-42-535	107573	189	DRXL-54-420	76821	181	EBC2/CEBC2-RK	30034	224
CRDF24	90632	121	DRXDX-48-520	107575	189	DRXL-54-435	76837	181	ELT	74774	138
CRDF30	90633	121	DRXDX-48-535	107576	189	DRXL-54-520	76829	181	ES24-4-SF	91664	210
CRDF36	90634	121	DRXDX-54-520	107578	189	DRXL-54-535	76845	181	ES24-4-SN	91653	210
CRDF42	90635	121	DRXDX-54-535	107579	189	DRXL-60-420	76822	181	ES24-8-SF	91700	210
CRDF48	90636	121	DRXDX-60-520	107581	189	DRXL-60-435	76838	181	ES24-8-SN	91689	210
CRDF54	90637	121	DRXDX-60-535	107582	189	DRXL-60-520	76830	181	ES30-4-SF	91665	210
CRDF60	90638	121	DRXDX-72-520	107584	189	DRXL-60-535	76846	181	ES30-4-SN	91654	210
CRDF72	90639	121	DRXDX-72-535	107585	189	DRXL-72-420	76823	181	ES30-8-SF	91701	210
CRDF84	90640	121	DRXDX-84-520	107587	189	DRXL-72-435	76839	181	ES30-8-SN	91690	210
CST1HD-B	77874	110	DRXDX-84-535	107588	189	DRXL-72-520	76831	181	ES36-4-SF	91666	210

INDEX By Ordering Number

Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #
ES36-4-SN	91655	210	ESBK-PS	76410	19	EZBMK-60	78950	173	EZIB54-5M	78916	171
ES36-8-SF	91702	210	ESBK-PS	76410	113	EZBMK-72	78951	170	EZIB60-4L	78893	168
ES36-8-SN	91691	210	ESPBK	76408	19	EZBMK-72	78951	173	EZIB60-4M	78909	171
ES42-4-SF	91667	210	ESPRK	76409	19	EZBS-L4	78953	167	EZIB60-5L	78901	168
ES42-4-SN	91656	210	ESPSBK	76407	19	EZBS-L4	78953	170	EZIB60-5M	78917	171
ES42-8-SF	91703	210	ESS-B	76413	19	EZBS-L5	78954	167	EZIB72-4L	78894	168
ES42-8-SN	91692	210	ESS-S	76412	19	EZBS-L5	78954	170	EZIB72-4M	78910	171
ES48-4-SF	91668	210	ESS-S	76412	113	EZCRMK24-48	90434	167	EZIB72-5L	78902	168
ES48-4-SN	91657	210	EST-A-B	90816	19	EZCRMK54-60	90261	167	EZIB72-5M	78918	171
ES48-4-TF	91682	210	EST-A-P	90814	19	EZCRMK72	90262	167	EZIRMK	79318	167
ES48-4-TN	91675	210	EST-A-S	90815	19	EZCSK-24	78978	164	EZP-LS212	77127	25
ES48-8-SF	91704	210	EST-B	76405	19	EZCSK-24	78978	167	EZP-LS212HT	77746	26
ES48-8-SN	91693	210	EST-G-S/S	78810	24	EZCSK-24	78978	170	EZP-LS218	77128	25
ES48-8-TF	91718	210	EST-P	76403	19	EZCSK-24	78978	173	EZP-LS218HT	77747	26
ES48-8-TN	91711	210	EST-P-S/S	78808	24	EZCSK-30	78979	164	EZP-LS224	77129	25
ES54-4-SF	91669	210	EST-S	76404	19	EZCSK-30	78979	167	EZP-LS224HT	77748	26
ES54-4-SN	91658	210	EST-W-S/S	78809	24	EZCSK-30	78979	170	EZP-LS230	77130	25
ES54-4-TF	91683	210	ESTAK-EST	76406	19	EZCSK-30	78979	173	EZP-LS230HT	77749	26
ES54-4-TN	91676	210	ESTAK-EST	76406	113	EZCSK-36	78980	164	EZP-LS236	77131	25
ES54-8-SF	91705	210	ESTAK-EST-S/S	78849	24	EZCSK-36	78980	167	EZP-LS236HT	77750	26
ES54-8-SN	91694	210	EZAI-24	79000	162	EZCSK-36	78980	170	EZP-LS242	77132	25
ES54-8-TF	91719	210	EZAI-24I	79091	165	EZCSK-36	78980	173	EZP-LS242HT	77751	26
ES54-8-TN	91712	210	EZAI-24I	79091	174	EZCSK-42	78981	164	EZP-LS248	77133	25
ES60-4-SF	91670	210	EZAI-24I	79091	177	EZCSK-42	78981	167	EZP-LS248HT	77752	26
ES60-4-SN	91659	210	EZAI-30	79001	162	EZCSK-42	78981	170	EZP-LS254	77134	25
ES60-4-TF	91684	210	EZAI-30I	79092	165	EZCSK-42	78981	173	EZP-LS254HT	77753	26
ES60-4-TN	91677	210	EZAI-30I	79092	174	EZCSK-48	78982	164	EZP-LS260	77135	25
ES60-8-SF	91706	210	EZAI-30I	79092	177	EZCSK-48	78982	167	EZP-LS260HT	77754	26
ES60-8-SN	91695	210	EZAI-36	79002	162	EZCSK-48	78982	170	EZP-LS818	77136	25
ES60-8-TF	91720	210	EZAI-36I	79093	165	EZCSK-48	78982	173	EZP-LS824	77137	25
ES60-8-TN	91713	210	EZAI-36I	79093	174	EZCSK-54	78983	164	EZP-LS830	77138	25
ES66-4-SF	91671	210	EZAI-36I	79093	177	EZCSK-54	78983	167	EZP-LS836	77139	25
ES66-4-SN	91660	210	EZAI-42	79003	162	EZCSK-54	78983	170	EZP-LS842	77140	25
ES66-4-TF	91685	210	EZAI-42I	79094	165	EZCSK-54	78983	173	EZP-LS848	77141	25
ES66-4-TN	91678	210	EZAI-42I	79094	174	EZCSK-60	78984	164	EZP-LS854	77142	25
ES66-8-SF	91707	210	EZAI-42I	79094	177	EZCSK-60	78984	167	EZP-LS860	77143	25
ES66-8-SN	91696	210	EZAI-48	79004	162	EZCSK-60	78984	170	EZP1-212	75610	11
ES66-8-TF	91721	210	EZAI-48I	79095	165	EZCSK-60	78984	173	EZP1-212W	78934	15
ES66-8-TN	91714	210	EZAI-48I	79095	174	EZCSK-72	78985	164	EZP1-218	75611	11
ES72-4-SF	91672	210	EZAI-48I	79095	177	EZCSK-72	78985	167	EZP1-218W	78935	15
ES72-4-SN	91661	210	EZAI-54	79005	162	EZCSK-72	78985	170	EZP1-224	75612	11
ES72-4-TF	91686	210	EZAI-54I	79096	165	EZCSK-72	78985	173	EZP1-224W	78936	15
ES72-4-TN	91679	210	EZAI-54I	79096	174	EZIB24-4L	78887	168	EZP1-230	75613	11
ES72-8-SF	91708	210	EZAI-54I	79096	177	EZIB24-4M	78903	171	EZP1-230W	78937	15
ES72-8-SN	91697	210	EZAI-60	79006	162	EZIB24-5L	78895	168	EZP1-236	75614	11
ES72-8-TF	91722	210	EZAI-60I	79097	165	EZIB24-5M	78911	171	EZP1-236W	78938	15
ES72-8-TN	91715	210	EZAI-60I	79097	174	EZIB30-4L	78888	168	EZP1-242	75615	11
ES84-4-SF	91673	210	EZAI-60I	79097	177	EZIB30-4M	78904	171	EZP1-242W	78939	15
ES84-4-SN	91662	210	EZAI-72	79007	162	EZIB30-5L	78896	168	EZP1-248	75616	11
ES84-4-TF	91687	210	EZAI-72I	79098	165	EZIB30-5M	78912	171	EZP1-248W	78940	15
ES84-4-TN	91680	210	EZAI-72I	79098	174	EZIB36-4L	78889	168	EZP1-254	75617	11
ES84-8-SF	91709	210	EZAI-72I	79098	177	EZIB36-4M	78905	171	EZP1-254W	78941	15
ES84-8-SN	91698	210	EZBMK-24	78944	170	EZIB36-5L	78897	168	EZP1-260	75618	11
ES84-8-TF	91723	210	EZBMK-24	78944	173	EZIB36-5M	78913	171	EZP1-260W	78942	15
ES84-8-TN	91716	210	EZBMK-30	78945	170	EZIB42-4L	78890	168	EZP1-272	75771	11
ES96-4-SF	91674	210	EZBMK-30	78945	173	EZIB42-4M	78906	171	EZP1-272W	78943	15
ES96-4-SN	91663	210	EZBMK-36	78946	170	EZIB42-5L	78898	168	EZP1-818	75779	11
ES96-4-TF	91688	210	EZBMK-36	78946	173	EZIB42-5M	78914	171	EZP1-824	75780	11
ES96-4-TN	91681	210	EZBMK-42	78947	170	EZIB48-4L	78891	168	EZP1-830	75781	11
ES96-8-SF	91710	210	EZBMK-42	78947	173	EZIB48-4M	78907	171	EZP1-836	75782	11
ES96-8-SN	91699	210	EZBMK-48	78948	170	EZIB48-5L	78899	168	EZP1-842	75783	11
ES96-8-TF	91724	210	EZBMK-48	78948	173	EZIB48-5M	78915	171	EZP1-848	75784	11
ES96-8-TN	91717	210	EZBMK-54	78949	170	EZIB54-4L	78892	168	EZP1-854	75785	11
ESBK-ATEX	90264	19	EZBMK-54	78949	173	EZIB54-4M	78908	171	EZP1-860	75786	11
ESBK-B	76411	19	EZBMK-60	78950	170	EZIB54-5L	78900	168	EZP1-872	75774	11

INDEX By Ordering Number

Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #
EZP1-UHT1424	91245	14	EZP1P72-S/S	78821	24	EZSB24-4C	78855	162	FL-ACT	70186	231
EZP1-UHT1430	91246	14	EZP1PL	75641	19	EZSB24-4I	78871	165	FL-ADH-0.8	75017	231
EZP1-UHT1436	91247	14	EZP1PL	75641	20	EZSB24-5C	78863	162	FL-CP-I	71141	218
EZP1-UHT1442	91248	14	EZP1PL	75641	139	EZSB24-5I	78879	165	FL-CP-I	71141	218
EZP1-UHT1448	91249	14	EZP1PL-S/S	78848	24	EZSB30-4C	78856	162	FL-CP-ISS	71164	218
EZP1-UHT1454	91250	14	EZP1T-212	78488	12	EZSB30-4I	78872	165	FL-L-SP	76982	220
EZP1-UHT1460	91251	14	EZP1T-218	78489	12	EZSB30-5C	78864	162	FL-M-SP	76981	220
EZP1-UHT1472	91252	14	EZP1T-224	78490	12	EZSB30-5I	78880	165	FL-PC-I	71057	218
EZP1-UHT212	91226	14	EZP1T-230	78491	12	EZSB36-4C	78857	162	FL-PC-ISS	71168	218
EZP1-UHT218	91227	14	EZP1T-236	78492	12	EZSB36-4I	78873	165	FL-PKIT-ML	77250	221
EZP1-UHT224	91228	14	EZP1T-242	78493	12	EZSB36-5C	78865	162	FL-PKIT-XL	77251	221
EZP1-UHT230	91229	14	EZP1T-248	78494	12	EZSB36-5I	78881	165	FL-PR-0.75	70189	231
EZP1-UHT236	91230	14	EZP1T-254	78495	12	EZSB42-4C	78858	162	FL-RBI	71060	218
EZP1-UHT242	91231	14	EZP1T-260	78496	12	EZSB42-4I	78874	165	FL-RBI	71060	218
EZP1-UHT248	91232	14	EZP1T-272	78497	12	EZSB42-5C	78866	162	FL-RPI	71058	218
EZP1-UHT254	91233	14	EZP1T-818	78498	12	EZSB42-5I	78882	165	FL-RPI	71058	218
EZP1-UHT260	91234	14	EZP1T-824	78499	12	EZSB48-4C	78859	162	FL-XL-SP	77386	220
EZP1-UHT272	91235	14	EZP1T-830	78500	12	EZSB48-4I	78875	165	FLCK	77729	220
EZP1-UHT818	91236	14	EZP1T-836	78501	12	EZSB48-5C	78867	162	FLCP	76479	221
EZP1-UHT824	91237	14	EZP1T-842	78502	12	EZSB48-5I	78883	165	FLEL-L	76473	221
EZP1-UHT830	91238	14	EZP1T-848	78503	12	EZSB54-4C	78860	162	FLEL-M	76472	221
EZP1-UHT836	91239	14	EZP1T-854	78504	12	EZSB54-4I	78876	165	FLELK-XL	76986	221
EZP1-UHT842	91240	14	EZP1T-860	78505	12	EZSB54-5C	78868	162	FLELP	76474	221
EZP1-UHT848	91241	14	EZP1T-872	78506	12	EZSB54-5I	78884	165	FLM-PC	71140	218
EZP1-UHT854	91242	14	EZPTBT	77384	20	EZSB60-4C	78861	162	FLRLB-L-SP	77406	221
EZP1-UHT860	91243	14	EZPTBTHD	77385	20	EZSB60-4I	78877	165	FLRLB-M-SP	77405	221
EZP1-UHT872	91244	14	EZPTCK	78508	20	EZSB60-5C	78869	162	FLRP	76478	221
EZP1BP	75642	19	EZPTCKHD	78509	20	EZSB60-5I	78885	165	FLSC-I	71052	218
EZP1BP	75642	20	EZPTMPK	78507	20	EZSB72-4C	78862	162	FLSC-I-50	71054	218
EZP1BP	75642	143	EZPTSK	78511	20	EZSB72-4I	78878	165	FLSC-ISS	75778	218
EZP1BP	75642	147	EZPTSKHD	78512	20	EZSB72-5C	78870	162	FLSCM-I	71055	218
EZP1BP	75642	148	EZPTSR	78510	20	EZSB72-5I	78886	165	FLSCM-I-50	71100	218
EZP1MPK	75637	19	EZRMRK	78952	164	EZWPK-24	78970	164	FLTW-L-SP	77409	221
EZP1MPK-S/S	78923	24	EZS2-18	75643	76	EZWPK-24	78970	167	FLTW-M-SP	77408	221
EZP10TK1	76418	19	EZS2-24	75644	76	EZWPK-24	78970	170	FLTW-XL-SP	77410	221
EZP10TK2	76419	19	EZS2-30	75645	76	EZWPK-24	78970	173	FLVRL-XL-SP	77407	221
EZP1P12	75619	19	EZS2-36	75646	76	EZWPK-30	78971	164	FLXCP	91430	110
EZP1P12	75619	20	EZS2-42	75647	76	EZWPK-30	78971	167	FLXEP	91431	110
EZP1P12-S/S	78812	24	EZS2-48	75648	76	EZWPK-30	78971	170	FMS-18-YST	90545	95
EZP1P18	75620	19	EZS2-54	75649	76	EZWPK-30	78971	173	FMS-24-YST	90546	95
EZP1P18	75620	20	EZS2-60	75650	76	EZWPK-36	78972	164	FMS-30-YST	90547	95
EZP1P18-S/S	78813	24	EZS2-72	75651	76	EZWPK-36	78972	167	FMS-36-YST	90548	95
EZP1P24	75621	19	EZS2MBK	75666	79	EZWPK-36	78972	170	FMS-42-YST	90549	95
EZP1P24	75621	20	EZS2MBK	75666	91	EZWPK-36	78972	173	FMS-48-YST	90550	95
EZP1P24-S/S	78814	24	EZS2MBK	75666	94	EZWPK-42	78973	164	FMS-54-YST	90551	95
EZP1P30	75622	19	EZS2MBK	75666	121	EZWPK-42	78973	167	FMS-60-YST	90552	95
EZP1P30	75622	20	EZS2MBK	75666	140	EZWPK-42	78973	170	FMS-72-YST	90553	95
EZP1P30-S/S	78815	24	EZS2P18	75652	79	EZWPK-42	78973	173	FMSC	79699	97
EZP1P36	75623	19	EZS2P18	75652	140	EZWPK-48	78974	164	H-MK1	78987	139
EZP1P36	75623	20	EZS2P24	75653	79	EZWPK-48	78974	167	H-MK2	78801	139
EZP1P36-S/S	78816	24	EZS2P24	75653	140	EZWPK-48	78974	170	H2P18	79358	67
EZP1P42	75624	19	EZS2P30	75654	79	EZWPK-48	78974	173	H2P24	79359	67
EZP1P42	75624	20	EZS2P30	75654	140	EZWPK-54	78975	164	H2P30	79360	67
EZP1P42-S/S	78817	24	EZS2P36	75655	79	EZWPK-54	78975	167	H2P36	79361	67
EZP1P48	75625	19	EZS2P36	75655	140	EZWPK-54	78975	170	H2P42	79362	67
EZP1P48	75625	20	EZS2P42	75656	79	EZWPK-54	78975	173	H2P48	79363	67
EZP1P48-S/S	78818	24	EZS2P42	75656	140	EZWPK-60	78976	164	H2P54	79364	67
EZP1P54	75626	19	EZS2P48	75657	79	EZWPK-60	78976	167	H2P60	79365	67
EZP1P54	75626	20	EZS2P48	75657	140	EZWPK-60	78976	170	H2P72	79366	67
EZP1P54-S/S	78819	24	EZS2P54	75658	79	EZWPK-60	78976	173	H2RC	79374	67
EZP1P60	75627	19	EZS2P54	75658	140	EZWPK-72	78977	164	H2SA6L	79372	65
EZP1P60	75627	20	EZS2P60	75659	79	EZWPK-72	78977	167	H2SA6L	79372	67
EZP1P60-S/S	78820	24	EZS2P60	75659	140	EZWPK-72	78977	170	H2SA6LL	79373	65
EZP1P72	75772	19	EZS2P72	75660	79	EZWPK-72	78977	173	H2SA6LL	79373	67
EZP1P72	75772	20	EZS2P72	75660	140	FFCK	75661	79	H2SA6M	79371	65

INDEX By Ordering Number

Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #
H2SA6M	79371	67	HSA8M	73049	72	HV-30SS	76103	70	HV2T-S/S	79367	65
H2SA6S	79370	65	HSA8M	73049	74	HV-36L	76198	70	HV2T-S/S	79367	67
H2SA6S	79370	67	HSA8M	73049	75	HV-36M	76197	70	HVP-18L	76268	72
H2SA6SS	79369	65	HSA8M	73049	139	HV-36S	76196	70	HVP-18M	76267	72
H2SA6SS	79369	67	HSA8S	73048	70	HV-36SS	76104	70	HVP-18S	76124	72
H78P18	76110	74	HSA8S	73048	72	HV-42L	76252	70	HVP-24L	76270	72
H78P24	76111	74	HSA8S	73048	74	HV-42LL	76253	70	HVP-24M	76269	72
H78P30	76112	74	HSA8S	73048	75	HV-42M	76251	70	HVP-24S	76125	72
H78P36	76113	74	HSA8S	73048	139	HV-42S	76199	70	HVP-30L	76272	72
H78P42	76114	74	HSA8SS	73047	70	HV-42SS	76105	70	HVP-30M	76271	72
H78P48	76115	74	HSA8SS	73047	72	HV-48L	76256	70	HVP-30S	76126	72
H78P54	76116	74	HSA8SS	73047	74	HV-48LL	76257	70	HVP-36L	76274	72
H78P60	76117	74	HSA8SS	73047	75	HV-48M	76255	70	HVP-36M	76273	72
H78P72	76118	74	HSA8SS	73047	139	HV-48S	76254	70	HVP-36S	76127	72
HAR-K	78786	19	HSA8SSS	75565	139	HV-48SS	76106	70	HVP-42L	76276	72
HAR-K	78786	139	HSSCS	74772	74	HV-54L	76259	70	HVP-42M	76275	72
HTBK	74776	139	HSSCS	74772	139	HV-54LL	76260	70	HVP-42S	76128	72
HDARK	74550	139	HSSTS	74771	74	HV-54M	76258	70	HVP-48L	76278	72
HDR24	79010	137	HSSTS	74771	139	HV-54S	76107	70	HVP-48LL	76279	72
HDR30	79011	137	HTF212	76658	13	HV-60L	76262	70	HVP-48M	76277	72
HDR36	79012	137	HTF218	76659	13	HV-60LL	76263	70	HVP-48S	76129	72
HDR42	79013	137	HTF224	76660	13	HV-60M	76261	70	HVP-54L	76281	72
HDR48	79014	137	HTF230	76661	13	HV-60S	76108	70	HVP-54LL	76282	72
HDR54	79015	137	HTF236	76662	13	HV-72L	76265	70	HVP-54M	76280	72
HDR60	79016	137	HTF242	76663	13	HV-72LL	76266	70	HVP-54S	76130	72
HDRBK	79009	137	HTF248	76664	13	HV-72M	76264	70	HVP-60L	76284	72
HDRBK-HD	79072	137	HTF254	76665	13	HV-72S	76109	70	HVP-60LL	76285	72
HDRGEK	79236	137	HTF260	76666	13	HV2-18M	79325	65	HVP-60M	76283	72
HDRR24	79019	137	HTF272	76667	13	HV2-18S	79324	65	HVP-60S	76131	72
HDRR30	79020	137	HTS18	76085	77	HV2-18SS	79323	65	HVP-72L	76287	72
HDRR36	79021	137	HTS24	76086	77	HV2-24M	79328	65	HVP-72LL	76288	72
HDRR42	79022	137	HTS30	76087	77	HV2-24S	79327	65	HVP-72M	76286	72
HDRR48	79023	137	HTS36	76088	77	HV2-24SS	79326	65	HVP-72S	76132	72
HDRR54	79024	137	HTS42	76089	77	HV2-30M	79331	65	HVPPT	73631	72
HDRR60	79025	137	HTS48	76090	77	HV2-30S	79330	65	HVPPT	73631	74
HDRRS72	79026	137	HTS54	76091	77	HV2-30SS	79329	65	HVPPT	73631	139
HDRRS84	79027	137	HTS60	76092	77	HV2-36L	79335	65	HVT8-S/S	75419	70
HDRS72	79017	137	HTS72	76093	77	HV2-36M	79334	65	HVT8-S/S	75419	74
HDRS84	79018	137	HTSCK	76094	77	HV2-36S	79333	65	HVT8-S/S	75419	75
HTDS	74502	19	HTSCK	76094	79	HV2-36SS	79332	65	HVT8-S/S	75419	139
HTDS	74502	113	HTTS	74141	138	HV2-42L	79339	65	HW-BC	74100	138
HTDS	74502	139	HTTS-HT	79068	75	HV2-42LL	79340	65	HW-IMPB	76939	191
HFC2	75901	74	HTV18S	74828	75	HV2-42M	79338	65	HXF2-18M	76290	68
HFC2	75901	139	HTV18SS	74821	75	HV2-42S	79337	65	HXF2-18S	76289	68
HOBK	76399	67	HTV24S	74829	75	HV2-42SS	79336	65	HXF2-18SS	76138	68
HOBK	76399	74	HTV24SS	74822	75	HV2-48L	79344	65	HXF2-24M	76292	68
HP-18	78990	139	HTV30S	74830	75	HV2-48LL	79345	65	HXF2-24S	76291	68
HP-24	78991	139	HTV30SS	74823	75	HV2-48M	79343	65	HXF2-24SS	76139	68
HP-30	78992	139	HTV36M	74838	75	HV2-48S	79342	65	HXF2-30M	76294	68
HP-36	78993	139	HTV36S	74831	75	HV2-48SS	79341	65	HXF2-30S	76293	68
HP-42	78994	139	HTV36SS	74824	75	HV2-54L	79348	65	HXF2-30SS	76140	68
HP-48	78995	139	HTV42M	74839	75	HV2-54LL	79349	65	HXF2-36L	76297	68
HP-54	78996	139	HTV42S	74832	75	HV2-54M	79347	65	HXF2-36M	76296	68
HP-60	78997	139	HTV42SS	74825	75	HV2-54S	79346	65	HXF2-36S	76295	68
HP-72	78998	139	HTV48M	74840	75	HV2-60L	79352	65	HXF2-36SS	76141	68
HPS8	73050	139	HTV48S	74833	75	HV2-60LL	79353	65	HXF2-42L	76300	68
HSA8L	73063	70	HTV48SS	74826	75	HV2-60M	79351	65	HXF2-42M	76299	68
HSA8L	73063	72	HV-18M	76191	70	HV2-60S	79350	65	HXF2-42S	76298	68
HSA8L	73063	74	HV-18S	76190	70	HV2-72L	79356	65	HXF2-42SS	76142	68
HSA8L	73063	139	HV-18SS	76101	70	HV2-72LL	79357	65	HXF2-48L	76303	68
HSA8LL	73064	70	HV-24M	76193	70	HV2-72M	79355	65	HXF2-48M	76302	68
HSA8LL	73064	72	HV-24S	76192	70	HV2-72S	79354	65	HXF2-48S	76301	68
HSA8LL	73064	74	HV-24SS	76102	70	HV2PT	79368	65	HXF2-48SS	76143	68
HSA8LL	73064	139	HV-30M	76195	70	HV2PT	79368	67	HXF2-54L	76306	68
HSA8M	73049	70	HV-30S	76194	70	HV2SSTS	79375	67	HXF2-54M	76305	68

INDEX By Ordering Number

Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #
HXF2-54S	76304	68	ICT6	74535	76	LA-60	91836	214	MAKHD2	79382	208
HXF2-54SS	76144	68	ICT6	74535	77	LA-66	91837	214	MAKHD2-S/S	90049	209
HXF2-60L	76308	68	ICT6	74535	79	LA-72	91838	214	MAKSD	74920	208
HXF2-60M	76307	68	ICT6	74535	88	LA-84	91839	214	MAKSD-S/S	90057	209
HXF2-60S	76145	68	ICT6	74535	89	LA-96	91840	214	MAPEK	76024	129
HXF2-72L	76310	68	ICT6	74535	91	LAGGING-TB	79080	231	MBADB	79527	120
HXF2-72M	76309	68	ICT6	74535	92	LAGGING-TB2	79099	231	MBC-18	79494	118
HXF2-72S	76146	68	ICT6	74535	94	LS-BP	77114	29	MBC-18-575V	79914	118
HXF2-L	75982	68	ICT6	74535	95	LS-BP-S/S	77115	33	MBC-18-575V-S	91581	118
HXF2-L	75982	74	ICT6	74535	97	LS-SPK	77365	29	MBC-18-S	91571	118
HXF2-L	75982	139	ICT6	74535	98	LS-SS	77118	29	MBC-24	79495	118
HXF2-M	75981	68	ICT6	74535	99	LS-SW	77117	29	MBC-24-575V	79915	118
HXF2-M	75981	74	ICT6	74535	100	LS-SW-S/S	78850	33	MBC-24-575V-S	91582	118
HXF2-M	75981	139	ICT6	74535	104	LSHD-RPK	30390	225	MBC-24-S	91572	118
HXF2-S	75980	68	ICT6	74535	106	LSHD30	30393	225	MBC-30	79496	118
HXF2-S	75980	74	ICT6	74535	107	LSHD36	30394	225	MBC-30-575V	79916	118
HXF2-S	75980	139	ICT6	74535	110	LSHD42	30395	225	MBC-30-575V-S	91583	118
HXF2-SS	75979	68	ICT6	74535	140	LSHD48	30396	225	MBC-30-S	91573	118
HXF2-SS	75979	74	ICT6-S/S	78700	106	LSHD54	30397	225	MBC-36	79497	118
HXF2-SS	75979	139	IDHINGE	79316	131	LSHD60	30398	225	MBC-36-575V	79917	118
HXF8L	74691	68	IDLATCH	79317	131	LSHD72	30399	225	MBC-36-575V-S	91584	118
HXF8L	74691	139	IDSC-1212	79311	131	LSHDB30-2	30418	225	MBC-36-S	91574	118
HXF8M	74690	68	IDSC-1218	79312	131	LSHDB36-2	30414	225	MBC-42	79498	118
HXF8M	74690	139	IDSC-1824	79313	131	LSHDB42-2	30421	225	MBC-42-575V	79918	118
HXF8S	74689	68	IDSC-2424	79314	131	LSHDB48-2	30423	225	MBC-42-575V-S	91585	118
HXF8S	74689	139	IDSEAL	79315	131	LSHDB54-2	30424	225	MBC-42-S	91575	118
HXF8SS	74307	68	IEA-42-60	76937	187	LSHDB60-2	30430	225	MBC-48	79499	118
HXF8SS	74307	139	IEA-42-60	76937	189	LSHDB72-2	30408	225	MBC-48-575V	79919	118
HXFC2	75902	74	IEA-72-96	76938	187	LSHDCBS	30373	225	MBC-48-575V-S	91586	118
HXFC2	75902	139	IEA-72-96	76938	189	LSHDLR	30400	225	MBC-48-S	91576	118
IB4	76926	167	IMK	76936	181	LSHDPP	30052	225	MBC-54	79500	118
IB4	76926	170	IMK	76936	183	LSHDS	30392	225	MBC-54-575V	79920	118
IB4	76926	173	IMK	76936	185	LSP12	77070	29	MBC-54-575V-S	91587	118
IB4	76926	181	INDR-1212	79303	131	LSP12-S/S	77079	33	MBC-54-S	91577	118
IB4	76926	183	INDR-1212S	79307	131	LSP18	77071	29	MBC-60	79501	118
IB4	76926	185	INDR-1218	79304	131	LSP18-S/S	77080	33	MBC-60-575V	79921	118
IB4-1U	76965	191	INDR-1218S	79308	131	LSP24	77072	29	MBC-60-575V-S	91588	118
IB5	76927	167	INDR-1824	79305	131	LSP24-S/S	77081	33	MBC-60-S	91578	118
IB5	76927	170	INDR-1824S	79309	131	LSP30	77073	29	MBC-72	79502	118
IB5	76927	173	INDR-2424	79306	131	LSP30-S/S	77082	33	MBC-72-575V	79922	118
IB5	76927	181	INDR-2424S	79310	131	LSP36	77074	29	MBC-72-575V-S	91589	118
IB5	76927	183	ISABK	76935	187	LSP36-S/S	77083	33	MBC-72-S	91579	118
IB5	76927	185	ISABK	76935	189	LSP42	77075	29	MBC-84	79503	118
IB5	76927	187	ISABK-LMH	77529	181	LSP42-S/S	77084	33	MBC-84-575V	79923	118
IB5	76927	189	ISABK-LMH	77529	183	LSP48	77076	29	MBC-84-575V-S	91590	118
IB5-1U	76966	191	ISABK-LMH	77529	185	LSP48-S/S	77085	33	MBC-84-S	91580	118
IBBK	76928	164	ISC	74534	140	LSP54	77077	29	MBCB	79526	120
IBBK	76928	167	JNK-A	79891	19	LSP54-S/S	77086	33	MBCBC	79525	120
IBBK	76928	170	JNK-B	79892	29	LSP60	77078	29	MBCBL	79532	120
IBBK	76928	173	JNK-C	79893	39	LSP60-S/S	77087	33	MBCBM	79528	120
IBBK	76928	181	JNK-C	79893	47	LST-B-S/S	77124	33	MBCDBK	79536	118
IBBK	76928	183	JNK-C	79893	67	LST-P	77121	29	MBCDBK	79536	120
IBBK	76928	185	JNK-C	79893	74	LST-S	77123	29	MBCDBK	79536	129
IBBK	76928	187	JNK-C	79893	104	LST-TAK	77120	29	MBCCEC	79534	120
IBBK	76928	189	JNK-C	79893	113	LST-W	77122	29	MBCM-1	79529	120
IBS-D5	77530	187	JNK-C	79893	117	LST-W-S/S	77125	33	MBCM-1-S	91591	120
IBS-DX5	111728	189	JNK-D	79894	55	LST-W-S/S-2	77126	33	MBCM-2	79530	120
IBS-H4	76933	185	JNK-D	79894	60	LSTMPK	77366	29	MBCM-2-S	91592	120
IBS-H5	76934	185	JNK-G	114390	113	LSTMPK-S/S	78933	33	MBCM-575-1	79924	120
IBS-L4	76929	181	LA-24	91762	214	LSTMPK2-S/S	78462	33	MBCM-575-1-S	91593	120
IBS-L5	76930	181	LA-30	91763	214	LSTPB-RK	77367	29	MBCM-575-2	79925	120
IBS-M4	76931	173	LA-36	91764	214	MAK	74918	208	MBCM-575-2-S	91594	120
IBS-M4	76931	183	LA-42	91765	214	MAK2	79381	208	MBCMK	79524	120
IBS-M5	76932	173	LA-48	91766	214	MAK2-S/S	90048	209	MBCMKK	79533	120
IBS-M5	76932	183	LA-54	91835	214	MAKHD	74919	208	MBCTA	79531	120

INDEX By Ordering Number

Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #
MBDS-18	79504	120	MDWS-24	75868	114	MHCP-BCK84	76810	58	MHP-2484P	78681	50
MBDS-24	79505	120	MDWS-24P	78745	114	MHCP-BCK96	78957	58	MHP-2496	78675	49
MBDS-30	79506	120	MDWS-30	75869	114	MHCP-BPA24	75945	58	MHP-2496P	78682	50
MBDS-36	79507	120	MDWS-30P	78746	114	MHCP-BPA30	75946	58	MHP-6108P	90159	50
MBDS-42	79508	120	MDWS-36	75870	114	MHCP-BPA36	75947	58	MHP-6120P	90160	50
MBDS-48	79509	120	MDWS-36P	78747	114	MHCP-BPA42	75948	58	MHP-624	77703	49
MBDS-54	79510	120	MDWS-42	75871	114	MHCP-BPA48	75949	58	MHP-624P	78599	50
MBDS-60	79511	120	MDWS-42P	78748	114	MHCP-BPA54	75950	58	MHP-630	77704	49
MBDS-72	79512	120	MDWS-48	75872	114	MHCP-BPA60	75951	58	MHP-630P	78600	50
MBDS-84	79513	120	MDWS-48P	78749	114	MHCP-BPA72	75952	58	MHP-636	77705	49
MBRD-18	79514	118	MDWS-54	75873	114	MHCP-BPA84	76809	58	MHP-636P	78601	50
MBRD-18	79514	120	MDWS-54P	78750	114	MHCP-BPA96	78956	58	MHP-642	77706	49
MBRD-24	79515	118	MDWS-60	75874	114	MHCP-BS	76394	60	MHP-642P	78602	50
MBRD-24	79515	120	MDWS-60P	78751	114	MHCP-CH	76393	60	MHP-648	77707	49
MBRD-30	79516	118	MDWS-72	75875	114	MHP-12108P	90161	50	MHP-648P	78603	50
MBRD-30	79516	120	MDWS-72P	78752	114	MHP-12120P	90162	50	MHP-654	77708	49
MBRD-36	79517	118	MDWS-84	76806	114	MHP-1230	77713	49	MHP-654P	78604	50
MBRD-36	79517	120	MDWS-84P	78753	114	MHP-1230P	78609	50	MHP-660	77709	49
MBRD-42	79518	118	MDWS-96	79063	114	MHP-1236	77714	49	MHP-660P	78605	50
MBRD-42	79518	120	MDWS-96P	79064	114	MHP-1236P	78610	50	MHP-672	77710	49
MBRD-48	79519	118	METABO-CHGR110	30369	224	MHP-1242	77715	49	MHP-672P	78606	50
MBRD-48	79519	120	METABO-CHGR220	114974	224	MHP-1242P	78611	50	MHP-684	77711	49
MBRD-54	79520	118	MFASK	75531	208	MHP-1248	77716	49	MHP-684P	78607	50
MBRD-54	79520	120	MFASKHD	79571	208	MHP-1248P	78612	50	MHP-696	77712	49
MBRD-60	79521	118	MFASKHD-S/S	90050	209	MHP-1254	77717	49	MHP-696P	78608	50
MBRD-60	79521	120	MHCP-108P	90169	56	MHP-1254P	78613	50	MHP-CP24	75961	60
MBRD-72	79522	118	MHCP-120P	90170	56	MHP-1260	77718	49	MHP-CP30	75962	60
MBRD-72	79522	120	MHCP-24P	78723	56	MHP-1260P	78614	50	MHP-CP36	75963	60
MBRD-84	79523	118	MHCP-24S	75929	56	MHP-1272	77719	49	MHP-CP42	75964	60
MBRD-84	79523	120	MHCP-2BC24	76638	60	MHP-1272P	78615	50	MHP-CP48	75965	60
MCB	74925	207	MHCP-2BC30	76639	60	MHP-1284	77720	49	MHP-CP54	75966	60
MCB	74925	208	MHCP-2BC36	76640	60	MHP-1284P	78616	50	MHP-CP60	75967	60
MCB	74925	209	MHCP-2BC42	76641	60	MHP-1296	77721	49	MHP-CP72	75968	60
MCBK	76025	207	MHCP-2BC48	76642	60	MHP-1296P	78617	50	MHP-CP84	76811	60
MCBK	76025	208	MHCP-2BC54	76643	60	MHP-18108P	90163	50	MHP-CP96	78958	60
MCBK	76025	209	MHCP-2BC60	76644	60	MHP-18120P	90164	50	MHP-EP	76392	47
MCBKHD	76026	207	MHCP-2BC72	76645	60	MHP-1836	78591	49	MHP-EP	76392	55
MCBKHD	76026	208	MHCP-2BC84	76812	60	MHP-1836P	78618	50	MHP-EP	76392	60
MCBKHD	76026	209	MHCP-2BC96	78986	60	MHP-1842	78592	49	MHP-EP	76392	110
MCBKSD	114404	208	MHCP-30P	78724	56	MHP-1842P	78619	50	MHP-EP-S/S	77599	48
MCBKSD	114404	209	MHCP-30S	75930	56	MHP-1848	78593	49	MHPBPK	77728	55
MCBSD	74926	208	MHCP-36P	78725	56	MHP-1848P	78620	50	MHPMPK	77727	55
MCBSD	74926	209	MHCP-36S	75931	56	MHP-1854	78594	49	MHPMPK	77727	60
MCRK	74923	207	MHCP-42P	78726	56	MHP-1854P	78621	50	MHS-120-2ESAC	77852	107
MCRK	74923	208	MHCP-42S	75932	56	MHP-1860	78595	49	MHS-120V-2ESAC	77865	107
MCRK	74923	209	MHCP-48P	78727	56	MHP-1860P	78622	50	MHS-18RUV	79748	98
MCRKSD	74924	208	MHCP-48S	75933	56	MHP-1872	78596	49	MHS-18RV	76646	100
MCRKSD	74924	209	MHCP-54P	78728	56	MHP-1872P	78623	50	MHS-18V	76169	99
MCS	74930	207	MHCP-54S	75934	56	MHP-1884	78597	49	MHS-24	75910	99
MCS	74930	208	MHCP-60P	78729	56	MHP-1884P	78624	50	MHS-24-ESAC	77840	107
MCS	74930	209	MHCP-60S	75935	56	MHP-1896	78598	49	MHS-24-S/S	77601	102
MCSHD	74931	207	MHCP-72P	78730	56	MHP-1896P	78625	50	MHS-24P	78736	100
MCSHD	74931	208	MHCP-72S	75936	56	MHP-24108P	90165	50	MHS-24R	76613	100
MCSHD	74931	209	MHCP-84P	78731	56	MHP-24120P	90166	50	MHS-24R-S/S	77640	102
MCSK	74927	207	MHCP-84S	76800	56	MHP-2442	78669	49	MHS-24RU	79738	98
MCSK	74927	208	MHCP-96P	78959	56	MHP-2442P	78676	50	MHS-24RUV	79749	98
MCSK	74927	209	MHCP-96S	78955	56	MHP-2448	78670	49	MHS-24RV	76647	100
MCSKHD	74928	207	MHCP-BCK24	75953	58	MHP-2448P	78677	50	MHS-24RV-S/S	77649	102
MCSKHD	74928	208	MHCP-BCK30	75954	58	MHP-2454	78671	49	MHS-24V	76170	99
MCSKHD	74928	209	MHCP-BCK36	75955	58	MHP-2454P	78678	50	MHS-24V-ESAC	77853	107
MCSKSD	74929	208	MHCP-BCK42	75956	58	MHP-2460	78672	49	MHS-24V-S/S	77610	102
MCSKSD	74929	209	MHCP-BCK48	75957	58	MHP-2460P	78679	50	MHS-30	75911	99
MCSSD	74932	208	MHCP-BCK54	75958	58	MHP-2472	78673	49	MHS-30-ESAC	77841	107
MCSSD	74932	209	MHCP-BCK60	75959	58	MHP-2472P	78680	50	MHS-30-S/S	77602	102
MDWS-108P	90177	114	MHCP-BCK72	75960	58	MHP-2484	78674	49	MHS-30P	78737	100

INDEX By Ordering Number

Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #
MHS-30R	76614	100	MHS-60P**	78742	100	MHS-CARK-V54/1350	77942	108	MIB42-2H	79974	177
MHS-30R-S/S	77641	102	MHS-60R	76619	100	MHS-CARK-V60/1500	77943	108	MIB42CPK	90256	179
MHS-30RU	79739	98	MHS-60R-S/S	77646	102	MHS-CARK-V72/1800	77944	108	MIB42CSK	90240	176
MHS-30RUV	79750	98	MHS-60RU	79744	98	MHS-CARK2-C120/3000	77949	108	MIB42CSK	90240	179
MHS-30RV	76648	100	MHS-60RUV	79755	98	MHS-CARK2-C60/1500	77945	108	MIB42WPK	90248	176
MHS-30RV-S/S	77650	102	MHS-60RV	76653	100	MHS-CARK2-C72/1800	77946	108	MIB42WPK	90248	179
MHS-30V	76171	99	MHS-60RV-S/S	77655	102	MHS-CARK2-C84/2100	77947	108	MIB48-2H	79975	177
MHS-30V-ESAC	77854	107	MHS-60V	76176	99	MHS-CARK2-C96/2400	77948	108	MIB48CPK	90257	179
MHS-30V-S/S	77611	102	MHS-60V-2ESAC	77861	107	MHS-CARK2-V120/3000	77954	108	MIB48CSK	90241	176
MHS-36	75912	99	MHS-60V-ESAC	77859	107	MHS-CARK2-V60/1500	77950	108	MIB48CSK	90241	179
MHS-36-ESAC	77842	107	MHS-60V-S/S	77616	102	MHS-CARK2-V72/1800	77951	108	MIB48WPK	90249	176
MHS-36-S/S	77603	102	MHS-72	75917	99	MHS-CARK2-V84/2100	77952	108	MIB48WPK	90249	179
MHS-36P	78738	100	MHS-72-2ESAC	77849	107	MHS-CARK2-V96/2400	77953	108	MIB54-2H	79976	177
MHS-36R	76615	100	MHS-72-ESAC	77847	107	MHSP-18	76178	97	MIB54CPK	90258	179
MHS-36R-S/S	77642	102	MHS-72-S/S	77608	102	MHSP-18	76178	104	MIB54CSK	90242	176
MHS-36RU	79740	98	MHS-72P**	78743	100	MHSP-24	75918	97	MIB54CSK	90242	179
MHS-36RUV	79751	98	MHS-72R	76620	100	MHSP-24	75918	104	MIB54WPK	90250	176
MHS-36RV	76649	100	MHS-72R-S/S	77647	102	MHSP-30	75919	97	MIB54WPK	90250	179
MHS-36RV-S/S	77651	102	MHS-72RU	79745	98	MHSP-30	75919	104	MIB60-2H	79977	177
MHS-36V	76172	99	MHS-72RUV	79756	98	MHSP-36	75920	97	MIB60CPK	90259	179
MHS-36V-ESAC	77855	107	MHS-72RV	76654	100	MHSP-36	75920	104	MIB60CSK	90243	176
MHS-36V-S/S	77612	102	MHS-72RV-S/S	77656	102	MHSP-42	75921	97	MIB60CSK	90243	179
MHS-42	75913	99	MHS-72V	76177	99	MHSP-42	75921	104	MIB60WPK	90251	176
MHS-42-ESAC	77843	107	MHS-72V-2ESAC	77862	107	MHSP-48	75922	97	MIB60WPK	90251	179
MHS-42-S/S	77604	102	MHS-72V-ESAC	77860	107	MHSP-48	75922	104	MIB72-2H	79978	177
MHS-42P	78739	100	MHS-72V-S/S	77617	102	MHSP-54	75923	97	MIB72CPK	90260	179
MHS-42R	76616	100	MHS-84	76803	99	MHSP-54	75923	104	MIB72CSK	90244	176
MHS-42R-S/S	77643	102	MHS-84-2ESAC	77850	107	MHSP-60	75924	97	MIB72CSK	90244	179
MHS-42RU	79741	98	MHS-84-S/S	77609	102	MHSP-60	75924	104	MIB72WPK	90252	176
MHS-42RUV	79752	98	MHS-84P**	78744	100	MHSP-72	75925	97	MIB72WPK	90252	179
MHS-42RV	76650	100	MHS-84R	76621	100	MHSP-72	75925	104	MMBK	75830	34
MHS-42RV-S/S	77652	102	MHS-84R-S/S	77648	102	MHSP-84	76814	104	MMBK	75830	41
MHS-42V	76173	99	MHS-84RU	79746	98	MHSP-96	79052	104	MMBK	75830	49
MHS-42V-ESAC	77856	107	MHS-84RUV	79757	98	MHSP24-S/S	77620	106	MMBK	75830	56
MHS-42V-S/S	77613	102	MHS-84RV	76805	100	MHSP30-S/S	77621	106	MMBK	75830	129
MHS-48	75914	99	MHS-84RV-S/S	77657	102	MHSP36-S/S	77622	106	MMKU	77324	113
MHS-48-ESAC	77844	107	MHS-84V	76804	99	MHSP42-S/S	77623	106	MMKUHD	77327	113
MHS-48-S/S	77605	102	MHS-84V-2ESAC	77863	107	MHSP48-S/S	77624	106	MMP-12108P	90391	43
MHS-48P	78740	100	MHS-84V-S/S	77618	102	MHSP54-S/S	77625	106	MMP-12120P	90392	43
MHS-48R	76617	100	MHS-96	79043	99	MHSP60-S/S	77626	106	MMP-1230	76551	41
MHS-48R-S/S	77644	102	MHS-96-2ESAC	77851	107	MHSP72-S/S	77627	106	MMP-1230-S/S	77433	42
MHS-48RU	79742	98	MHS-96-S/S	79048	102	MHSP84-S/S	77628	106	MMP-1230P	78715	43
MHS-48RUV	79753	98	MHS-96P**	79047	100	MHSP96-S/S	79053	106	MMP-1236	76552	41
MHS-48RV	76651	100	MHS-96R	79045	100	MIB2-1U	79379	176	MMP-1236-S/S	77434	42
MHS-48RV-S/S	77653	102	MHS-96R-S/S	79050	102	MIB2-1U	79379	179	MMP-1236P	78716	43
MHS-48V	76174	99	MHS-96RU	79747	98	MIB2-1UF	79908	176	MMP-1242	76553	41
MHS-48V-ESAC	77857	107	MHS-96RUV	79758	98	MIB2-1UF	79908	179	MMP-1242-S/S	77435	42
MHS-48V-S/S	77614	102	MHS-96RV	79046	100	MIB24-2H	79971	177	MMP-1242P	78717	43
MHS-54	75915	99	MHS-96RV-S/S	79051	102	MIB24CPK	90253	179	MMP-1248	76554	41
MHS-54-ESAC	77845	107	MHS-96V	79044	99	MIB24CSK	90237	176	MMP-1248-S/S	77436	42
MHS-54-S/S	77606	102	MHS-96V-2ESAC	77864	107	MIB24CSK	90237	179	MMP-1248P	78718	43
MHS-54P	78741	100	MHS-96V-S/S	79049	102	MIB24WPK	90245	176	MMP-1254	76555	41
MHS-54R	76618	100	MHS-CARK-C24/600	77929	108	MIB24WPK	90245	179	MMP-1254-S/S	77437	42
MHS-54R-S/S	77645	102	MHS-CARK-C30/750	77930	108	MIB30-2H	79972	177	MMP-1254P	78719	43
MHS-54RU	79743	98	MHS-CARK-C36/900	77931	108	MIB30CPK	90254	179	MMP-1260	76556	41
MHS-54RUV	79754	98	MHS-CARK-C42/1050	77932	108	MIB30CSK	90238	176	MMP-1260-S/S	77438	42
MHS-54RV	76652	100	MHS-CARK-C48/1200	77933	108	MIB30CSK	90238	179	MMP-1260P	78720	43
MHS-54RV-S/S	77654	102	MHS-CARK-C54/1350	77934	108	MIB30WPK	90246	176	MMP-1272	76557	41
MHS-54V	76175	99	MHS-CARK-C60/1500	77935	108	MIB30WPK	90246	179	MMP-1272-S/S	77439	42
MHS-54V-ESAC	77858	107	MHS-CARK-C72/1800	77936	108	MIB36-2H	79973	177	MMP-1272P	78721	43
MHS-54V-S/S	77615	102	MHS-CARK-V24/600	77937	108	MIB36CPK	90255	179	MMP-1284	76799	41
MHS-60	75916	99	MHS-CARK-V30/750	77938	108	MIB36CSK	90239	176	MMP-1284-S/S	77440	42
MHS-60-2ESAC	77848	107	MHS-CARK-V36/900	77939	108	MIB36CSK	90239	179	MMP-1284P	78722	43
MHS-60-ESAC	77846	107	MHS-CARK-V42/1050	77940	108	MIB36WPK	90247	176	MMP-1296	79034	41
MHS-60-S/S	77607	102	MHS-CARK-V48/1200	77941	108	MIB36WPK	90247	179	MMP-1296-S/S	79036	42

INDEX By Ordering Number

Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #
MMP-1296P	79038	43	MMPCP72	76465	47	MSP-284-S/S	77461	36	MSPP54	75808	117
MMP-1836	77575	41	MMPCP72	76465	55	MSP-824	75795	34	MSPP54-S/S	77477	40
MMP-1842	77576	41	MMPCP72-S/S	77597	48	MSP-824-S/S	77462	36	MSPP60	75809	39
MMP-1848	77577	41	MMPCP84	76808	47	MSP-830	75796	34	MSPP60	75809	117
MMP-1854	77578	41	MMPCP84	76808	55	MSP-830-S/S	77463	36	MSPP60-S/S	77478	40
MMP-1860	77579	41	MMPCP84-S/S	77598	48	MSP-836	75797	34	MSPP66	76695	117
MMP-1872	77580	41	MMPCP96	77722	47	MSP-836-S/S	77464	36	MSPP72	75810	39
MMP-1884	77581	41	MMPCP96	77722	55	MSP-842	75798	34	MSPP72-S/S	77479	40
MMP-1896	79040	41	MMPCP96-S/S	78686	48	MSP-842-S/S	77465	36	MSPP84	76807	39
MMP-6108P	90389	43	MMPK	76537	34	MSP-848	75799	34	MSPP84-S/S	77480	40
MMP-6120P	90390	43	MMPK	76537	41	MSP-848-S/S	77466	36	MSPPL	75816	39
MMP-624	76450	41	MMPK	76537	49	MSP-854	75800	34	MSPPL	75816	67
MMP-624-S/S	77424	42	MMPK	76537	56	MSP-854-S/S	77467	36	MSPPL	75816	74
MMP-624P	78706	43	MMPK	76537	129	MSP-860	75801	34	MSPPL-S/S	77524	40
MMP-630	76451	41	MORK	74921	208	MSP-860-S/S	77468	36	MSR	74914	208
MMP-630-S/S	77425	42	MORK	74921	209	MSP-872	75802	34	MSR2	79378	207
MMP-630P	78707	43	MORKSD	74922	208	MSP-872-S/S	77470	36	MSR2	79378	208
MMP-636	76452	41	MORKSD	74922	209	MSP-884	76797	34	MSR2-S/S	90046	209
MMP-636-S/S	77426	42	MRB18	77531	52	MSP-884-S/S	77471	36	MSRSD	74915	208
MMP-636P	78708	43	MRB24	77532	52	MSP-UHT1442	91280	35	MSRSD-S/S	90055	209
MMP-642	76453	41	MRB30	77533	52	MSP-UHT1448	91281	35	MXP-12108	90643	61
MMP-642-S/S	77427	42	MRB36	77534	52	MSP-UHT1454	91282	35	MXP-12120	90588	61
MMP-642P	78709	43	MRB42	77535	52	MSP-UHT1460	91283	35	MXP-1242	90581	61
MMP-648	76454	41	MRB48	77536	52	MSP-UHT1472	91284	35	MXP-1248	90582	61
MMP-648-S/S	77428	42	MRB54	77537	52	MSP-UHT224	91264	35	MXP-1254	90583	61
MMP-648P	78710	43	MRB60	77538	52	MSP-UHT230	91265	35	MXP-1260	90584	61
MMP-654	76455	41	MRB66	77539	52	MSP-UHT236	91266	35	MXP-1272	90585	61
MMP-654-S/S	77429	42	MRB72	77540	52	MSP-UHT242	91267	35	MXP-1284	90586	61
MMP-654P	78711	43	MRB78	77541	52	MSP-UHT248	91268	35	MXP-1296	90587	61
MMP-660	76456	41	MRB84	77542	52	MSP-UHT254	91269	35	MXP-6108	90642	61
MMP-660-S/S	77430	42	MRB90	77543	52	MSP-UHT260	91270	35	MXP-6120	90400	61
MMP-660P	78712	43	MSB24-2I	79979	174	MSP-UHT272	91271	35	MXP-642	90393	61
MMP-672	76457	41	MSB24RMK	79991	174	MSP-UHT824	91272	35	MXP-648	90394	61
MMP-672-S/S	77431	42	MSB30-2I	79980	174	MSP-UHT830	91273	35	MXP-654	90395	61
MMP-672P	78713	43	MSB30RMK	79992	174	MSP-UHT836	91274	35	MXP-660	90396	61
MMP-684	76798	41	MSB36-2I	79981	174	MSP-UHT842	91275	35	MXP-672	90397	61
MMP-684-S/S	77432	42	MSB36RMK	79993	174	MSP-UHT848	91276	35	MXP-684	90398	61
MMP-684P	78714	43	MSB42-2I	79982	174	MSP-UHT854	91277	35	MXP-696	90399	61
MMP-696	79033	41	MSB42RMK	79994	174	MSP-UHT860	91278	35	MXPP-12108	90645	64
MMP-696-S/S	79035	42	MSB48-2I	79983	174	MSP-UHT872	91279	35	MXPP-12120	90629	64
MMP-696P	79037	43	MSB48RMK	79995	174	MSPPB	107852	39	MXPP-1242	90622	64
MMPBPK	76466	47	MSB54-2I	79984	174	MSPPB	107852	40	MXPP-1248	90623	64
MMPBPK	76466	146	MSB54RMK	79996	174	MSPPB	107852	117	MXPP-1254	90624	64
MMPBPK-S/S	77600	48	MSB60-2I	79985	174	MSPPBK-S/S	77583	24	MXPP-1260	90625	64
MMPCP24	76458	47	MSB60RMK	79997	174	MSPPMK	75811	39	MXPP-1272	90626	64
MMPCP24	76458	55	MSB72-2I	79986	174	MSPPMK	75811	47	MXPP-1284	90627	64
MMPCP24-S/S	77590	48	MSB72RMK	79998	174	MSPPMK	75811	67	MXPP-1296	90628	64
MMPCP30	76459	47	MSBRMK	79987	176	MSPPMK	75811	74	MXPP-6108	90644	64
MMPCP30	76459	55	MSP-224	75787	34	MSPPMK-S/S	77582	40	MXPP-6120	90596	64
MMPCP30-S/S	77591	48	MSP-224-S/S	77453	36	MSPPMK-S/S	77582	48	MXPP-642	90589	64
MMPCP36	76460	47	MSP-230	75788	34	MSPP24	75803	39	MXPP-648	90590	64
MMPCP36	76460	55	MSP-230-S/S	77454	36	MSPP24-S/S	77472	40	MXPP-654	90591	64
MMPCP36-S/S	77592	48	MSP-236	75789	34	MSPP30	75804	39	MXPP-660	90592	64
MMPCP42	76461	47	MSP-236-S/S	77455	36	MSPP30	75804	117	MXPP-672	90593	64
MMPCP42	76461	55	MSP-242	75790	34	MSPP30-S/S	77473	40	MXPP-684	90594	64
MMPCP42-S/S	77593	48	MSP-242-S/S	77456	36	MSPP36	75805	39	MXPP-696	90595	64
MMPCP48	76462	47	MSP-248	75791	34	MSPP36	75805	117	MXPPBK	90607	64
MMPCP48	76462	55	MSP-248-S/S	77457	36	MSPP36-S/S	77474	40	MXPPE	90598	64
MMPCP48-S/S	77594	48	MSP-254	75792	34	MSPP42	75806	39	N6D3T-24-9-A45	26107	164
MMPCP54	76463	47	MSP-254-S/S	77458	36	MSPP42	75806	117	N6D3T-30-11-A45	26108	164
MMPCP54	76463	55	MSP-260	75793	34	MSPP42-S/S	77475	40	N6D3T-36-13-A45	26109	164
MMPCP54-S/S	77595	48	MSP-260-S/S	77459	36	MSPP48	75807	39	N6D3T-42-15-A45	26110	164
MMPCP60	76464	47	MSP-272	75794	34	MSPP48	75807	117	N6D3T-48-17-A45	26111	164
MMPCP60	76464	55	MSP-272-S/S	77460	36	MSPP48-S/S	77476	40	N6D3T-54-19-A45	26112	164
MMPCP60-S/S	77596	48	MSP-284	76796	34	MSPP54	75808	39	N6D3T-60-21-A45	26113	164

INDEX By Ordering Number

Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #
N16D3T-72-25-A45	26114	164	PC54	74572	88	PSTA-S/S	77442	40	PTM42T-S/S	90004	205
N16D3T-24-9-A45	26184	167	PC60	74573	88	PSTA-S/S	77442	48	PTM42VR	79672	204
N16D3T-24-9-A45	26184	176	PC72	74574	88	PSTS-R	77726	55	PTM42VR-S/S	90026	205
N16D3T-30-11-A45	26185	167	PFC	75927	104	PSTS-R	77726	60	PTM48R	74902	204
N16D3T-30-11-A45	26185	176	PFC	75927	110	PSTS-S	75899	47	PTM48R-S/S	90016	205
N16D3T-36-13-A45	26186	167	PFC-SS	76560	106	PSTS-S	75899	55	PTM48T	74888	204
N16D3T-36-13-A45	26186	176	PFRS	76622	100	PSTS-S	75899	60	PTM48T-S/S	90005	205
N16D3T-42-15-A45	26187	167	PFRS	76622	104	PSTS-S	75899	67	PTM48VR	79673	204
N16D3T-42-15-A45	26187	176	PFRS	76622	106	PSTS-S	75899	74	PTM48VR-S/S	90027	205
N16D3T-48-17-A45	26188	167	PFRS	76622	107	PSTS-W	75898	39	PTM54R	74903	204
N16D3T-48-17-A45	26188	176	PFS-ESAC	79073	107	PSTS-W	75898	47	PTM54R-S/S	90017	205
N16D3T-54-19-A45	26189	167	PHA	73626	91	PSTS-W	75898	55	PTM54T	74889	204
N16D3T-54-19-A45	26189	176	PLSC18	75588	89	PSTS-W	75898	60	PTM54T-S/S	90006	205
N16D3T-60-21-A45	26190	167	PLSC24	75589	89	PSTS-W	75898	67	PTM54VR	79674	204
N16D3T-60-21-A45	26190	176	PLSC30	75590	89	PSTS-W	75898	74	PTM54VR-S/S	90028	205
N16D3T-72-25-A45	26191	167	PLSC36	75591	89	PSTS-W	75898	113	PTM60R	74904	204
N16D3T-72-25-A45	26191	176	PLSC42	75592	89	PTEZ-18	90265	196	PTM60R-S/S	90018	205
OIBBK	76950	191	PLSC48	75593	89	PTEZ-24	90266	196	PTM60T	74890	204
PAB	75513	79	PLSC54	75594	89	PTEZ-30	90267	196	PTM60T-S/S	90007	205
PAB	75513	91	PLSP18	75595	91	PTEZ-36	90268	196	PTM60VR	79675	204
PAB	75513	94	PLSP24	75596	91	PTEZ-42	90269	196	PTM60VR-S/S	90029	205
PAB	75513	121	PLSP30	75597	91	PTEZ-48	90270	196	PTMA36R	90367	203
PAB	75513	140	PLSP36	75598	91	PTEZDC	90353	196	PTMA36T	90362	203
PACB2-100	108229	44	PLSP42	75599	91	PTEZHD-42/1050	90616	196	PTMA36VR	90372	203
PACB2-100	108229	51	PLSP48	75600	91	PTEZHD-42/1050-UG	90798	196	PTMA42R	90368	203
PACB2-100	108229	57	PLSP54	75601	91	PTEZHD-48/1200	90617	196	PTMA42T	90363	203
PACB2-100	108229	101	PMSMK	74916	208	PTEZHD-48/1200-UG	90799	196	PTMA42VR	90373	203
PACB2-100	108229	115	PMSMK2	79380	207	PTEZHD-54/1350	90618	196	PTMA48R	90369	203
PACB2-100	108229	123	PMSMK2	79380	208	PTEZHD-54/1350-UG	90800	196	PTMA48T	90364	203
PACB2-60	108228	44	PMSMK2-S/S	90047	209	PTEZHD-56/1400	90795	196	PTMA48VR	90374	203
PACB2-60	108228	51	PMSMKSD	74917	208	PTEZHD-60/1500	90619	196	PTMA54R	90370	203
PACB2-60	108228	57	PMSMKSD-S/S	90056	209	PTEZHD-60/1500-UG	90801	196	PTMA54T	90365	203
PACB2-60	108228	101	PP-18	78414	91	PTEZHD-64/1600	90796	196	PTMA54VR	90375	203
PACB2-60	108228	115	PP-24	78416	91	PTEZHD-72/1800	90620	196	PTMA60R	90371	203
PACB2-60	108228	123	PP-30	78418	91	PTEZHD-72/1800-UG	90802	196	PTMA60T	90366	203
PAT-C-100	108231	44	PP-36	78420	91	PTEZHD-80/2000	90797	196	PTMA60VR	90376	203
PAT-C-100	108231	51	PP-42	78422	91	PTEZHD-84/2100	90621	196	PTMAAK	90194	207
PAT-C-100	108231	57	PP-48	78424	91	PTEZHD-DCK	90805	196	PTMAAKHD	90195	207
PAT-C-100	108231	101	PP-54	78425	91	PTEZHD-JBBK	90807	196	PTMAEKHDR	90192	207
PAT-C-100	108231	115	PP-60	78451	91	PTEZHD-MBK	90803	196	PTMAEKHDT	90191	207
PAT-C-100	108231	123	PP72	73017	91	PTEZHD-PBK	90804	196	PTMAEKHDR	90193	207
PAT-C-60	108230	44	PPS6	73024	91	PTEZHD-WRBK	90806	196	PTMAEKR	90189	207
PAT-C-60	108230	51	PSA150	73156	88	PTEZMB	90351	196	PTMAEKT	90188	207
PAT-C-60	108230	57	PSA150	73156	91	PTEZPB	90352	196	PTMAEVKVR	90190	207
PAT-C-60	108230	101	PSSS	74773	91	PTM24R	75584	204	PTMAFASK	90196	207
PAT-C-60	108230	115	PSSS	74773	97	PTM24R-S/S	90012	205	PTMAFMKHDR	90187	207
PAT-C-60	108230	123	PSSS	74773	100	PTM24T	75583	204	PTMAFMKR	90186	207
PAT-N	108232	44	PSSS	74773	104	PTM24T-S/S	90001	205	PTMAFMKT	90185	207
PAT-N	108232	51	PSSS	74773	106	PTM24VR	79669	204	PTMAHD54R	90381	203
PAT-N	108232	57	PST2-R	77725	55	PTM24VR-S/S	90023	205	PTMAHD54T	90377	203
PAT-N	108232	101	PST2-R	77725	58	PTM30R	74899	204	PTMAHD54VR	90385	203
PAT-N	108232	115	PST2-R	77725	60	PTM30R-S/S	90013	205	PTMAHD60R	90382	203
PAT-N	108232	123	PST2-S	77724	55	PTM30T	74885	204	PTMAHD60T	90378	203
PATHK	78794	44	PST2-S	77724	58	PTM30T-S/S	90002	205	PTMAHD60VR	90386	203
PATHK	78794	51	PST2-S	77724	60	PTM30VR	79670	204	PTMAHD72R	90383	203
PATHK	78794	57	PST2-W	77723	55	PTM30VR-S/S	90024	205	PTMAHD72T	90379	203
PATHK	78794	101	PST2-W	77723	58	PTM36R	74900	204	PTMAHD72VR	90387	203
PATHK	78794	115	PST2-W	77723	60	PTM36R-S/S	90014	205	PTMAHD84R	90384	203
PATHK	78794	123	PSTA	75896	39	PTM36T	74886	204	PTMAHD84T	90380	203
PC18	74566	88	PSTA	75896	47	PTM36T-S/S	90003	205	PTMAHD84VR	90388	203
PC24	74567	88	PSTA	75896	55	PTM36VR	79671	204	PTMAORK	90197	207
PC30	74568	88	PSTA	75896	60	PTM36VR-S/S	90025	205	PTMH54R	74905	204
PC36	74569	88	PSTA	75896	67	PTM42R	74901	204	PTMH54R-S/S	90019	205
PC42	74570	88	PSTA	75896	74	PTM42R-S/S	90015	205	PTMH54T	74891	204
PC48	74571	88	PSTA	75896	113	PTM42T	74887	204	PTMH54T-S/S	90008	205

INDEX By Ordering Number

Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #
PTMHD54VR	79665	204	PTS-HIBK	77697	202	QMTBK-P	76097	40	RBAGM-22	77107	147
PTMHD54VR-S/S	90030	205	PTS-IBK	77696	202	QMTBK-P	76097	47	RBAGM-28	77108	29
PTMHD60R	74906	204	PTS-LHSAA	77756	202	QMTBK-P	76097	48	RBAGM-28	77108	147
PTMHD60R-S/S	90020	205	PTS-MBK	77700	202	QMTBK-P	76097	67	RBAGM-34	77109	29
PTMHD60T	74892	204	PTS-MBKUG	77701	202	QMTBK-P	76097	74	RBAGM-34	77109	147
PTMHD60T-S/S	90009	205	PTS-PA	77699	202	QMTBK-W	76098	39	RBAGM-40	77110	29
PTMHD60VR	79666	204	PTS-PS	77698	202	QMTBK-W	76098	40	RBAGM-40	77110	147
PTMHD60VR-S/S	90031	205	PTS-RHSAA	77755	202	QMTBK-W	76098	47	RBAGM-46	77111	29
PTMHD72R	74907	204	PTS-RR21	77680	200	QMTBK-W	76098	48	RBAGM-46	77111	147
PTMHD72R-S/S	90021	205	PTS-RR27	77681	200	QMTBK-W	76098	55	RBAGS-16	75995	147
PTMHD72T	74893	204	PTS-RR33	77682	200	QMTBK-W	76098	60	RBAGS-18	76967	147
PTMHD72T-S/S	90010	205	PTS-RR39	77683	200	QMTBK-W	76098	67	RBAGS-22	75996	147
PTMHD72VR	79667	204	PTS-RR39	77683	200	QMTBK-W	76098	74	RBAGS-24	76968	147
PTMHD72VR-S/S	90032	205	PTS-RR45	77684	200	QMTBK-W	76098	113	RBAGS-28	75997	147
PTMHD84R	74908	204	PTS-RR45	77684	200	QMTPAK	76096	39	RBAGS-30	76969	147
PTMHD84R-S/S	90022	205	PTS-RR51	77685	200	QMTPAK	76096	47	RBAGS-34	75998	147
PTMHD84T	74894	204	PTS-RR51	77685	200	QMTPAK	76096	67	RBAGS-36	76970	147
PTMHD84T-S/S	90011	205	PTS-RR57	77686	200	QMTPAK	76096	74	RBAGS-40	75999	147
PTMHD84VR	79668	204	PTS-RR57	77686	200	QMTPAK	76096	113	RBAGS-42	76971	147
PTMHD84VR-S/S	90033	205	PTS-RR63	77687	200	QMTPAK-S/S	77587	40	RBAGS-46	76028	147
PTMSD120R	74912	204	PTS-RR63	77687	200	QMTPAK-S/S	77587	48	RBAGS-48	76972	147
PTMSD120R-S/S	90041	205	PTS-RR69	77688	200	QMTPSBK	76099	39	RBAGS-52	76029	147
PTMSD120T	74898	204	PTS-RR75	77689	200	QMTPSBK	76099	47	RBAGS-54	76973	147
PTMSD120T-S/S	90037	205	PTS-RR81	77690	200	QMTPSBK	76099	67	RBAGS-58	76030	147
PTMSD120VR	90054	204	PTS-SAK	77694	202	QMTPSBK	76099	74	RBAGS-60	76974	147
PTMSD120VR-S/S	90045	205	PTS-SR	77691	202	QMTPSBK-S/S	77588	40	RBAGS-70	76031	147
PTMSD72R	74909	204	PTS-WMK	78767	202	QMTPSBK-S/S	77588	48	RBAGS-72	76975	147
PTMSD72R-S/S	90038	205	PV-18	78453	88	QMTS-G	76484	39	RBAGS-84	76976	147
PTMSD72T	74895	204	PV-24	78415	88	QMTS-G	76484	47	RBAGSCM-16	76572	148
PTMSD72T-S/S	90034	205	PV-30	78417	88	QMTS-G-S/S	77452	24	RBAGSCM-22	76573	148
PTMSD72VR	90051	204	PV-36	78419	88	QMTS-G-S/S	77452	40	RBAGSCM-28	76574	148
PTMSD72VR-S/S	90042	205	PV-42	78421	88	QMTS-G-S/S	77452	48	RBAGSCM-34	76575	148
PTMSD84R	74910	204	PV-48	78423	88	QMTS-P	75845	19	RBAGSCM-40	76576	148
PTMSD84R-S/S	90039	205	PV-54	78454	88	QMTS-P	75845	39	RBAGSCM-46	76577	148
PTMSD84T	74896	204	PV-60	78455	88	QMTS-P	75845	47	RBAGSCM-52	76578	148
PTMSD84T-S/S	90035	205	PV72	73438	88	QMTS-P	75845	67	RBAGSCM-58	76579	148
PTMSD84VR	90052	204	QB1PCK	90954	145	QMTS-P	75845	74	RBAGSCM-70	76581	148
PTMSD84VR-S/S	90043	205	QMT-A-P	91285	39	QMTS-P	75845	113	RBAS4-18	76032	150
PTMSD96R	74911	204	QMT-A-W	91286	39	QMTS-P-S/S	77450	24	RBAS4-24	76033	150
PTMSD96R-S/S	90040	205	QMT-ATEX	90435	39	QMTS-P-S/S	77450	40	RBAS4-30	76034	150
PTMSD96T	74897	204	QMT-G	76483	39	QMTS-P-S/S	77450	48	RBAS4-36	76035	150
PTMSD96T-S/S	90036	205	QMT-G	76483	47	QMTS-S/S/S	79056	48	RBAS4-42	76036	150
PTMSD96VR	90053	204	QMT-G-S/S	77586	40	QMTS-W/S/S	77451	24	RBAS4-48	76037	150
PTMSD96VR-S/S	90044	205	QMT-G-S/S	77586	48	QMTS-W/S/S	77451	40	RBAS4-54	76038	150
PTPK	75897	55	QMT-P	76074	39	QMTS-W/S/S	77451	48	RBAS4-60	76039	150
PTPK	75897	60	QMT-P	76074	47	RAPEK	77423	129	RBAS4-72	76040	150
PTS-18R	77664	200	QMT-P	76074	67	RB38BP	79481	144	RBDT-6C	90614	154
PTS-24R	77665	200	QMT-P	76074	74	RB38BP	79481	150	RBDTXHD-13C	90615	155
PTS-30R	77666	200	QMT-P-S/S	77584	40	RB38BP	79481	151	RBDTXHD-6.5C	77517	155
PTS-30R-UG	77673	200	QMT-P-S/S	77584	48	RB6DH	76571	153	RBP1R-L	90648	193
PTS-36R	77667	200	QMT-S	79039	47	RB6SA	76570	152	RBP1R-M	90647	193
PTS-36R-UG	77674	200	QMT-S	79039	67	RBAER-10	76041	151	RBP1R-S	90646	193
PTS-42R	77668	200	QMT-S	79039	74	RBAER-16	76042	151	RBP1R-XL	90649	193
PTS-42R-UG	77675	200	QMT-S-S/S	79059	48	RBAER-22	76043	151	RBP1S-L	74560	193
PTS-48R	77669	200	QMT-W	76075	39	RBAER-28	76044	151	RBP1S-M	74559	193
PTS-48R-UG	77676	200	QMT-W	76075	47	RBAER-34	76045	151	RBP1S-S	74558	193
PTS-54R	77670	200	QMT-W	76075	67	RBAER-40	76046	151	RBP1S-XL	74561	193
PTS-54R-UG	77677	200	QMT-W	76075	74	RBAER-44	76655	151	RBPFK-L	75524	195
PTS-60R	77671	200	QMT-W-S/S	77585	40	RBAER-46	76047	151	RBPFK-M	75523	195
PTS-60R-UG	77678	200	QMT-W-S/S	77585	48	RBAER-52	76048	151	RBPFK-S	75522	195
PTS-72R	77672	200	QMTBK-G	76540	39	RBAER-58	76049	151	RBPFK-XL	75525	195
PTS-72R-UG	77679	200	QMTBK-G	76540	40	RBAER-70	76050	151	RBPIT-L	75529	195
PTS-DRK	90100	202	QMTBK-G	76540	47	RBAGM-16	77106	29	RBPIT-M	75528	195
PTS-EBK	77702	202	QMTBK-G	76540	48	RBAGM-16	77106	147	RBPIT-S	75527	195
PTS-HDSR	77692	202	QMTBK-P	76097	39	RBAGM-22	77107	29	RBPIT-XL	75530	195

INDEX By Ordering Number

Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #
RBPMBK	75526	195	RDPBK-M	74700	157	RSRR-48	92174	214	RWSECS-42C	91564	128
RBPRET	73163	195	RDPBK-M	74700	159	RSRR-54	92175	214	RWSECS-42F	91421	128
RBPRET	73163	202	RDPBK-S	74699	157	RSRR-60	92176	214	RWSECS-48C	91565	128
RBPRR-L	90652	195	RDPBK-S	74699	159	RSRR-66	92177	214	RWSECS-48F	91422	128
RBPRR-M	90651	195	RDPBK-XL	74702	157	RSRR-72	92178	214	RWSECS-54C	91566	128
RBPRR-S	90650	195	RDPBK-XL	74702	159	RSRR-84	92179	214	RWSECS-54F	91423	128
RBPSR-XL	90653	195	RDPF-L	75568	159	RSRR-96	92180	214	RWSECS-60C	91567	128
RBPSR-L	74564	195	RDPF-M	75567	159	RV-18	78402	92	RWSECS-60F	91424	128
RBPSR-M	74563	195	RDPF-S	75566	159	RV-24	78403	92	RWSECS-72C	91568	128
RBPSR-S	74562	195	RDPF-XL	75569	159	RV-30	78404	92	RWSECS-72F	91425	128
RBPSR-XL	74565	195	RDPMBK	74698	159	RV-36	78405	92	RWSECS-84C	91569	128
RBQB1-16/400	90935	145	RDPMSK	74705	159	RV-42	78406	92	RWSECS-84F	91426	128
RBQB1-18/450	90936	145	RMCI	75817	217	RV-48	78407	92	RWSECS-96C	91570	128
RBQB1-22/550	90937	145	RMCI-50	75833	217	RV-54	78408	92	RWSECS-96F	91427	128
RBQB1-24/600	90938	145	RMCI-BCP	76414	217	RV-60	78409	92	SAC2-TIP-TL	77866	110
RBQB1-28/700	90939	145	RMCI-BPP	76415	217	RV-72	74641	92	SACHP2	77768	110
RBQB1-30/750	90940	145	RMCI-BPP	76415	219	RVT6-S/S	76205	106	SACKRP	77885	110
RBQB1-34/850	90941	145	RMCI-CB	75820	217	RWPBLD-18	90087	127	SACPL-24/600	77887	110
RBQB1-36/900	90942	145	RMCI-CB	75820	219	RWPBLD-24	90088	127	SACPL-30/750	77888	110
RBQB1-40/1000	90943	145	RMCI-CP	75819	217	RWPBLD-30	90089	127	SACPL-36/900	77889	110
RBQB1-42/1050	90944	145	RMCI-LS	75834	217	RWPBLD-36	90090	127	SACPL-42/1050	77890	110
RBQB1-46/1150	90945	145	RMCI-LSBPP	76538	217	RWPBLD-42	90091	127	SACPL-48/1200	77891	110
RBQB1-48/1200	90946	145	RMCI-LSPP	75836	217	RWPBLD-48	90092	127	SACPL-54/1350	77892	110
RBQB1-52/1300	90947	145	RMCI-PL	75821	217	RWPBLD-54	90093	127	SACPL-60/1500	77893	110
RBQB1-54/1350	90948	145	RMCI-PP	75832	217	RWPBLD-60	90094	127	SACPL-72/1800	77894	110
RBQB1-58/1450	90949	145	RMCI1S-PL	75835	217	RWPBLD-66	90095	127	SACPL2-120/3000	77899	110
RBQB1-60/1500	90950	145	RMC2-FS-1	76558	219	RWPBLD-72	90096	127	SACPL2-60/1500	77895	110
RBQB1-64/1600	90951	145	RMC2-FS-50	77330	219	RWPBLD-78	90097	127	SACPL2-72/1800	77896	110
RBQB1-70/1750	90952	145	RMC2-FSAPK	76559	219	RWPBLD-84	90098	127	SACPL2-84/2100	77897	110
RBQB1-72/1800	90953	145	RP-18	78426	94	RWPBLD-90	90099	127	SACPL2-96/2400	77898	110
RBQC1HD-12	75985	144	RP-24	78427	94	RWPREC-1230	90078	126	SACRH	77883	110
RBQC1HD-18	75986	144	RP-30	78428	94	RWPREC-1236	90079	126	SACRHL	77884	110
RBQC1HD-24	75987	144	RP-36	78429	94	RWPREC-1242	90080	126	SACRKN	77882	110
RBQC1HD-30	75988	144	RP-42	78430	94	RWPREC-1248	90081	126	SACRKT	77886	110
RBQC1HD-36	75989	144	RP-48	78431	94	RWPREC-1254	90082	126	SACSK	77052	110
RBQC1HD-42	75990	144	RP-54	78432	94	RWPREC-1260	90083	126	SACSRC	77065	110
RBQC1HD-48	75991	144	RP-60	78433	94	RWPREC-1272	90084	126	SAT2AK	78733	104
RBQC1HD-54	75992	144	RP-72	74612	94	RWPREC-1284	90085	126	SAT2AK	78733	105
RBQC1HD-66	75993	144	RS-24	91725	211	RWPREC-1296	90086	126	SAT2AK	78733	117
RBSE-10	79861	149	RS-30	91726	211	RWPREC-1836	91214	126	SAT2AK	78733	125
RBSE-16	79862	149	RS-36	91727	211	RWPREC-1842	91215	126	SAT2PM	78732	105
RBSE-22	79863	149	RS-42	91728	211	RWPREC-1848	91216	126	SAT2PM	78732	117
RBSE-28	79864	149	RS-48	91729	211	RWPREC-1854	91217	126	SAT2PM	78732	125
RBSE-34	79865	149	RS-54	91730	211	RWPREC-1860	91218	126	SATB	76083	105
RBSE-40	79866	149	RS-60	91731	211	RWPREC-1872	91219	126	SATB	76083	117
RBSE-46	79867	149	RS-66	91732	211	RWPREC-1884	91220	126	SATB	76083	125
RBSE-52	79868	149	RS-72	91733	211	RWPREC-1896	91221	126	SATHB	76084	105
RBSE-58	79869	149	RS-84	91734	211	RWPREC-624	90068	126	SATHB	76084	117
RBSE-64	79870	149	RS-96	91735	211	RWPREC-630	90069	126	SATHB	76084	125
RBSE-70	79871	149	RSA	76249	94	RWPREC-636	90070	126	SATXDMK	91415	105
RC18	74618	92	RSA150	73628	92	RWPREC-642	90071	126	SATXDMK	91415	117
RC24	74619	92	RSA150	73628	94	RWPREC-648	90072	126	SATXDMK	91415	125
RC30	74620	92	RSA150	73628	95	RWPREC-654	90073	126	SATXDNCB	91414	105
RC36	74621	92	RSA150	73628	97	RWPREC-660	90074	126	SATXDNCB	91414	117
RC42	74622	92	RSA150	73628	98	RWPREC-672	90075	126	SATXDNCB	91414	125
RC48	74623	92	RSA150	73628	99	RWPREC-684	90076	126	SB2	79970	176
RC54	74624	92	RSA150	73628	100	RWPREC-696	90077	126	SB2	79970	179
RC60	74625	92	RSA150	73628	104	RWSECS-18C	91560	128	SB2F	79988	176
RC72	74626	92	RSA150	73628	106	RWSECS-18F	91417	128	SB2F	79988	179
RDP1-L	74694	157	RSA150	73628	107	RWSECS-24C	91561	128	SB4	78789	164
RDP1-M	74693	157	RSA150	73628	110	RWSECS-24F	91418	128	SB4	78789	167
RDP1-S	74692	157	RSRR-24	92170	214	RWSECS-30C	91562	128	SB4	78789	170
RDP1-XL	74695	157	RSRR-30	92171	214	RWSECS-30F	91419	128	SB4	78789	173
RDPBK-L	74701	157	RSRR-36	92172	214	RWSECS-36C	91563	128	SB4	78789	181
RDPBK-L	74701	159	RSRR-42	92173	214	RWSECS-36F	91420	128	SB4	78789	183

INDEX By Ordering Number

Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #
SB4	78789	185	SKPU-12X3/8X50	91325	215	SPK54	74715	133	SSTXD-S	91409	117
SB5	78790	164	SKPU-12X5/8X25	91322	215	SPK60	74716	133	SSTXD-S	91409	125
SB5	78790	167	SKPU-12X5/8X50	91327	215	SPK72	74717	133	SSTXD-W	91408	104
SB5	78790	170	SKPU-4X1/2X25	91289	215	SPKHD120	74721	133	SSTXD-W	91408	117
SB5	78790	173	SKPU-4X1/2X50	91294	215	SPKHD42	74952	133	SSTXD-W	91408	125
SB5	78790	181	SKPU-4X1X25	91292	215	SPKHD48	74953	133	SSTXDMK	91412	104
SB5	78790	183	SKPU-4X1X50	91297	215	SPKHD54	74954	133	SSTXDMK	91412	117
SB5	78790	185	SKPU-4X3/4X25	91291	215	SPKHD60	74955	133	SSTXDMK	91412	125
SB5	78790	187	SKPU-4X3/4X50	91296	215	SPKHD72	74718	133	STAK	75847	104
SB5	78790	189	SKPU-4X3/8X25	91288	215	SPKHD84	74719	133	STAK	75847	106
SE6-R36	90220	207	SKPU-4X3/8X50	91293	215	SPKHD96	74720	133	STAK	75847	110
SE6-R42	90221	207	SKPU-4X5/8X25	91290	215	SPMK2	75578	133	STAK	75847	117
SE6-R48	90222	207	SKPU-4X5/8X50	91295	215	SPMK3	75579	133	STAKHD	75892	104
SE6-R54	90223	207	SKPU-6X1/2X25	90283	215	SPN	74746	133	STAKHD	75892	106
SE6-R60	90224	207	SKPU-6X1/2X50	91222	215	SPPN	74748	133	STAKHD	75892	110
SE6-R72	90225	207	SKPU-6X1X25	91300	215	SPPR	74744	133	STAKHD	75892	117
SE6-R84	90226	207	SKPU-6X1X50	91303	215	SPYS	74743	133	STGK2	77867	104
SE6-T36	90227	207	SKPU-6X3/4X25	90284	215	SRBK	74941	136	STGK2	77867	105
SE6-T42	90228	207	SKPU-6X3/4X50	91223	215	SSRB	75978	60	STGK2	77867	117
SE6-T48	90229	207	SKPU-6X3/8X25	91298	215	SST-BUK	76943	104	STGK2	77867	117
SE6-T54/VR36	90230	207	SKPU-6X3/8X50	91301	215	SST-BUK	76943	117	STGK2	77867	125
SE6-T60/VR42	90231	207	SKPU-6X5/8X25	91299	215	SST-BUK-S/S	77636	106	STGK2	77867	125
SE6-T72/VR48	90232	207	SKPU-6X5/8X50	91302	215	SST2HD-B-S/S	77639	106	STGK2-S/S	77635	106
SE6-T84	90233	207	SKPU-8X1/2X25	90285	215	SST2HD-G-S/S	79042	106	STHDMK2-S/S	77634	106
SE6-VR54	90234	207	SKPU-8X1/2X50	91224	215	SST2HD-S/S	77638	106	STHDPM2-S/S	77633	106
SE6-VR60	90235	207	SKPU-8X1X25	91306	215	SST2HD-W-S/S	77637	106	STJK	74417	19
SE6-VR72	90236	207	SKPU-8X1X50	91309	215	SSTBK-B	76637	104	STJK	74417	113
SE6-VR84	90319	207	SKPU-8X3/4X25	90286	215	SSTBK-B	76637	106	STJK	74417	139
SHIM-KITH	77550	185	SKPU-8X3/4X50	91225	215	SSTBK-B	76637	117	STJM	74775	19
SHIM-KITL	77548	164	SKPU-8X3/8X25	91304	215	SSTBK-B	76637	125	STJM	74775	113
SHIM-KITL	77548	167	SKPU-8X3/8X50	91307	215	SSTBK-W	76636	104	STJM	74775	139
SHIM-KITL	77548	170	SKPU-8X5/8X25	91305	215	SSTBK-W	76636	106	STKD	74504	139
SHIM-KITL	77548	181	SKPU-8X5/8X50	91308	215	SSTBK-W	76636	117	STKHSD	74316	139
SHIM-KITM	77549	173	SKPU-DUAL-6X1/2X25	91400	216	SSTBK-W	76636	125	STKHSS	74313	139
SHIM-KITM	77549	183	SKPU-DUAL-6X1/2X50	91404	216	SSTHB	79582	104	STKS	74505	139
SHIM-KITMOD	79989	176	SKPU-DUAL-6X3/4X25	91401	216	SSTHB	79582	117	STLP	79535	120
SHIM-KITMOD	79989	179	SKPU-DUAL-6X3/4X50	91405	216	SSTHB	79582	125	STS-B	75844	87
SKC-24	91751	214	SKPU-DUAL-8X1/2X25	91402	216	SSTHB-S/S	79586	106	STS-B	75844	104
SKC-30	91752	214	SKPU-DUAL-8X1/2X50	91406	216	SSTHDPM	77868	104	STS-B	75844	117
SKC-36	91753	214	SKPU-DUAL-8X3/4X25	91403	216	SSTHDPM	77868	117	STS-B	75844	125
SKC-42	91754	214	SKPU-DUAL-8X3/4X50	91407	216	SSTHDPM	77868	125	STS-B-S/S	77632	106
SKC-48	91755	214	SL-48	91841	214	SSTHK	79070	104	STS-G	78142	104
SKC-54	91756	214	SP-24	91747	211	SSTHK	79070	110	STS-G	78142	117
SKC-60	91757	214	SP-48	91748	211	SSTHK	79070	117	STS-G	78142	125
SKC-66	91758	214	SP-72	91749	211	SSTHK-S/S	79071	106	STS-G-S/S	79057	106
SKC-72	91759	214	SP-96	91750	211	SSTLBK	79493	104	STS-S	75843	87
SKC-84	91760	214	SPBV	74742	133	SSTLBK	79493	106	STS-S	75843	104
SKC-96	91761	214	SPCP	74734	133	SSTLBK	79493	117	STS-S	75843	117
SKPU-10X1/2X25	91311	215	SPCP	74734	134	SSTLBK	79493	125	STS-S	75843	125
SKPU-10X1/2X50	91316	215	SPG	74747	133	SSTLMB	76072	99	STS-S-S/S	77631	106
SKPU-10X1X25	91314	215	SPG-CVR-A	77387	130	SSTLMB	76072	114	STS-W	75846	104
SKPU-10X1X50	91319	215	SPG-CVR-B	77388	130	SSTLMB	76072	129	STS-W	75846	117
SKPU-10X3/4X25	91313	215	SPG-CVR-C	77389	130	SSTOTA	76073	99	STS-W	75846	125
SKPU-10X3/4X50	91318	215	SPG-CVR-D	77390	130	SSTOTA	76073	114	STS-W-S/S	77630	106
SKPU-10X3/8X25	91310	215	SPG-CVR-E	77391	130	SSTOTA	76073	129	STTS	74419	19
SKPU-10X3/8X50	91315	215	SPG-CVR-F	77392	130	SSTSMB	76071	99	STTS	74419	113
SKPU-10X5/8X25	91312	215	SPG-CVR-G	77393	130	SSTSMB	76071	114	STTS	74419	139
SKPU-10X5/8X50	91317	215	SPG-CVR-H	77741	130	SSTSMB	76071	129	TEN-LOCK-KIT	77443	130
SKPU-12X1/2X25	91321	215	SPH10	74745	133	SSTXD-B	91410	104	TL-48	91842	214
SKPU-12X1/2X50	91326	215	SPK18	74709	133	SSTXD-B	91410	117	TRB-HT18	78754	45
SKPU-12X1X25	91324	215	SPK24	74710	133	SSTXD-B	91410	125	TRB-HT24	78755	45
SKPU-12X1X50	91329	215	SPK30	74711	133	SSTXD-G	91411	104	TRB-HT30	78756	45
SKPU-12X3/4X25	91323	215	SPK36	74712	133	SSTXD-G	91411	117	TRB-HT36	78757	45
SKPU-12X3/4X50	91328	215	SPK42	74713	133	SSTXD-G	91411	125	TRB-HT42	78758	45
SKPU-12X3/8X25	91320	215	SPK48	74714	133	SSTXD-S	91409	104	TRB-HT48	78759	45

INDEX By Ordering Number

Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #
TRB-HT54	78760	45	TUG6S	31793	227	USB12	90409	64	VMBK	73399	159
TRB-HT60	78761	45	TUG8-36-AL	31706	226	USB6	90410	61	VMF72	74398	159
TRB-HT66	78762	45	TUG8-42-AL	31707	226	USB6	90410	64	VMF84	74399	159
TRB-HT72	78763	45	TUG8-48-AL	31708	226	USBBRP	90412	64	VMF96	74440	159
TRB-HT78	78764	45	TUG8-54-AL	31709	226	USBP	90411	64	VMFL	74038	159
TRB-UHT18	91865	45	TUG8-60-AL	31710	226	USMK	76792	113	VMFM	74037	159
TRB-UHT24	91866	45	TUG8-72-AL	31711	226	USMK	76792	113	VMFS	73549	159
TRB-UHT30	91867	45	TUG8-84-AL	31712	226	USP18/450	76772	113	VMFXS	73535	159
TRB-UHT36	91868	45	TUG8-96-AL	31713	226	USP24/600	76773	113	VMLK	74982	159
TRB-UHT42	91869	45	TUG8B-12-AL	31735	226	USP30/750	76774	113	VP72	74395	159
TRB-UHT48	91870	45	TUG8B-36-AL	31736	226	USP36/900	76775	113	VP84	74396	159
TRB-UHT54	91871	45	TUG8B-42-AL	31737	226	USP42/1050	76776	113	VP96	74397	159
TRB-UHT60	91872	45	TUG8B-48-AL	31738	226	USP48/1200	76777	113	VPL	73410	159
TRB-UHT66	91873	45	TUG8B-54-AL	31739	226	USP54/1350	76778	113	VPM	73409	159
TRB-UHT72	91874	45	TUG8B-60-AL	31740	226	USP60/1500	76779	113	VPS	73408	159
TRB-UHT78	91875	45	TUG8B-72-AL	31741	226	USP72/1800	76780	113	VPXS	73400	159
TRB-UHT84	91876	45	TUG8B-84-AL	31742	226	USP84/2100	76781	113	VSC	74983	159
TRB-UHT90	91877	45	TUG8B-96-AL	31743	226	USPB2	79206	113	VUBK-72	75574	156
TRB18	76485	45	TUG8C	31799	227	USPK	76790	113	VUBK-84	75575	156
TRB18	76485	146	TUG8E	31747	226	USPK	76790	113	VUBK-96	75576	156
TRB24	76486	45	TUG8P-36-AL	31720	226	UST-P	76794	113	VUBK-L	75573	156
TRB24	76486	146	TUG8P-42-AL	31721	226	UST-S	77757	113	VUBK-M	75572	156
TRB30	76487	45	TUG8P-48-AL	31722	226	UST-W	76795	113	VUBK-S	75571	156
TRB30	76487	146	TUG8P-54-AL	31723	226	USTSC	79299	113	VUBK-XS	75570	156
TRB36	76488	45	TUG8P-60-AL	31724	226	USTSC	79299	113	WB24-2-S/S	K2546	134
TRB36	76488	146	TUG8P-72-AL	31725	226	USTSCHD	79300	113	WB24C-2-S/S	K2686	134
TRB42	76489	45	TUG8P-84-AL	31726	226	USTSCHD	79300	113	WB30-2-S/S	K2547	134
TRB42	76489	146	TUG8P-96-AL	31727	226	USTSCK	79202	113	WB30C-2-S/S	K2687	134
TRB48	76490	45	TUG8S	31794	227	USTSCKHD	79204	113	WB36-2-S/S	K2548	134
TRB48	76490	146	TUGH	31792	227	UTC18	76712	111	WB36C-2-S/S	K2688	134
TRB54	76491	45	UBTK	76977	113	UTC24	76713	111	WB42-2-S/S	K2549	134
TRB54	76491	146	UFB18	74448	111	UTC30	76714	111	WB42C-2-S/S	K2689	134
TRB60	76492	45	UFB24	74449	111	UTC36	76715	111	WB48-2-S/S	K2550	134
TRB60	76492	146	UFB30	74450	111	UTC42	76716	111	WB48C-2-S/S	K2690	134
TRB66	76493	45	UFB36	74451	111	UTC48	76717	111	WB54-2-S/S	K2551	134
TRB66	76493	146	UFB42	74452	111	UTC54	76718	111	WB54C-2-S/S	K2691	134
TRB72	76494	45	UFB48	74453	111	UTC60	76719	111	WB60-2-S/S	K2552	134
TRB72	76494	146	UFB54	74454	111	UTC72	76720	111	WB60C-2-S/S	K2692	134
TRB78	76697	45	UFB60	74455	111	UTC84	76721	111	WB72-2-S/S	K2553	134
TRB78	76697	146	UFB72	74456	111	UTF18	76724	111	WB72C-2-S/S	K2693	134
TRB84	77047	45	UFB84	74460	111	UTF24	76725	111	WB84-2-S/S	K2554	134
TRB84	77047	146	UHDBTK	76978	113	UTF30	76726	111	WB84C-2-S/S	K2694	134
TRB90	77048	45	UHMK	76793	113	UTF36	76727	111	WB96-2-S/S	K2555	134
TRB90	77048	146	UHMK	76793	113	UTF42	76728	111	WB96C-2-S/S	K2695	134
TUG6-36-AL	31700	226	UHPB2	79207	113	UTF48	76729	111	WCLN18-16	71131	233
TUG6-42-AL	31701	226	UHSPK	76791	113	UTF54	76730	111	WCLN24-16	71132	233
TUG6-48-AL	31702	226	UHSPK	76791	113	UTF60	76731	111	WCLN24-30	71150	233
TUG6-54-AL	31703	226	UHVC	79453	67	UTF72	76732	111	WCLN30-16	71133	233
TUG6-60-AL	31704	226	UMBK	76789	113	UTF84	76733	111	WCLN30-30	71134	233
TUG6-72-AL	31705	226	UMBK	76789	113	VAK	76416	159	WCLN36-16	71135	233
TUG6B-12-AL	31728	226	UPBKA	114389	113	VBK-72	74457	156	WCLN36-30	71136	233
TUG6B-36-AL	31729	226	UPFCC	79320	98	VBK-72	74457	159	WCLN42-16	71137	233
TUG6B-42-AL	31730	226	UPFCC	79320	104	VBK-84	74458	156	WCLN42-30	71138	233
TUG6B-48-AL	31731	226	UPSBK	76784	113	VBK-84	74458	159	WCLN48-16	71139	233
TUG6B-54-AL	31732	226	URCB18/450	76748	111	VBK-96	74459	156	WCLN48-30	71144	233
TUG6B-60-AL	31733	226	URCB24/600	76749	111	VBK-96	74459	159	WCLN54-16	71149	233
TUG6B-72-AL	31734	226	URCB30/750	76750	111	VBK-L	73193	156	WCLN54-30	71145	233
TUG6C	31798	227	URCB36/900	76751	111	VBK-L	73193	159	WCLN60-16	71165	233
TUG6E	31744	226	URCB42/1050	76752	111	VBK-M	73192	156	WCLN60-30	71146	233
TUG6P-36-AL	31714	226	URCB48/1200	76753	111	VBK-M	73192	159	WCLN72-16	71151	233
TUG6P-42-AL	31715	226	URCB54/1350	76754	111	VBK-S	73191	156	WCLN72-30	71147	233
TUG6P-48-AL	31716	226	URCB60/1500	76755	111	VBK-S	73191	159	WF RD18-16	72187	232
TUG6P-54-AL	31717	226	URCB72/1800	76756	111	VBK-XS	73190	156	WF RD18-30	72188	232
TUG6P-60-AL	31718	226	URCB84/2100	76757	111	VBK-XS	73190	159	WF RD24-16	72189	232
TUG6P-72-AL	31719	226	USB12	90409	61	VCS	73533	159	WF RD24-30	72190	232

INDEX By Ordering Number

Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #	Ordering Number	Item Code	Page #
WFRD30-16	72191	232	YCART-36/900-VW	79614	81	YSTHDMB	79849	87	YTHDR-36S	91816	84
WFRD30-30	72192	232	YCART-42/1050-HDP	79818	85	YSTHDS-BL	79798	87	YTHDR-42S	91817	84
WFRD36-16	72193	232	YCART-42/1050-HDR	91824	85	YSTHDS-GR	79797	87	YTHDR-48S	91818	84
WFRD36-30	72194	232	YCART-42/1050-HDTC	79830	85	YSTLBK	79846	83	YTHDR-54S	91819	84
WFRD42-16	72195	232	YCART-42/1050-HDW	79824	85	YSTLBK	79846	97	YTHDR-60S	91820	84
WFRD42-30	72196	232	YCART-42/1050-P	79621	81	YSTLBK-R	91812	83	YTHDR-72S	91821	84
WFRD48-16	72197	232	YCART-42/1050-R	91809	81	YSTMB	79843	83	YTHDW-36S	79789	84
WFRD48-30	72198	232	YCART-42/1050-TC	79815	81	YSTMB	79843	97	YTHDW-42S	79790	84
WFRD54-16	72199	232	YCART-42/1050-W	79615	81	YSTPHDMK	79854	87	YTHDW-48S	79791	84
WFRD54-30	72200	232	YCART-48/1200-HDP	79819	85	YSTPMK	79848	83	YTHDW-54S	79792	84
WFRD60-16	72201	232	YCART-48/1200-HDR	91825	85	YSTPMK	79848	97	YTHDW-60S	79793	84
WFRD60-30	72202	232	YCART-48/1200-HDTC	79831	85	YSTS-P	79796	83	YTHDW-72S	79794	84
WFRD72-16	72203	232	YCART-48/1200-HDW	79825	85	YSTS-P	79796	97	YTP-18/450	79587	83
WFRD72-30	72204	232	YCART-48/1200-P	79622	81	YSTS-Y	79795	83	YTP-24/600	79588	83
WND18-16	72169	232	YCART-48/1200-R	91810	81	YSTS-Y	79795	97	YTP-30/750	79589	83
WND18-30	72170	232	YCART-48/1200-TC	79816	81	YSTTBK-B	79855	83	YTP-36/900	79590	83
WND24-16	72171	232	YCART-48/1200-W	79616	81	YSTTBK-B	79855	97	YTP-42/1050	79591	83
WND24-30	72172	232	YCART-54/1350-HDP	79820	85	YSTTBK-W	79847	83	YTP-48/1200	79592	83
WND30-16	72173	232	YCART-54/1350-HDR	91826	85	YSTTBK-W	79847	97	YTPHD-36/900	79799	87
WND30-30	72174	232	YCART-54/1350-HDTC	79832	85	YT-18S	79765	80	YTPHD-42/1050	79800	87
WND36-16	72175	232	YCART-54/1350-HDW	79826	85	YT-24S	79766	80	YTPHD-48/1200	79801	87
WND36-30	72176	232	YCART-60/1500-HDP	79821	85	YT-30S	79767	80	YTPHD-54/1350	79802	87
WND42-16	72177	232	YCART-60/1500-HDR	91827	85	YT-36S	79768	80	YTPHD-60/1500	79803	87
WND42-30	72178	232	YCART-60/1500-HDTC	79833	85	YT-42S	79769	80	YTPHD-72/1800	79804	87
WND48-16	72179	232	YCART-60/1500-HDW	79827	85	YT-48S	79770	80	YTR-18S	91798	80
WND48-30	72180	232	YCART-72/1800-HDP	79822	85	YT-C	79574	81	YTR-24S	91799	80
WND54-16	72181	232	YCART-72/1800-HDR	91828	85	YT-HDC	79728	85	YTR-30S	91800	80
WND54-30	72182	232	YCART-72/1800-HDTC	79834	85	YT-HDP	79677	85	YTR-36S	91801	80
WND60-16	72183	232	YCART-72/1800-HDW	79828	85	YT-HDR	91822	85	YTR-42S	91802	80
WND60-30	72184	232	YST-P	79837	83	YT-HDW	79676	85	YTR-48S	91803	80
WND72-16	72185	232	YST-P	79837	97	YT-P	79573	81	YTW-18S	79771	80
WND72-30	72186	232	YST-P-R	91815	83	YT-R	91804	81	YTW-24S	79772	80
XDST-B	90613	64	YST-S	79838	83	YT-TC-18S	79759	80	YTW-30S	79773	80
XDST-P	90612	64	YST-S	79838	97	YT-TC-24S	79760	80	YTW-36S	79774	80
XDST-W	90611	64	YST-Y	79836	83	YT-TC-30S	79761	80	YTW-42S	79775	80
XDSTBK-B	90606	64	YST-Y	79836	97	YT-TC-36S	79762	80	YTW-48S	79776	80
XDSTBK-P	90605	64	YST-Y-R	91814	83	YT-TC-42S	79763	80			
XDSTBK-W	90604	64	YSTANK	79857	83	YT-TC-48S	79764	80			
XDSTJNK	90610	64	YSTANK	79857	97	YT-W	79572	81			
XDSTMPK	90599	64	YSTANKHD	79858	87	YTA-18/450	79593	83			
XDSTPAK	90600	64	YSTBKPU-R	91813	83	YTA-24/600	79594	83			
XDSTPSBK	90608	64	YSTDBK2	113390	80	YTA-30/750	79595	83			
XDSTS-B	90603	64	YSTDBK2	113390	83	YTA-36/900	79596	83			
XDSTS-P	90602	64	YSTDBK2	113390	97	YTA-42/1050	79597	83			
XDSTS-W	90601	64	YSTDBK2	113390	129	YTA-48/1200	79598	83			
XDSTTAK	90609	64	YSTGBK	79845	83	YTAC	79623	83			
YCART-18/450-P	79617	81	YSTGBK	79845	97	YTACHD	79835	87			
YCART-18/450-R	91805	81	YSTGBK-R	91811	83	YTAHD-36/900	79805	87			
YCART-18/450-TC	79811	81	YSTHD-BK	79842	87	YTAHD-42/1050	79806	87			
YCART-18/450-W	79611	81	YSTHD-BL	79841	87	YTAHD-48/1200	79807	87			
YCART-24/600-P	79618	81	YSTHD-BL-R	91834	87	YTAHD-54/1350	79808	87			
YCART-24/600-R	91806	81	YSTHD-GR	79839	87	YTAHD-60/1500	79809	87			
YCART-24/600-TC	79812	81	YSTHD-GR-R	91833	87	YTAHD-72/1800	79810	87			
YCART-24/600-W	79612	81	YSTHD-S	79840	87	YTHD-36S	79783	84			
YCART-30/750-P	79619	81	YSTHDBK-B	79856	87	YTHD-42S	79784	84			
YCART-30/750-R	91807	81	YSTHDBK-BL-R	91831	87	YTHD-48S	79785	84			
YCART-30/750-TC	79813	81	YSTHDBK-GR-R	91832	87	YTHD-54S	79786	84			
YCART-30/750-W	79613	81	YSTHDBK-W	79853	87	YTHD-60S	79787	84			
YCART-36/900-HDP	79817	85	YSTHDBK	79850	84	YTHD-72S	79788	84			
YCART-36/900-HDR	91823	85	YSTHDBK	79850	87	YTHD-TC-36S	79777	84			
YCART-36/900-HDTC	79829	85	YSTHDBK	79850	129	YTHD-TC-42S	79778	84			
YCART-36/900-HDW	79823	85	YSTHDGBK	79851	87	YTHD-TC-48S	79779	84			
YCART-36/900-P	79620	81	YSTHDGBK-R	91829	87	YTHD-TC-54S	79780	84			
YCART-36/900-R	91808	81	YSTHDLBK	79852	87	YTHD-TC-60S	79781	84			
YCART-36/900-TC	79814	81	YSTHDLBK-R	91830	87	YTHD-TC-72S	79782	84			

INDEX By Item Code

Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #
04143	900936	222	30418	LSHDB30-2	225	61303	CLMN2100/84-15	229	71082	CLFR2100/84-12	230
04144	900948	222	30421	LSHDB42-2	225	61308	CLMFR450/18-15	229	71100	FLSCM-I-50	218
04145	900960	222	30423	LSHDB48-2	225	61309	CLMFR600/24-15	229	71111	CLN460/18.4-12	230
04146	900972	222	30424	LSHDB54-2	225	61310	CLMFR750/30-15	229	71112	CLN600/24-12	230
04147	900984	222	30430	LSHDB60-2	225	61311	CLMFR900/36-15	229	71113	CLN760/30.4-12	230
04149	900CBK	222	31700	TUG6-36-AL	226	61312	CLMFR1050/42-15	229	71115	CLN900/36-12	230
04200	900924	222	31701	TUG6-42-AL	226	61313	CLMFR1200/48-15	229	71116	CLN1060/42.4-12	230
26107	N6D3T-24-9-A45	164	31702	TUG6-48-AL	226	61314	CLMFR1350/54-15	229	71118	CLFR460/18.4-12	230
26108	N6D3T-30-11-A45	164	31703	TUG6-54-AL	226	61315	CLMFR1500/60-15	229	71119	CLFR600/24-12	230
26109	N6D3T-36-13-A45	164	31704	TUG6-60-AL	226	61316	CLMFR1800/72-15	229	71120	CLFR760/30.4-12	230
26110	N6D3T-42-15-A45	164	31705	TUG6-72-AL	226	61317	CLMFR2100/84-15	229	71122	CLFR900/36-12	230
26111	N6D3T-48-17-A45	164	31706	TUG8-36-AL	226	61319	CLMFR6.5/21-15	228	71123	CLFR1060/42.4-12	230
26112	N6D3T-54-19-A45	164	31707	TUG8-42-AL	226	62052	CLMN450/18-15S	229	71126	CLN1360/54.4-12	230
26113	N6D3T-60-21-A45	164	31708	TUG8-48-AL	226	62053	CLMN600/24-15S	229	71127	CLN1520/60.8-12	230
26114	N6D3T-72-25-A45	164	31709	TUG8-54-AL	226	62054	CLMN750/30-15S	229	71131	WCLN18-16	233
26184	NI6D3T-24-9-A45	167	31710	TUG8-60-AL	226	62055	CLMN900/36-15S	229	71132	WCLN24-16	233
26184	NI6D3T-24-9-A45	176	31711	TUG8-72-AL	226	62056	CLMN1050/42-15S	229	71133	WCLN30-16	233
26185	NI6D3T-30-11-A45	167	31712	TUG8-84-AL	226	62057	CLMN1200/48-15S	229	71134	WCLN30-30	233
26185	NI6D3T-30-11-A45	176	31713	TUG8-96-AL	226	62058	CLMN1350/54-15S	229	71135	WCLN36-16	233
26186	NI6D3T-36-13-A45	167	31714	TUG6P-36-AL	226	62059	CLMN1500/60-15S	229	71136	WCLN36-30	233
26186	NI6D3T-36-13-A45	176	31715	TUG6P-42-AL	226	62060	CLMN1800/72-15S	229	71137	WCLN42-16	233
26187	NI6D3T-42-15-A45	167	31716	TUG6P-48-AL	226	62061	CLMN2100/84-15S	229	71138	WCLN42-30	233
26187	NI6D3T-42-15-A45	176	31717	TUG6P-54-AL	226	62063	CLMFR450/18-15S	229	71139	WCLN48-16	233
26188	NI6D3T-48-17-A45	167	31718	TUG6P-60-AL	226	62064	CLMFR600/24-15S	229	71140	FLM-PC	218
26188	NI6D3T-48-17-A45	176	31719	TUG6P-72-AL	226	62065	CLMFR750/30-15S	229	71141	FL-CP-I	218
26189	NI6D3T-54-19-A45	167	31720	TUG8P-36-AL	226	62066	CLMFR900/36-15S	229	71141	FL-CP-I	218
26189	NI6D3T-54-19-A45	176	31721	TUG8P-42-AL	226	62067	CLMFR1050/42-15S	229	71144	WCLN48-30	233
26190	NI6D3T-60-21-A45	167	31722	TUG8P-48-AL	226	62068	CLMFR1200/48-15S	229	71145	WCLN54-30	233
26190	NI6D3T-60-21-A45	176	31723	TUG8P-54-AL	226	62069	CLMFR1350/54-15S	229	71146	WCLN60-30	233
26191	NI6D3T-72-25-A45	167	31724	TUG8P-60-AL	226	62070	CLMFR1500/60-15S	229	71147	WCLN72-30	233
26191	NI6D3T-72-25-A45	176	31725	TUG8P-72-AL	226	62071	CLMFR1800/72-15S	229	71149	WCLN54-16	233
30001	EBC1	223	31726	TUG8P-84-AL	226	62072	CLMFR2100/84-15S	229	71150	WCLN24-30	233
30002	EBC2	223	31727	TUG8P-96-AL	226	62216	CLMN6.5/21-15	228	71151	WCLN72-16	233
30003	EBC1/CEBC1-B	224	31728	TUG6B-12-AL	226	70186	FL-ACT	231	71152	25ND6.5/21	228
30004	EBC2/CEBC2-B	224	31729	TUG6B-36-AL	226	70189	FL-PR-0.75	231	71155	12NDC6.5/21	228
30005	EBC1-DR	224	31730	TUG6B-42-AL	226	71002	10ND6.5/21	228	71159	12FRDC6.5/21	228
30006	EBC2-DR	224	31731	TUG6B-48-AL	226	71004	12ND6.5/21	228	71163	25NP6.5/21	228
30007	EBC/CEBC-EB	224	31732	TUG6B-54-AL	226	71005	CLFR1200/48-12	230	71164	FL-CP-ISS	218
30008	EBC/CEBC-H	224	31733	TUG6B-60-AL	226	71006	15ND6.5/21	228	71165	WCLN60-16	233
30011	EBC1-220	223	31734	TUG6B-72-AL	226	71008	20ND6.5/21	228	71168	FL-PC-ISS	218
30012	EBC2-220	223	31735	TUG8B-12-AL	226	71009	CLFR1520/60.8-12	230	72129	20FRP6.5/21	228
30013	EBC1-220-DR	224	31736	TUG8B-36-AL	226	71010	10NP6.5/21	228	72169	WND18-16	232
30014	EBC2-220-DR	224	31737	TUG8B-42-AL	226	71012	12NP6.5/21	228	72170	WND18-30	232
30018	CEBC1	223	31738	TUG8B-48-AL	226	71014	10FRD6.5/21	228	72171	WND24-16	232
30019	CEBC2	223	31739	TUG8B-54-AL	226	71015	15FRP6.5/21	228	72172	WND24-30	232
30021	CEBC1-220	223	31740	TUG8B-60-AL	226	71016	12FRD6.5/21	228	72173	WND30-16	232
30022	CEBC2-220	223	31741	TUG8B-72-AL	226	71017	15NP6.5/21	228	72174	WND30-30	232
30024	EBC/CEBC-BK	224	31742	TUG8B-84-AL	226	71018	15FRD6.5/21	228	72175	WND36-16	232
30033	EBC1/CEBC1-RK	224	31743	TUG8B-96-AL	226	71019	20FRD6.5/21	228	72176	WND36-30	232
30034	EBC2/CEBC2-RK	224	31744	TUG6E	226	71020	10FRP6.5/21	228	72177	WND42-16	232
30052	LSHDPP	225	31747	TUG8E	226	71021	20NP6.5/21	228	72178	WND42-30	232
30369	METABO-CHGR110	224	31792	TUGH	227	71022	12FRP6.5/21	228	72179	WND48-16	232
30373	LSHDCBS	225	31793	TUG6S	227	71039	CLN1200/48-12	230	72180	WND48-30	232
30390	LSHD-RPK	225	31794	TUG8S	227	71042	CLN1800/72-12	230	72181	WND54-16	232
30392	LSHDS	225	31798	TUG6C	227	71044	CLN2100/84-12	230	72182	WND54-30	232
30393	LSHD30	225	31799	TUG8C	227	71052	FLSC-I	218	72183	WND60-16	232
30394	LSHD36	225	61294	CLMN450/18-15	229	71054	FLSC-I-50	218	72184	WND60-30	232
30395	LSHD42	225	61295	CLMN600/24-15	229	71055	FLSCM-I	218	72185	WND72-16	232
30396	LSHD48	225	61296	CLMN750/30-15	229	71057	FL-PC-I	218	72186	WND72-30	232
30397	LSHD54	225	61297	CLMN900/36-15	229	71058	FL-RPI	218	72187	WFRD18-16	232
30398	LSHD60	225	61298	CLMN1050/42-15	229	71058	FL-RPI	218	72188	WFRD18-30	232
30399	LSHD72	225	61299	CLMN1200/48-15	229	71060	FL-RBI	218	72189	WFRD24-16	232
30400	LSHDP	225	61300	CLMN1350/54-15	229	71060	FL-RBI	218	72190	WFRD24-30	232
30408	LSHDB72-2	225	61301	CLMN1500/60-15	229	71077	7.5NLD3.3/11	228	72191	WFRD30-16	232
30414	LSHDB36-2	225	61302	CLMN1800/72-15	229	71079	CLFR1800/72-12	230	72192	WFRD30-30	232

INDEX By Item Code

Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #
72193	WFRD36-16	232	73628	RSA150	94	74535	ICT6	94	74714	SPK48	133
72194	WFRD36-30	232	73628	RSA150	95	74535	ICT6	95	74715	SPK54	133
72195	WFRD42-16	232	73628	RSA150	97	74535	ICT6	97	74716	SPK60	133
72196	WFRD42-30	232	73628	RSA150	98	74535	ICT6	98	74717	SPK72	133
72197	WFRD48-16	232	73628	RSA150	99	74535	ICT6	99	74718	SPKHD72	133
72198	WFRD48-30	232	73628	RSA150	100	74535	ICT6	100	74719	SPKHD84	133
72199	WFRD54-16	232	73628	RSA150	104	74535	ICT6	104	74720	SPKHD96	133
72200	WFRD54-30	232	73628	RSA150	106	74535	ICT6	106	74721	SPKHD120	133
72201	WFRD60-16	232	73628	RSA150	107	74535	ICT6	107	74734	SPCP	133
72202	WFRD60-30	232	73628	RSA150	110	74535	ICT6	110	74734	SPCP	134
72203	WFRD72-16	232	73631	HVPT	72	74535	ICT6	140	74742	SPBV	133
72204	WFRD72-30	232	73631	HVPT	74	74550	HDARK	139	74743	SPYS	133
73017	PP72	91	73631	HVPT	139	74558	RBP1S-S	193	74744	SPPR	133
73024	PPS6	91	74037	VMFM	159	74559	RBP1S-M	193	74745	SPH10	133
73047	HSA8SS	70	74038	VMFL	159	74560	RBP1S-L	193	74746	SPN	133
73047	HSA8SS	72	74100	HW-BC	138	74561	RBP1S-XL	193	74747	SPG	133
73047	HSA8SS	74	74141	HTTS	138	74562	RBPSR-S	195	74748	SPPN	133
73047	HSA8SS	75	74307	HXF8SS	68	74563	RBPSR-M	195	74771	HSSTS	74
73047	HSA8SS	139	74307	HXF8SS	139	74564	RBPSR-L	195	74771	HSSTS	139
73048	HSA8S	70	74313	STKHSS	139	74565	RBPSR-XL	195	74772	HSSCS	74
73048	HSA8S	72	74316	STKHSD	139	74566	PC18	88	74772	HSSCS	139
73048	HSA8S	74	74389	CBV-72	156	74567	PC24	88	74773	PSSS	91
73048	HSA8S	75	74390	CBV-84	156	74568	PC30	88	74773	PSSS	97
73048	HSA8S	139	74391	CBV-96	156	74569	PC36	88	74773	PSSS	100
73049	HSA8M	70	74395	VP72	159	74570	PC42	88	74773	PSSS	104
73049	HSA8M	72	74396	VP84	159	74571	PC48	88	74773	PSSS	106
73049	HSA8M	74	74397	VP96	159	74572	PC54	88	74774	ELT	138
73049	HSA8M	75	74398	VMF72	159	74573	PC60	88	74775	STJM	19
73049	HSA8M	139	74399	VMF84	159	74574	PC72	88	74775	STJM	113
73050	HPS8	139	74417	STJK	19	74612	RP-72	94	74775	STJM	139
73063	HSA8L	70	74417	STJK	113	74618	RC18	92	74776	HBTK	139
73063	HSA8L	72	74417	STJK	139	74619	RC24	92	74821	HTV18SS	75
73063	HSA8L	74	74419	STTS	19	74620	RC30	92	74822	HTV24SS	75
73063	HSA8L	139	74419	STTS	113	74621	RC36	92	74823	HTV30SS	75
73064	HSA8LL	70	74419	STTS	139	74622	RC42	92	74824	HTV36SS	75
73064	HSA8LL	72	74440	VMF96	159	74623	RC48	92	74825	HTV42SS	75
73064	HSA8LL	74	74448	UFB18	111	74624	RC54	92	74826	HTV48SS	75
73064	HSA8LL	139	74449	UFB24	111	74625	RC60	92	74828	HTV18S	75
73131	CBV-XS	156	74450	UFB30	111	74626	RC72	92	74829	HTV24S	75
73132	CBV-S	156	74451	UFB36	111	74641	RV-72	92	74830	HTV30S	75
73133	CBV-M	156	74452	UFB42	111	74689	HXF8S	68	74831	HTV36S	75
73134	CBV-L	156	74453	UFB48	111	74689	HXF8S	139	74832	HTV42S	75
73156	PSA150	88	74454	UFB54	111	74690	HXF8M	68	74833	HTV48S	75
73156	PSA150	91	74455	UFB60	111	74690	HXF8M	139	74838	HTV36M	75
73163	RBPRET	195	74456	UFB72	111	74691	HXF8L	68	74839	HTV42M	75
73163	RBPRET	202	74457	VBK-72	156	74691	HXF8L	139	74840	HTV48M	75
73190	VBK-XS	156	74457	VBK-72	159	74692	RDP1-S	157	74885	PTM30T	204
73190	VBK-XS	159	74458	VBK-84	156	74693	RDP1-M	157	74886	PTM36T	204
73191	VBK-S	156	74458	VBK-84	159	74694	RDP1-L	157	74887	PTM42T	204
73191	VBK-S	159	74459	VBK-96	156	74695	RDP1-XL	157	74888	PTM48T	204
73192	VBK-M	156	74459	VBK-96	159	74698	RDPMBK	159	74889	PTM54T	204
73192	VBK-M	159	74460	UFB84	111	74699	RDPBK-S	157	74890	PTM60T	204
73193	VBK-L	156	74502	HDTs	19	74699	RDPBK-S	159	74891	PTMHD54T	204
73193	VBK-L	159	74502	HDTs	113	74700	RDPBK-M	157	74892	PTMHD60T	204
73399	VMBK	159	74502	HDTs	139	74700	RDPBK-M	159	74893	PTMHD72T	204
73400	VPXS	159	74504	STKD	139	74701	RDPBK-L	157	74894	PTMHD84T	204
73408	VPS	159	74505	STKS	139	74701	RDPBK-L	159	74895	PTMSD72T	204
73409	VPM	159	74534	ISC	140	74702	RDPBK-XL	157	74896	PTMSD84T	204
73410	VPL	159	74535	ICT6	76	74702	RDPBK-XL	159	74897	PTMSD96T	204
73438	PV72	88	74535	ICT6	77	74705	RDPMSK	159	74898	PTMSD120T	204
73533	VCS	159	74535	ICT6	79	74709	SPK18	133	74899	PTM30R	204
73535	VMFXS	159	74535	ICT6	88	74710	SPK24	133	74900	PTM36R	204
73549	VMFS	159	74535	ICT6	89	74711	SPK30	133	74901	PTM42R	204
73626	PHA	91	74535	ICT6	91	74712	SPK36	133	74902	PTM48R	204
73628	RSA150	92	74535	ICT6	92	74713	SPK42	133	74903	PTM54R	204

INDEX By Item Code

Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #
74904	PTM60R	204	75524	RBPFK-L	195	75628	CRB10	16	75657	EZS2P48	140
74905	PTMHD54R	204	75525	RBPFK-XL	195	75628	CRB10	22	75658	EZS2P54	79
74906	PTMHD60R	204	75526	RBPMBK	195	75628	CRB10	37	75658	EZS2P54	140
74907	PTMHD72R	204	75527	RBPIT-S	195	75628	CRB10	143	75659	EZS2P60	79
74908	PTMHD84R	204	75528	RBPIT-M	195	75629	CRB16	16	75659	EZS2P60	140
74909	PTMSD72R	204	75529	RBPIT-L	195	75629	CRB16	22	75660	EZS2P72	79
74910	PTMSD84R	204	75530	RBPIT-XL	195	75629	CRB16	37	75660	EZS2P72	140
74911	PTMSD96R	204	75531	MFASK	208	75629	CRB16	143	75661	FFCK	79
74912	PTMSD120R	204	75565	HSA8SSS	139	75630	CRB22	16	75666	EZS2MBK	79
74914	MSR	208	75566	RDPF-S	159	75630	CRB22	22	75666	EZS2MBK	91
74915	MSRSD	208	75567	RDPF-M	159	75630	CRB22	37	75666	EZS2MBK	94
74916	PMSMK	208	75568	RDPF-L	159	75630	CRB22	143	75666	EZS2MBK	121
74917	PMSMKS	208	75569	RDPF-XL	159	75631	CRB28	16	75666	EZS2MBK	140
74918	MAK	208	75570	VUBK-XS	156	75631	CRB28	22	75771	EZP1-272	11
74919	MAKHD	208	75571	VUBK-S	156	75631	CRB28	37	75772	EZP1P72	19
74920	MAKSD	208	75572	VUBK-M	156	75631	CRB28	143	75772	EZP1P72	20
74921	MORK	208	75573	VUBK-L	156	75632	CRB34	16	75773	CRB70	16
74921	MORK	209	75574	VUBK-72	156	75632	CRB34	22	75773	CRB70	22
74922	MORKSD	208	75575	VUBK-84	156	75632	CRB34	37	75773	CRB70	37
74922	MORKSD	209	75576	VUBK-96	156	75632	CRB34	143	75773	CRB70	143
74923	MCRK	207	75578	SPMK2	133	75633	CRB40	16	75774	EZP1-872	11
74923	MCRK	208	75579	SPMK3	133	75633	CRB40	22	75775	CRB64	16
74923	MCRK	209	75583	PTM24T	204	75633	CRB40	37	75775	CRB64	22
74924	MCRKSD	208	75584	PTM24R	204	75633	CRB40	143	75775	CRB64	37
74924	MCRKSD	209	75588	PLSC18	89	75634	CRB46	16	75778	FLSC-ISS	218
74925	MCB	207	75589	PLSC24	89	75634	CRB46	22	75779	EZP1-818	11
74925	MCB	208	75590	PLSC30	89	75634	CRB46	37	75780	EZP1-824	11
74925	MCB	209	75591	PLSC36	89	75634	CRB46	143	75781	EZP1-830	11
74926	MCBSD	208	75592	PLSC42	89	75635	CRB52	16	75782	EZP1-836	11
74926	MCBSD	209	75593	PLSC48	89	75635	CRB52	22	75783	EZP1-842	11
74927	MCSK	207	75594	PLSC54	89	75635	CRB52	37	75784	EZP1-848	11
74927	MCSK	208	75595	PLSP18	91	75635	CRB52	143	75785	EZP1-854	11
74927	MCSK	209	75596	PLSP24	91	75636	CRB58	16	75786	EZP1-860	11
74928	MCSKHD	207	75597	PLSP30	91	75636	CRB58	22	75787	MSP-224	34
74928	MCSKHD	208	75598	PLSP36	91	75636	CRB58	37	75788	MSP-230	34
74928	MCSKHD	209	75599	PLSP42	91	75636	CRB58	143	75789	MSP-236	34
74929	MCSKSD	208	75600	PLSP48	91	75637	EZP1MPK	19	75790	MSP-242	34
74929	MCSKSD	209	75601	PLSP54	91	75641	EZP1PL	19	75791	MSP-248	34
74930	MCS	207	75610	EZP1-212	11	75641	EZP1PL	20	75792	MSP-254	34
74930	MCS	208	75611	EZP1-218	11	75641	EZP1PL	139	75793	MSP-260	34
74930	MCS	209	75612	EZP1-224	11	75642	EZP1BP	19	75794	MSP-272	34
74931	MCSHD	207	75613	EZP1-230	11	75642	EZP1BP	20	75795	MSP-824	34
74931	MCSHD	208	75614	EZP1-236	11	75642	EZP1BP	143	75796	MSP-830	34
74931	MCSHD	209	75615	EZP1-242	11	75642	EZP1BP	147	75797	MSP-836	34
74932	MCSSD	208	75616	EZP1-248	11	75642	EZP1BP	148	75798	MSP-842	34
74932	MCSSD	209	75617	EZP1-254	11	75643	EZS2-18	76	75799	MSP-848	34
74941	SRBK	136	75618	EZP1-260	11	75644	EZS2-24	76	75800	MSPP-854	34
74952	SPKHD42	133	75619	EZP1P12	19	75645	EZS2-30	76	75801	MSPP-860	34
74953	SPKHD48	133	75619	EZP1P12	20	75646	EZS2-36	76	75802	MSPP-872	34
74954	SPKHD54	133	75620	EZP1P18	19	75647	EZS2-42	76	75803	MSPP24	39
74955	SPKHD60	133	75620	EZP1P18	20	75648	EZS2-48	76	75804	MSPP30	39
74982	VMLK	159	75621	EZP1P24	19	75649	EZS2-54	76	75804	MSPP30	117
74983	VSC	159	75621	EZP1P24	20	75650	EZS2-60	76	75805	MSPP36	39
75017	FL-ADH-0.8	231	75622	EZP1P30	19	75651	EZS2-72	76	75805	MSPP36	117
75419	HVT8-S/S	70	75622	EZP1P30	20	75652	EZS2P18	79	75806	MSPP42	39
75419	HVT8-S/S	74	75623	EZP1P36	19	75652	EZS2P24	140	75806	MSPP42	117
75419	HVT8-S/S	75	75623	EZP1P36	20	75653	EZS2P24	79	75807	MSPP48	39
75419	HVT8-S/S	139	75624	EZP1P42	19	75653	EZS2P24	140	75807	MSPP48	117
75513	PAB	79	75624	EZP1P42	20	75654	EZS2P30	79	75808	MSPP54	39
75513	PAB	91	75625	EZP1P48	19	75654	EZS2P30	140	75808	MSPP54	117
75513	PAB	94	75625	EZP1P48	20	75655	EZS2P36	79	75809	MSPP60	39
75513	PAB	121	75626	EZP1P54	19	75655	EZS2P36	140	75809	MSPP60	117
75513	PAB	140	75626	EZP1P54	20	75656	EZS2P42	79	75810	MSPP72	39
75522	RBPFK-S	195	75627	EZP1P60	19	75656	EZS2P42	140	75811	MSPPMK	39
75523	RBPFK-M	195	75627	EZP1P60	20	75657	EZS2P48	79	75811	MSPPMK	47

INDEX By Item Code

Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #
75811	MSPMPK	67	75896	PSTA	60	75934	MHCP-54S	56	76032	RBAS4-18	150
75811	MSPMPK	74	75896	PSTA	67	75935	MHCP-60S	56	76033	RBAS4-24	150
75816	MSPL	39	75896	PSTA	74	75936	MHCP-72S	56	76034	RBAS4-30	150
75816	MSPL	67	75896	PSTA	113	75945	MHCP-BPA24	58	76035	RBAS4-36	150
75816	MSPL	74	75897	PTPK	55	75946	MHCP-BPA30	58	76036	RBAS4-42	150
75817	RMC1	217	75897	PTPK	60	75947	MHCP-BPA36	58	76037	RBAS4-48	150
75819	RMC1-CP	217	75898	PSTS-W	39	75948	MHCP-BPA42	58	76038	RBAS4-54	150
75820	RMC1-CB	217	75898	PSTS-W	47	75949	MHCP-BPA48	58	76039	RBAS4-60	150
75820	RMC1-CB	219	75898	PSTS-W	55	75950	MHCP-BPA54	58	76040	RBAS4-72	150
75821	RMC1-PL	217	75898	PSTS-W	60	75951	MHCP-BPA60	58	76041	RBAER-10	151
75830	MMBK	34	75898	PSTS-W	67	75952	MHCP-BPA72	58	76042	RBAER-16	151
75830	MMBK	41	75898	PSTS-W	74	75953	MHCP-BCK24	58	76043	RBAER-22	151
75830	MMBK	49	75898	PSTS-W	113	75954	MHCP-BCK30	58	76044	RBAER-28	151
75830	MMBK	56	75899	PSTS-S	47	75955	MHCP-BCK36	58	76045	RBAER-34	151
75830	MMBK	129	75899	PSTS-S	55	75956	MHCP-BCK42	58	76046	RBAER-40	151
75832	RMC1-PP	217	75899	PSTS-S	60	75957	MHCP-BCK48	58	76047	RBAER-46	151
75833	RMC1-50	217	75899	PSTS-S	67	75958	MHCP-BCK54	58	76048	RBAER-52	151
75834	RMC1-LS	217	75899	PSTS-S	74	75959	MHCP-BCK60	58	76049	RBAER-58	151
75835	RMC1LS-PL	217	75901	HFC2	74	75960	MHCP-BCK72	58	76050	RBAER-70	151
75836	RMC1-LSPP	217	75901	HFC2	139	75961	MHP-CP24	60	76069	AWTNCB	47
75843	STS-S	87	75902	HXFC2	74	75962	MHP-CP30	60	76069	AWTNCB	55
75843	STS-S	104	75902	HXFC2	139	75963	MHP-CP36	60	76069	AWTNCB	58
75843	STS-S	117	75905	AWTB	47	75964	MHP-CP42	60	76069	AWTNCB	60
75843	STS-S	125	75905	AWTB	55	75965	MHP-CP48	60	76071	SSTSMB	99
75844	STS-B	87	75905	AWTB	60	75966	MHP-CP54	60	76071	SSTSMB	114
75844	STS-B	104	75906	AWTMB	47	75967	MHP-CP60	60	76071	SSTSMB	129
75844	STS-B	117	75906	AWTMB	55	75968	MHP-CP72	60	76072	SSTLMB	99
75844	STS-B	125	75906	AWTMB	60	75978	SSRB	60	76072	SSTLMB	114
75845	QMTS-P	19	75907	AWTA	47	75979	HXF2-SS	68	76072	SSTLMB	129
75845	QMTS-P	39	75907	AWTA	55	75979	HXF2-SS	74	76073	SSTOTA	99
75845	QMTS-P	47	75907	AWTA	60	75979	HXF2-SS	139	76073	SSTOTA	114
75845	QMTS-P	67	75909	AWTHK	47	75980	HXF2-S	68	76073	SSTOTA	129
75845	QMTS-P	74	75909	AWTHK	55	75980	HXF2-S	74	76074	QMT-P	39
75845	QMTS-P	113	75909	AWTHK	60	75980	HXF2-S	139	76074	QMT-P	47
75846	STS-W	104	75910	MHS-24	99	75981	HXF2-M	68	76074	QMT-P	67
75846	STS-W	117	75911	MHS-30	99	75981	HXF2-M	74	76074	QMT-P	74
75846	STS-W	125	75912	MHS-36	99	75981	HXF2-M	139	76075	QMT-W	39
75847	STAK	104	75913	MHS-42	99	75982	HXF2-L	68	76075	QMT-W	47
75847	STAK	106	75914	MHS-48	99	75982	HXF2-L	74	76075	QMT-W	67
75847	STAK	110	75915	MHS-54	99	75982	HXF2-L	139	76075	QMT-W	74
75847	STAK	117	75916	MHS-60	99	75985	RBQC1HD-12	144	76083	SATB	105
75868	MDWS-24	114	75917	MHS-72	99	75986	RBQC1HD-18	144	76083	SATB	117
75869	MDWS-30	114	75918	MHSP-24	97	75987	RBQC1HD-24	144	76083	SATB	125
75870	MDWS-36	114	75918	MHSP-24	104	75988	RBQC1HD-30	144	76084	SATHB	105
75871	MDWS-42	114	75919	MHSP-30	97	75989	RBQC1HD-36	144	76084	SATHB	117
75872	MDWS-48	114	75919	MHSP-30	104	75990	RBQC1HD-42	144	76084	SATHB	125
75873	MDWS-54	114	75920	MHSP-36	97	75991	RBQC1HD-48	144	76085	HTS18	77
75874	MDWS-60	114	75920	MHSP-36	104	75992	RBQC1HD-54	144	76086	HTS24	77
75875	MDWS-72	114	75921	MHSP-42	97	75993	RBQC1HD-66	144	76087	HTS30	77
75883	DWP-72	117	75921	MHSP-42	104	75995	RBAGS-16	147	76088	HTS36	77
75884	CDWB24	114	75922	MHSP-48	97	75996	RBAGS-22	147	76089	HTS42	77
75885	CDWB30	114	75922	MHSP-48	104	75997	RBAGS-28	147	76090	HTS48	77
75886	CDWB36	114	75923	MHSP-54	97	75998	RBAGS-34	147	76091	HTS54	77
75887	CDWB42	114	75923	MHSP-54	104	75999	RBAGS-40	147	76092	HTS60	77
75888	CDWB48	114	75924	MHSP-60	97	76024	MAPEK	129	76093	HTS72	77
75889	CDWB54	114	75924	MHSP-60	104	76025	MCBK	207	76094	HTSCK	77
75890	CDWB60	114	75925	MHSP-72	97	76025	MCBK	208	76094	HTSCK	79
75891	CDWB72	114	75925	MHSP-72	104	76025	MCBK	209	76096	QMTPAK	39
75892	STAKHD	104	75927	PFC	104	76026	MCBKHD	207	76096	QMTPAK	47
75892	STAKHD	106	75927	PFC	110	76026	MCBKHD	208	76096	QMTPAK	67
75892	STAKHD	110	75929	MHCP-24S	56	76026	MCBKHD	209	76096	QMTPAK	74
75892	STAKHD	117	75930	MHCP-30S	56	76028	RBAGS-46	147	76096	QMTPAK	113
75896	PSTA	39	75931	MHCP-36S	56	76029	RBAGS-52	147	76097	QMTBK-P	39
75896	PSTA	47	75932	MHCP-42S	56	76030	RBAGS-58	147	76097	QMTBK-P	40
75896	PSTA	55	75933	MHCP-48S	56	76031	RBAGS-70	147	76097	QMTBK-P	47

INDEX By Item Code

Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #
76097	QMTBK-P	48	76192	HV-24S	70	76306	HXF2-54L	68	76483	QMT-G	47
76097	QMTBK-P	67	76193	HV-24M	70	76307	HXF2-60M	68	76484	QMTS-G	39
76097	QMTBK-P	74	76194	HV-30S	70	76308	HXF2-60L	68	76484	QMTS-G	47
76098	QMTBK-W	39	76195	HV-30M	70	76309	HXF2-72M	68	76485	TRB18	45
76098	QMTBK-W	40	76196	HV-36S	70	76310	HXF2-72L	68	76485	TRB18	146
76098	QMTBK-W	47	76197	HV-36M	70	76392	MHP-EP	47	76486	TRB24	45
76098	QMTBK-W	48	76198	HV-36L	70	76392	MHP-EP	55	76486	TRB24	146
76098	QMTBK-W	55	76199	HV-42S	70	76392	MHP-EP	60	76487	TRB30	45
76098	QMTBK-W	60	76205	RVT6-S/S	106	76392	MHP-EP	110	76487	TRB30	146
76098	QMTBK-W	67	76249	RSA	94	76393	MHCP-CH	60	76488	TRB36	45
76098	QMTBK-W	74	76251	HV-42M	70	76394	MHCP-BS	60	76488	TRB36	146
76098	QMTBK-W	113	76252	HV-42L	70	76399	HOBK	67	76489	TRB42	45
76099	QMTPSBK	39	76253	HV-42LL	70	76399	HOBK	74	76489	TRB42	146
76099	QMTPSBK	47	76254	HV-48S	70	76403	EST-P	19	76490	TRB48	45
76099	QMTPSBK	67	76255	HV-48M	70	76404	EST-S	19	76490	TRB48	146
76099	QMTPSBK	74	76256	HV-48L	70	76405	EST-B	19	76491	TRB54	45
76101	HV-18SS	70	76257	HV-48LL	70	76406	ESTAK-EST	19	76491	TRB54	146
76102	HV-24SS	70	76258	HV-54M	70	76406	ESTAK-EST	113	76492	TRB60	45
76103	HV-30SS	70	76259	HV-54L	70	76407	ESPSBK	19	76492	TRB60	146
76104	HV-36SS	70	76260	HV-54LL	70	76408	ESPBK	19	76493	TRB66	45
76105	HV-42SS	70	76261	HV-60M	70	76409	ESPRK	19	76493	TRB66	146
76106	HV-48SS	70	76262	HV-60L	70	76410	ESBK-PS	19	76494	TRB72	45
76107	HV-54S	70	76263	HV-60LL	70	76410	ESBK-PS	113	76494	TRB72	146
76108	HV-60S	70	76264	HV-72M	70	76411	ESBK-B	19	76537	MMPK	34
76109	HV-72S	70	76265	HV-72L	70	76412	ESS-S	19	76537	MMPK	41
76110	H78P18	74	76266	HV-72LL	70	76412	ESS-S	113	76537	MMPK	49
76111	H78P24	74	76267	HVP-18M	72	76413	ESS-B	19	76537	MMPK	56
76112	H78P30	74	76268	HVP-18L	72	76414	RMC1-BCP	217	76537	MMPK	129
76113	H78P36	74	76269	HVP-24M	72	76415	RMC1-BPP	217	76538	RMC1-LSBPP	217
76114	H78P42	74	76270	HVP-24L	72	76415	RMC1-BPP	219	76540	QMTBK-G	39
76115	H78P48	74	76271	HVP-30M	72	76416	VAK	159	76540	QMTBK-G	40
76116	H78P54	74	76272	HVP-30L	72	76418	EZP10TK1	19	76540	QMTBK-G	47
76117	H78P60	74	76273	HVP-36M	72	76419	EZP10TK2	19	76540	QMTBK-G	48
76118	H78P72	74	76274	HVP-36L	72	76450	MMP-624	41	76551	MMP-1230	41
76124	HVP-18S	72	76275	HVP-42M	72	76451	MMP-630	41	76552	MMP-1236	41
76125	HVP-24S	72	76276	HVP-42L	72	76452	MMP-636	41	76553	MMP-1242	41
76126	HVP-30S	72	76277	HVP-48M	72	76453	MMP-642	41	76554	MMP-1248	41
76127	HVP-36S	72	76278	HVP-48L	72	76454	MMP-648	41	76555	MMP-1254	41
76128	HVP-42S	72	76279	HVP-48LL	72	76455	MMP-654	41	76556	MMP-1260	41
76129	HVP-48S	72	76280	HVP-54M	72	76456	MMP-660	41	76557	MMP-1272	41
76130	HVP-54S	72	76281	HVP-54L	72	76457	MMP-672	41	76558	RMC2-FS-1	219
76131	HVP-60S	72	76282	HVP-54LL	72	76458	MMPCP24	47	76559	RMC2-FSAPK	219
76132	HVP-72S	72	76283	HVP-60M	72	76458	MMPCP24	55	76560	PFC-SS	106
76138	HXF2-18SS	68	76284	HVP-60L	72	76459	MMPCP30	47	76570	RB6SA	152
76139	HXF2-24SS	68	76285	HVP-60LL	72	76459	MMPCP30	55	76571	RB6DH	153
76140	HXF2-30SS	68	76286	HVP-72M	72	76460	MMPCP36	47	76572	RBAGSCM-16	148
76141	HXF2-36SS	68	76287	HVP-72L	72	76460	MMPCP36	55	76573	RBAGSCM-22	148
76142	HXF2-42SS	68	76288	HVP-72LL	72	76461	MMPCP42	47	76574	RBAGSCM-28	148
76143	HXF2-48SS	68	76289	HXF2-18S	68	76461	MMPCP42	55	76575	RBAGSCM-34	148
76144	HXF2-54SS	68	76290	HXF2-18M	68	76462	MMPCP48	47	76576	RBAGSCM-40	148
76145	HXF2-60S	68	76291	HXF2-24S	68	76462	MMPCP48	55	76577	RBAGSCM-46	148
76146	HXF2-72S	68	76292	HXF2-24M	68	76463	MMPCP54	47	76578	RBAGSCM-52	148
76169	MHS-18V	99	76293	HXF2-30S	68	76463	MMPCP54	55	76579	RBAGSCM-58	148
76170	MHS-24V	99	76294	HXF2-30M	68	76464	MMPCP60	47	76581	RBAGSCM-70	148
76171	MHS-30V	99	76295	HXF2-36S	68	76464	MMPCP60	55	76593	CRB-HT10	16
76172	MHS-36V	99	76296	HXF2-36M	68	76465	MMPCP72	47	76593	CRB-HT10	22
76173	MHS-42V	99	76297	HXF2-36L	68	76465	MMPCP72	55	76593	CRB-HT10	37
76174	MHS-48V	99	76298	HXF2-42S	68	76466	MMPBPK	47	76594	CRB-HT16	16
76175	MHS-54V	99	76299	HXF2-42M	68	76466	MMPBPK	146	76594	CRB-HT16	22
76176	MHS-60V	99	76300	HXF2-42L	68	76472	FLEL-M	221	76594	CRB-HT16	37
76177	MHS-72V	99	76301	HXF2-48S	68	76473	FLEL-L	221	76595	CRB-HT22	16
76178	MHSP-18	97	76302	HXF2-48M	68	76474	FLELP	221	76595	CRB-HT22	22
76178	MHSP-18	104	76303	HXF2-48L	68	76478	FLRP	221	76595	CRB-HT22	37
76190	HV-18S	70	76304	HXF2-54S	68	76479	FLCP	221	76596	CRB-HT28	16
76191	HV-18M	70	76305	HXF2-54M	68	76483	QMT-G	39	76596	CRB-HT28	22

INDEX By Item Code

Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #
76596	CRB-HT28	37	76662	HTF236	13	76791	UHSPK	113	76855	DRXM-72-420	183
76597	CRB-HT34	16	76663	HTF242	13	76791	UHSPK	113	76856	DRXM-24-520	183
76597	CRB-HT34	22	76664	HTF248	13	76792	USMK	113	76857	DRXM-30-520	183
76597	CRB-HT34	37	76665	HTF254	13	76792	USMK	113	76858	DRXM-36-520	183
76598	CRB-HT40	16	76666	HTF260	13	76793	UHMK	113	76859	DRXM-42-520	183
76598	CRB-HT40	22	76667	HTF272	13	76793	UHMK	113	76860	DRXM-48-520	183
76598	CRB-HT40	37	76668	CBC18	121	76794	UST-P	113	76861	DRXM-54-520	183
76599	CRB-HT46	16	76669	CBC24	121	76795	UST-W	113	76862	DRXM-60-520	183
76599	CRB-HT46	22	76670	CBC30	121	76796	MSP-284	34	76863	DRXM-72-520	183
76599	CRB-HT46	37	76671	CBC36	121	76797	MSP-884	34	76864	DRXM-24-435	183
76600	CRB-HT52	16	76672	CBC42	121	76798	MMP-684	41	76865	DRXM-30-435	183
76600	CRB-HT52	22	76673	CBC48	121	76799	MMP-1284	41	76866	DRXM-36-435	183
76600	CRB-HT52	37	76674	CBC54	121	76800	MHCP-84S	56	76867	DRXM-42-435	183
76601	CRB-HT58	16	76675	CBC60	121	76803	MHS-84	99	76868	DRXM-48-435	183
76601	CRB-HT58	22	76692	CPB	121	76804	MHS-84V	99	76869	DRXM-54-435	183
76601	CRB-HT58	37	76695	MSPP66	117	76805	MHS-84RV	100	76870	DRXM-60-435	183
76602	CRB-HT64	16	76697	TRB78	45	76806	MDWS-84	114	76871	DRXM-72-435	183
76602	CRB-HT64	22	76697	TRB78	146	76807	MSPP84	39	76872	DRXM-24-535	183
76602	CRB-HT64	37	76712	UTC18	111	76808	MMPCP84	47	76873	DRXM-30-535	183
76603	CRB-HT70	16	76713	UTC24	111	76808	MMPCP84	55	76874	DRXM-36-535	183
76603	CRB-HT70	22	76714	UTC30	111	76809	MHCP-BPA84	58	76875	DRXM-42-535	183
76603	CRB-HT70	37	76715	UTC36	111	76810	MHCP-BCK84	58	76876	DRXM-48-535	183
76613	MHS-24R	100	76716	UTC42	111	76811	MHP-CP84	60	76877	DRXM-54-535	183
76614	MHS-30R	100	76717	UTC48	111	76812	MHCP-2BC84	60	76878	DRXM-60-535	183
76615	MHS-36R	100	76718	UTC54	111	76814	MHSP-84	104	76879	DRXM-72-535	183
76616	MHS-42R	100	76719	UTC60	111	76815	DWP-84	117	76880	DRXH-24-420	185
76617	MHS-48R	100	76720	UTC72	111	76816	DRXL-24-420	181	76881	DRXH-30-420	185
76618	MHS-54R	100	76721	UTC84	111	76817	DRXL-30-420	181	76882	DRXH-36-420	185
76619	MHS-60R	100	76724	UTF18	111	76818	DRXL-36-420	181	76883	DRXH-42-420	185
76620	MHS-72R	100	76725	UTF24	111	76819	DRXL-42-420	181	76884	DRXH-48-420	185
76621	MHS-84R	100	76726	UTF30	111	76820	DRXL-48-420	181	76885	DRXH-54-420	185
76622	PFRS	100	76727	UTF36	111	76821	DRXL-54-420	181	76886	DRXH-60-420	185
76622	PFRS	104	76728	UTF42	111	76822	DRXL-60-420	181	76887	DRXH-72-420	185
76622	PFRS	106	76729	UTF48	111	76823	DRXL-72-420	181	76888	DRXH-24-520	185
76622	PFRS	107	76730	UTF54	111	76824	DRXL-24-520	181	76889	DRXH-30-520	185
76636	SSTBK-W	104	76731	UTF60	111	76825	DRXL-30-520	181	76890	DRXH-36-520	185
76636	SSTBK-W	106	76732	UTF72	111	76826	DRXL-36-520	181	76891	DRXH-42-520	185
76636	SSTBK-W	117	76733	UTF84	111	76827	DRXL-42-520	181	76892	DRXH-48-520	185
76636	SSTBK-W	125	76748	URCB18/450	111	76828	DRXL-48-520	181	76893	DRXH-54-520	185
76637	SSTBK-B	104	76749	URCB24/600	111	76829	DRXL-54-520	181	76894	DRXH-60-520	185
76637	SSTBK-B	106	76750	URCB30/750	111	76830	DRXL-60-520	181	76895	DRXH-72-520	185
76637	SSTBK-B	117	76751	URCB36/900	111	76831	DRXL-72-520	181	76896	DRXH-24-435	185
76637	SSTBK-B	125	76752	URCB42/1050	111	76832	DRXL-24-435	181	76897	DRXH-30-435	185
76638	MHCP-2BC24	60	76753	URCB48/1200	111	76833	DRXL-30-435	181	76898	DRXH-36-435	185
76639	MHCP-2BC30	60	76754	URCB54/1350	111	76834	DRXL-36-435	181	76899	DRXH-42-435	185
76640	MHCP-2BC36	60	76755	URCB60/1500	111	76835	DRXL-42-435	181	76900	DRXH-48-435	185
76641	MHCP-2BC42	60	76756	URCB72/1800	111	76836	DRXL-48-435	181	76901	DRXH-54-435	185
76642	MHCP-2BC48	60	76757	URCB84/2100	111	76837	DRXL-54-435	181	76902	DRXH-60-435	185
76643	MHCP-2BC54	60	76772	USP18/450	113	76838	DRXL-60-435	181	76903	DRXH-72-435	185
76644	MHCP-2BC60	60	76773	USP24/600	113	76839	DRXL-72-435	181	76904	DRXH-24-535	185
76645	MHCP-2BC72	60	76774	USP30/750	113	76840	DRXL-24-535	181	76905	DRXH-30-535	185
76646	MHS-18RV	100	76775	USP36/900	113	76841	DRXL-30-535	181	76906	DRXH-36-535	185
76647	MHS-24RV	100	76776	USP42/1050	113	76842	DRXL-36-535	181	76907	DRXH-42-535	185
76648	MHS-30RV	100	76777	USP48/1200	113	76843	DRXL-42-535	181	76908	DRXH-48-535	185
76649	MHS-36RV	100	76778	USP54/1350	113	76844	DRXL-48-535	181	76909	DRXH-54-535	185
76650	MHS-42RV	100	76779	USP60/1500	113	76845	DRXL-54-535	181	76910	DRXH-60-535	185
76651	MHS-48RV	100	76780	USP72/1800	113	76846	DRXL-60-535	181	76911	DRXH-72-535	185
76652	MHS-54RV	100	76781	USP84/2100	113	76847	DRXL-72-535	181	76912	DRXD-42-520	187
76653	MHS-60RV	100	76784	UPSBK	113	76848	DRXM-24-420	183	76913	DRXD-48-520	187
76654	MHS-72RV	100	76788	ABU	113	76849	DRXM-30-420	183	76914	DRXD-54-520	187
76655	RBAER-44	151	76788	ABU	113	76850	DRXM-36-420	183	76915	DRXD-60-520	187
76658	HTF212	13	76789	UMBK	113	76851	DRXM-42-420	183	76916	DRXD-72-520	187
76659	HTF218	13	76789	UMBK	113	76852	DRXM-48-420	183	76917	DRXD-84-520	187
76660	HTF224	13	76790	USPK	113	76853	DRXM-54-420	183	76918	DRXD-96-520	187
76661	HTF230	13	76790	USPK	113	76854	DRXM-60-420	183	76919	DRXD-42-535	187

INDEX By Item Code

Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #
76920	DRXD-48-535	187	76973	RBAGS-54	147	77103	CRB-LS46W	31	77327	MMKUHD	113
76921	DRXD-54-535	187	76974	RBAGS-60	147	77104	CRB-LS52W	27	77330	RMC2-FS-50	219
76922	DRXD-60-535	187	76975	RBAGS-72	147	77104	CRB-LS52W	31	77365	LS-SPK	29
76923	DRXD-72-535	187	76976	RBAGS-84	147	77105	CRB-LS58W	27	77366	LSTMPK	29
76924	DRXD-84-535	187	76977	UBTK	113	77105	CRB-LS58W	31	77367	LSTPB-RK	29
76925	DRXD-96-535	187	76978	UHDBTK	113	77106	RBAGM-16	29	77384	EZPTBT	20
76926	IB4	167	76981	FL-M-SP	220	77106	RBAGM-16	147	77385	EZPTBTHD	20
76926	IB4	170	76982	FL-L-SP	220	77107	RBAGM-22	29	77386	FL-XL-SP	220
76926	IB4	173	76986	FLELK-XL	221	77107	RBAGM-22	147	77387	SPG-CVR-A	130
76926	IB4	181	77037	CSTBK	110	77108	RBAGM-28	29	77388	SPG-CVR-B	130
76926	IB4	183	77047	TRB84	45	77108	RBAGM-28	147	77389	SPG-CVR-C	130
76926	IB4	185	77047	TRB84	146	77109	RBAGM-34	29	77390	SPG-CVR-D	130
76927	IB5	167	77048	TRB90	45	77109	RBAGM-34	147	77391	SPG-CVR-E	130
76927	IB5	170	77048	TRB90	146	77110	RBAGM-40	29	77392	SPG-CVR-F	130
76927	IB5	173	77052	SACSK	110	77110	RBAGM-40	147	77393	SPG-CVR-G	130
76927	IB5	181	77065	SACSRC	110	77111	RBAGM-46	29	77405	FLRLB-M-SP	221
76927	IB5	183	77070	LSP12	29	77111	RBAGM-46	147	77406	FLRLB-L-SP	221
76927	IB5	185	77071	LSP18	29	77114	LS-BP	29	77407	FLVRL-XL-SP	221
76927	IB5	187	77072	LSP24	29	77115	LS-BP-S/S	33	77408	FLTW-M-SP	221
76927	IB5	189	77073	LSP30	29	77117	LS-SW	29	77409	FLTW-L-SP	221
76928	IBBK	164	77074	LSP36	29	77118	LS-SS	29	77410	FLTW-XL-SP	221
76928	IBBK	167	77075	LSP42	29	77120	LST-TAK	29	77423	RAPEK	129
76928	IBBK	170	77076	LSP48	29	77121	LST-P	29	77424	MMP-624-S/S	42
76928	IBBK	173	77077	LSP54	29	77122	LST-W	29	77425	MMP-630-S/S	42
76928	IBBK	181	77078	LSP60	29	77123	LST-S	29	77426	MMP-636-S/S	42
76928	IBBK	183	77079	LSP12-S/S	33	77124	LST-B-S/S	33	77427	MMP-642-S/S	42
76928	IBBK	185	77080	LSP18-S/S	33	77125	LST-W-S/S	33	77428	MMP-648-S/S	42
76928	IBBK	187	77081	LSP24-S/S	33	77126	LST-W-S/S-2	33	77429	MMP-654-S/S	42
76928	IBBK	189	77082	LSP30-S/S	33	77127	EZP-LS212	25	77430	MMP-660-S/S	42
76929	IBS-L4	181	77083	LSP36-S/S	33	77128	EZP-LS218	25	77431	MMP-672-S/S	42
76930	IBS-L5	181	77084	LSP42-S/S	33	77129	EZP-LS224	25	77432	MMP-684-S/S	42
76931	IBS-M4	173	77085	LSP48-S/S	33	77130	EZP-LS230	25	77433	MMP-1230-S/S	42
76931	IBS-M4	183	77086	LSP54-S/S	33	77131	EZP-LS236	25	77434	MMP-1236-S/S	42
76932	IBS-M5	173	77087	LSP60-S/S	33	77132	EZP-LS242	25	77435	MMP-1242-S/S	42
76932	IBS-M5	183	77088	CRB-LS10	27	77133	EZP-LS248	25	77436	MMP-1248-S/S	42
76933	IBS-H4	185	77088	CRB-LS10	31	77134	EZP-LS254	25	77437	MMP-1254-S/S	42
76934	IBS-H5	185	77089	CRB-LS16	27	77135	EZP-LS260	25	77438	MMP-1260-S/S	42
76935	ISABK	187	77089	CRB-LS16	31	77136	EZP-LS818	25	77439	MMP-1272-S/S	42
76935	ISABK	189	77090	CRB-LS22	27	77137	EZP-LS824	25	77440	MMP-1284-S/S	42
76936	IMK	181	77090	CRB-LS22	31	77138	EZP-LS830	25	77442	PSTA-S/S	40
76936	IMK	183	77091	CRB-LS28	27	77139	EZP-LS836	25	77442	PSTA-S/S	48
76936	IMK	185	77091	CRB-LS28	31	77140	EZP-LS842	25	77443	TEN-LOCK-KIT	130
76937	IEA-42-60	187	77092	CRB-LS34	27	77141	EZP-LS848	25	77450	QMTS-P-S/S	24
76937	IEA-42-60	189	77092	CRB-LS34	31	77142	EZP-LS854	25	77450	QMTS-P-S/S	40
76938	IEA-72-96	187	77093	CRB-LS40	27	77143	EZP-LS860	25	77450	QMTS-P-S/S	48
76938	IEA-72-96	189	77093	CRB-LS40	31	77144	CLSGF-212	30	77451	QMTS-W-S/S	24
76939	HW-IMPB	191	77094	CRB-LS46	27	77145	CLSGF-218	30	77451	QMTS-W-S/S	40
76940	CRB76	16	77094	CRB-LS46	31	77146	CLSGF-224	30	77451	QMTS-W-S/S	48
76940	CRB76	22	77095	CRB-LS52	27	77147	CLSGF-230	30	77452	QMTS-G-S/S	24
76940	CRB76	37	77095	CRB-LS52	31	77148	CLSGF-236	30	77452	QMTS-G-S/S	40
76941	CRB82	16	77096	CRB-LS58	27	77149	CLSGF-242	30	77452	QMTS-G-S/S	48
76941	CRB82	22	77096	CRB-LS58	31	77150	CLSGF-248	30	77453	MSP-224-S/S	36
76941	CRB82	37	77097	CRB-LS10W	27	77151	CLSGF-254	30	77454	MSP-230-S/S	36
76942	CDWB84	114	77097	CRB-LS10W	31	77152	CLSGF-260	30	77455	MSP-236-S/S	36
76943	SST-BUK	104	77098	CRB-LS16W	27	77153	CLSGF-818	30	77456	MSP-242-S/S	36
76943	SST-BUK	117	77098	CRB-LS16W	31	77154	CLSGF-824	30	77457	MSP-248-S/S	36
76950	OIBBK	191	77099	CRB-LS22W	27	77155	CLSGF-830	30	77458	MSP-254-S/S	36
76965	IB4-1U	191	77099	CRB-LS22W	31	77156	CLSGF-836	30	77459	MSP-260-S/S	36
76966	IB5-1U	191	77100	CRB-LS28W	27	77157	CLSGF-842	30	77460	MSP-272-S/S	36
76967	RBAGS-18	147	77100	CRB-LS28W	31	77158	CLSGF-848	30	77461	MSP-284-S/S	36
76968	RBAGS-24	147	77101	CRB-LS34W	27	77159	CLSGF-854	30	77462	MSP-824-S/S	36
76969	RBAGS-30	147	77101	CRB-LS34W	31	77160	CLSGF-860	30	77463	MSP-830-S/S	36
76970	RBAGS-36	147	77102	CRB-LS40W	27	77250	FL-PKIT-ML	221	77464	MSP-836-S/S	36
76971	RBAGS-42	147	77102	CRB-LS40W	31	77251	FL-PKIT-XL	221	77465	MSP-842-S/S	36
76972	RBAGS-48	147	77103	CRB-LS46W	27	77324	MMKU	113	77466	MSP-848-S/S	36

INDEX By Item Code

Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #
77467	MSP-854-S/S	36	77582	MSPMPK-S/S	48	77645	MHS-54R-S/S	102	77713	MHP-1230	49
77468	MSP-860-S/S	36	77583	MSPBPK-S/S	24	77646	MHS-60R-S/S	102	77714	MHP-1236	49
77470	MSP-872-S/S	36	77584	QMT-P-S/S	40	77647	MHS-72R-S/S	102	77715	MHP-1242	49
77471	MSP-884-S/S	36	77584	QMT-P-S/S	48	77648	MHS-84R-S/S	102	77716	MHP-1248	49
77472	MSPP24-S/S	40	77585	QMT-W-S/S	40	77649	MHS-24RV-S/S	102	77717	MHP-1254	49
77473	MSPP30-S/S	40	77585	QMT-W-S/S	48	77650	MHS-30RV-S/S	102	77718	MHP-1260	49
77474	MSPP36-S/S	40	77586	QMT-G-S/S	40	77651	MHS-36RV-S/S	102	77719	MHP-1272	49
77475	MSPP42-S/S	40	77586	QMT-G-S/S	48	77652	MHS-42RV-S/S	102	77720	MHP-1284	49
77476	MSPP48-S/S	40	77587	QMTPAK-S/S	40	77653	MHS-48RV-S/S	102	77721	MHP-1296	49
77477	MSPP54-S/S	40	77587	QMTPAK-S/S	48	77654	MHS-54RV-S/S	102	77722	MMPCP96	47
77478	MSPP60-S/S	40	77588	QMTPSBK-S/S	40	77655	MHS-60RV-S/S	102	77722	MMPCP96	55
77479	MSPP72-S/S	40	77588	QMTPSBK-S/S	48	77656	MHS-72RV-S/S	102	77723	PST2-W	55
77480	MSPP84-S/S	40	77590	MMPCP24-S/S	48	77657	MHS-84RV-S/S	102	77723	PST2-W	58
77517	RBDTXHD-6.5C	155	77591	MMPCP30-S/S	48	77664	PTS-18R	200	77723	PST2-W	60
77524	MSPPL-S/S	40	77592	MMPCP36-S/S	48	77665	PTS-24R	200	77724	PST2-S	55
77529	ISABK-LMH	181	77593	MMPCP42-S/S	48	77666	PTS-30R	200	77724	PST2-S	58
77529	ISABK-LMH	183	77594	MMPCP48-S/S	48	77667	PTS-36R	200	77724	PST2-S	60
77529	ISABK-LMH	185	77595	MMPCP54-S/S	48	77668	PTS-42R	200	77725	PST2-R	55
77530	IBS-D5	187	77596	MMPCP60-S/S	48	77669	PTS-48R	200	77725	PST2-R	58
77531	MRB18	52	77597	MMPCP72-S/S	48	77670	PTS-54R	200	77725	PST2-R	60
77532	MRB24	52	77598	MMPCP84-S/S	48	77671	PTS-60R	200	77726	PSTS-R	55
77533	MRB30	52	77599	MHP-EP-S/S	48	77672	PTS-72R	200	77726	PSTS-R	60
77534	MRB36	52	77600	MMPBPK-S/S	48	77673	PTS-30R-UG	200	77727	MHPMPK	55
77535	MRB42	52	77601	MHS-24-S/S	102	77674	PTS-36R-UG	200	77727	MHPMPK	60
77536	MRB48	52	77602	MHS-30-S/S	102	77675	PTS-42R-UG	200	77728	MHPBPK	55
77537	MRB54	52	77603	MHS-36-S/S	102	77676	PTS-48R-UG	200	77729	FLCK	220
77538	MRB60	52	77604	MHS-42-S/S	102	77677	PTS-54R-UG	200	77741	SPG-CVR-H	130
77539	MRB66	52	77605	MHS-48-S/S	102	77678	PTS-60R-UG	200	77742	CTS-W	110
77540	MRB72	52	77606	MHS-54-S/S	102	77679	PTS-72R-UG	200	77743	CTS-S	83
77541	MRB78	52	77607	MHS-60-S/S	102	77680	PTS-RR21	200	77743	CTS-S	97
77542	MRB84	52	77608	MHS-72-S/S	102	77681	PTS-RR27	200	77743	CTS-S	110
77543	MRB90	52	77609	MHS-84-S/S	102	77682	PTS-RR33	200	77744	CTS-B	110
77548	SHIM-KITL	164	77610	MHS-24V-S/S	102	77683	PTS-RR39	200	77745	CTS-G	110
77548	SHIM-KITL	167	77611	MHS-30V-S/S	102	77683	PTS-RR39	200	77746	EZP-LS212HT	26
77548	SHIM-KITL	170	77612	MHS-36V-S/S	102	77684	PTS-RR45	200	77747	EZP-LS218HT	26
77548	SHIM-KITL	181	77613	MHS-42V-S/S	102	77684	PTS-RR45	200	77748	EZP-LS224HT	26
77549	SHIM-KITM	173	77614	MHS-48V-S/S	102	77685	PTS-RR51	200	77749	EZP-LS230HT	26
77549	SHIM-KITM	183	77615	MHS-54V-S/S	102	77685	PTS-RR51	200	77750	EZP-LS236HT	26
77550	SHIM-KITH	185	77616	MHS-60V-S/S	102	77686	PTS-RR57	200	77751	EZP-LS242HT	26
77551	CRB-LS10HT	27	77617	MHS-72V-S/S	102	77686	PTS-RR57	200	77752	EZP-LS248HT	26
77551	CRB-LS10HT	31	77618	MHS-84V-S/S	102	77687	PTS-RR63	200	77753	EZP-LS254HT	26
77552	CRB-LS16HT	27	77620	MHSP24-S/S	106	77687	PTS-RR63	200	77754	EZP-LS260HT	26
77552	CRB-LS16HT	31	77621	MHSP30-S/S	106	77688	PTS-RR69	200	77755	PTS-RHSAA	202
77553	CRB-LS22HT	27	77622	MHSP36-S/S	106	77689	PTS-RR75	200	77756	PTS-LHSAA	202
77553	CRB-LS22HT	31	77623	MHSP42-S/S	106	77690	PTS-RR81	200	77757	UST-S	113
77554	CRB-LS28HT	27	77624	MHSP48-S/S	106	77691	PTS-SR	202	77768	SACHP2	110
77554	CRB-LS28HT	31	77625	MHSP54-S/S	106	77692	PTS-HDSR	202	77840	MHS-24-ESAC	107
77555	CRB-LS34HT	27	77626	MHSP60-S/S	106	77694	PTS-SAK	202	77841	MHS-30-ESAC	107
77555	CRB-LS34HT	31	77627	MHSP72-S/S	106	77696	PTS-IBK	202	77842	MHS-36-ESAC	107
77556	CRB-LS40HT	27	77628	MHSP84-S/S	106	77697	PTS-HIBK	202	77843	MHS-42-ESAC	107
77556	CRB-LS40HT	31	77630	STS-W-S/S	106	77698	PTS-PS	202	77844	MHS-48-ESAC	107
77557	CRB-LS46HT	27	77631	STS-S-S/S	106	77699	PTS-PA	202	77845	MHS-54-ESAC	107
77557	CRB-LS46HT	31	77632	STS-B-S/S	106	77700	PTS-MBK	202	77846	MHS-60-ESAC	107
77558	CRB-LS52HT	27	77633	STHDPM2-S/S	106	77701	PTS-MBKUG	202	77847	MHS-72-ESAC	107
77558	CRB-LS52HT	31	77634	STHDMK2-S/S	106	77702	PTS-EBK	202	77848	MHS-60-2ESAC	107
77559	CRB-LS58HT	27	77635	STGK2-S/S	106	77703	MHP-624	49	77849	MHS-72-2ESAC	107
77559	CRB-LS58HT	31	77636	SST-BUK-S/S	106	77704	MHP-630	49	77850	MHS-84-2ESAC	107
77575	MMP-1836	41	77637	SST2HD-W-S/S	106	77705	MHP-636	49	77851	MHS-96-2ESAC	107
77576	MMP-1842	41	77638	SST2HD-S-S/S	106	77706	MHP-642	49	77852	MHS-120-2ESAC	107
77577	MMP-1848	41	77639	SST2HD-B-S/S	106	77707	MHP-648	49	77853	MHS-24V-ESAC	107
77578	MMP-1854	41	77640	MHS-24R-S/S	102	77708	MHP-654	49	77854	MHS-30V-ESAC	107
77579	MMP-1860	41	77641	MHS-30R-S/S	102	77709	MHP-660	49	77855	MHS-36V-ESAC	107
77580	MMP-1872	41	77642	MHS-36R-S/S	102	77710	MHP-672	49	77856	MHS-42V-ESAC	107
77581	MMP-1884	41	77643	MHS-42R-S/S	102	77711	MHP-684	49	77857	MHS-48V-ESAC	107
77582	MSPMPK-S/S	40	77644	MHS-48R-S/S	102	77712	MHP-696	49	77858	MHS-54V-ESAC	107

INDEX By Item Code

Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #
77859	MHS-60V-ESAC	107	77940	MHS-CARK-V42/1050	108	78475	CRB-W34	22	78617	MHP-1296P	50
77860	MHS-72V-ESAC	107	77941	MHS-CARK-V48/1200	108	78475	CRB-W34	37	78618	MHP-1836P	50
77861	MHS-60V-2ESAC	107	77942	MHS-CARK-V54/1350	108	78476	CRB-W40	16	78619	MHP-1842P	50
77862	MHS-72V-2ESAC	107	77943	MHS-CARK-V60/1500	108	78476	CRB-W40	22	78620	MHP-1848P	50
77863	MHS-84V-2ESAC	107	77944	MHS-CARK-V72/1800	108	78476	CRB-W40	37	78621	MHP-1854P	50
77864	MHS-96V-2ESAC	107	77945	MHS-CARK2-C60/1500	108	78477	CRB-W46	16	78622	MHP-1860P	50
77865	MHS-120V-2ESAC	107	77946	MHS-CARK2-C72/1800	108	78477	CRB-W46	22	78623	MHP-1872P	50
77866	SAC2-TIP-TL	110	77947	MHS-CARK2-C84/2100	108	78477	CRB-W46	37	78624	MHP-1884P	50
77867	STGK2	104	77948	MHS-CARK2-C96/2400	108	78478	CRB-W52	16	78625	MHP-1896P	50
77867	STGK2	105	77949	MHS-CARK2-C120/3000	108	78478	CRB-W52	22	78669	MHP-2442	49
77867	STGK2	117	77950	MHS-CARK2-V60/1500	108	78478	CRB-W52	37	78670	MHP-2448	49
77867	STGK2	117	77951	MHS-CARK2-V72/1800	108	78479	CRB-W58	16	78671	MHP-2454	49
77867	STGK2	125	77952	MHS-CARK2-V84/2100	108	78479	CRB-W58	22	78672	MHP-2460	49
77867	STGK2	125	77953	MHS-CARK2-V96/2400	108	78479	CRB-W58	37	78673	MHP-2472	49
77868	SSTHDPMP	104	77954	MHS-CARK2-V120/3000	108	78488	EZP1T-212	12	78674	MHP-2484	49
77868	SSTHDPMP	117	78142	STS-G	104	78489	EZP1T-218	12	78675	MHP-2496	49
77868	SSTHDPMP	125	78142	STS-G	117	78490	EZP1T-224	12	78676	MHP-2442P	50
77869	CSTHDPMP	110	78142	STS-G	125	78491	EZP1T-230	12	78677	MHP-2448P	50
77871	CSTHDMK	110	78387	CTS-B-S/S	33	78492	EZP1T-236	12	78678	MHP-2454P	50
77872	CST1HD-W	110	78402	RV-18	92	78493	EZP1T-242	12	78679	MHP-2460P	50
77873	CST1HD-S	110	78403	RV-24	92	78494	EZP1T-248	12	78680	MHP-2472P	50
77874	CST1HD-B	110	78404	RV-30	92	78495	EZP1T-254	12	78681	MHP-2484P	50
77875	CST1HD-G	110	78405	RV-36	92	78496	EZP1T-260	12	78682	MHP-2496P	50
77882	SACRKN	110	78406	RV-42	92	78497	EZP1T-272	12	78686	MMPCP96-S/S	48
77883	SACRH	110	78407	RV-48	92	78498	EZP1T-818	12	78700	ICT6-S/S	106
77884	SACRHL	110	78408	RV-54	92	78499	EZP1T-824	12	78706	MMP-624P	43
77885	SACKRP	110	78409	RV-60	92	78500	EZP1T-830	12	78707	MMP-630P	43
77886	SACRKT	110	78414	PP-18	91	78501	EZP1T-836	12	78708	MMP-636P	43
77887	SACPL-24/600	110	78415	PV-24	88	78502	EZP1T-842	12	78709	MMP-642P	43
77888	SACPL-30/750	110	78416	PP-24	91	78503	EZP1T-848	12	78710	MMP-648P	43
77889	SACPL-36/900	110	78417	PV-30	88	78504	EZP1T-854	12	78711	MMP-654P	43
77890	SACPL-42/1050	110	78418	PP-30	91	78505	EZP1T-860	12	78712	MMP-660P	43
77891	SACPL-48/1200	110	78419	PV-36	88	78506	EZP1T-872	12	78713	MMP-672P	43
77892	SACPL-54/1350	110	78420	PP-36	91	78507	EZPTMPK	20	78714	MMP-684P	43
77893	SACPL-60/1500	110	78421	PV-42	88	78508	EZPTCK	20	78715	MMP-1230P	43
77894	SACPL-72/1800	110	78422	PP-42	91	78509	EZPTCKHD	20	78716	MMP-1236P	43
77895	SACPL2-60/1500	110	78423	PV-48	88	78510	EZPTSR	20	78717	MMP-1242P	43
77896	SACPL2-72/1800	110	78424	PP-48	91	78511	EZPTSK	20	78718	MMP-1248P	43
77897	SACPL2-84/2100	110	78425	PP-54	91	78512	EZPTSKHD	20	78719	MMP-1254P	43
77898	SACPL2-96/2400	110	78426	RP-18	94	78591	MHP-1836	49	78720	MMP-1260P	43
77899	SACPL2-120/3000	110	78427	RP-24	94	78592	MHP-1842	49	78721	MMP-1272P	43
77900	CART-24/600	110	78428	RP-30	94	78593	MHP-1848	49	78722	MMP-1284P	43
77901	CART-30/750	110	78429	RP-36	94	78594	MHP-1854	49	78723	MHCP-24P	56
77902	CART-36/900	110	78430	RP-42	94	78595	MHP-1860	49	78724	MHCP-30P	56
77903	CART-42/1050	110	78431	RP-48	94	78596	MHP-1872	49	78725	MHCP-36P	56
77904	CART-48/1200	110	78432	RP-54	94	78597	MHP-1884	49	78726	MHCP-42P	56
77905	CART-54/1350	110	78433	RP-60	94	78598	MHP-1896	49	78727	MHCP-48P	56
77906	CART-60/1500	110	78451	PP-60	91	78599	MHP-624P	50	78728	MHCP-54P	56
77907	CART-72/1800	110	78453	PV-18	88	78600	MHP-630P	50	78729	MHCP-60P	56
77908	CART-60/1500	110	78454	PV-54	88	78601	MHP-636P	50	78730	MHCP-72P	56
77909	CART-72/1800	110	78455	PV-60	88	78602	MHP-642P	50	78731	MHCP-84P	56
77910	CART2-84/2100	110	78462	LSTMPK2-S/S	33	78603	MHP-648P	50	78732	SAT2PM	105
77911	CART2-96/2400	110	78471	CRB-W10	16	78604	MHP-654P	50	78732	SAT2PM	117
77912	CART2-120/3000	110	78471	CRB-W10	22	78605	MHP-660P	50	78732	SAT2PM	125
77929	MHS-CARK-C24/600	108	78471	CRB-W10	37	78606	MHP-672P	50	78733	SAT2AK	104
77930	MHS-CARK-C30/750	108	78472	CRB-W16	16	78607	MHP-684P	50	78733	SAT2AK	105
77931	MHS-CARK-C36/900	108	78472	CRB-W16	22	78608	MHP-696P	50	78733	SAT2AK	117
77932	MHS-CARK-C42/1050	108	78472	CRB-W16	37	78609	MHP-1230P	50	78733	SAT2AK	125
77933	MHS-CARK-C48/1200	108	78473	CRB-W22	16	78610	MHP-1236P	50	78736	MHS-24P	100
77934	MHS-CARK-C54/1350	108	78473	CRB-W22	22	78611	MHP-1242P	50	78737	MHS-30P	100
77935	MHS-CARK-C60/1500	108	78473	CRB-W22	37	78612	MHP-1248P	50	78738	MHS-36P	100
77936	MHS-CARK-C72/1800	108	78474	CRB-W28	16	78613	MHP-1254P	50	78739	MHS-42P	100
77937	MHS-CARK-V24/600	108	78474	CRB-W28	22	78614	MHP-1260P	50	78740	MHS-48P	100
77938	MHS-CARK-V30/750	108	78474	CRB-W28	37	78615	MHP-1272P	50	78741	MHS-54P	100
77939	MHS-CARK-V36/900	108	78475	CRB-W34	16	78616	MHP-1284P	50	78742	MHS-60P**	100

INDEX By Item Code

Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #
78743	MHS-72P**	100	78842	CFG-236	21	78912	EZIB30-5M	171	78971	EZWPK-30	170
78744	MHS-84P**	100	78843	CFG-242	21	78913	EZIB36-5M	171	78971	EZWPK-30	173
78745	MDWS-24P	114	78844	CFG-248	21	78914	EZIB42-5M	171	78972	EZWPK-36	164
78746	MDWS-30P	114	78845	CFG-254	21	78915	EZIB48-5M	171	78972	EZWPK-36	167
78747	MDWS-36P	114	78846	CFG-260	21	78916	EZIB54-5M	171	78972	EZWPK-36	170
78748	MDWS-42P	114	78848	EZP1PL-S/S	24	78917	EZIB60-5M	171	78972	EZWPK-36	173
78749	MDWS-48P	114	78849	ESTAK-EST-S/S	24	78918	EZIB72-5M	171	78973	EZWPK-42	164
78750	MDWS-54P	114	78850	LS-SW-S/S	33	78919	CCMK	79	78973	EZWPK-42	167
78751	MDWS-60P	114	78855	EZSB24-4C	162	78919	CCMK	91	78973	EZWPK-42	170
78752	MDWS-72P	114	78856	EZSB30-4C	162	78919	CCMK	94	78973	EZWPK-42	173
78753	MDWS-84P	114	78857	EZSB36-4C	162	78919	CCMK	140	78974	EZWPK-48	164
78754	TRB-HT18	45	78858	EZSB42-4C	162	78920	CCMKHD	79	78974	EZWPK-48	167
78755	TRB-HT24	45	78859	EZSB48-4C	162	78920	CCMKHD	140	78974	EZWPK-48	170
78756	TRB-HT30	45	78860	EZSB54-4C	162	78923	EZP1MPK-S/S	24	78974	EZWPK-48	173
78757	TRB-HT36	45	78861	EZSB60-4C	162	78924	CFG-818	21	78975	EZWPK-54	164
78758	TRB-HT42	45	78862	EZSB72-4C	162	78925	CFG-824	21	78975	EZWPK-54	167
78759	TRB-HT48	45	78863	EZSB24-5C	162	78926	CFG-830	21	78975	EZWPK-54	170
78760	TRB-HT54	45	78864	EZSB30-5C	162	78927	CFG-836	21	78975	EZWPK-54	173
78761	TRB-HT60	45	78865	EZSB36-5C	162	78928	CFG-842	21	78976	EZWPK-60	164
78762	TRB-HT66	45	78866	EZSB42-5C	162	78929	CFG-848	21	78976	EZWPK-60	167
78763	TRB-HT72	45	78867	EZSB48-5C	162	78930	CFG-854	21	78976	EZWPK-60	170
78764	TRB-HT78	45	78868	EZSB54-5C	162	78931	CFG-860	21	78976	EZWPK-60	173
78767	PTS-WMK	202	78869	EZSB60-5C	162	78933	LSTMPK-S/S	33	78977	EZWPK-72	164
78786	HAR-K	19	78870	EZSB72-5C	162	78934	EZP1-212W	15	78977	EZWPK-72	167
78786	HAR-K	139	78871	EZSB24-4I	165	78935	EZP1-218W	15	78977	EZWPK-72	170
78789	SB4	164	78872	EZSB30-4I	165	78936	EZP1-224W	15	78977	EZWPK-72	173
78789	SB4	167	78873	EZSB36-4I	165	78937	EZP1-230W	15	78978	EZCSK-24	164
78789	SB4	170	78874	EZSB42-4I	165	78938	EZP1-236W	15	78978	EZCSK-24	167
78789	SB4	173	78875	EZSB48-4I	165	78939	EZP1-242W	15	78978	EZCSK-24	170
78789	SB4	181	78876	EZSB54-4I	165	78940	EZP1-248W	15	78978	EZCSK-24	173
78789	SB4	183	78877	EZSB60-4I	165	78941	EZP1-254W	15	78979	EZCSK-30	164
78789	SB4	185	78878	EZSB72-4I	165	78942	EZP1-260W	15	78979	EZCSK-30	167
78790	SB5	164	78879	EZSB24-5I	165	78943	EZP1-272W	15	78979	EZCSK-30	170
78790	SB5	167	78880	EZSB30-5I	165	78944	EZBMK-24	170	78979	EZCSK-30	173
78790	SB5	170	78881	EZSB36-5I	165	78944	EZBMK-24	173	78980	EZCSK-36	164
78790	SB5	173	78882	EZSB42-5I	165	78945	EZBMK-30	170	78980	EZCSK-36	167
78790	SB5	181	78883	EZSB48-5I	165	78945	EZBMK-30	173	78980	EZCSK-36	170
78790	SB5	183	78884	EZSB54-5I	165	78946	EZBMK-36	170	78980	EZCSK-36	173
78790	SB5	185	78885	EZSB60-5I	165	78946	EZBMK-36	173	78981	EZCSK-42	164
78790	SB5	187	78886	EZSB72-5I	165	78947	EZBMK-42	170	78981	EZCSK-42	167
78790	SB5	189	78887	EZIB24-4L	168	78947	EZBMK-42	173	78981	EZCSK-42	170
78794	PATHK	44	78888	EZIB30-4L	168	78948	EZBMK-48	170	78981	EZCSK-42	173
78794	PATHK	51	78889	EZIB36-4L	168	78948	EZBMK-48	173	78982	EZCSK-48	164
78794	PATHK	57	78890	EZIB42-4L	168	78949	EZBMK-54	170	78982	EZCSK-48	167
78794	PATHK	101	78891	EZIB48-4L	168	78949	EZBMK-54	173	78982	EZCSK-48	170
78794	PATHK	115	78892	EZIB54-4L	168	78950	EZBMK-60	170	78982	EZCSK-48	173
78794	PATHK	123	78893	EZIB60-4L	168	78950	EZBMK-60	173	78983	EZCSK-54	164
78801	H-MK2	139	78894	EZIB72-4L	168	78951	EZBMK-72	170	78983	EZCSK-54	167
78808	EST-P-S/S	24	78895	EZIB24-5L	168	78951	EZBMK-72	173	78983	EZCSK-54	170
78809	EST-W-S/S	24	78896	EZIB30-5L	168	78952	EZRMK	164	78983	EZCSK-54	173
78810	EST-G-S/S	24	78897	EZIB36-5L	168	78953	EZBS-L4	167	78984	EZCSK-60	164
78812	EZP1P12-S/S	24	78898	EZIB42-5L	168	78953	EZBS-L4	170	78984	EZCSK-60	167
78813	EZP1P18-S/S	24	78899	EZIB48-5L	168	78954	EZBS-L5	167	78984	EZCSK-60	170
78814	EZP1P24-S/S	24	78900	EZIB54-5L	168	78954	EZBS-L5	170	78984	EZCSK-60	173
78815	EZP1P30-S/S	24	78901	EZIB60-5L	168	78955	MHCP-96S	56	78985	EZCSK-72	164
78816	EZP1P36-S/S	24	78902	EZIB72-5L	168	78956	MHCP-BPA96	58	78985	EZCSK-72	167
78817	EZP1P42-S/S	24	78903	EZIB24-4M	171	78957	MHCP-BCK96	58	78985	EZCSK-72	170
78818	EZP1P48-S/S	24	78904	EZIB30-4M	171	78958	MHP-CP96	60	78985	EZCSK-72	173
78819	EZP1P54-S/S	24	78905	EZIB36-4M	171	78959	MHCP-96P	56	78986	MHCP-2BC96	60
78820	EZP1P60-S/S	24	78906	EZIB42-4M	171	78970	EZWPK-24	164	78987	H-MK1	139
78821	EZP1P72-S/S	24	78907	EZIB48-4M	171	78970	EZWPK-24	167	78990	HP-18	139
78838	CFG-212	21	78908	EZIB54-4M	171	78970	EZWPK-24	170	78991	HP-24	139
78839	CFG-218	21	78909	EZIB60-4M	171	78970	EZWPK-24	173	78992	HP-30	139
78840	CFG-224	21	78910	EZIB72-4M	171	78971	EZWPK-30	164	78993	HP-36	139
78841	CFG-230	21	78911	EZIB24-5M	171	78971	EZWPK-30	167	78994	HP-42	139

INDEX By Item Code

Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #
78995	HP-48	139	79072	HDRBK-HD	137	79313	IDSC-1824	131	79370	H2SA6S	67
78996	HP-54	139	79073	PFS-ESAC	107	79314	IDSC-2424	131	79371	H2SA6M	65
78997	HP-60	139	79080	LAGGING-TB	231	79315	IDSEAL	131	79371	H2SA6M	67
78998	HP-72	139	79091	EZAI-24I	165	79316	IDHINGE	131	79372	H2SA6L	65
79000	EZAI-24	162	79091	EZAI-24I	174	79317	IDLATCH	131	79372	H2SA6L	67
79001	EZAI-30	162	79091	EZAI-24I	177	79318	EZIRMK	167	79373	H2SA6LL	65
79002	EZAI-36	162	79092	EZAI-30I	165	79319	AVTRK	44	79373	H2SA6LL	67
79003	EZAI-42	162	79092	EZAI-30I	174	79319	AVTRK	51	79374	H2RC	67
79004	EZAI-48	162	79092	EZAI-30I	177	79319	AVTRK	57	79375	HV2STS	67
79005	EZAI-54	162	79093	EZAI-36I	165	79319	AVTRK	101	79378	MSR2	207
79006	EZAI-60	162	79093	EZAI-36I	174	79319	AVTRK	115	79378	MSR2	208
79007	EZAI-72	162	79093	EZAI-36I	177	79319	AVTRK	123	79379	MIB2-1U	176
79009	HDRBK	137	79094	EZAI-42I	165	79320	UPFCC	98	79379	MIB2-1U	179
79010	HDR24	137	79094	EZAI-42I	174	79320	UPFCC	104	79380	PMSMK2	207
79011	HDR30	137	79094	EZAI-42I	177	79323	HV2-18SS	65	79380	PMSMK2	208
79012	HDR36	137	79095	EZAI-48I	165	79324	HV2-18S	65	79381	MAK2	208
79013	HDR42	137	79095	EZAI-48I	174	79325	HV2-18M	65	79382	MAKHD2	208
79014	HDR48	137	79095	EZAI-48I	177	79326	HV2-24SS	65	79383	CLN460/18.4-12S	230
79015	HDR54	137	79096	EZAI-54I	165	79327	HV2-24S	65	79384	CLN600/24-12S	230
79016	HDR60	137	79096	EZAI-54I	174	79328	HV2-24M	65	79385	CLN760/30.4-12S	230
79017	HDRS72	137	79096	EZAI-54I	177	79329	HV2-30SS	65	79387	CLN900/36-12S	230
79018	HDRS84	137	79097	EZAI-60I	165	79330	HV2-30S	65	79388	CLN1060/42.4-12S	230
79019	HDERR24	137	79097	EZAI-60I	174	79331	HV2-30M	65	79389	CLN1200/48-12S	230
79020	HDERR30	137	79097	EZAI-60I	177	79332	HV2-36SS	65	79390	CLN1360/54.4-12S	230
79021	HDERR36	137	79098	EZAI-72I	165	79333	HV2-36S	65	79392	CLN1520/60.8-12S	230
79022	HDERR42	137	79098	EZAI-72I	174	79334	HV2-36M	65	79395	CLN1800/72-12S	230
79023	HDERR48	137	79098	EZAI-72I	177	79335	HV2-36L	65	79398	CLN2100/84-12S	230
79024	HDERR54	137	79099	LAGGING-TB2	231	79336	HV2-42SS	65	79406	CLFR460/18.4-12S	230
79025	HDERR60	137	79202	USTSCK	113	79337	HV2-42S	65	79407	CLFR600/24-12S	230
79026	HDERRS72	137	79204	USTSCKHD	113	79338	HV2-42M	65	79408	CLFR760/30.4-12S	230
79027	HDERRS84	137	79206	USPB2	113	79339	HV2-42L	65	79410	CLFR900/36-12S	230
79033	MMP-696	41	79207	UHPB2	113	79340	HV2-42LL	65	79411	CLFR1060/42.4-12S	230
79034	MMP-1296	41	79224	CCKL	79	79341	HV2-48SS	65	79412	CLFR1200/48-12S	230
79035	MMP-696-S/S	42	79224	CCKL	91	79342	HV2-48S	65	79413	CLFR1360/54.4-12S	230
79036	MMP-1296-S/S	42	79224	CCKL	94	79343	HV2-48M	65	79415	CLFR1520/60.8-12S	230
79037	MMP-696P	43	79224	CCKL	140	79344	HV2-48L	65	79418	CLFR1800/72-12S	230
79038	MMP-1296P	43	79225	CCKHDL	79	79345	HV2-48LL	65	79421	CLFR2100/84-12S	230
79039	QMT-S	47	79225	CCKHDL	140	79346	HV2-54S	65	79453	UHVC	67
79039	QMT-S	67	79228	CCKR	79	79347	HV2-54M	65	79481	RB38BP	144
79039	QMT-S	74	79228	CCKR	91	79348	HV2-54L	65	79481	RB38BP	150
79040	MMP-1896	41	79228	CCKR	94	79349	HV2-54LL	65	79481	RB38BP	151
79042	SST2HD-G-S/S	106	79228	CCKR	140	79350	HV2-60S	65	79493	SSTLBK	104
79043	MHS-96	99	79229	CCKHDR	79	79351	HV2-60M	65	79493	SSTLBK	106
79044	MHS-96V	99	79229	CCKHDR	140	79352	HV2-60L	65	79493	SSTLBK	117
79045	MHS-96R	100	79232	CCKTS	79	79353	HV2-60LL	65	79493	SSTLBK	125
79046	MHS-96RV	100	79232	CCKTS	91	79354	HV2-72S	65	79494	MBC-18	118
79047	MHS-96P**	100	79232	CCKTS	94	79355	HV2-72M	65	79495	MBC-24	118
79048	MHS-96-S/S	102	79232	CCKTS	140	79356	HV2-72L	65	79496	MBC-30	118
79049	MHS-96V-S/S	102	79233	CCKHDTs	79	79357	HV2-72LL	65	79497	MBC-36	118
79050	MHS-96R-S/S	102	79233	CCKHDTs	140	79358	H2P18	67	79498	MBC-42	118
79051	MHS-96RV-S/S	102	79236	HDRGEK	137	79359	H2P24	67	79499	MBC-48	118
79052	MHSP-96	104	79299	USTSC	113	79360	H2P30	67	79500	MBC-54	118
79053	MHSP96-S/S	106	79299	USTSC	113	79361	H2P36	67	79501	MBC-60	118
79056	QMTS-S-S/S	48	79300	USTSCHD	113	79362	H2P42	67	79502	MBC-72	118
79057	STS-G-S/S	106	79300	USTSCHD	113	79363	H2P48	67	79503	MBC-84	118
79059	QMT-S-S/S	48	79303	INDR-1212	131	79364	H2P54	67	79504	MBDS-18	120
79060	DWP-96	117	79304	INDR-1218	131	79365	H2P60	67	79505	MBDS-24	120
79062	CDWB96	114	79305	INDR-1824	131	79366	H2P72	67	79506	MBDS-30	120
79063	MDWS-96	114	79306	INDR-2424	131	79367	HV2T-S/S	65	79507	MBDS-36	120
79064	MDWS-96P	114	79307	INDR-1212S	131	79367	HV2T-S/S	67	79508	MBDS-42	120
79068	HTTS-HT	75	79308	INDR-1218S	131	79368	HV2PT	65	79509	MBDS-48	120
79070	SSTHK	104	79309	INDR-1824S	131	79368	HV2PT	67	79510	MBDS-54	120
79070	SSTHK	110	79310	INDR-2424S	131	79369	H2SA6SS	65	79511	MBDS-60	120
79070	SSTHK	117	79311	IDSC-1212	131	79369	H2SA6SS	67	79512	MBDS-72	120
79071	SSTHK-S/S	106	79312	IDSC-1218	131	79370	H2SA6S	65	79513	MBDS-84	120

INDEX By Item Code

Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #
79514	MBRD-18	118	79621	YCART-42/1050-P	81	79785	YTHD-48S	84	79845	YSTGBK	83
79514	MBRD-18	120	79622	YCART-48/1200-P	81	79786	YTHD-54S	84	79845	YSTGBK	97
79515	MBRD-24	118	79623	YTAC	83	79787	YTHD-60S	84	79846	YSTLBK	83
79515	MBRD-24	120	79665	PTMHD54VR	204	79788	YTHD-72S	84	79846	YSTLBK	97
79516	MBRD-30	118	79666	PTMHD60VR	204	79789	YTHDW-36S	84	79847	YSTTBK-W	83
79516	MBRD-30	120	79667	PTMHD72VR	204	79790	YTHDW-42S	84	79847	YSTTBK-W	97
79517	MBRD-36	118	79668	PTMHD84VR	204	79791	YTHDW-48S	84	79848	YSTPMK	83
79517	MBRD-36	120	79669	PTM24VR	204	79792	YTHDW-54S	84	79848	YSTPMK	97
79518	MBRD-42	118	79670	PTM30VR	204	79793	YTHDW-60S	84	79849	YSTHDMB	87
79518	MBRD-42	120	79671	PTM36VR	204	79794	YTHDW-72S	84	79850	YSTHDBK	84
79519	MBRD-48	118	79672	PTM42VR	204	79795	YSTS-Y	83	79850	YSTHDBK	87
79519	MBRD-48	120	79673	PTM48VR	204	79795	YSTS-Y	97	79850	YSTHDBK	129
79520	MBRD-54	118	79674	PTM54VR	204	79796	YSTS-P	83	79851	YSTHGBK	87
79520	MBRD-54	120	79675	PTM60VR	204	79796	YSTS-P	97	79852	YSTHDLBK	87
79521	MBRD-60	118	79676	YT-HDW	85	79797	YSTHDS-GR	87	79853	YSTHDBK-W	87
79521	MBRD-60	120	79677	YT-HDP	85	79798	YSTHDS-BL	87	79854	YSTPHDMK	87
79522	MBRD-72	118	79699	FMSC	97	79799	YTPHD-36/900	87	79855	YSTTBK-B	83
79522	MBRD-72	120	79728	YT-HDC	85	79800	YTPHD-42/1050	87	79855	YSTTBK-B	97
79523	MBRD-84	118	79738	MHS-24RU	98	79801	YTPHD-48/1200	87	79856	YSTHDBK-B	87
79523	MBRD-84	120	79739	MHS-30RU	98	79802	YTPHD-54/1350	87	79857	YSTANK	83
79524	MBCMK	120	79740	MHS-36RU	98	79803	YTPHD-60/1500	87	79857	YSTANK	97
79525	MBCBC	120	79741	MHS-42RU	98	79804	YTPHD-72/1800	87	79858	YSTANKHD	87
79526	MBCB	120	79742	MHS-48RU	98	79805	YTAHD-36/900	87	79861	RBSE-10	149
79527	MBADB	120	79743	MHS-54RU	98	79806	YTAHD-42/1050	87	79862	RBSE-16	149
79528	MBCBM	120	79744	MHS-60RU	98	79807	YTAHD-48/1200	87	79863	RBSE-22	149
79529	MBCM-1	120	79745	MHS-72RU	98	79808	YTAHD-54/1350	87	79864	RBSE-28	149
79530	MBCM-2	120	79746	MHS-84RU	98	79809	YTAHD-60/1500	87	79865	RBSE-34	149
79531	MBCTA	120	79747	MHS-96RU	98	79810	YTAHD-72/1800	87	79866	RBSE-40	149
79532	MBCBL	120	79748	MHS-18RUV	98	79811	YCART-18/450-TC	81	79867	RBSE-46	149
79533	MBCMKK	120	79749	MHS-24RUV	98	79812	YCART-24/600-TC	81	79868	RBSE-52	149
79534	MBCEC	120	79750	MHS-30RUV	98	79813	YCART-30/750-TC	81	79869	RBSE-58	149
79535	STLP	120	79751	MHS-36RUV	98	79814	YCART-36/900-TC	81	79870	RBSE-64	149
79536	MBCDBK	118	79752	MHS-42RUV	98	79815	YCART-42/1050-TC	81	79871	RBSE-70	149
79536	MBCDBK	120	79753	MHS-48RUV	98	79816	YCART-48/1200-TC	81	79891	JNK-A	19
79536	MBCDBK	129	79754	MHS-54RUV	98	79817	YCART-36/900-HDP	85	79892	JNK-B	29
79571	MFASKHD	208	79755	MHS-60RUV	98	79818	YCART-42/1050-HDP	85	79893	JNK-C	39
79572	YT-W	81	79756	MHS-72RUV	98	79819	YCART-48/1200-HDP	85	79893	JNK-C	47
79573	YT-P	81	79757	MHS-84RUV	98	79820	YCART-54/1350-HDP	85	79893	JNK-C	67
79574	YT-C	81	79758	MHS-96RUV	98	79821	YCART-60/1500-HDP	85	79893	JNK-C	74
79582	SSTHB	104	79759	YT-TC-18S	80	79822	YCART-72/1800-HDP	85	79893	JNK-C	104
79582	SSTHB	117	79760	YT-TC-24S	80	79823	YCART-36/900-HDW	85	79893	JNK-C	113
79582	SSTHB	125	79761	YT-TC-30S	80	79824	YCART-42/1050-HDW	85	79893	JNK-C	117
79586	SSTHB-S/S	106	79762	YT-TC-36S	80	79825	YCART-48/1200-HDW	85	79894	JNK-D	55
79587	YTP-18/450	83	79763	YT-TC-42S	80	79826	YCART-54/1350-HDW	85	79894	JNK-D	60
79588	YTP-24/600	83	79764	YT-TC-48S	80	79827	YCART-60/1500-HDW	85	79908	MIB2-1UF	176
79589	YTP-30/750	83	79765	YT-18S	80	79828	YCART-72/1800-HDW	85	79908	MIB2-1UF	179
79590	YTP-36/900	83	79766	YT-24S	80	79829	YCART-36/900-HDT	85	79914	MBC-18-575V	118
79591	YTP-42/1050	83	79767	YT-30S	80	79830	YCART-42/1050-HDT	85	79915	MBC-24-575V	118
79592	YTP-48/1200	83	79768	YT-36S	80	79831	YCART-48/1200-HDT	85	79916	MBC-30-575V	118
79593	YTA-18/450	83	79769	YT-42S	80	79832	YCART-54/1350-HDT	85	79917	MBC-36-575V	118
79594	YTA-24/600	83	79770	YT-48S	80	79833	YCART-60/1500-HDT	85	79918	MBC-42-575V	118
79595	YTA-30/750	83	79771	YTW-18S	80	79834	YCART-72/1800-HDT	85	79919	MBC-48-575V	118
79596	YTA-36/900	83	79772	YTW-24S	80	79835	YTACHD	87	79920	MBC-54-575V	118
79597	YTA-42/1050	83	79773	YTW-30S	80	79836	YST-Y	83	79921	MBC-60-575V	118
79598	YTA-48/1200	83	79774	YTW-36S	80	79836	YST-Y	97	79922	MBC-72-575V	118
79611	YCART-18/450-W	81	79775	YTW-42S	80	79837	YST-P	83	79923	MBC-84-575V	118
79612	YCART-24/600-W	81	79776	YTW-48S	80	79837	YST-P	97	79924	MBCM-575-1	120
79613	YCART-30/750-W	81	79777	YTHD-TC-36S	84	79838	YST-S	83	79925	MBCM-575-2	120
79614	YCART-36/900-W	81	79778	YTHD-TC-42S	84	79838	YST-S	97	79936	CBS18SF	122
79615	YCART-42/1050-W	81	79779	YTHD-TC-48S	84	79839	YSTHD-GR	87	79937	CBS24SF	122
79616	YCART-48/1200-W	81	79780	YTHD-TC-54S	84	79840	YSTHD-S	87	79938	CBS30SF	122
79617	YCART-18/450-P	81	79781	YTHD-TC-60S	84	79841	YSTHD-BL	87	79939	CBS36SF	122
79618	YCART-24/600-P	81	79782	YTHD-TC-72S	84	79842	YSTHD-BK	87	79940	CBS42SF	122
79619	YCART-30/750-P	81	79783	YTHD-36S	84	79843	YSTMB	83	79941	CBS48SF	122
79620	YCART-36/900-P	81	79784	YTHD-42S	84	79843	YSTMB	97	79942	CBS54SF	122

INDEX By Item Code

Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #
79943	CBS60SF	122	79996	MSB54RMK	174	90070	RWPREC-636	126	90197	PTMAORK	207
79944	CBS72SF	122	79997	MSB60RMK	174	90071	RWPREC-642	126	90220	SE6-R36	207
79945	CBS84SF	122	79998	MSB72RMK	174	90072	RWPREC-648	126	90221	SE6-R42	207
79946	CBS96SF	122	90000	AWTPBA	47	90073	RWPREC-654	126	90222	SE6-R48	207
79947	CBSBLD18F	122	90000	AWTPBA	55	90074	RWPREC-660	126	90223	SE6-R54	207
79947	CBSBLD18F	128	90000	AWTPBA	60	90075	RWPREC-672	126	90224	SE6-R60	207
79948	CBSBLD24F	122	90001	PTM24T-S/S	205	90076	RWPREC-684	126	90225	SE6-R72	207
79948	CBSBLD24F	128	90002	PTM30T-S/S	205	90077	RWPREC-696	126	90226	SE6-R84	207
79949	CBSBLD30F	122	90003	PTM36T-S/S	205	90078	RWPREC-1230	126	90227	SE6-T36	207
79949	CBSBLD30F	128	90004	PTM42T-S/S	205	90079	RWPREC-1236	126	90228	SE6-T42	207
79950	CBSBLD36F	122	90005	PTM48T-S/S	205	90080	RWPREC-1242	126	90229	SE6-T48	207
79950	CBSBLD36F	128	90006	PTM54T-S/S	205	90081	RWPREC-1248	126	90230	SE6-T54/VR36	207
79951	CBSBLD42F	122	90007	PTM60T-S/S	205	90082	RWPREC-1254	126	90231	SE6-T60/VR42	207
79951	CBSBLD42F	128	90008	PTMHHD54T-S/S	205	90083	RWPREC-1260	126	90232	SE6-T72/VR48	207
79952	CBSBLD48F	122	90009	PTMHHD60T-S/S	205	90084	RWPREC-1272	126	90233	SE6-T84	207
79952	CBSBLD48F	128	90010	PTMHHD72T-S/S	205	90085	RWPREC-1284	126	90234	SE6-VR54	207
79953	CBSBLD54F	122	90011	PTMHHD84T-S/S	205	90086	RWPREC-1296	126	90235	SE6-VR60	207
79953	CBSBLD54F	128	90012	PTM24R-S/S	205	90087	RWPBLD-18	127	90236	SE6-VR72	207
79954	CBSBLD60F	122	90013	PTM30R-S/S	205	90088	RWPBLD-24	127	90237	MIB24CSK	176
79954	CBSBLD60F	128	90014	PTM36R-S/S	205	90089	RWPBLD-30	127	90237	MIB24CSK	179
79955	CBSBLD72F	122	90015	PTM42R-S/S	205	90090	RWPBLD-36	127	90238	MIB30CSK	176
79955	CBSBLD72F	128	90016	PTM48R-S/S	205	90091	RWPBLD-42	127	90238	MIB30CSK	179
79956	CBSBLD84F	122	90017	PTM54R-S/S	205	90092	RWPBLD-48	127	90239	MIB36CSK	176
79956	CBSBLD84F	128	90018	PTM60R-S/S	205	90093	RWPBLD-54	127	90239	MIB36CSK	179
79957	CBSBLD96F	122	90019	PTMHHD54R-S/S	205	90094	RWPBLD-60	127	90240	MIB42CSK	176
79957	CBSBLD96F	128	90020	PTMHHD60R-S/S	205	90095	RWPBLD-66	127	90240	MIB42CSK	179
79958	CBS18PF	122	90021	PTMHHD72R-S/S	205	90096	RWPBLD-72	127	90241	MIB48CSK	176
79959	CBS24PF	122	90022	PTMHHD84R-S/S	205	90097	RWPBLD-78	127	90241	MIB48CSK	179
79960	CBS30PF	122	90023	PTM24VR-S/S	205	90098	RWPBLD-84	127	90242	MIB54CSK	176
79961	CBS36PF	122	90024	PTM30VR-S/S	205	90099	RWPBLD-90	127	90242	MIB54CSK	179
79962	CBS42PF	122	90025	PTM36VR-S/S	205	90100	PTS-DRK	202	90243	MIB60CSK	176
79963	CBS48PF	122	90026	PTM42VR-S/S	205	90101	CBSBP18F	125	90243	MIB60CSK	179
79964	CBS54PF	122	90027	PTM48VR-S/S	205	90102	CBSBP24F	125	90244	MIB72CSK	176
79965	CBS60PF	122	90028	PTM54VR-S/S	205	90103	CBSBP30F	125	90244	MIB72CSK	179
79966	CBS72PF	122	90029	PTM60VR-S/S	205	90104	CBSBP36F	125	90245	MIB24WPK	176
79967	CBS84PF	122	90030	PTMHHD54VR-S/S	205	90105	CBSBP42F	125	90245	MIB24WPK	179
79968	CBS96PF	122	90031	PTMHHD60VR-S/S	205	90106	CBSBP48F	125	90246	MIB30WPK	176
79970	SB2	176	90032	PTMHHD72VR-S/S	205	90107	CBSBP54F	125	90246	MIB30WPK	179
79970	SB2	179	90033	PTMHHD84VR-S/S	205	90108	CBSBP60F	125	90247	MIB36WPK	176
79971	MIB24-2H	177	90034	PTMSD72T-S/S	205	90109	CBSBP72F	125	90247	MIB36WPK	179
79972	MIB30-2H	177	90035	PTMSD84T-S/S	205	90110	CBSBP84F	125	90248	MIB42WPK	176
79973	MIB36-2H	177	90036	PTMSD96T-S/S	205	90111	CBSBP96F	125	90248	MIB42WPK	179
79974	MIB42-2H	177	90037	PTMSD120T-S/S	205	90159	MHP-6108P	50	90249	MIB48WPK	176
79975	MIB48-2H	177	90038	PTMSD72R-S/S	205	90160	MHP-6120P	50	90249	MIB48WPK	179
79976	MIB54-2H	177	90039	PTMSD84R-S/S	205	90161	MHP-12108P	50	90250	MIB54WPK	176
79977	MIB60-2H	177	90040	PTMSD96R-S/S	205	90162	MHP-12120P	50	90250	MIB54WPK	179
79978	MIB72-2H	177	90041	PTMSD120R-S/S	205	90163	MHP-18108P	50	90251	MIB60WPK	176
79979	MSB24-2I	174	90042	PTMSD72VR-S/S	205	90164	MHP-18120P	50	90251	MIB60WPK	179
79980	MSB30-2I	174	90043	PTMSD84VR-S/S	205	90165	MHP-24108P	50	90252	MIB72WPK	176
79981	MSB36-2I	174	90044	PTMSD96VR-S/S	205	90166	MHP-24120P	50	90252	MIB72WPK	179
79982	MSB42-2I	174	90045	PTMSD120VR-S/S	205	90169	MHCP-108P	56	90253	MIB24CPK	179
79983	MSB48-2I	174	90046	MSR2-S/S	209	90170	MHCP-120P	56	90254	MIB30CPK	179
79984	MSB54-2I	174	90047	PMSMK2-S/S	209	90177	MDWS-108P	114	90255	MIB36CPK	179
79985	MSB60-2I	174	90048	MAK2-S/S	209	90185	PTMAFMKT	207	90256	MIB42CPK	179
79986	MSB72-2I	174	90049	MAKHD2-S/S	209	90186	PTMAFMKR	207	90257	MIB48CPK	179
79987	MSBRMK	176	90050	MFASKHD-S/S	209	90187	PTMAFMKHDR	207	90258	MIB54CPK	179
79988	SB2F	176	90051	PTMSD72VR	204	90188	PTMAEK	207	90259	MIB60CPK	179
79988	SB2F	179	90052	PTMSD84VR	204	90189	PTMAEKR	207	90260	MIB72CPK	179
79989	SHIM-KITMOD	176	90053	PTMSD96VR	204	90190	PTMAEKVR	207	90261	EZCRMK54-60	167
79989	SHIM-KITMOD	179	90054	PTMSD120VR	204	90191	PTMAEKHT	207	90262	EZCRMK72	167
79991	MSB24RMK	174	90055	MSRSR-S/S	209	90192	PTMAEKHDR	207	90264	ESBK-ATEX	19
79992	MSB30RMK	174	90056	PMSMKSD-S/S	209	90193	PTMAEKHDVR	207	90265	PTEZ-18	196
79993	MSB36RMK	174	90057	MAKSD-S/S	209	90194	PTMAAK	207	90266	PTEZ-24	196
79994	MSB42RMK	174	90068	RWPREC-624	126	90195	PTMAAKHD	207	90267	PTEZ-30	196
79995	MSB48RMK	174	90069	RWPREC-630	126	90196	PTMAFASK	207	90268	PTEZ-36	196

INDEX By Item Code

Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #
90269	PTEZ-42	196	90545	FMS-18-YST	95	90637	CRDF54	121	91224	SKPU-8X1/2X50	215
90270	PTEZ-48	196	90546	FMS-24-YST	95	90638	CRDF60	121	91225	SKPU-8X3/4X50	215
90283	SKPU-6X1/2X25	215	90547	FMS-30-YST	95	90639	CRDF72	121	91226	EZP1-UHT212	14
90284	SKPU-6X3/4X25	215	90548	FMS-36-YST	95	90640	CRDF84	121	91227	EZP1-UHT218	14
90285	SKPU-8X1/2X25	215	90549	FMS-42-YST	95	90641	CBC3R	121	91228	EZP1-UHT224	14
90286	SKPU-8X3/4X25	215	90550	FMS-48-YST	95	90642	MXP-6108	61	91229	EZP1-UHT230	14
90319	SE6-VR84	207	90551	FMS-54-YST	95	90643	MXP-12108	61	91230	EZP1-UHT236	14
90351	PTEZMB	196	90552	FMS-60-YST	95	90644	MXPP-6108	64	91231	EZP1-UHT242	14
90352	PTEZPB	196	90553	FMS-72-YST	95	90645	MXPP-12108	64	91232	EZP1-UHT248	14
90353	PTEZDC	196	90554	CBCS72	121	90646	RBP1R-S	193	91233	EZP1-UHT254	14
90362	PTMA36T	203	90555	CBCS84	121	90647	RBP1R-M	193	91234	EZP1-UHT260	14
90363	PTMA42T	203	90581	MXP-1242	61	90648	RBP1R-L	193	91235	EZP1-UHT272	14
90364	PTMA48T	203	90582	MXP-1248	61	90649	RBP1R-XL	193	91236	EZP1-UHT818	14
90365	PTMA54T	203	90583	MXP-1254	61	90650	RBPRR-S	195	91237	EZP1-UHT824	14
90366	PTMA60T	203	90584	MXP-1260	61	90651	RBPRR-M	195	91238	EZP1-UHT830	14
90367	PTMA36R	203	90585	MXP-1272	61	90652	RBPRR-L	195	91239	EZP1-UHT836	14
90368	PTMA42R	203	90586	MXP-1284	61	90653	RBPRR-XL	195	91240	EZP1-UHT842	14
90369	PTMA48R	203	90587	MXP-1296	61	90762	CBC72	121	91241	EZP1-UHT848	14
90370	PTMA54R	203	90588	MXP-12120	61	90763	CBC84	121	91242	EZP1-UHT854	14
90371	PTMA60R	203	90589	MXPP-642	64	90795	PTEZHD-56/1400	196	91243	EZP1-UHT860	14
90372	PTMA36VR	203	90590	MXPP-648	64	90796	PTEZHD-64/1600	196	91244	EZP1-UHT872	14
90373	PTMA42VR	203	90591	MXPP-654	64	90797	PTEZHD-80/2000	196	91245	EZP1-UHT1424	14
90374	PTMA48VR	203	90592	MXPP-660	64	90798	PTEZHD-42/1050-UG	196	91246	EZP1-UHT1430	14
90375	PTMA54VR	203	90593	MXPP-672	64	90799	PTEZHD-48/1200-UG	196	91247	EZP1-UHT1436	14
90376	PTMA60VR	203	90594	MXPP-684	64	90800	PTEZHD-54/1350-UG	196	91248	EZP1-UHT1442	14
90377	PTMAHD54T	203	90595	MXPP-696	64	90801	PTEZHD-60/1500-UG	196	91249	EZP1-UHT1448	14
90378	PTMAHD60T	203	90596	MXPP-6120	64	90802	PTEZHD-72/1800-UG	196	91250	EZP1-UHT1454	14
90379	PTMAHD72T	203	90598	MXPPE	64	90803	PTEZHD-MBK	196	91251	EZP1-UHT1460	14
90380	PTMAHD84T	203	90599	XDSTMPK	64	90804	PTEZHD-PBK	196	91252	EZP1-UHT1472	14
90381	PTMAHD54R	203	90600	XDSTPAK	64	90805	PTEZHD-DCK	196	91253	CRB-UHT10	16
90382	PTMAHD60R	203	90601	XDSTS-W	64	90806	PTEZHD-WRBK	196	91253	CRB-UHT10	37
90383	PTMAHD72R	203	90602	XDSTS-P	64	90807	PTEZHD-JBBK	196	91254	CRB-UHT16	16
90384	PTMAHD84R	203	90603	XDSTS-B	64	90814	EST-A-P	19	91254	CRB-UHT16	37
90385	PTMAHD54VR	203	90604	XDSTBK-W	64	90815	EST-A-S	19	91255	CRB-UHT22	16
90386	PTMAHD60VR	203	90605	XDSTBK-P	64	90816	EST-A-B	19	91255	CRB-UHT22	37
90387	PTMAHD72VR	203	90606	XDSTBK-B	64	90935	RBQB1-16/400	145	91256	CRB-UHT28	16
90388	PTMAHD84VR	203	90607	MXPPBK	64	90936	RBQB1-18/450	145	91256	CRB-UHT28	37
90389	MMP-6108P	43	90608	XDSTPSBK	64	90937	RBQB1-22/550	145	91257	CRB-UHT34	16
90390	MMP-6120P	43	90609	XDSTTAK	64	90938	RBQB1-24/600	145	91257	CRB-UHT34	37
90391	MMP-12108P	43	90610	XDSTJNK	64	90939	RBQB1-28/700	145	91258	CRB-UHT40	16
90392	MMP-12120P	43	90611	XDST-W	64	90940	RBQB1-30/750	145	91258	CRB-UHT40	37
90393	MXP-642	61	90612	XDST-P	64	90941	RBQB1-34/850	145	91259	CRB-UHT46	16
90394	MXP-648	61	90613	XDST-B	64	90942	RBQB1-36/900	145	91259	CRB-UHT46	37
90395	MXP-654	61	90614	RBDT-6C	154	90943	RBQB1-40/1000	145	91260	CRB-UHT52	16
90396	MXP-660	61	90615	RBDTXHD-13C	155	90944	RBQB1-42/1050	145	91260	CRB-UHT52	37
90397	MXP-672	61	90616	PTEZHD-42/1050	196	90945	RBQB1-46/1150	145	91261	CRB-UHT58	16
90398	MXP-684	61	90617	PTEZHD-48/1200	196	90946	RBQB1-48/1200	145	91261	CRB-UHT58	37
90399	MXP-696	61	90618	PTEZHD-54/1350	196	90947	RBQB1-52/1300	145	91262	CRB-UHT64	16
90400	MXP-6120	61	90619	PTEZHD-60/1500	196	90948	RBQB1-54/1350	145	91262	CRB-UHT64	37
90409	USB12	61	90620	PTEZHD-72/1800	196	90949	RBQB1-58/1450	145	91263	CRB-UHT70	16
90409	USB12	64	90621	PTEZHD-84/2100	196	90950	RBQB1-60/1500	145	91263	CRB-UHT70	37
90410	USB6	61	90622	MXPP-1242	64	90951	RBQB1-64/1600	145	91264	MSP-UHT224	35
90410	USB6	64	90623	MXPP-1248	64	90952	RBQB1-70/1750	145	91265	MSP-UHT230	35
90411	USBP	64	90624	MXPP-1254	64	90953	RBQB1-72/1800	145	91266	MSP-UHT236	35
90412	USBBRP	64	90625	MXPP-1260	64	90954	QB1PCK	145	91267	MSP-UHT242	35
90434	EZCRMK24-48	167	90626	MXPP-1272	64	91214	RWPREC-1836	126	91268	MSP-UHT248	35
90435	QMT-ATEX	39	90627	MXPP-1284	64	91215	RWPREC-1842	126	91269	MSP-UHT254	35
90537	CBCS18	121	90628	MXPP-1296	64	91216	RWPREC-1848	126	91270	MSP-UHT260	35
90538	CBCS24	121	90629	MXPP-12120	64	91217	RWPREC-1854	126	91271	MSP-UHT272	35
90539	CBCS30	121	90631	CRDF18	121	91218	RWPREC-1860	126	91272	MSP-UHT284	35
90540	CBCS36	121	90632	CRDF24	121	91219	RWPREC-1872	126	91273	MSP-UHT830	35
90541	CBCS42	121	90633	CRDF30	121	91220	RWPREC-1884	126	91274	MSP-UHT836	35
90542	CBCS48	121	90634	CRDF36	121	91221	RWPREC-1896	126	91275	MSP-UHT842	35
90543	CBCS54	121	90635	CRDF42	121	91222	SKPU-6X1/2X50	215	91276	MSP-UHT848	35
90544	CBCS60	121	90636	CRDF48	121	91223	SKPU-6X3/4X50	215	91277	MSP-UHT854	35

INDEX By Item Code

Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #
91278	MSP-UHT860	35	91410	SSTXD-B	104	91534	CBSBLD60C	128	91654	ES30-4-SN	210
91279	MSP-UHT872	35	91410	SSTXD-B	117	91535	CBSBLD72C	122	91655	ES36-4-SN	210
91280	MSP-UHT1442	35	91410	SSTXD-B	125	91535	CBSBLD72C	128	91656	ES42-4-SN	210
91281	MSP-UHT1448	35	91411	SSTXD-G	104	91536	CBSBLD84C	122	91657	ES48-4-SN	210
91282	MSP-UHT1454	35	91411	SSTXD-G	117	91536	CBSBLD84C	128	91658	ES54-4-SN	210
91283	MSP-UHT1460	35	91411	SSTXD-G	125	91537	CBSBLD96C	122	91659	ES60-4-SN	210
91284	MSP-UHT1472	35	91412	SSTXDMK	104	91537	CBSBLD96C	128	91660	ES66-4-SN	210
91285	QMT-A-P	39	91412	SSTXDMK	117	91538	CBSBP18C	125	91661	ES72-4-SN	210
91286	QMT-A-W	39	91412	SSTXDMK	125	91539	CBSBP24C	125	91662	ES84-4-SN	210
91288	SKPU-4X3/8X25	215	91414	SATXDNCB	105	91540	CBSBP30C	125	91663	ES96-4-SN	210
91289	SKPU-4X1/2X25	215	91414	SATXDNCB	117	91541	CBSBP36C	125	91664	ES24-4-SF	210
91290	SKPU-4X5/8X25	215	91414	SATXDNCB	125	91542	CBSBP42C	125	91665	ES30-4-SF	210
91291	SKPU-4X3/4X25	215	91415	SATXDMK	105	91543	CBSBP48C	125	91666	ES36-4-SF	210
91292	SKPU-4X1X25	215	91415	SATXDMK	117	91544	CBSBP54C	125	91667	ES42-4-SF	210
91293	SKPU-4X3/8X50	215	91415	SATXDMK	125	91545	CBSBP60C	125	91668	ES48-4-SF	210
91294	SKPU-4X1/2X50	215	91417	RWSECS-18F	128	91546	CBSBP72C	125	91669	ES54-4-SF	210
91295	SKPU-4X5/8X50	215	91418	RWSECS-24F	128	91547	CBSBP84C	125	91670	ES60-4-SF	210
91296	SKPU-4X3/4X50	215	91419	RWSECS-30F	128	91548	CBSBP96C	125	91671	ES66-4-SF	210
91297	SKPU-4X1X50	215	91420	RWSECS-36F	128	91549	CBS18PC	122	91672	ES72-4-SF	210
91298	SKPU-6X3/8X25	215	91421	RWSECS-42F	128	91550	CBS24PC	122	91673	ES84-4-SF	210
91299	SKPU-6X5/8X25	215	91422	RWSECS-48F	128	91551	CBS30PC	122	91674	ES96-4-SF	210
91300	SKPU-6X1X25	215	91423	RWSECS-54F	128	91552	CBS36PC	122	91675	ES48-4-TN	210
91301	SKPU-6X3/8X50	215	91424	RWSECS-60F	128	91553	CBS42PC	122	91676	ES54-4-TN	210
91302	SKPU-6X5/8X50	215	91425	RWSECS-72F	128	91554	CBS48PC	122	91677	ES60-4-TN	210
91303	SKPU-6X1X50	215	91426	RWSECS-84F	128	91555	CBS54PC	122	91678	ES66-4-TN	210
91304	SKPU-8X3/8X25	215	91427	RWSECS-96F	128	91556	CBS60PC	122	91679	ES72-4-TN	210
91305	SKPU-8X5/8X25	215	91430	FLXCP	110	91557	CBS72PC	122	91680	ES84-4-TN	210
91306	SKPU-8X1X25	215	91431	FLXEP	110	91558	CBS84PC	122	91681	ES96-4-TN	210
91307	SKPU-8X3/8X50	215	91432	CBSP18	125	91559	CBS96PC	122	91682	ES48-4-TF	210
91308	SKPU-8X5/8X50	215	91433	CBSP24	125	91560	RWSECS-18C	128	91683	ES54-4-TF	210
91309	SKPU-8X1X50	215	91434	CBSP30	125	91561	RWSECS-24C	128	91684	ES60-4-TF	210
91310	SKPU-10X3/8X25	215	91435	CBSP36	125	91562	RWSECS-30C	128	91685	ES66-4-TF	210
91311	SKPU-10X1/2X25	215	91436	CBSP42	125	91563	RWSECS-36C	128	91686	ES72-4-TF	210
91312	SKPU-10X5/8X25	215	91437	CBSP48	125	91564	RWSECS-42C	128	91687	ES84-4-TF	210
91313	SKPU-10X3/4X25	215	91438	CBSP54	125	91565	RWSECS-48C	128	91688	ES96-4-TF	210
91314	SKPU-10X1X25	215	91439	CBSP60	125	91566	RWSECS-54C	128	91689	ES24-8-SN	210
91315	SKPU-10X3/8X50	215	91440	CBSP72	125	91567	RWSECS-60C	128	91690	ES30-8-SN	210
91316	SKPU-10X1/2X50	215	91441	CBSP84	125	91568	RWSECS-72C	128	91691	ES36-8-SN	210
91317	SKPU-10X5/8X50	215	91442	CBSP96	125	91569	RWSECS-84C	128	91692	ES42-8-SN	210
91318	SKPU-10X3/4X50	215	91495	CBS18SC	122	91570	RWSECS-96C	128	91693	ES48-8-SN	210
91319	SKPU-10X1X50	215	91496	CBS24SC	122	91571	MBC-18-S	118	91694	ES54-8-SN	210
91320	SKPU-12X3/8X25	215	91497	CBS30SC	122	91572	MBC-24-S	118	91695	ES60-8-SN	210
91321	SKPU-12X1/2X25	215	91498	CBS36SC	122	91573	MBC-30-S	118	91696	ES66-8-SN	210
91322	SKPU-12X5/8X25	215	91499	CBS42SC	122	91574	MBC-36-S	118	91697	ES72-8-SN	210
91323	SKPU-12X3/4X25	215	91500	CBS48SC	122	91575	MBC-42-S	118	91698	ES84-8-SN	210
91324	SKPU-12X1X25	215	91501	CBS54SC	122	91576	MBC-48-S	118	91699	ES96-8-SN	210
91325	SKPU-12X3/8X50	215	91502	CBS60SC	122	91577	MBC-54-S	118	91700	ES24-8-SF	210
91326	SKPU-12X1/2X50	215	91503	CBS72SC	122	91578	MBC-60-S	118	91701	ES30-8-SF	210
91327	SKPU-12X5/8X50	215	91504	CBS84SC	122	91579	MBC-72-S	118	91702	ES36-8-SF	210
91328	SKPU-12X3/4X50	215	91505	CBS96SC	122	91580	MBC-84-S	118	91703	ES42-8-SF	210
91329	SKPU-12X1X50	215	91527	CBSBLD18C	122	91581	MBC-18-575V-S	118	91704	ES48-8-SF	210
91400	SKPU-DUAL-6X1/2X25	216	91527	CBSBLD18C	128	91582	MBC-24-575V-S	118	91705	ES54-8-SF	210
91401	SKPU-DUAL-6X3/4X25	216	91528	CBSBLD24C	122	91583	MBC-30-575V-S	118	91706	ES60-8-SF	210
91402	SKPU-DUAL-8X1/2X25	216	91528	CBSBLD24C	128	91584	MBC-36-575V-S	118	91707	ES66-8-SF	210
91403	SKPU-DUAL-8X3/4X25	216	91529	CBSBLD30C	122	91585	MBC-42-575V-S	118	91708	ES72-8-SF	210
91404	SKPU-DUAL-6X1/2X50	216	91529	CBSBLD30C	128	91586	MBC-48-575V-S	118	91709	ES84-8-SF	210
91405	SKPU-DUAL-6X3/4X50	216	91530	CBSBLD36C	122	91587	MBC-54-575V-S	118	91710	ES96-8-SF	210
91406	SKPU-DUAL-8X1/2X50	216	91530	CBSBLD36C	128	91588	MBC-60-575V-S	118	91711	ES48-8-TN	210
91407	SKPU-DUAL-8X3/4X50	216	91531	CBSBLD42C	122	91589	MBC-72-575V-S	118	91712	ES54-8-TN	210
91408	SSTXD-W	104	91531	CBSBLD42C	128	91590	MBC-84-575V-S	118	91713	ES60-8-TN	210
91408	SSTXD-W	117	91532	CBSBLD48C	122	91591	MBCM-1-S	120	91714	ES66-8-TN	210
91408	SSTXD-W	125	91532	CBSBLD48C	128	91592	MBCM-2-S	120	91715	ES72-8-TN	210
91409	SSTXD-S	104	91533	CBSBLD54C	122	91593	MBCM-575-1-S	120	91716	ES84-8-TN	210
91409	SSTXD-S	117	91533	CBSBLD54C	128	91594	MBCM-575-2-S	120	91717	ES96-8-TN	210
91409	SSTXD-S	125	91534	CBSBLD60C	122	91653	ES24-4-SN	210	91718	ES48-8-TF	210

INDEX By Item Code

Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #	Item Code	Ordering Number	Page #
91719	ES54-8-TF	210	91815	YST-P-R	83	107570	DRDXD-36-535	189	113390	YSTDBK2	80
91720	ES60-8-TF	210	91816	YTHDR-36S	84	107572	DRDXD-42-520	189	113390	YSTDBK2	83
91721	ES66-8-TF	210	91817	YTHDR-42S	84	107573	DRDXD-42-535	189	113390	YSTDBK2	97
91722	ES72-8-TF	210	91818	YTHDR-48S	84	107575	DRDXD-48-520	189	113390	YSTDBK2	129
91723	ES84-8-TF	210	91819	YTHDR-54S	84	107576	DRDXD-48-535	189	114389	UPBKA	113
91724	ES96-8-TF	210	91820	YTHDR-60S	84	107578	DRDXD-54-520	189	114390	JNK-G	113
91725	RS-24	211	91821	YTHDR-72S	84	107579	DRDXD-54-535	189	114404	MCBKSD	208
91726	RS-30	211	91822	YT-HDR	85	107581	DRDXD-60-520	189	114404	MCBKSD	209
91727	RS-36	211	91823	YCART-36/900-HDR	85	107582	DRDXD-60-535	189	114974	METABO-CHGR220	224
91728	RS-42	211	91824	YCART-42/1050-HDR	85	107584	DRDXD-72-520	189	115010	DRXD-36-520	187
91729	RS-48	211	91825	YCART-48/1200-HDR	85	107585	DRDXD-72-535	189	115011	DRXD-36-535	187
91730	RS-54	211	91826	YCART-54/1350-HDR	85	107587	DRDXD-84-520	189	30001RPR	EBC1 - REFURBISH	223
91731	RS-60	211	91827	YCART-60/1500-HDR	85	107588	DRDXD-84-535	189	30002RPR	EBC2 - REFURBISH	223
91732	RS-66	211	91828	YCART-72/1800-HDR	85	107590	DRDXD-96-520	189	30018RPR	CEBC1 - REFURBISH	223
91733	RS-72	211	91829	YSTHDBK-R	87	107591	DRDXD-96-535	189	30019RPR	CEBC2 - REFURBISH	223
91734	RS-84	211	91830	YSTHDLBK-R	87	107852	MSPBP	39	A1636	CLFR1360/54.4-12	230
91735	RS-96	211	91831	YSTHDBK-BL-R	87	107852	MSPBP	40	K2546	WB24-2-S/S	134
91736	DC-24	211	91832	YSTHDBK-GR-R	87	107852	MSPBP	117	K2547	WB30-2-S/S	134
91737	DC-30	211	91833	YSTHD-GR-R	87	108043	CEBC1/CEBC2-DRM	224	K2548	WB36-2-S/S	134
91738	DC-36	211	91834	YSTHD-BL-R	87	108045	CEBC1-CPLGM	224	K2549	WB42-2-S/S	134
91739	DC-42	211	91835	LA-54	214	108046	CEBC2-CPLGM	224	K2550	WB48-2-S/S	134
91740	DC-48	211	91836	LA-60	214	108047	EBC1-CPLGM	224	K2551	WB54-2-S/S	134
91741	DC-54	211	91837	LA-66	214	108048	EBC2-CPLGM	224	K2552	WB60-2-S/S	134
91742	DC-60	211	91838	LA-72	214	108228	PACB2-60	44	K2553	WB72-2-S/S	134
91743	DC-66	211	91839	LA-84	214	108228	PACB2-60	51	K2554	WB84-2-S/S	134
91744	DC-72	211	91840	LA-96	214	108228	PACB2-60	57	K2555	WB96-2-S/S	134
91745	DC-84	211	91841	SL-48	214	108228	PACB2-60	101	K2686	WB24C-2-S/S	134
91746	DC-96	211	91842	TL-48	214	108228	PACB2-60	115	K2687	WB30C-2-S/S	134
91747	SP-24	211	91865	TRB-UHT18	45	108228	PACB2-60	123	K2688	WB36C-2-S/S	134
91748	SP-48	211	91866	TRB-UHT24	45	108229	PACB2-100	44	K2689	WB42C-2-S/S	134
91749	SP-72	211	91867	TRB-UHT30	45	108229	PACB2-100	51	K2690	WB48C-2-S/S	134
91750	SP-96	211	91868	TRB-UHT36	45	108229	PACB2-100	57	K2691	WB54C-2-S/S	134
91751	SKC-24	214	91869	TRB-UHT42	45	108229	PACB2-100	101	K2692	WB60C-2-S/S	134
91752	SKC-30	214	91870	TRB-UHT48	45	108229	PACB2-100	115	K2693	WB72C-2-S/S	134
91753	SKC-36	214	91871	TRB-UHT54	45	108229	PACB2-100	123	K2694	WB84C-2-S/S	134
91754	SKC-42	214	91872	TRB-UHT60	45	108230	PAT-C-60	44	K2695	WB96C-2-S/S	134
91755	SKC-48	214	91873	TRB-UHT66	45	108230	PAT-C-60	51			
91756	SKC-54	214	91874	TRB-UHT72	45	108230	PAT-C-60	57			
91757	SKC-60	214	91875	TRB-UHT78	45	108230	PAT-C-60	101			
91758	SKC-66	214	91876	TRB-UHT84	45	108230	PAT-C-60	115			
91759	SKC-72	214	91877	TRB-UHT90	45	108230	PAT-C-60	123			
91760	SKC-84	214	92159	DCRR-24	214	108231	PAT-C-100	44			
91761	SKC-96	214	92160	DCRR-30	214	108231	PAT-C-100	51			
91762	LA-24	214	92161	DCRR-36	214	108231	PAT-C-100	57			
91763	LA-30	214	92162	DCRR-42	214	108231	PAT-C-100	101			
91764	LA-36	214	92163	DCRR-48	214	108231	PAT-C-100	115			
91765	LA-42	214	92164	DCRR-54	214	108231	PAT-C-100	123			
91766	LA-48	214	92165	DCRR-60	214	108232	PAT-N	44			
91798	YTR-18S	80	92166	DCRR-66	214	108232	PAT-N	51			
91799	YTR-24S	80	92167	DCRR-72	214	108232	PAT-N	57			
91800	YTR-30S	80	92168	DCRR-84	214	108232	PAT-N	101			
91801	YTR-36S	80	92169	DCRR-96	214	108232	PAT-N	115			
91802	YTR-42S	80	92170	RSRR-24	214	108232	PAT-N	123			
91803	YTR-48S	80	92171	RSRR-30	214	108384	CEBC1-DUK	224			
91804	YT-R	81	92172	RSRR-36	214	108385	CEBC2-DUK	224			
91805	YCART-18/450-R	81	92173	RSRR-42	214	111390	CEBC1/CEBC2-BATMET	224			
91806	YCART-24/600-R	81	92174	RSRR-48	214	111728	IBS-DX5	189			
91807	YCART-30/750-R	81	92175	RSRR-54	214	112918	BSB-1	160			
91808	YCART-36/900-R	81	92176	RSRR-60	214	112919	BSB-2	160			
91809	YCART-42/1050-R	81	92177	RSRR-66	214	112920	BSB-3	160			
91810	YCART-48/1200-R	81	92178	RSRR-72	214	112921	BSB-4	160			
91811	YSTGBK-R	83	92179	RSRR-84	214	112922	BSB-5	160			
91812	YSTLBK-R	83	92180	RSRR-96	214	112923	BSB-6	160			
91813	YSTBKPU-R	83	106186	900CKK	222	112956	BSB-BRK	160			
91814	YST-Y-R	83	107569	DRDXD-36-520	189	112960	BSB-BR	160			



Partners in Productivity

Av. Jorge Alessandri 11.500 – Edificio 7
Megacentro San Bernardo, San Bernardo, Santiago, Chile
Phone: 56-2-2896-7870
Email: ventaslatam@flexco.com

www.flexco.com