

Flexco Focuses on Worker Safety

A safer and more effective alternative to utility and pocket knives when cutting conveyor belts.

A SAFER WAY TO CUT YOUR BELT



Working with an exposed blade always presents a safety hazard and, when this is paired with the several passes it takes to complete the cut, it increases the risk of injury. Plus, utility knives simply can't provide the same level of speed and accuracy when cutting belts.

Powered Belt Cutters

Cuts all types of belting from the softest of natural rubbers to the hardest constructed solid woven PVC and fabric plied belts.

- Spring loaded blade guard protects operator from cutting edge of blade
- Self-balancing rail guide system provides added stability during use
- Side handle can be mounted on either side for left or right hand operation
- Top mounted eye bolt for attaching cutter to tool balancer
- For all belt widths as well as extended longitudinal cuts
- Offered in both Corded and Cordless models



CEBC1/CEBC2



EBC1/EBC2

Ordering Information

Description	Ordering Number	Item Code
Corded Model	EBC1	30001
	EBC2	30002
Cordless Model	CEBC1	30018
	CEBC2	30019

Cutting Capacity

Description	EBC1/CEBC1	EBC2/CEBC2
Rubber Belt	Up to 1"	Up to 2"
PVC Belt	Up to 360 P.I.W.	Up to 1140 P.I.W.

900 Series™ Belt Cutter

More accurate, faster, safer cutting for all belting including thick and/or hard carcass belts.

- Blade fully enclosed during cutting operations
- Special flat-top blade design for added operator safety
- Upper beam can be fully removed or pinned into the open position for safe placement on conveyor systems
- Single-sided clamp feature allows belt to fall free from cutting edge for reduced operator effort
- Safely and accurately cuts belts up to 1-1/2" (38 mm) thick



900 Series™

Ordering Information

Description	Belt Width	Ordering Number	Item Code
Cutter Complete for belts up to 1.5"	36"	900936	04143
	48"	900948	04144
	60"	900960	04145
	72"	900972	04146
	84"	900984	04147
	96"	900996	04193
Replacement Blade Kit		900CBK	04149



WORK SAFER & WORK SMARTER

Flexco offers a complete system of belt maintenance tools to make each step in the process easier, faster, and safer.

A SAFER WAY TO LIFT YOUR BELTS

Flex-Lifter™ Conveyor Belt Lifter

- Easily and safely lifts a tensioned belt up to the stated ratings
- Wide, dual-rail base to maintain unit stability
- Optimized lift height to provide sufficient room to make repairs easily

Recommended for: Top-side (troughed or flat) belts and return-side belts up to 4000 lb.

Flex-Lifter™ Conveyor Belt Lifter			
Description	Ordering Number	Item Code	Wt. Lbs.
Medium Flex-Lifter™ 36"-60" (900-1500mm)	FL-M	76469	66.0
Large Flex-Lifter™ 48"-72" (1200-1800mm)	FL-L	76470	78.0
XL Flex-Lifter™ 72"-96" (1800-2400mm)	FL-XL	76983	128.0
Return Lift Bar - Medium	FLRLB-M	76482	25.0
Return Lift Bar - Large	FLRLB-L	76481	50.0
Return Lift Bar - XL	FLVRL-XL	76984	63.0
Flex-Lifter Cart	FLCK	77729	20.0



A SAFER WAY TO SECURE YOUR BELTS

TUG™ HD® Belt Clamps

- Available in 6- and 8- metric ton versions, TUG™ HD® Belt Clamps provide ultimate grip strength by clamping over the belt
- Modular components allow for increased versatility and portability
- Can be used on multiple conveyor belting types including flat, sidewall, chevron, and other specialty profiles up to 2.25" thick

Recommended for: 6- and 8-ton load capacity ratings and belt widths up to 96"

Far-Pul™ HD® Belt Clamps

- Provides even clamping tension across entire belt width for safer belt maintenance
- Securely grips belts up to 1" thick
- Adjusts easily for a variety of belt widths

Recommended for: Load capacity up to 3 tons and belt widths up to 72"

TUG™ HD® Belt Clamps COMPLETE Ordering Information				
Belt Width	Ordering Number		TUG6 Weight	TUG8 Weight
in.	6 Ton	8 Ton	lbs.	lbs.
Up to 36	TUG6-36-AL	TUG8-36-AL	134	178
Up to 42	TUG6-42-AL	TUG8-42-AL	141	189
Up to 48	TUG6-48-AL	TUG8-48-AL	148	200
Up to 54	TUG6-54-AL	TUG8-54-AL	155	211
Up to 60	TUG6-60-AL	TUG8-60-AL	162	222
Up to 72	TUG6-72-AL	TUG8-72-AL	176	244
Up to 84	N/A	TUG8-84-AL	N/A	266
Up to 96	N/A	TUG8-96-AL	N/A	288


Note: A complete set of TUG™ HD® Belt Clamps includes four aluminum clamp bars and four steel clamp ends. Contact customer service for information on steel bars.

Far-Pul™ HD® Belt Clamps		
Belt Width	Ordering Number	Weight
in.		lbs.
Up to 30	LSHD30	93.0
Up to 36	LSHD36	99.0
Up to 42	LSHD42	106.0
Up to 48	LSHD48	112.0
Up to 54	LSHD54	119.0
Up to 60	LSHD60	127.0
Up to 72	LSHD72	139.0

Note: A complete set of Far-Pul™ HD® Belt Clamps includes four clamp bars and four steel clamp scissors with carry bag. Come-alongs not included.



Far-Pul™ HD®

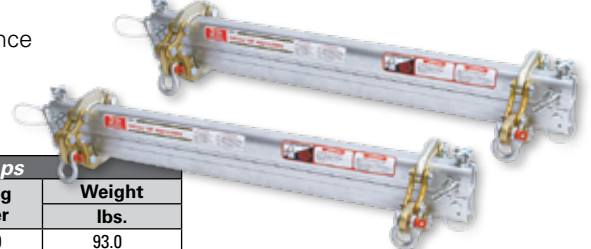

FSK™ Belt Skiver

A SAFER WAY TO SKIVE YOUR BELTS

FSK™ Belt Skiver

- A safe, easy way to remove belt top covers for installation of recessed splices
- Accurate and adjustable cutting depth provides skives from 1/16" to 3/8" deep in a single pass
- Blade safely enclosed during skiving operation

Recommended for:

Belts with rubber top covers of 3/16" thick or more



Ordering Information	
Description	Ordering Number
Skiver Complete with Plastic Fence*	FSK2
Skiver Complete with Metal Fence*	FSK2M
Skiver XL Complete with Plastic Fence*	FSK2XL
Skiver XL Complete with Metal Fence*	FSK2MXL
Sharpening Stone	31987