


Product Information

Dual Seal Polyurethane Skirting

Dual Seal Polyurethane Skirting

Height		Thickness		Length		CHAMFER	ORDERING NUMBER	ITEM CODE	WT. KG.
mm	in	mm	in	m	ft				
150	6	12	1/2	7.6	25	35°	SKPU-DUAL-6X1/2X25	91400	20.4
150	6	20	3/4				SKPU-DUAL-6X3/4X25	91401	30.8
200	8	12	1/2				SKPU-DUAL-8X1/2X25	91402	27.4
200	8	20	3/4				SKPU-DUAL-8X3/4X25	91403	40.0
150	6	12	1/2	15.2	50		SKPU-DUAL-6X1/2X50	91404	42.6
150	6	20	3/4				SKPU-DUAL-6X3/4X50	91405	61.5
200	8	12	1/2				SKPU-DUAL-8X1/2X50	91406	54.9
200	8	20	3/4				SKPU-DUAL-8X3/4X50	91407	79.9

Price Per Inch for reference only; skirting is available standard in 7.6m (25') lengths. Shaded items are made to order.

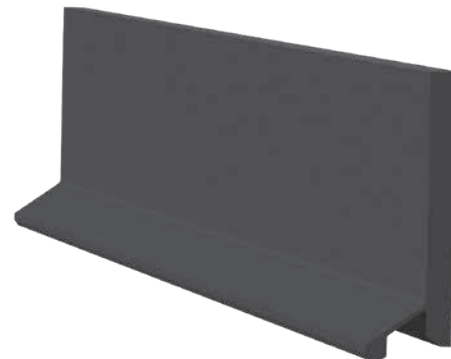

Stock items (non-shaded) refer to (*) for specific lead time, if not specified, standard lead time applies.

Non-stock items (shaded) please contact Flexco for dispatch options and lead times.

Product Notes:

- Secondary seal provides a floating contact area behind the main slab to prevent spillage.
- Polyurethane skirting offers a more wear-resistant material than typical rubber, often providing as much as 3-4 times the wear life in similar applications. The lower coefficient of friction reduces strain on the system.
- Works with Flexco series of skirt clamps that offer simple serviceability: RMC1/PAL-Pak, Flex-Lok™, and Flex-Seal™.
- Uses soft durometer (65A) polyurethane with exceptional tear resistance to ensure a good seal and long belt life.
- 7.6m (25') roll size ensures easy transportation, while the 35° chamfer eliminates the typical skirting break-in period.
- Suitable for most applications: single direction or reversing belts, wet or dry conditions, old or new belts, vulcanized or mechanically-spliced systems.
- Rated for temperatures from -30°C to 82°C (-20°F to 180°F).

240 Macpherson Road • #02-01 • Singapore 348574
Tel: +65-6484-1533 • Fax: +65-6484-1531 • E-mail: asiasales@flexco.com

Visit www.flexco.com for other Flexco locations and products.

©2019 Flexible Steel Lacing Company. 10/17/19. For reorder: XW930

