


# FAR-PUL™ HD® Belt Clamp

## Safely Lock Belt Securely in Place

Avoid the problems and potential dangers associated with homemade devices such as c-clamps, lumber and chains. Far-Pul™ HD® Belt Clamps are specially designed to properly secure a belt and clamp it for safe belt conveyor maintenance.

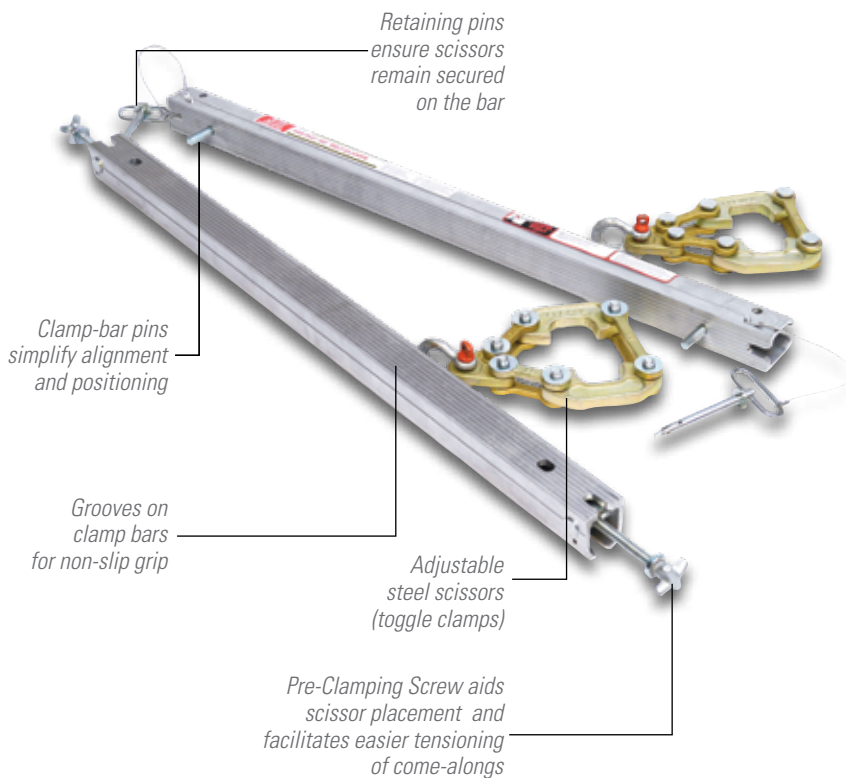

### Unique design, easily adjustable

The unique design of the Far-Pul™ HD® Belt Clamp provides even tensioning across the entire belt width for a secure grip. And with a load capacity of up to three tons (2.7 metric tons), when used with two 1-1/2-ton chain come-alongs, it is ideal for rubber covered and PVC heavy-duty belting from 7/32" (6 mm) to 1" (25 mm) thick.

The Far-Pul HD also accommodates a variety of belt widths. So the need to inventory different clamp bars for different belt widths is eliminated. Our pre-clamping screw allows you to slide the scissors on to the bars in a quick, efficient, and safe manner. Clamping scissors slide easily into place against both belt edges for easy adjustability. And clamp-bar pins simplify alignment and positioning.

# FAR-PUL™ HD®

## Belt Clamp



Far-Pul™ HD® clamp bars are constructed from heat-treated extruded aluminum so they resist corrosion and won't seize up in wet and corrosive environments. Clamps include adjustable steel scissors.

### Engineered for heavy-duty applications

- Aggregate
- Steel
- Coal
- Potash
- Grain
- Foundry
- Salt

<b>Far-Pul™ HD® Belt Clamps</b>				
<b>Belt Width</b>		<b>Ordering Number</b>	<b>Weight</b>	
<b>in.</b>	<b>mm</b>		<b>lbs.</b>	<b>kgs.</b>
Up to 30	Up to 750	LSHD30	93.0	42.2
Up to 36	Up to 900	LSHD36	99.0	44.9
Up to 42	Up to 1050	LSHD42	106.0	48.1
Up to 48	Up to 1200	LSHD48	112.0	50.8
Up to 54	Up to 1350	LSHD54	119.0	54.0
Up to 60	Up to 1500	LSHD60	127.0	57.6
Up to 72	Up to 1800	LSHD72	139.0	63.0

Note: A complete set of Far-Pul™ HD® Belt Clamps includes four clamp bars and four steel clamp scissors with carry bag. Come-alongs not included.

<b>Aluminum Content</b>		
<b>Aluminum Alloy Type</b>	<b>Percent</b>	
	<b>Mg Magnesium</b>	<b>Ti Titanium</b>
6061	1.00%	0%

Authorized Distributor:



2525 Wisconsin Avenue • Downers Grove, IL 60515-4200 • USA  
Tel: (630) 971-0150 • Fax: (630) 971-1180 • E-mail: info@flexco.com

Visit [www.flexco.com](http://www.flexco.com) for other Flexco locations and products.

© 2012 Flexible Steel Lacing Company. HD® is a registered trademark. 05-14-20. For Reorder: X0724

