
Massive, Rugged, Ready to Work

The MHCP Heavy-Duty Cartridge Primary Cleaner features segmented SuperShear[™] blades that are engineered to stand up to the most abusive beltline conditions, such as wet, sticky fire clay, and maintain constant cleaning force. The massive blades have an extended wear life and also a quick-change blade cartridge feature. This is an extreme-duty cleaner that gets the job done – and with minimal maintenance.



Features and Benefits

- Works with mechanical fasteners. The shock-absorbing tensioners allow mechanical splices, skived or unskived, to pass without damage to the splice or the cleaner and with minimal cleaning disruption.
- **Retrofits to other cleaners.** The MHCP blade cartridge will fit on the poles of other cleaner manufacturers. Now you can experience the benefits of the SuperShear blades without having to install a completely new cleaner.
- **Complete cleaning system.** When teamed with the MHS HD Secondary Cleaner, it makes up a system that delivers maximum cleaning power for the most abusive conveyor applications.
- Made for mining conveyors. Made from heavy-duty, corrosion-resistant steel, the MHCP is available in sizes for belt widths from 600 to 3000mm. Additional sizes are available upon request.

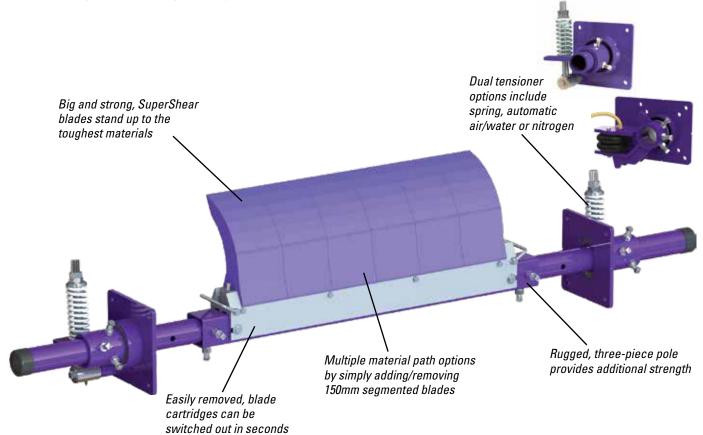

MHCP Heavy-Duty Cartridge Primary Cleaner

Maximum Belt Speed

6 M/sec

Temperature Rating -35° C to 82° C

Minimum Pulley Diameter 500 mm

Blade Height

350 mm

CEMA Cleaner Rating Class 5

Usable Blade Wear Length 200 mm

Ordering Information

MHCP HD Cartridge Primary Cleaner

with Spring lensioner (PS1)						
Belt \	elt Width Blade Coverage		Ordering	Item		
mm	in.	mm in.		Number	Code	
600	24	450	18	MHCP-24S	75929	
750	30	600	24	MHCP-30S	75930	
900	36	750	30	MHCP-36S	75931	
1050	42	900	36	MHCP-42S	75932	
1200	48	1050	42	MHCP-48S	75933	
1350	54	1200	48	MHCP-54S	75934	
1500	60	1350	54	MHCP-60S	75935	
1800	72	1650	66	MHCP-72S	75936	
2100	84	1950	78	MHCP-84S	76800	
2400	96	2250	90	MHCP-96S	78955	
2700	108	2550	102	MHCP-108S	90167	
3000	120	2850	114	MHCP-120S	90168	
ead time: 1 working day						

Lead time: 1 working day

	MHCP HD Cartridge Precleaner with Portable Air Tensioner (PAT)					
Belt Width		Blade Coverage		Ordering	Item	
mm	in.	mm	in.	Number	Code	
600	24	450	18	MHCP-24P	78723	
750	30	600	24	MHCP-30P	78724	
900	36	750	30	MHCP-36P	78725	
1050	42	900	36	MHCP-42P	78726	
1200	48	1050	42	MHCP-48P	78727	
1350	54	1200	48	MHCP-54P	78728	
1500	60	1350	54	MHCP-60P	78729	
1800	72	1650	66	MHCP-72P	78730	
2100	84	1950	78	MHCP-84P	78731	
2400	96	2250	90	MHCP-96P	78959	
2700	108	2550	102	MHCP-108P	90169	
3000	120	2850	114	MHCP-120P	90170	

Lead time: 1 working day

Blade Material

Urethane 90 durometer (proprietary blend for abrasion resistance and long wear) **Available for Belt Widths** 600 to 3000 mm

Please Note:


The mild steel version of this product features aluminum components, so it is not suitable for FRAS applications. Please contact our team to find out about the FRAS model.

Blad	e Cartridge Kits
(Incl	udes blades, cartridge, and
mou	nting bolts)

ine uning worke,				
Belt Width		Ordering	ltem	
mm	in.	Number	Code	
600	24	MHCP-BCK24	75953	
750	30	MHCP-BCK30	75954	
900	36	MHCP-BCK36	75955	
1050	42	MHCP-BCK42	75956	
1200	48	MHCP-BCK48	75957	
1350	54	MHCP-BCK54	75958	
1500	60	MHCP-BCK60	75959	
1800	72	MHCP-BCK72	75960	
2100	84	MHCP-BCK84	76810	
2400	96	MHCP-BCK96	78957	
2700	108	MHCP-BCK108	90415	
3000	120	MHCP-BCK120	90416	

NOTE: For easy blade changeout, remove cartridge with worn blades and replace with new blade cartridge kit. New blades can then be installed in the old cartridge for the next changeout. Lead time: 1 working day


Pole Location Specs



Maximum Conveyor Span Centre Pole Length **Overall Pole Length** Cleaner size + 1450 mm

Maximum Overall Pole Length

Maximum Conveyor Span Cleaner size + 1050 mm



Horizontal Clearance Required 175 mm **Vertical Clearance Required** 475 mm

Pole	Locati	on Cha	art
Α	Х	Y	С
500	254	365	445
525	267	365	451
550	279	365	460
575	292	365	467
600	305	365	476
625	318	365	483
650	330	365	492
675	343	365	502
700	356	365	511
725	368	365	518
750	381	365	527
775	394	365	537
800	406	365	546
825	419	365	556
850	432	365	565
875	445	365	575
900	457	365	584
925	470	365	594
950	483	365	606
975	495	365	616
1000	508	365	625
1025	521	365	635
1050	533	365	648
1075	546	365	657
1100	565	365	673
1125	581	365	686
1150	597	365	699
1175	610	365	711
1200	625	365	724

Authorized Distributor:

ISO 9000

Flexco (Aust.) Ptv. Ltd • 10 Solent Circuit • Baulkham Hills NSW 2153 • Australia Tel: 612-8818-2000 • Fax: 612-8824-6333 • E-mail: salesau@flexco.com

Visit www.flexco.com for other Flexco locations and products.

©2022 Flexible Steel Lacing Company. 10/03/22. For reorder: X1876

