


Reliable Secondary Belt Cleaner

P-Type® conveyor belt cleaners from Flexco are compact and designed to be positioned just off the head pulley and to remove carryback from the belt. Stand alone or, when used in conjunction with a Flexco primary cleaner, the P-Type cleaner is a reliable choice for maintaining a highly efficient cleaning system.



P cushion

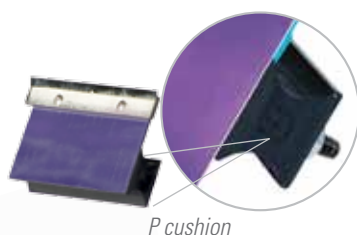

V-Tip



C-Tip

Segmented Cushions

Independently tensioned 150 mm segmented rubber cushions allow each blade to self-adjust to the conveyor belt as it wears, ensuring continuous blade-to-belt contact, even under varying belt tensions and for a wide range of materials.

Available in Two Blade Options

The PV-Tip is high grade Tungsten Carbide allowing for maximum cleaning efficiency and superior wear characteristics on vulcanised belts.

C-Tip is Tungsten Carbide sandwiched between tool steel, for use with mechanically spliced applications.

Optimally Positioned off the Head Pulley

The P-Type cleaner is positioned just off the head pulley in the secondary position. The cushion is angled back in a non-aggressive position at 70 degrees to the belt. This position eliminates the possibility of the blades damaging the belt.




Features and Benefits

- High cleaning ability
- Easily installed and maintained
- Compatible with Flexco mechanical splices
- Available in Stainless Steel
- 450 to 1200 mm poles, Schedule 80, 60 mm diameter
- 1400 and 1600 mm, Schedule 40, 73 mm diameter
- Heavy-Duty 1800 mm and above poles, Schedule 40, 73 mm diameter. Complete with stiffening brace

Optional Mounting Style

Tensioner can be installed in either pull-up or push-up position.

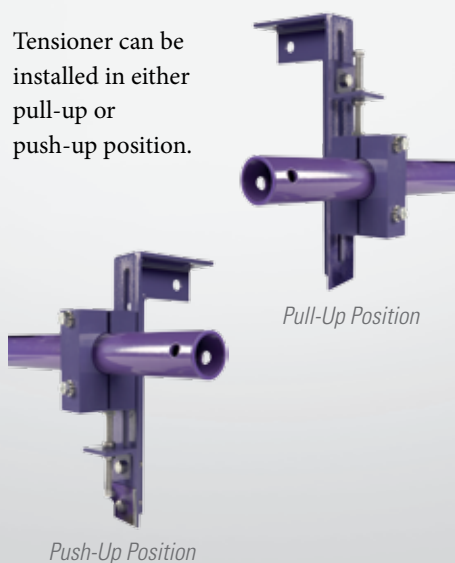

ELIMINATOR® P-TYPE® Secondary Cleaner

Ordering Information		
Powder Coated P-Type® with V-Tips		
Belt Width (mm)	Ordering Number	Item Code
450	PV450	73435
600	PV600	73004
750	PV750	73006
900	PV900	73008
1050	PV1050	73010
1200	PV1200	73012
1400	PV1400	73436
1500	PV1500	73437
1800	PVHD1800	74598
Stainless Steel P-Type® with V-Tips		
450	PV450-S/S	75323
600	PV600-S/S	75324
750	PV750-S/S	75325
900	PV900-S/S	75326
1050	PV1050-S/S	75327
1200	PV1200-S/S	75328
1400	PV1400-S/S	75329
1500	PV1500-S/S	75330
1800	PVHD1800-S/S	A1603

Additional sizes up to 3,000 mm available upon request.

Replacement Tips for P-Type®	
mm	Tips Required
500	3
600	4
750	5
900	6
1050	7
1200	8
1400	9
1500	10
1800	12

Contact Flexco for C-Tip ordering information

The P-Type® cleaner is effective in removing any remaining residue from the conveyor belt after it has passed the primary belt cleaner. It also removes any water that may still remain on the belt. Although mounted in the trailing position, the P-Type tungsten carbide tips remain at 90° to the belt facilitating the most efficient cleaning of the belt.



Flexco (Aust.) Pty. Ltd • 18-20 Brookhollow Ave. • Baulkham Hills NSW 2153 Australia
Tel: 612-9680-3322 • Fax: 612-9899-1237 • New Zealand: Tel: 021-762-285 • 021-908-019
E-mail: sales@flexco.com.au • Web: www.flexco.com

China: 86-21-33528388 • England: 44-1274-600-942 • Germany: 49-7428-9406-0
Mexico: 52-55-5674-5326 • South Africa: 27-11-608-4180 • U.S.A: 1-630-971-0150

©2009 Flexible Steel Lacing Company. Eliminator® and P-Type® are registered trademarks. 10-09. For Reorder: X2206

Authorised Distributor:

