


# R-TYPE® Secondary Belt Cleaner

## Reversing Secondary Belt Cleaner

The Flexco R-Type® Secondary Belt Cleaner is recommended for reversing belts and is designed to be positioned just off the head pulley to remove carryback from the belt. Stand alone, or when used in conjunction with a precleaner, the R-Type cleaner is a reliable choice for maintaining a highly efficient cleaning system.

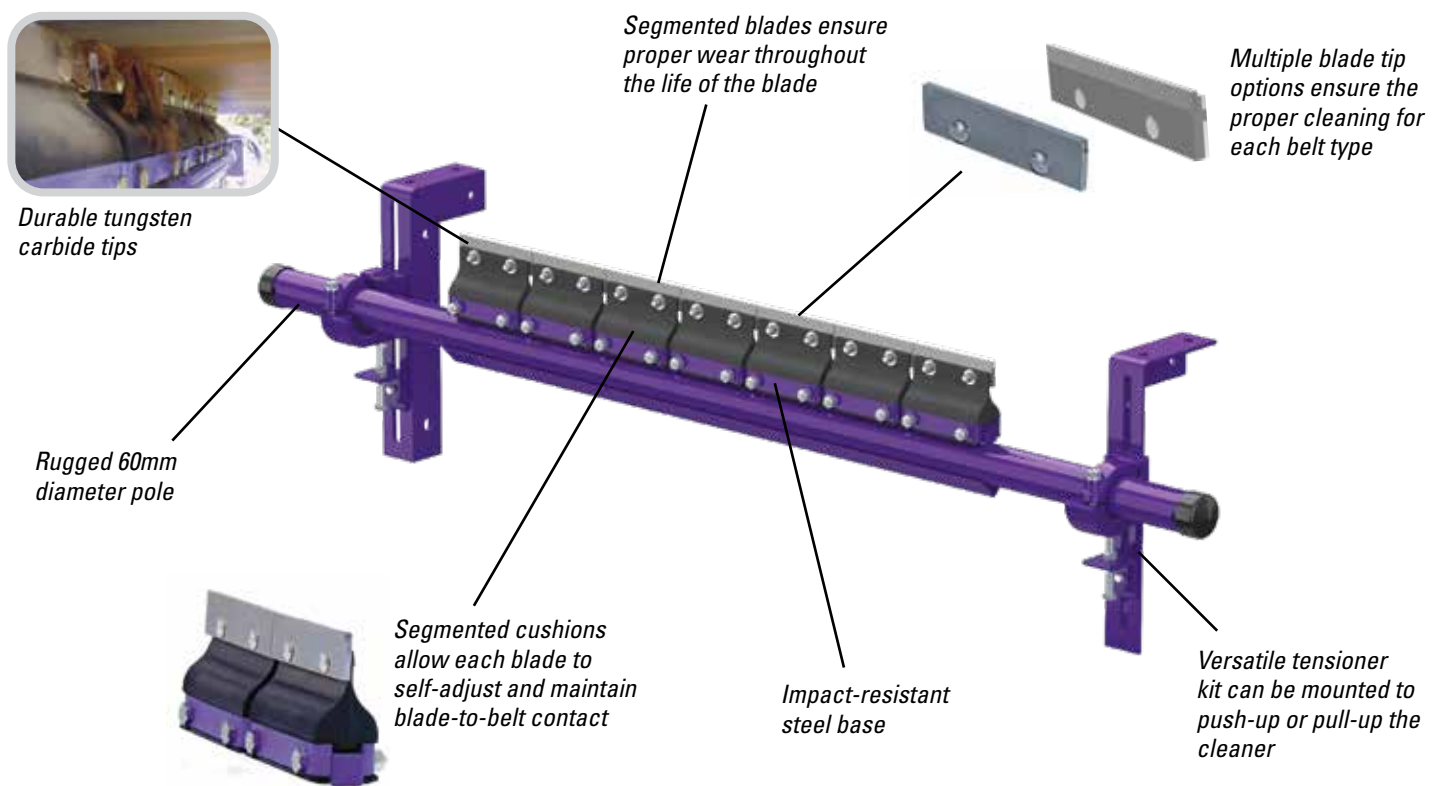

### Features and Benefits

- **Cleaning efficiency of metal blades.** The thin, hard edges of the metal blades deliver high cleaning efficiency and long wear life.
- Works with Flexco mechanical splices. The C-Tip tungsten carbide blades are impact-resistant, and the spring cushion allows them to move away from a passing splice without damage and with minimal cleaning disruption. V-Tips can be used only on vulcanized belts.
- A complete cleaning system. When the R-Type is teamed with a precleaner the system provides maximum cleaning power for tough applications.
- Fits most conveyor structures. Available for belt widths from 450mm to 1800mm.

# R-TYPE® Secondary Belt Cleaner

## Specifications and Guidelines

### Maximum Belt Speed

5 m/s

### Temperature Rating

-35° C to 82° C

### Usable Blade Wear Length


9mm

### Blade Material

Impact resistant, long-lasting tungsten carbide (C-Tips for mechanical fasteners, V-Tips for vulcanized belts)

### Available for Belt Widths

450 to 1800mm

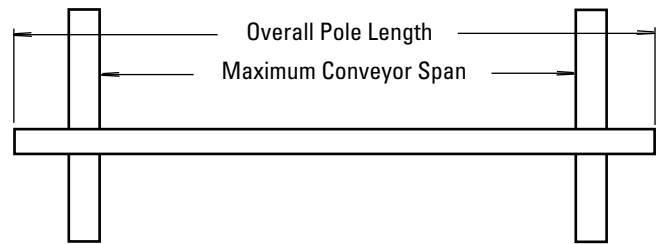

### Pole Length

Cleaner size up to 1200mm + 750mm

Cleaner size 1350mm and up + 850mm

### Maximum Conveyor Span

Cleaner size up to 1200mm + 625mm


Cleaner size 1350mm and up + 725mm

### Horizontal Clearance Required

100mm

### Vertical Clearance Required

200mm



## Ordering Information

R-Type® (Powder Coated) with V-Tips*		
Belt Width mm	Ordering Number	Item Code
450	RV450	74633
600	RV600	74634
750	RV750	74635
900	RV900	74636
1050	RV1050	74637
1200	RV1200	74638
1350	RV1350	74639
1500	RV1500	74640
1800	RV1800	74642

\*NOTE: V-Tips can be used ONLY on vulcanized belts.  
Additional sizes up to 3000mm available upon request.

R-Type (Stainless Steel) with V-Tips*		
Belt Width mm	Ordering Number	Item Code
450	RV450-S/S	75341
600	RV600-S/S	75342
750	RV750-S/S	75343
900	RV900-S/S	75344
1050	RV1050-S/S	75345
1200	RV1200-S/S	75356
1350	RV1350-S/S	75347
1500	RV1500-S/S	75348
1800	RV1800-S/S	A1626

\*NOTE: V-Tips can be used ONLY on vulcanized belts.  
Additional sizes up to 3000mm available upon request.

### Replacement Tips

Ordering Number	Item Code
RSA150	73628

Lead time: 1 working day

### Tips Required per Cleaner Size

mm	450	600	750	900	1050	1200	1350	1500	1800
V-Tips Required	3	4	5	6	7	8	9	10	12

Distribution in Europe by:  
ANKER-FLEXCO GmbH • Maybachstrasse 9 • 72348 Rosenfeld • Germany  
Tel: +49-7428-9406-0 • Fax +49-7428-9406-260 • E-mail: info@anker-flexco.de • Web: [www.flexco.com](http://www.flexco.com)

Manufacturer: FLEXCO

Visit [www.flexco.com](http://www.flexco.com) for other Flexco locations and products.

©2020 Flexible Steel Lacing Company. 06/02/20. For reorder: X2319

Authorized Distributor:

