


P-TYPE® Secondary Belt Cleaner

Reliable Secondary Belt Cleaner

The Flexco P-Type® Secondary Belt Cleaner is compact and designed to be positioned just off the head pulley to remove carryback from the belt. Stand alone, or when used in conjunction with a precleaner, the P-Type cleaner is a reliable choice for maintaining a highly efficient cleaning system.

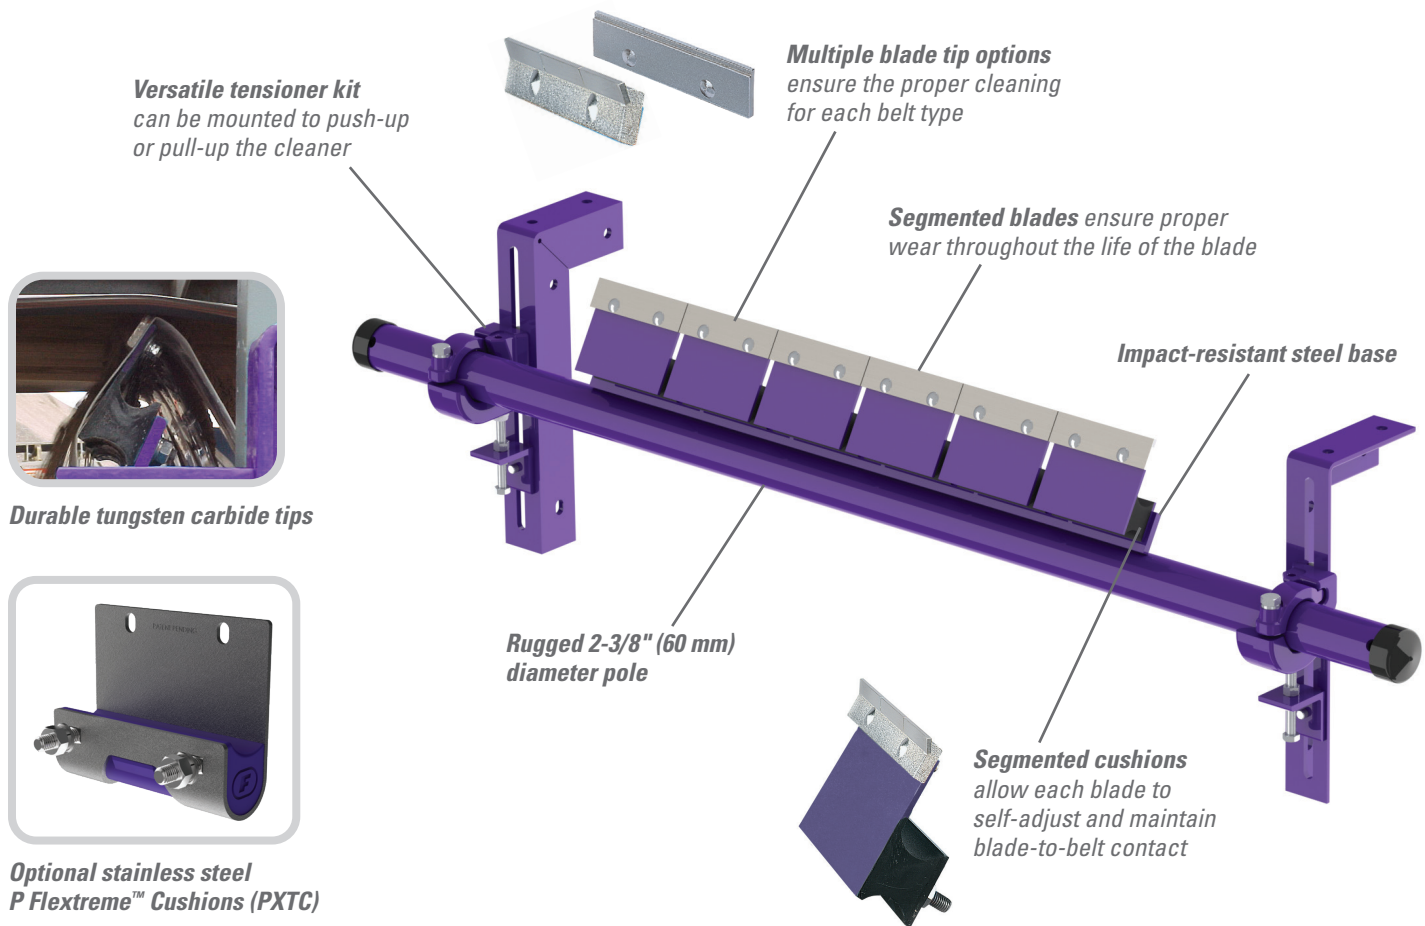

Features and Benefits

- **Cleaning efficiency of metal blades.** The thin, hard edges of the metal blades deliver high cleaning efficiency and long wear life.
- **Works with Flexco mechanical splices.** The C-Tip tungsten carbide blades are impact-resistant, and the spring cushion allows them to move away from a passing splice without damage and with minimal cleaning disruption. V-Tip can be used only on vulcanized belts.
- **A complete cleaning system.** When the P-Type is teamed with a primary cleaner the system provides maximum cleaning power for tough applications.
- **Fits most conveyor structures.** Available for belt widths from 18 to 72" (450 to 1800 mm).

P-TYPE®

Secondary Belt Cleaner

Specifications and Guidelines

Maximum Belt Speed

Standard with C-Tips: 1000 FPM (5 m/s)
 Standard with V-Tips: 1200 FPM (6 m/s)
 PXTC with C-Tips: 1200 FPM (6 m/s)
 PXTC with V-Tips: 1450 FPM (7.5 m/s)

Temperature Rating

-30 to 180°F (-35 to 82°C)

Usable Blade Wear Length

3/8" (9 mm)

Blade Material

Impact resistant, long-lasting tungsten carbide (C-Tips for mechanical fasteners, V-Tips for vulcanized belts)

CEMA Cleaner Rating

Class 4

Available for Belt Widths

18 to 72" (450 to 1800 mm)

Pole Length

Cleaner size up to 48" (1200 mm) + 30" (750 mm)
 Cleaner size 54" (1350 mm) and up + 34" (850 mm)

Maximum Conveyor Span



Cleaner size up to 48" (1200 mm) + 25" (625 mm)
 Cleaner size 54" (1350 mm) and up + 29" (725 mm)

Horizontal Clearance Required

4" (100 mm)

Vertical Clearance Required

8" (200 mm)

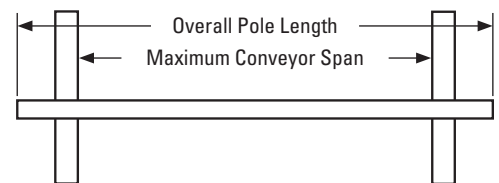

Ordering Information

P-Type® with C-Tips*			
Belt Width		Ordering Number	Item Code
in.	mm		
18	450	PC18	74566
24	600	PC24	74567
30	750	PC30	74568
36	900	PC36	74569
42	1050	PC42	74570
48	1200	PC48	74571
54	1350	PC54	74572
60	1500	PC60	74573
72	1800	PC72	74574

*C-Tips can be used on mechanically spliced and vulcanized belts. P-Type® cleaners come standard with Select Set™ Tensioners.

P-Type® with V-Tips*			
Belt Width		Ordering Number	Item Code
in.	mm		
18	450	PV-18	78453
24	600	PV-24	78415
30	750	PV-30	78417
36	900	PV-36	78419
42	1050	PV-42	78421
48	1200	PV-48	78423
54	1350	PV-54	78454
60	1500	PV-60	78455
72	1800	PV72	73438

*V-Tips can be used ONLY on vulcanized belts. P-Type® cleaners come standard with Select Set™ Tensioners.

Replacement Tips & Cushions		
Description	Ordering Number	Item Code
C-Tip	ICT6	74535
V-Tip	PSA150	73156
P Flexxtreme™ Cushion*	PXTC	107137

*Includes hardware

Lead time: 1 working day

Tips Required Per Cleaner Size									
in.	18	24	30	36	42	48	54	60	72
mm	450	600	750	900	1050	1200	1350	1500	1800
C-Tips or V-Tips Required	3	4	5	6	7	8	9	10	12

P-Type® with PXTC and C-Tips*			
Belt Width		Ordering Number	Item Code
in.	mm		
18	450	PC-PXT-18-CCMK	121169
24	600	PC-PXT-24-CCMK	121170
30	750	PC-PXT-30-CCMK	121171
36	900	PC-PXT-36-CCMK	121172
42	1050	PC-PXT-42-CCMK	121173
48	1200	PC-PXT-48-CCMK	121174
54	1350	PC-PXT-54-CCMK	121175
60	1500	PC-PXT-60-CCMK	121176
72	1800	PC-PXT-72-CCMK	121177

*C-Tips can be used on mechanically spliced and vulcanized belts.

P-Type® with PXTC and V-Tips*			
Belt Width		Ordering Number	Item Code
in.	mm		
18	450	PV-PXT-18-CCMK	121178
24	600	PV-PXT-24-CCMK	121179
30	750	PV-PXT-30-CCMK	121180
36	900	PV-PXT-36-CCMK	121181
42	1050	PV-PXT-42-CCMK	121182
48	1200	PV-PXT-48-CCMK	121183
54	1350	PV-PXT-54-CCMK	121184
60	1500	PV-PXT-60-CCMK	121185
72	1800	PV-PXT-72-CCMK	121186

*V-Tips can be used ONLY on vulcanized belts

Visit www.flexco.com for other Flexco locations and products, or to find an authorized distributor.

