
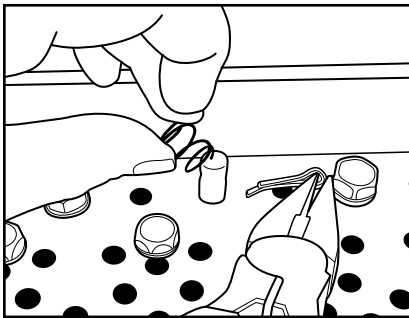



Replacement Anvil Instructions for Aluminum MSRT and MSRT8 Tools

Instructions


- A. Cotter Pin, Spring, and Gauge Pin Guide
- B. Guide Block Locator Bolts
- C. 3/4" (19 mm) anvil bolts
- D. 7/8" (22 mm) anvil bolts

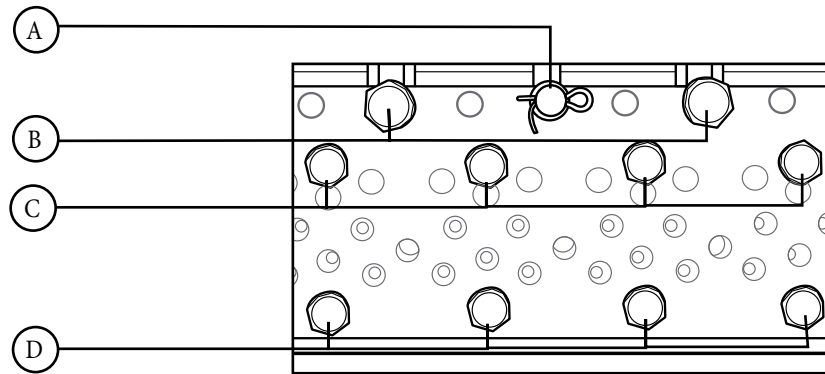


1. Turn tool over to access the bottom of the tool. Using pliers, remove cotter pin from the gauge pin guide. Then remove spring.

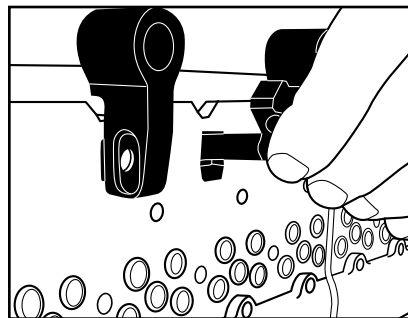


2. If the gauge pin guide does not fall out on its own, turn the tool to its side and remove it.

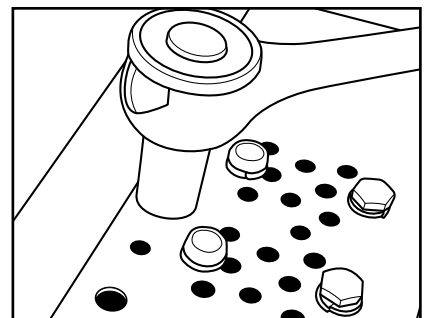


3. Using a 1/2" or 13 mm wrench, loosen the two guide block locator bolts.

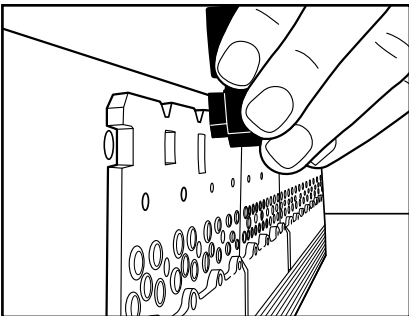


4. Turn the tool on its side and remove both guide block locators.

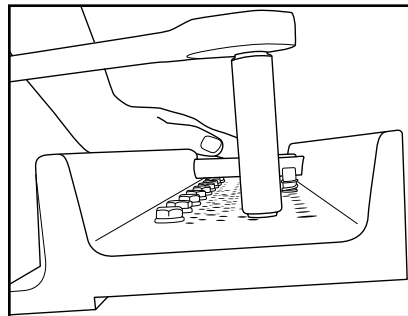


5. Using a 7/16" or 11 mm wrench, remove the four bolts in the center of the anvil plate. **These bolts measure 3/4" or 19 mm in length.**

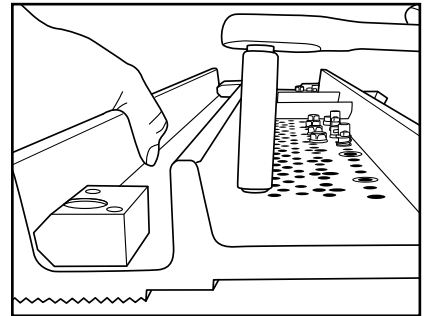


6. Using a 7/16" or 11 mm wrench, remove the four bolts on the end of the anvil plate. **These bolts measure 7/8" or 22 mm in length.**

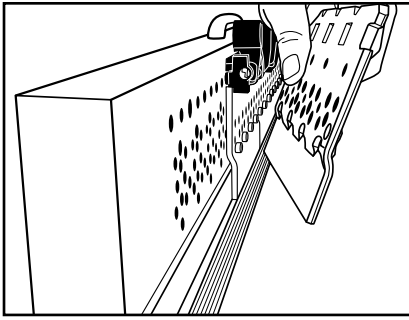


7. Remove existing anvil plate from the tool and place new anvil plate on the tool.

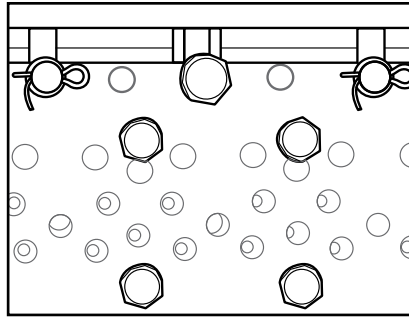


8. Re-insert all bolts into the tool and hand tighten them. The four anvil bolts that measure 3/4" (19 mm) should be in the middle and the four anvil bolts that measure 7/8" (22 mm) should be on the outside edge.

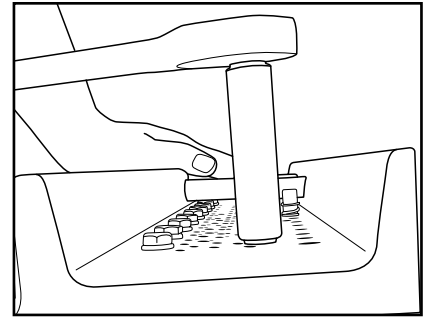


9. Using a 7/16" or 11 mm wrench, tighten the eight anvil bolts. Tighten the shorter bolts-3/4" (19 mm) first.

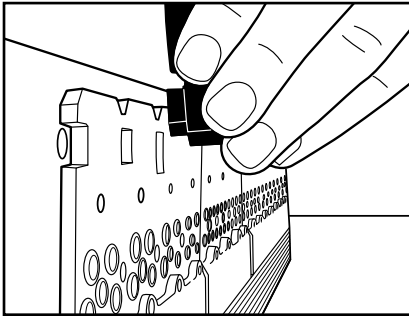


10. Place the guide block locators back on the tool and using a 1/2" or 13 mm wrench, tighten the two guide block locator bolts.

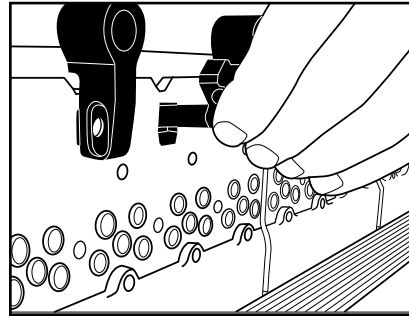

11. Replace the gauge pin guide into its place.

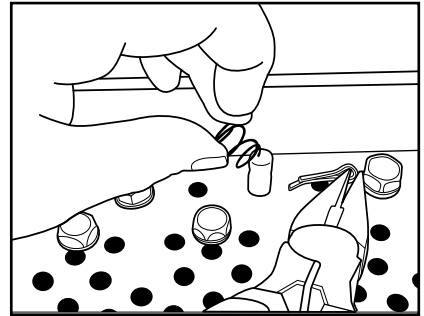

12. Place spring over the bottom of the gauge pin guide. **Insert the cotter pin into the gauge pin guide making sure the spring is contained between the cotter pin and the tool.**

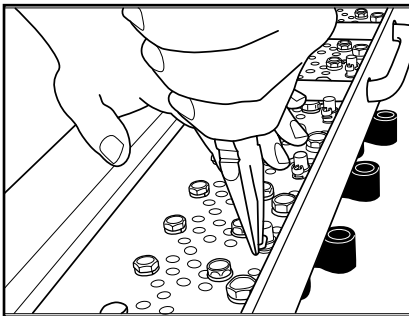

13. Bend cotter pin to ensure that it stays in place.



2525 Wisconsin Avenue • Downers Grove, IL 60515-4200 U.S.A.
Tel: 1-630-971-0150 • Fax: 1-630-971-1180 • E-mail: info@flexco.com

Visit www.flexco.com for other Flexco locations and products.

©2011 Flexible Steel Lacing Company. 12-13. For Reorder: X2467

