

FLEX-SEAL™ Skirting System

Solves Spillage and Dust Control Problems

Flex-Seal™ Skirting System is a dynamic containment unit that fully seals the loading zone. It stops material spillage leaks, controls dust emissions and helps prevent other resulting problems such as belt damage. Conventional skirt clamps and systems may contain spillage of materials, but maintenance is typically difficult and time-consuming. And more importantly, the damage done to the conveyor belt is costly. The Flex-Seal Skirting System creates a parallel seal with the belt to be effective for your operation.



Quick adjustment by using the locking wedges on the clamp pins


Anti-vibration pin ensures pin remains locked



Comes in easy-to-use 1.2M (4') lengths

Skirting thickness can vary from 8-19mm (5/16" to 3/4")

Angles the skirting so it seals with low contact pressure and without damaging the belt

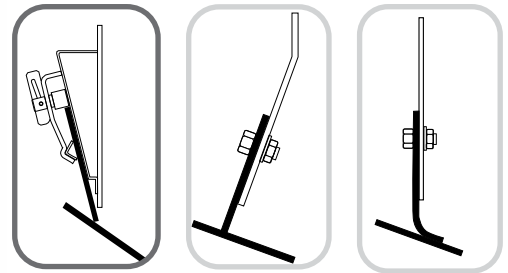

No hassle installation with few parts and complete step-by-step instructions

Features and Benefits

- **No belt damage.** With correct installation, the skirting will not drag on the belt, causing premature wear or gouge marks in the belt cover. Such damage reduces belt cleaning efficiency and the life of the belt.
- **Safe service access.** All installation and maintenance work can be done safely from the sides of the conveyor. Climbing into the chute to work on nuts and bolts is not required.
- **Long service life.** Flex-Seal Skirting Systems are made of corrosion-protected components for tough duty. Replacement parts are available.

FLEX-SEAL™ Skirting System

Ordering Information

Flex-Seal Skirt System*

| Description | Ordering Number | Item Code |
|-------------------------|-----------------|-----------|
| Flex-Seal™ Skirt System | CRMC2-FS | 81995 |

*Includes angle plate, one Bolt-On PAL PAK, and one 1.2M (4') Clamp Bar.
Skirt board and skirting not included.
Skirting Thickness Ranges: 8mm to 19mm (5/16" to 3/4")



Flex-Seal™



Bolt-On PAL PAK

Replacement Parts*

| Description | Ordering Number | Item Code |
|------------------|-----------------|-----------|
| Angle Plate | RMC2-AP | 76559 |
| Bolt-On PAL PAK* | RMC1-BPP | 76415 |
| Clamp Bar | RMC1-CB | 75820 |

*Includes two bolt-on clamp pins and two clamp plates.

Specifications

Skirting Width and Thickness Range

| | |
|-----------------|---------------------|
| Width Required | 150mm (6") |
| Thickness Range | 8-19mm (5/16"-3/4") |


Additional Information

Check out our other Skirting Systems, like the RMC1 or Flex-Lok™, as well as Flexco's Standard or Dual Seal Polyurethane Skirting.

RMC1



Flex-Lok™

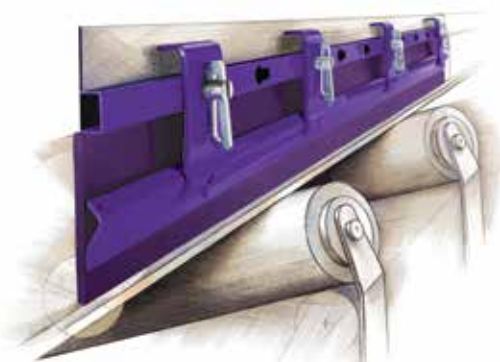

Flexco Polyurethane Skirting



240 Macpherson Road • #02-01 • Singapore 348574
Tel: +65-6484-1533 • Fax: +65-6484-1531 • E-mail: asiasales@flexco.com

Visit www.flexco.com for other Flexco locations and products.

©2022 Flexible Steel Lacing Company. 12/01/22. For reorder: X2812

