


The Economical, Efficient Belt Training Solution

The patented PT Smart™ Belt Trainer takes our unique "pivot and tilt" design and puts it into a more economical, medium-duty trainer. This unit reacts and compensates instantly to belt misalignment, ensuring that the belt stays away from the structure and the material stays on the belt. The result: a continuous solution to mistracking problems that cause damage to the belt and conveyor structure—at an affordable price.

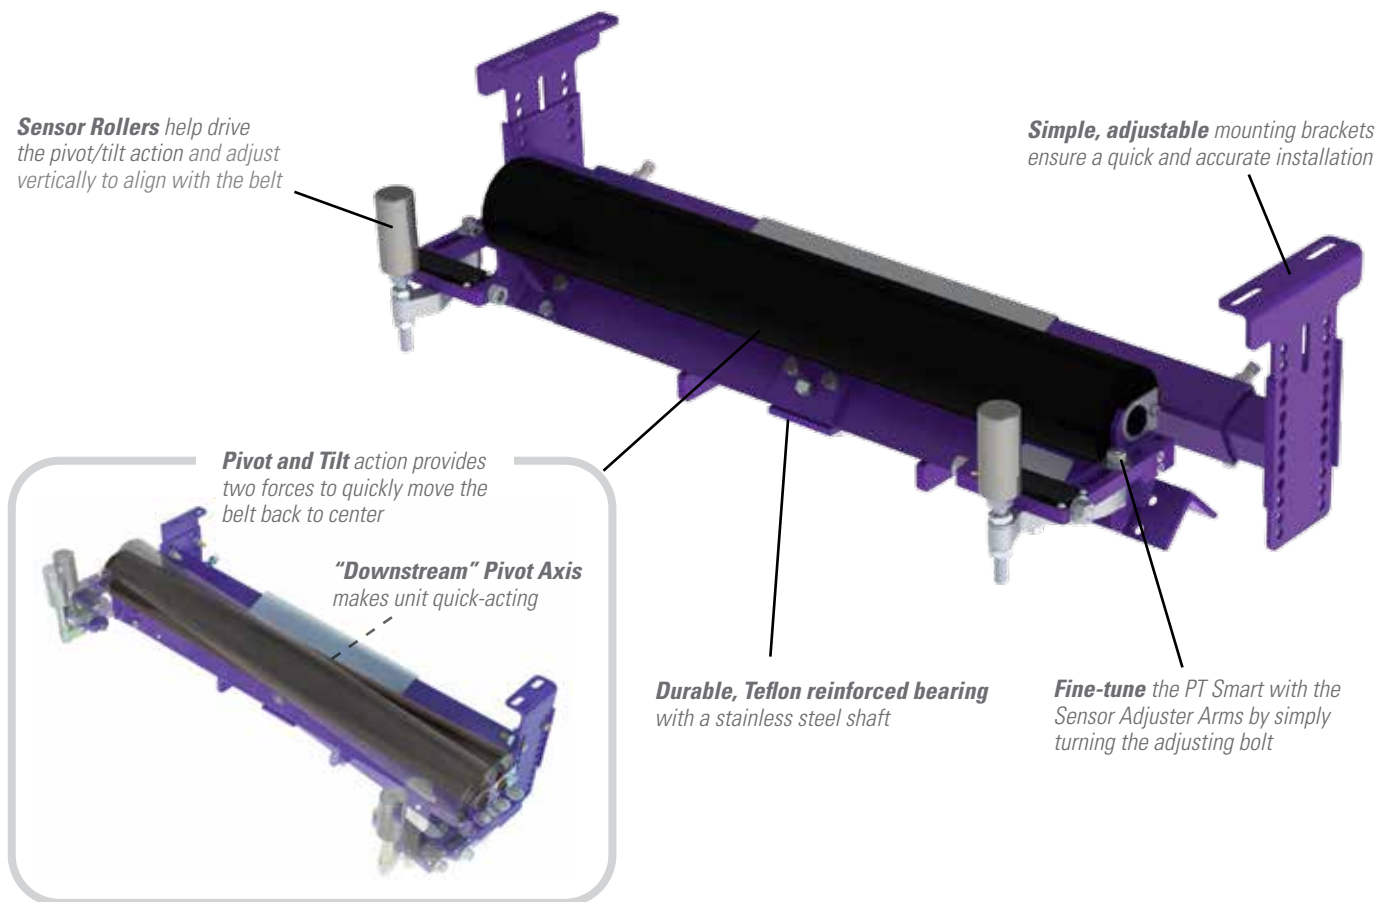

Features and Benefits

- **Works in multiple applications.** Above-ground version features an idler belt-width+75 mm (3"), 50 mm (2") sensor rollers, and easy-to-install mounting brackets. Underground version comes with an idler belt-width+225 mm (9"), 75 mm (3") sensor rollers, and an extended mounting bracket for underground structures.
- **Easy ordering and installation.** Enhanced to meet instant demands for training solutions, the PT Smart is available on a one-working-day lead time. The simple brackets and component construction also ensures a quick and easy installation.
- **Economical.** PT Smart is a very versatile, budget-conscious, out-of-the-box solution.
- **Made to last.** Durable and strong, the PT Smart offers a 2-year "No Risk" Performance Guarantee.
- **Works with mechanically fastened or vulcanized belts.**

Specifications and Guidelines

Selection Guidelines	
MODEL	APPLICATION RANGE
PT Smart™	Medium-duty belts up to 1600 PIW max tension. Belt width + 75mm" (3) idler. Belt thickness 25mm (1") maximum.
PT Smart™ Underground	Medium-duty belts up to 1600 PIW max tension. Belt width + 225mm (9") idler. Belt thickness 25mm (1") maximum. Fits underground structure.

Maximum Belt Speed: 5M/sec (1000 FPM)

Temperature Rating: -40°C to 71°C (-40°F to 180°F)

Belt Direction: One way

Available for Belt Widths: 450 to 1800 mm (18" to 72")

Selection Guidelines		
CONVEYOR CRITERIA	PT SMART™	PT SMART™ UNDERGROUND
Top side mistracking	NO	NO
Return side mistracking	YES	YES
Belt mistracking to one side	EXCELLENT	EXCELLENT
Belt mistracking to both sides	EXCELLENT	EXCELLENT
Inconsistent tracking problem	EXCELLENT	EXCELLENT
Belt is cupped (heavy)	GOOD	GOOD
Belt has low running tension	EXCELLENT	EXCELLENT
Belt has medium running tension	EXCELLENT	EXCELLENT
Belt has high running tension	GOOD	GOOD
Approx. "upstream" effect*	6 M (20')	6 M (20')
Approx. "downstream" effect*	36 - 45 M (120' - 150')	36 - 45 M (120' - 150')

Ordering Information					
Belt Width		Ordering Number	Item Code	Ordering Number	Item Code
mm	in.				
PT Smart™ Belt Trainer				Replacement Rollers	
450	18	PTS-18R	77664	PTS-RR21	77680
600	24	PTS-24R	77665	PTS-RR27	77681
750	30	PTS-30R	77666	PTS-RR33	77682
900	36	PTS-36R	77667	PTS-RR39	77683
1050	42	PTS-42R	77668	PTS-RR45	77684
1200	48	PTS-48R	77669	PTS-RR51	77685
1350	54	PTS-54R	77670	PTS-RR57	77686
1500	60	PTS-60R	77671	PTS-RR63	77687
1800	72	PTS-72R	77672	PTS-RR75	77689
PT Smart™ Underground Structure Belt Trainer				Replacement Rollers	
750	30	PTS-30R-UG	77673	PTS-RR39	77683
900	36	PTS-36R-UG	77674	PTS-RR45	77684
1050	42	PTS-42R-UG	77675	PTS-RR51	77685
1200	48	PTS-48R-UG	77676	PTS-RR57	77686
1350	54	PTS-54R-UG	77677	PTS-RR63	77687
1500	60	PTS-60R-UG	77678	PTS-RR69	77688
1800	72	PTS-72R-UG	77679	PTS-RR81	77690

Lead time: 1 working day

Authorized Distributor:

New Door No. 51 • Anna Salai, Nagalkeni • Pammal Village • Chennai - 600 044 • Tamil Nadu • India
Tel: +91-44-4856-6762 • E-mail: info.india@flexco.com

Visit www.flexco.com for other Flexco locations and products.

©2021 Flexible Steel Lacing Company. 03/25/21. For reorder: X2957

