


P-TYPE® Secondary Belt Cleaner

Reliable Secondary Belt Cleaner

The Flexco P-Type® Secondary Belt Cleaner is compact and designed to be positioned just off the head pulley to remove carryback from the belt. Stand alone, or when used in conjunction with a precleaner, the P-Type cleaner is a reliable choice for maintaining a highly efficient cleaning system.

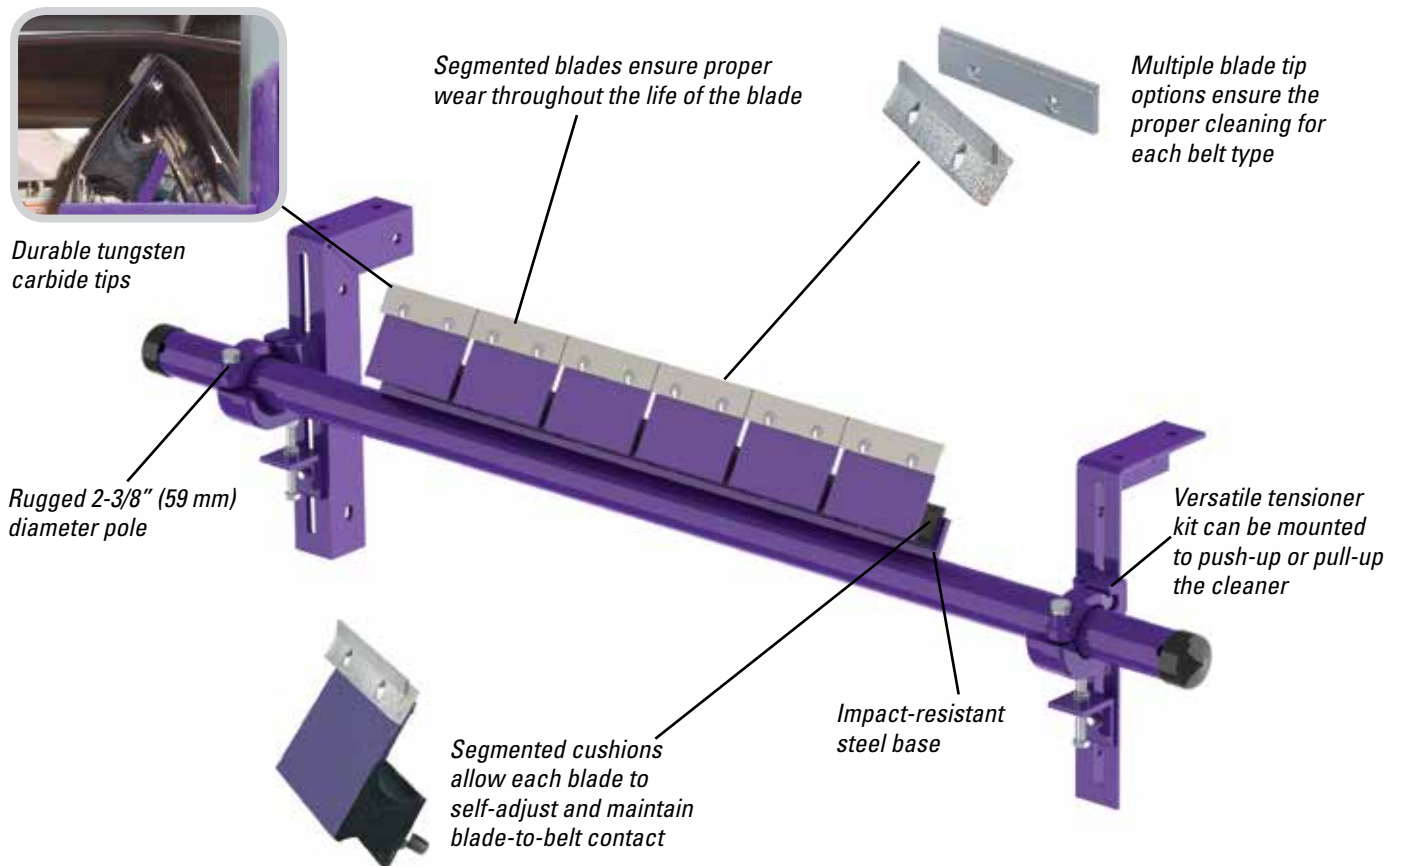

Features and Benefits

- **Cleaning efficiency of metal blades.** The thin, hard edges of the metal blades deliver high cleaning efficiency and long wear life.
- **Works with Flexco mechanical splices.** The C-Tip tungsten carbide blades are impact-resistant, and the spring cushion allows them to move away from a passing splice without damage and with minimal cleaning disruption. V-Tip can be used only on vulcanized belts.
- **A complete cleaning system.** When the P-Type is teamed with a primary cleaner the system provides maximum cleaning power for tough applications.
- **Fits most conveyor structures.** Available for belt widths from 18" to 72" (450 mm to 1800 mm).

P-TYPE® Secondary Belt Cleaner

Specifications and Guidelines

Maximum Belt Speed

1000 FPM (5 M/sec)

Temperature Rating

-30° F to 180° F (-35° C to 82° C)

Usable Blade Wear Length


3/8" (9 mm)

Blade Material

Impact resistant, long-lasting tungsten carbide (C-Tip for mechanical fasteners, V-Tips for vulcanized belts)

Available for Belt Widths

18" to 72" (450 to 1800mm)

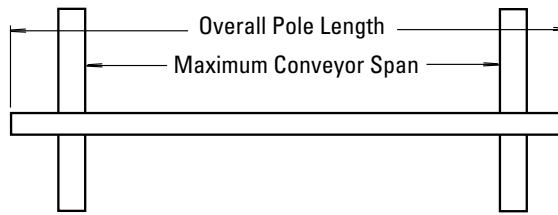


Pole Length

Cleaner size up to 48" (1200mm) + 30" (750mm) / Cleaner size 54" and up (1350mm) + 34" (850mm)

Maximum Conveyor Span

Cleaner size up to 48" (1200mm) + 25" (625mm) / Cleaner size 54" and up (1350mm) + 29" (725mm)



Horizontal Clearance Required

4" (100mm)

Vertical Clearance Required

8" (200mm)

Ordering Information

P-Type® Secondary with C-Tips*			
Belt Width		Ordering Number	Item Code
in.	mm		
18	450	PC450	81421
24	600	PC600	81422
30	750	PC750	81423
36	900	PC900	81424
42	1050	PC1050	81425
48	1200	PC1200	81426
54	1350	PCHD1350	81427
60	1500	PCHD1500	81428
72	1800	PCHD1800	81429

*NOTE: C-Tips can be used on mechanically spliced and vulcanized belts. P-Type cleaners come standard with Select Set™ Tensioners.

P-Type® Secondary with V-Tips*			
Belt Width		Ordering Number	Item Code
in.	mm		
18	450	PV450	73435
24	600	PV600	73004
30	750	PV750	73006
36	900	PV900	73008
42	1050	PV1050	73010
48	1200	PV1200	73012
54	1350	PV1350	73436
60	1500	PV1500	73437
72	1800	PVHD1800	74598

*NOTE: V-Tips can be used ONLY on vulcanized belts. P-Type cleaners come standard with Select Set™ Tensioners.

Replacement Tips	
Ordering Number	Item Code
PSA150	73156
ICT6	74535

Lead time: 1 working day

Tips Required per Cleaner Size									
in.	18	24	30	36	42	48	54	60	72
mm	450	600	750	900	1050	1200	1350	1500	1800
C-Tips or V-Tips Required	3	4	5	6	7	8	9	10	12

Additional Information

For size restricted applications, see the P-Type LS (Limited Space) Sell Sheet X2479.



Authorized Distributor:

New Door No. 51 • Anna Salai, Nagalkeni • Pammal Village • Chennai - 600 044 • Tamil Nadu • India
Tel: +91-44-4856-6762 • E-mail: info.india@flexco.com

Visit www.flexco.com for other Flexco locations and products.

