

Enclosed Skirt System


Simple and Effective

Not all containment solutions should require complicated measuring and engineering. Standard skirting assemblies with adjustable mounting arrangements provide universal mounting and easy installation.



Features and Benefits:

- **Easy Installation.** Our skirt legs can be located anywhere along your stringer. With easy slip-on connectors, installing Standard Flexco Skirting Solutions is quick and easy.
- **Sealing Options.** Seal to your conveyor belt using one of two Flexco sealing options: vertical or tangential.
- **Rear Door Seal.** Provides easy access for wash down, inspection, and repairs.
- **Dust Curtains.** Control air flow throughout the system to keep dust levels low.
- **Easy Maintenance.** Liners are externally replaceable and adjustable.
- **Customizable.** If the standard offering does not suit your application, it can be custom engineered to fit the job requirements.

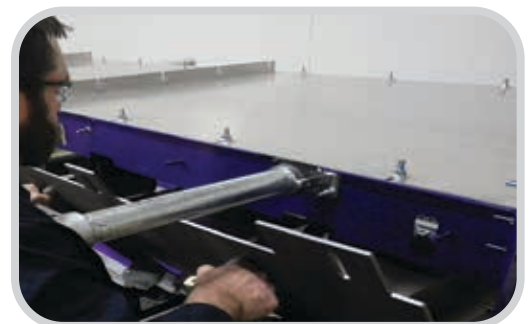

Enclosed Skirt System

Ordering Information

STANDARD BASE UNIT - 4' (1.2 M)											
BELT WIDTH		BASE UNIT LENGTH		STANDARD, NO COVER		STANDARD, COVERED		TANGENTIAL, NO COVER		TANGENTIAL, COVERED	
in.	mm	ft.	mm	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE
24	600	4	1200	ES24-4-SN	91653	ES24-4-SF	91664				
30	750	4	1200	ES30-4-SN	91654	ES30-4-SF	91665				
36	900	4	1200	ES36-4-SN	91655	ES36-4-SF	91666				
42	1050	4	1200	ES42-4-SN	91656	ES42-4-SF	91667				
48	1200	4	1200	ES48-4-SN	91657	ES48-4-SF	91668	ES48-4-TN	91675	ES48-4-TF	91682
54	1350	4	1200	ES54-4-SN	91658	ES54-4-SF	91669	ES54-4-TN	91676	ES54-4-TF	91683
60	1500	4	1200	ES60-4-SN	91659	ES60-4-SF	91670	ES60-4-TN	91677	ES60-4-TF	91684
66	1650	4	1200	ES66-4-SN	91660	ES66-4-SF	91671	ES66-4-TN	91678	ES66-4-TF	91685
72	1800	4	1200	ES72-4-SN	91661	ES72-4-SF	91672	ES72-4-TN	91679	ES72-4-TF	91686
84	2100	4	1200	ES84-4-SN	91662	ES84-4-SF	91673	ES84-4-TN	91680	ES84-4-TF	91687
96	2400	4	1200	ES96-4-SN	91663	ES96-4-SF	91674	ES96-4-TN	91681	ES96-4-TF	91688

STANDARD BASE UNIT- 8' (2.4 M)											
BELT WIDTH		BASE UNIT LENGTH		STANDARD, NO COVER		STANDARD, COVERED		TANGENTIAL, NO COVER		TANGENTIAL, COVERED	
in.	mm	ft.	mm	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE	ORDERING NUMBER	ITEM CODE
24	600	8	2400	ES24-8-SN	91689	ES24-8-SF	91700				
30	750	8	2400	ES30-8-SN	91690	ES30-8-SF	91701				
36	900	8	2400	ES36-8-SN	91691	ES36-8-SF	91702				
42	1050	8	2400	ES42-8-SN	91692	ES42-8-SF	91703				
48	1200	8	2400	ES48-8-SN	91693	ES48-8-SF	91704	ES48-8-TN	91711	ES48-8-TF	91718
54	1350	8	2400	ES54-8-SN	91694	ES54-8-SF	91705	ES54-8-TN	91712	ES54-8-TF	91719
60	1500	8	2400	ES60-8-SN	91695	ES60-8-SF	91706	ES60-8-TN	91713	ES60-8-TF	91720
66	1650	8	2400	ES66-8-SN	91696	ES66-8-SF	91707	ES66-8-TN	91714	ES66-8-TF	91721
72	1800	8	2400	ES72-8-SN	91697	ES72-8-SF	91708	ES72-8-TN	91715	ES72-8-TF	91722
84	2100	8	2400	ES84-8-SN	91698	ES84-8-SF	91709	ES84-8-TN	91716	ES84-8-TF	91723
96	2400	8	2400	ES96-8-SN	91699	ES96-8-SF	91710	ES96-8-TN	91717	ES96-8-TF	91724

REAR SEAL			
BELT WIDTH		ORDERING NUMBER	ITEM CODE
in.	mm		
24	600	RS-24	91725
30	750	RS-30	91726
36	900	RS-36	91727
42	1050	RS-42	91728
48	1200	RS-48	91729
54	1350	RS-54	91730
60	1500	RS-60	91731
66	1650	RS-66	91732
72	1800	RS-72	91733
84	2100	RS-84	91734
96	2400	RS-96	91735

DUST CURTAIN			
BELT WIDTH		ORDERING NUMBER	ITEM CODE
in.	mm		
24	600	DC-24	91736
30	750	DC-30	91737
36	900	DC-36	91738
42	1050	DC-42	91739
48	1200	DC-48	91740
54	1350	DC-54	91741
60	1500	DC-60	91742
66	1650	DC-66	91743
72	1800	DC-72	91744
84	2100	DC-84	91745
96	2400	DC-96	91746

SPANNERS			
SPANNER WIDTH		ORDERING NUMBER	ITEM CODE
in.	mm		
24	600	SP-24	91747
30	750	SP-48	91748
36	900	SP-72	91749
42	1050	SP-96	91750

Authorized Distributor:

2525 Wisconsin Avenue • Downers Grove, IL 60515-4200 • USA
 Tel: (630) 971-0150 • Fax: (630) 971-1180 • E-mail: info@flexco.com

Visit www.flexco.com for other Flexco locations and products.

©2020 Flexible Steel Lacing Company, 05/04/20. For reorder: X3846

