


P-TYPE® Secondary Belt Cleaner

Reliable Secondary Belt Cleaner

The Flexco P-Type® Secondary Belt Cleaner is compact and designed to be positioned just off the head pulley to remove carryback from the belt. Stand alone, or when used in conjunction with a precleaner, the P-Type® cleaner is a reliable choice for maintaining a highly efficient cleaning system.

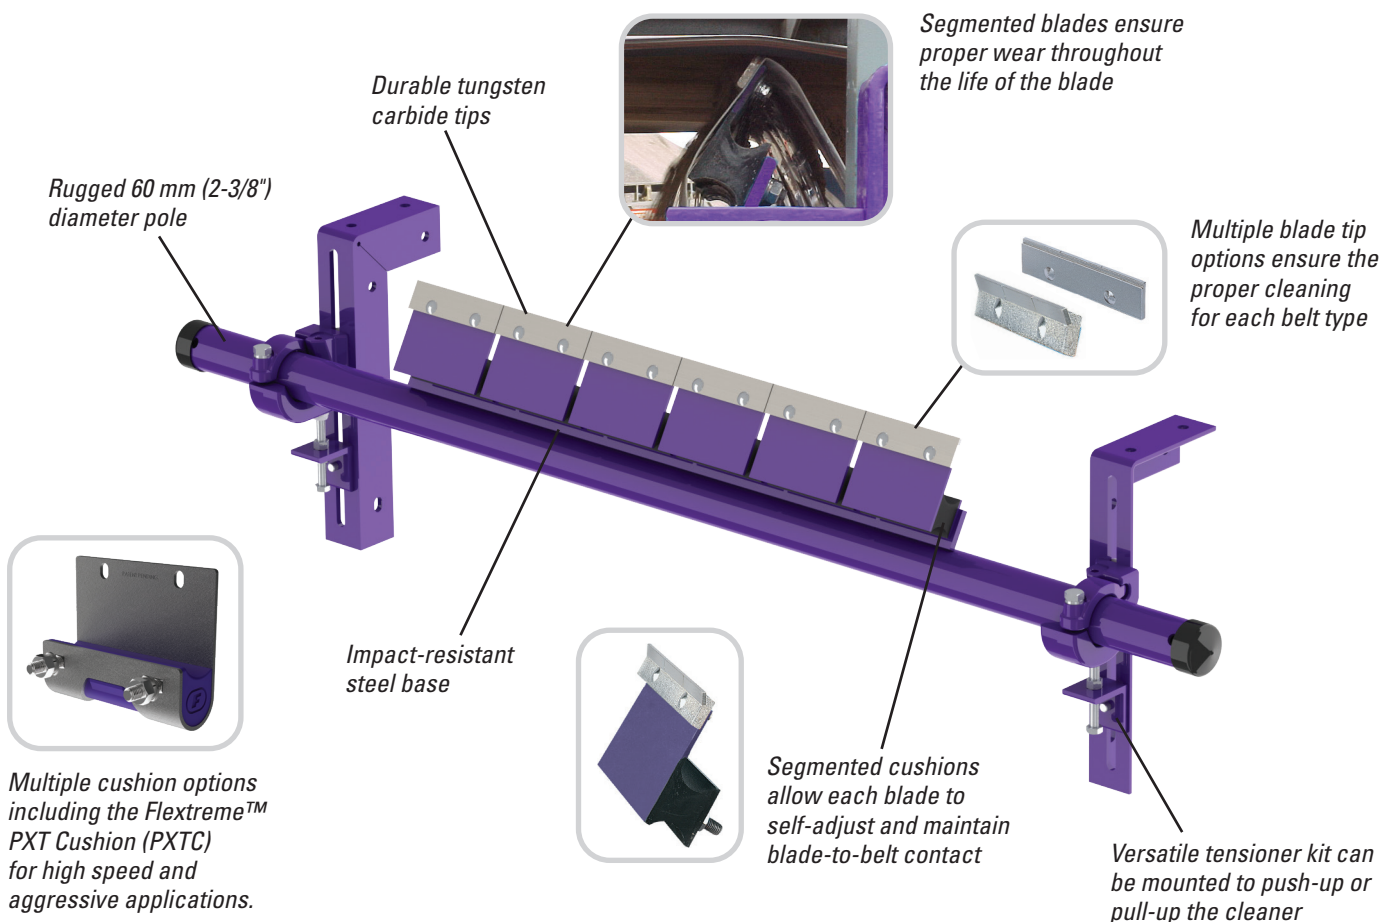

Features and Benefits

- **Cleaning efficiency of metal blades.** The thin, hard edges of the metal blades deliver high cleaning efficiency and long wear life.
- **Works with Flexco mechanical splices.** The C-Tip tungsten carbide blades are impact-resistant, and the spring cushion allows them to move away from a passing splice without damage and with minimal cleaning disruption. V-Tips can be used only on vulcanized belts.
- **A complete cleaning system.** When the P-Type® is teamed with a primary cleaner the system provides maximum cleaning power for tough applications.
- **Fits most conveyor structures.** Available for belt widths from 450 to 1800 mm (18 to 72").

P-TYPE® Secondary Belt Cleaner

Specifications and Guidelines

Maximum Belt Speed

5 m/s (1000 FPM) with standard cushions

7.5 m/s (1475 FPM) with PXTC cushions

Temperature Rating

-35° to 82°C (-30° to 180°F)

Usable Blade Wear Length

9 mm (3/8")

Blade Material

Impact resistant, long-lasting tungsten carbide (C-Tips for mechanical fasteners, V-Tips for vulcanized belts)

Available for Belt Widths

450 to 1800 mm (18 to 72")

Other sizes available upon request.

Pole Length

Cleaner size up to 1200 mm (48") + 750 mm (30")

Cleaner size 1350 mm (54") and up + 850 mm (34")

Maximum Conveyor Span

Cleaner size up to 1200 mm (48") + 625 mm (25")



Cleaner size 1350 mm (54") and up + 725 mm (29")

Horizontal Clearance Required

100 mm (4")

Vertical Clearance Required

200 mm (8")

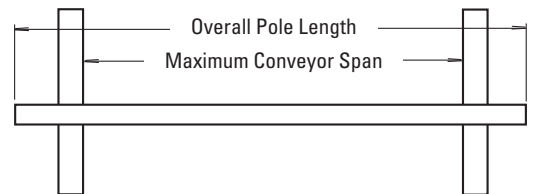

Ordering Information

P-Type® with V-Tips*			
Belt Width		Ordering Number	Item Code
mm	in.		
450	18	PV450	73435
600	24	PV600	73004
750	30	PV750	73006
900	36	PV900	73008
1050	42	PV1050	73010
1200	48	PV1200	73012
1350	54	PV1400	73436
1500	60	PV1500	73437
1800	72	PVHD1800	74598

Stainless Steel P-Type® with V-Tips*			
Belt Width		Ordering Number	Item Code
mm	in.		
450	18	PV450-S/S	75323
600	24	PV600-S/S	75324
750	30	PV750-S/S	75325
900	36	PV900-S/S	75326
1050	42	PV1050-S/S	75327
1200	48	PV1200-S/S	75328
1350	54	PV1400-S/S	75329
1500	60	PV1500-S/S	75330
1800	72	PVHD1800-S/S	A1603

Replacement Tips	
Ordering Number	Item Code
ICT6	74535
PSA150	73156

Lead time: 1 working day

Replacement Cushions	
Ordering Number	Item Code
PXTC	107137

*NOTE: V-Tips can be used ONLY on vulcanized belts. P-Type® cleaners come standard with Select Set™ Tensioners.

Tips Required per Cleaner Size									
mm	450	600	750	900	1050	1200	1350	1500	1800
in.	18	24	30	36	42	48	54	60	72
C-Tips or V-Tips Required	3	4	5	6	7	8	9	10	12

Contact Flexco for C-Tip ordering information.

Additional Information

For size restricted applications, see the P-Type® LS (Limited Space) Sell Sheet X2479.



Visit www.flexco.com for other Flexco locations and products, or to find an authorised distributor.

©2018 Flexible Steel Lacing Company. 02-07-25. X3887

