


EZS2 Rockline® Secondary Cleaner


The Economical, Efficient Belt Cleaning Solution

The EZS2 Secondary Belt Cleaner improves belt cleaning efficiency and reduces routine maintenance tasks. And it does all of this at an affordable price. Add easy, do-it-yourself installation and it makes an unbeatable solution for your conveyor belt cleaning needs.

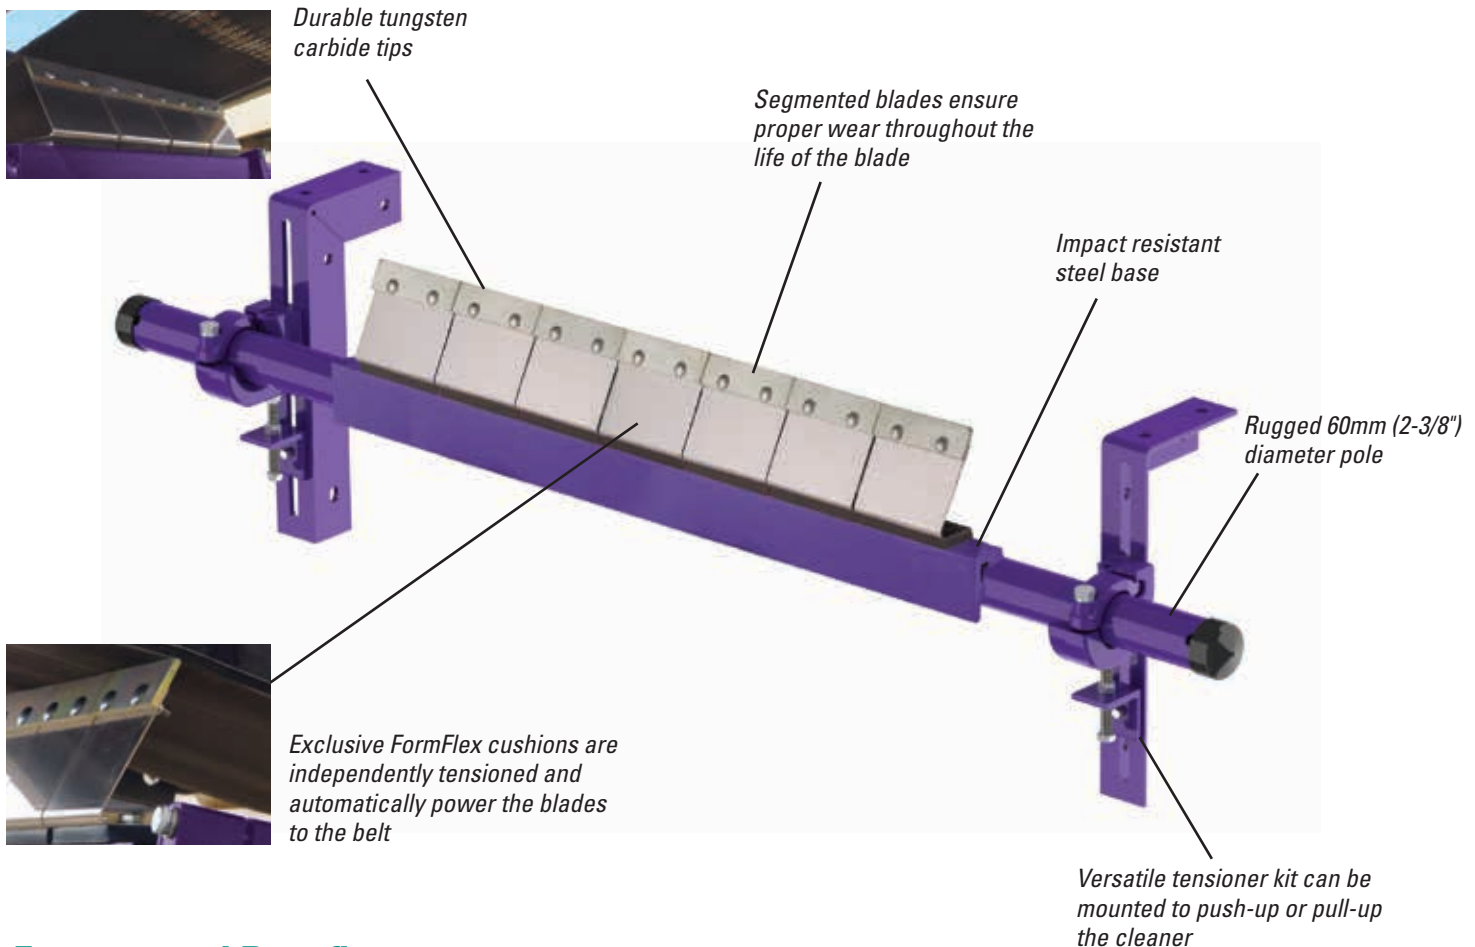

Features and Benefits

- **Cleaning efficiency of metal blades.** The thin, hard edges of the metal blades deliver high cleaning efficiency and long wear life.
- **Works with Flexco mechanical splices.** The tungsten carbide-tipped blades are impact-resistant, and the spring cushion allows them to move away from a passing splice without damage and with minimal cleaning disruption.
- **A complete cleaning system.** When the EZS2 is teamed with the EZP1 Precleaner, the system provides maximum cleaning power for tough applications.
- **Fits most conveyor structures.** Available for belt widths from 450mm to 1800mm (18" to 72").

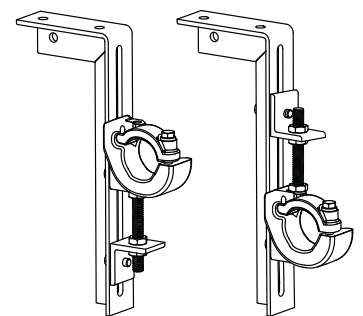

EZS2

Rockline® Secondary Cleaner

Specifications and Guidelines

Maximum Belt Speed

3.5 M/sec (700 FPM)

Temperature Rating


-35° C to 93° C (-30° F to 200° F)

Usable Blade Wear Length

9 mm (3/8")

Available for Belt Widths

450 to 1800 mm (18" to 72")

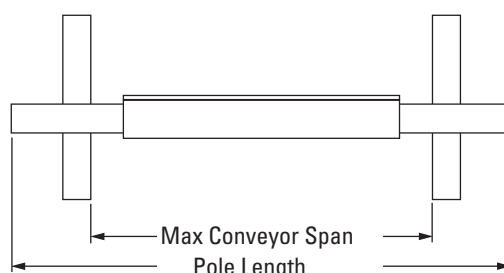


Pole Length

Blade width + 850 mm (34")

Maximum Conveyor Span

Blade width + 725 mm (29")

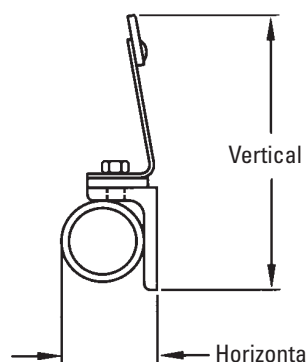

Horizontal Clearance Required
100 mm (4")

Vertical Clearance Required
213 – 238 mm (8-1/2" – 9-1/2")

Ordering Information

EZS2 Secondary			
Belt Width		Ordering Number	Item Code
mm	in.		
450	18	EZS2-18	75643
600	24	EZS2-24	75644
750	30	EZS2-30	75645
900	36	EZS2-36	75646
1050	42	EZS2-42	75647
1200	48	EZS2-48	75648
1350	54	EZS2-54	75649
1500	60	EZS2-60	75650
1800	72	EZS2-72	75651

Replacement C-Tips	
Ordering Number	Item Code
ICT6	74535

Tips Required Per Cleaner Size										
mm	450	600	750	900	1050	1200	1350	1500	1800	
in.	18	24	30	36	42	48	54	60	72	
C-Tips Required	3	4	5	6	7	8	9	10	12	

Additional Information

For high temperature applications up to 204° C (400° F), see the High Temp EZS2 Sell Sheet (X2502).



Authorized Distributor:

236 Albert Amon Rd • Meadowdale Ext. 7 • Germiston 1614 • South Africa
Tel: +27-11-608-4180 • Fax: +27-11-454-5821 • E-mail: flexco@flexco.co.za

Visit www.flexco.com for other Flexco locations and products.

©2015 Flexible Steel Lacing Company. 07/15. For reorder: X3951

