How To Modify Your C/EBC Cutter With The Rail/Guide System

Existing EBC1 shown with retrofit rail kit.




NOTE: Be sure to unplug tool prior to working on it. Stay clear of any sharp areas or pinch points.





Step 1. Loosen existing rail lock nuts with 8 mm or 5/16" hex and 17 mm box end/crescent wrench. Set aside lock nuts, bearings and washers.



Step 2. Attach retrofit rail kit to existing structure as shown.












- **Step 3. (A)** Remove bolt, washer, and lock nut from new retrofit rail kit.
 - (**B**) Add washer, bearing, and lock nut to back of rail system.

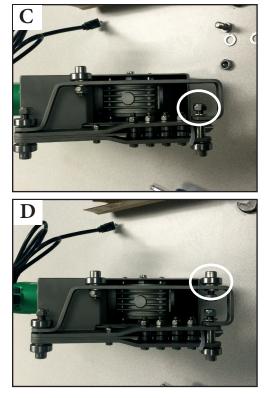

- (C) Add washer and lock nut to front, center of rail system.
- (D) Add bolt, bearing, washer, and lock nut to front, outside of rail system.



Step 4. Securely hand tighten all bolts and lock nuts.



Completed Tool





Visit **www.flexco.com** for other Flexco locations and products, or to find an authorized distributor.