
High Efficiency Tungsten-Carbide Primary Cleaner

The H-Type[®] conveyor belt cleaner from Flexco is designed to be positioned on the head pulley and to remove the bulk of the carryback from the belt. Proven performance for over 25 years as the most efficient primary cleaner in material handling applications such as coal, iron ore, bauxite, and hard rock mining.



Features and Benefits

- Works on reversing belts
- Available in power coated or stainless steel
- Extra-Life 15mm tips available for harsh mining conditions
- · Also available with long wearing polyurethane blades for use in mechanically spliced applications
- Also available in FRAS for underground coal applications

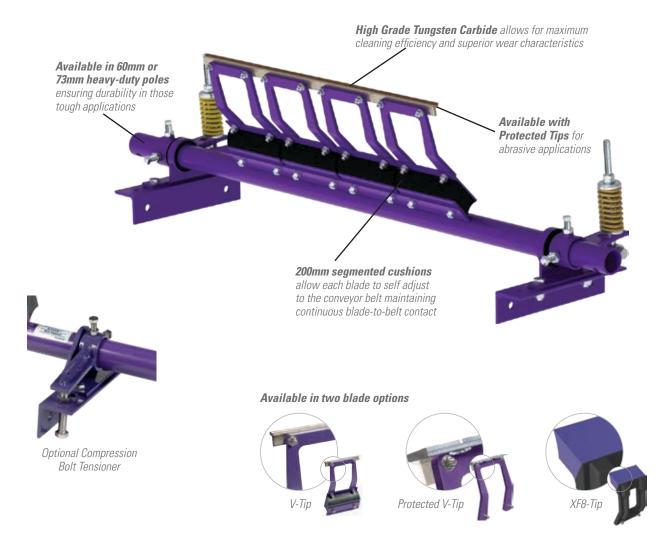

www.flexco.com

H-Type[®] Heavy-Duty Primary Cleaner

Maximum Belt Speed

6 m/s

Temperature Rating -35° C to 82° C

Usable Blade Wear Length 9 mm

Blade Material Impact resistant, long-lasting tungsten carbide

Available for Belt Widths 600 to 3000 mm

H-Type[®] Belt Cleaner with V-Tips

V-Tips should ONLY be used on vulcanised belts. Suspension arm size is determined by head pulley diameter (over lagging and belt). See chart below.

H-Type[®] Belt Cleaner with XF8-Tips

XF8 Tips are recommended for mechanically spliced belts but are also suitable for vulcanised belts. XF8 Tip size is determined by head pulley diameter (see chart below). Spring Tensioners are standard on HXF cleaners.

Pole Specifications					
Pole Length	Pole Diameter				
mm	mm				
1250	60				
1350	60				
1500	60				
1650	60				
1800	60				
1950	60				
2350	73				
2450	73				
2650	73				
	Pole Length 1250 1350 1650 1800 1950 2350 2450				

Additional sizes up to 3,000 mm available upon request.

Arm Selection Chart			
Head Pulley Dia. + Belt + Lagging (mm)	Arm Size		
Up to 499	SS		
500-799	S		
800-999	М		
1000-1199	L		
1200-1700	LL		

Ordering Information

H-Type-y	vith V-Tips Mild S	Steel	
Belt Width mm	Suspension Arm Size	Ordering Number	Item Code
	SS	HV450SS	73026
450	S	HV450S	73020
	M	HV450M	73020
600	SS	HV600SS	73045
	S	HV600S	73043
	M	HV600M	73173
	SS	HV750SS	73053
750	S	HV750S	73032
700	M	HV750M	73174
	SS	HV900SS	73055
	S	HV900S	73034
900	M	HV900M	73034
	L	HV900L	73178
	SS	HV1050SS	73057
1050	S	HV1050S	73056
	M	HV1050M	73036
	L	HV1050L	73179
	SS	HV1200SS	73059
1200	S	HV1200S	73058
	M	HV1200M	73038
	L	HV1200L	73180
	M	HV1500M	73177
1500	L	HV1500L	73158
	LL	HV1500LL	73215
	М	HV1600M	73637
1600	L	HV1600L	73638
	LL	HV1600LL	73639
	М	HVHD1800M	74602
1800	L	HVHD1800L	74477
	LL	HVHD1800LL	74478
	М	HVHD2100M	74539
2100	L	HVHD2100L	74540
	LL	HVHD2100LL	74541
	М	HVHD2400M	74544
2400	L	HVHD2400L	74545
	LL	HVHD2400LL	74546
2600	М	HVHD2600M	A2396
	L	HVHD2600L	A2461
	LL	HVHD2600LL	A2397
3000	М	HVHD3000M	74591
	L	HVHD3000L	74592
	LL	HVHD3000LL	74593

H-Type v	vith V-Tips and P	CST Tensioner - M	ild Steel
Belt Width mm	Suspension Arm Size	Ordering Number	ltem Code
450	SS	HV450SS-PCST	63936
	S	HV450S-PCST	63937
	М	HV450M-PCST	63938
600	SS	HV600SS-PCST	63939
	S	HV600S-PCST	63940
	М	HV600M-PCST	63941
750	SS	HV750SS-PCST	63942
	S	HV750S-PCST	63943
	М	HV750M-PCST	63944
	SS	HV900SS-PCST	63945
000	S	HV900S-PCST	63946
900	М	HV900M-PCST	63947
	L	HV900L-PCST	63948
	SS	HV1050SS-PCST	64045
1050	S	HV1050S-PCST	63950
1050	Μ	HV1050M-PCST	63951
	L	HV1050L-PCST	63952
	SS	HV1200SS-PCST	63953
4000	S	HV1200S-PCST	63954
1200	М	HV1200M-PCST	63955
	L	HV1200L-PCST	63956
	М	HV1500M-PCST	63957
1500	L	HV1500L-PCST	63958
	LL	HV1500LL-PCST	63959
	М	HV1600M-PCST	63960
1600	L	HV1600L-PCST	63961
	LL	HV1600LL-PCST	63962
	М	HV1800M-PCST	63963
1800	L	HV1800L-PCST	63964
	LL	HV1800LL-PCST	63965
	М	HV2100M-PCST	63966
2100	L	HV2100L-PCST	63967
	LL	HV2100LL-PCST	63968
	М	HV2400M-PCST	63969
2400	L	HV2400L-PCST	63970
	LL	HV2400LL-PCST	63971
	М	HV2600M-PCST	63972
2600	L	HV2600L-PCST	63973
	LL	HV2600LL-PCST	63974
3000	М	HV3000M-PCST	63975
	L	HV3000L-PCST	63976
	LL	HV3000LL-PCST	63977

Contact Flexco for further blade and tensioner options. Also available in Stainless Steel.

Authorized Distributor:

Flexco (Aust.) Pty. Ltd • 10 Solent Circuit, Norwest • NSW, Australia, 2153 • Australia Tel: 612-8818-2000 • Fax: 612-8824-6333 • E-mail: salesau@flexco.com

Visit www.flexco.com for other Flexco locations and products.

©2018 Flexible Steel Lacing Company. 12/20/18. For reorder: X4103

