


Approximately 42% of conveyor-related accidents occur during maintenance activities.*

*US MSHA Office of Injury and Employment Information

Flexco offers a safer approach to belt conveyor maintenance. Used together, Flexco tools and fasteners give your belt the long-lasting splice you want and the safety you expect.

A complete system to
Work SAFER.
Work Smarter.

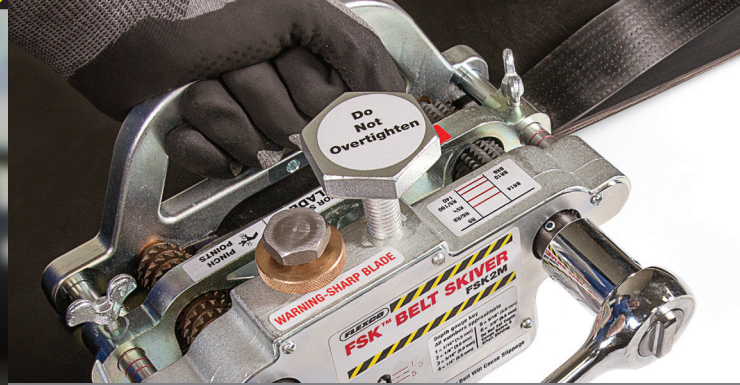

Flexco is committed to Safety and Quality.

Our hands-on industry experience gives us deep insight into your productivity demands, maintenance challenges, and safety requirements. And we won't settle for anything less than the best, most durable products around, with the services and support to match.



When you compare the cost of using Flexco Belt Maintenance tools with the time and money lost to belt repair and maintenance accidents, the choice is clear: you need to go with Flexco.

High quality Flexco tools provide a safer alternative to Belt Conveyor Maintenance for your operation and your workers.

240 Macpherson Road • #02-01 • Singapore 348574
Tel: +65-6484-1533 • Fax: +65-6484-1531 • E-mail: asiasales@flexco.com
Visit www.flexco.com for other Flexco locations and products.

FLEXCO

FLEXCO

©2016 Flexible Steel Lacing Company. 08-30-24. X4259

LIFT




A Safer Way to Lift a Belt

Eliminate pry bars and manual lifting to make a difficult and hazardous job easier and safer.

Flex-Lifter™ Belt Lifter safely lifts and holds tensioned conveyor belts.

- Highest safe lift rating available: 1810 kg (4000 lbs.)

CLAMP

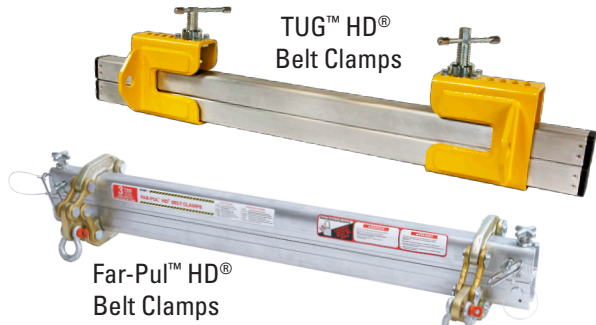


A Safer Way to Secure a Belt

Avoid problems and potential dangers associated with homemade devices like c-clamps, lumber, and chains.

Flexco Belt Clamps are specially designed to properly secure a belt and clamp it for safe belt conveyor maintenance.

- Safety factors of clamp ratings meet or exceed industry standards.

CUT

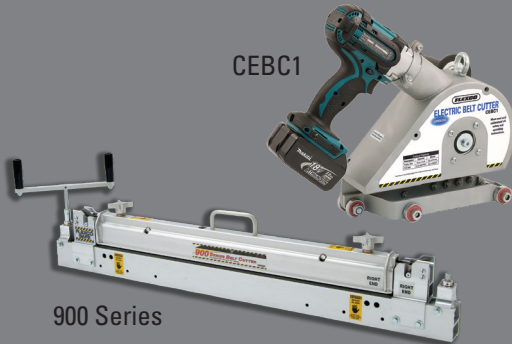


A Safer Way to Cut a Belt

Utility knives simply can't provide the same level of safety, speed, and accuracy when cutting belts.

Flexco Belt Cutters minimise the danger of accidental injury during the belt cutting process.

- Operators are protected from cutting edge of blades during operation.

SKIVE



A Safer Way to Skive a Belt

Skiving a belt without the proper tools can lead to serious injuries.

FSK™ Belt Skiver safely removes top cover for installation of recessed splices.

- Blade is safely enclosed during skiving operations.

ORDER TODAY!

Flex-Lifter™ Conveyor Belt Lifter			
Description	Belt Width mm	Ordering Number	Item Code
Medium Flex-Lifter	900-1500	FL-M	76979
Large Flex-Lifter	1200-1800	FL-L	76980
XL Flex-Lifter	1800-2400	FL-XL	76983

Note: XL V-return lift bar sold separately.

TUG™ HD® Belt Clamps			
Description	Belt Width	Ordering Number	Item Code
Belt Clamp Complete includes: 4 Aluminum Belt Clamp Bars and 4 Steel Clamp Ends	Up to 42"	TUG6-42-AL	31701
	Up to 48"	TUG6-48-AL	31702
	Up to 60"	TUG6-60-AL	31704
	Up to 72"	TUG6-72-AL	31705
	Up to 42"	TUG8-42-AL	31707
	Up to 48"	TUG8-48-AL	31708
	Up to 60"	TUG8-60-AL	31710
	Up to 72"	TUG8-72-AL	31711

Far-Pul™ HD® Belt Clamps			
Description	Belt Width mm	Ordering Number	Item Code
Belt Clamp Complete includes:	Up to 750	LSHD30	30393
	Up to 900	LSHD36	30394
	Up to 1050	LSHD42	30395
4 Belt Clamp Bars and 4 Belt Clamp Scissors	Up to 1200	LSHD48	30396
	Up to 1350	LSHD54	30397
	Up to 1500	LSHD60	30398
	Up to 1800	LSHD72	30399

Electric Belt Cutter			
Description	Belt Thickness mm	Ordering Number	Item Code
Corded Model	Up to 25	EBC1	30001
	Up to 50	EBC2	30002
Cordless Model	Up to 25	CEBC1	30018
	Up to 50	CEBC2	30019
Pneumatic Model	Up to 25	PBC-1	61356
	Up to 50	PBC-2	61357

900 Series™ Belt Cutter			
Description	Belt Width mm	Ordering Number	Item Code
Cutter complete for belts up to 38 mm thick	600	900936	04143
	900	900948	04144
	1200	900960	04145
	1500	900972	04146
	1800	900984	04147
	2130	900996	04193

FSK™ Belt Skiver			
Description	Fence Material	Ordering Number	Item Code
Skiver Complete	Metal	FSK2M	32068