
Flexco Inspection Door

Maintenance and Inspections Made Easy

Flexco Inspection Doors can be used to visually inspect and/or service conveyor equipment. They may also serve as an access point for cleaning material buildup off conveyor belt cleaners or other equipment.

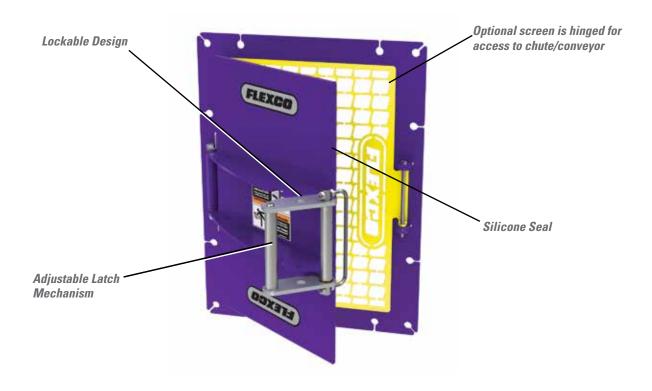

Features and Benefits

- Multiple sizes available for a variety of applications. Door opening options are 300 x 300mm, 300 x 450mm, 450 x 600mm, and 600 x 600mm (12 x 12", 12 x 18", 18 x 24", and 24 x 24")
- Adjustable Latch Mechanism. Tightness of door seal can be changed as needed by simply adjusting the nuts on the U-bolt.
- Lockable Design. A padlock can be placed through the latch and door gusset to prevent unauthorized users from accessing the chute/enclosure.
- Rated for Use in Environments Ranging from -56°C to 177°C (-70°F to 350°F).
- Silicone Seal on Door. Helps provide a tight seal between the door and mounting plate.
- **Dust-tight Seal to Chute/Enclosure Wall.** Doors are supplied with silicone sealant for a dust-tight seal between the mounting plate and the chute or enclosure wall.
- Optional Screen. Serves as a guard that helps keeps hands and tools from being placed into the chute/enclosure, but still allows visual access. Screen is hinged on one side and bolted on the other so it does not require full removal for accessing the chute/enclosure. A tool is required to unbolt the screen.



Specifications and Guidelines

- **Temperature Rating** -56° C to 177° C (-70°F to 350° F)
- Inside Opening Inside Opening 450 x 600 mm 600 x 600 mm **Overall Dimensions** (24" x 24") (18" x 24") Inside Opening 300 x 450 mm (12" x 18") Inside Opening 300 x 300 mm (12" x 12") 750 mm (27-3/4") 750 mm (27-3/4") 552 mm (21-3/4") 400 mm (15-3/4") 414 mm 414 mm (16-5/16") 567 mm (22-5/16") 719 mm (28-5/16") (16-5/16") 87 mm (3-7/16") 87 mm (3-7/16") 87 mm (3-7/16") 87 mm (3-7/16") 372 mm 372 mm 524 mm (20-5/8") (14-5/8") (14-5/8") 676 mm


Ordering Information

Flexco Inspection Doors								
Size		Without Screen		With Screen				
mm	in.	Ordering Number	Item Code	Ordering Number	Item Code			
300 x 300	12 x 12	INDR-1212	79303	INDR-1212S	79307			
300 x 450	12 x 18	INDR-1218	79304	INDR-1218S	79308			
450 x 600	18 x 24	INDR-1824	79305	INDR-1824S	79309			
600 x 600	24 x 24	INDR-2424	79306	INDR-2424S	79310			

Lead time: 1 working day

Replacement Parts - Flexco Inspection Doors							
Ref	Description	Ordering Number	Item Code	Wt. Kg.			
1a	Inspection Door Screen 300 x 300 mm (12 x 12)*	IDSC1212	79311	0.7			
1b	Inspection Door Screen 300 x 450 mm (12 x 18)*	IDSC1218	79312	1.0			
1c	Inspection Door Screen 450 x 600 mm (18 x 24)*	IDSC1824	79313	1.9			
1d	Inspection Door Screen 600 x 600 mm (24 x 24)*	IDSC2424	79314	2.4			
2	Replacement Seal 1.5M (5')**	IDSEAL	79315	0.03			
3	Replacement Hinge	IDHINGE	79316	0.1			
4	Replacement Latch (incl. bolt, bushings & nut)	IDLATCH	79317	1.1			

^{*}Hardware included
***One 1.5M (5') length of seal is needed for 300 x 300 mm (12" x 12") and 300 x 450 mm (12" x 18") doors or
screens, and two 1.5M (5') lengths are needed for 450 x 600 mm (18 "x 24") and 600 x 600 mm (24" x 24") doors or screens. Double if replacing seal on both door and screen.

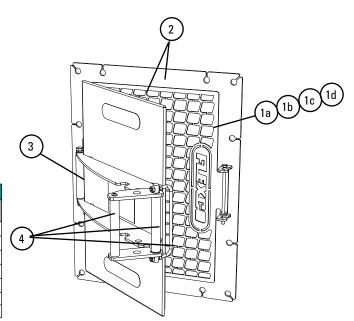

Flexco Europe GmbH • Maybachstrasse 9 • 72348 Rosenfeld • Deutschland Tel: +49-7428-9406-0 • Fax: +49-7428-9406-260 • E-mail: europe@flexco.com



©2020 Flexible Steel Lacing Company. 04/21/20. For reorder: X4339

