


R-TYPE® Secondary Belt Cleaner

Reversing Secondary Belt Cleaner

The Flexco R-Type® Secondary Belt Cleaner is recommended for reversing belts and is designed to be positioned just off the head pulley to remove carryback from the belt. Stand alone, or when used in conjunction with a precleaner, the R-Type cleaner is a reliable choice for maintaining a highly efficient cleaning system.

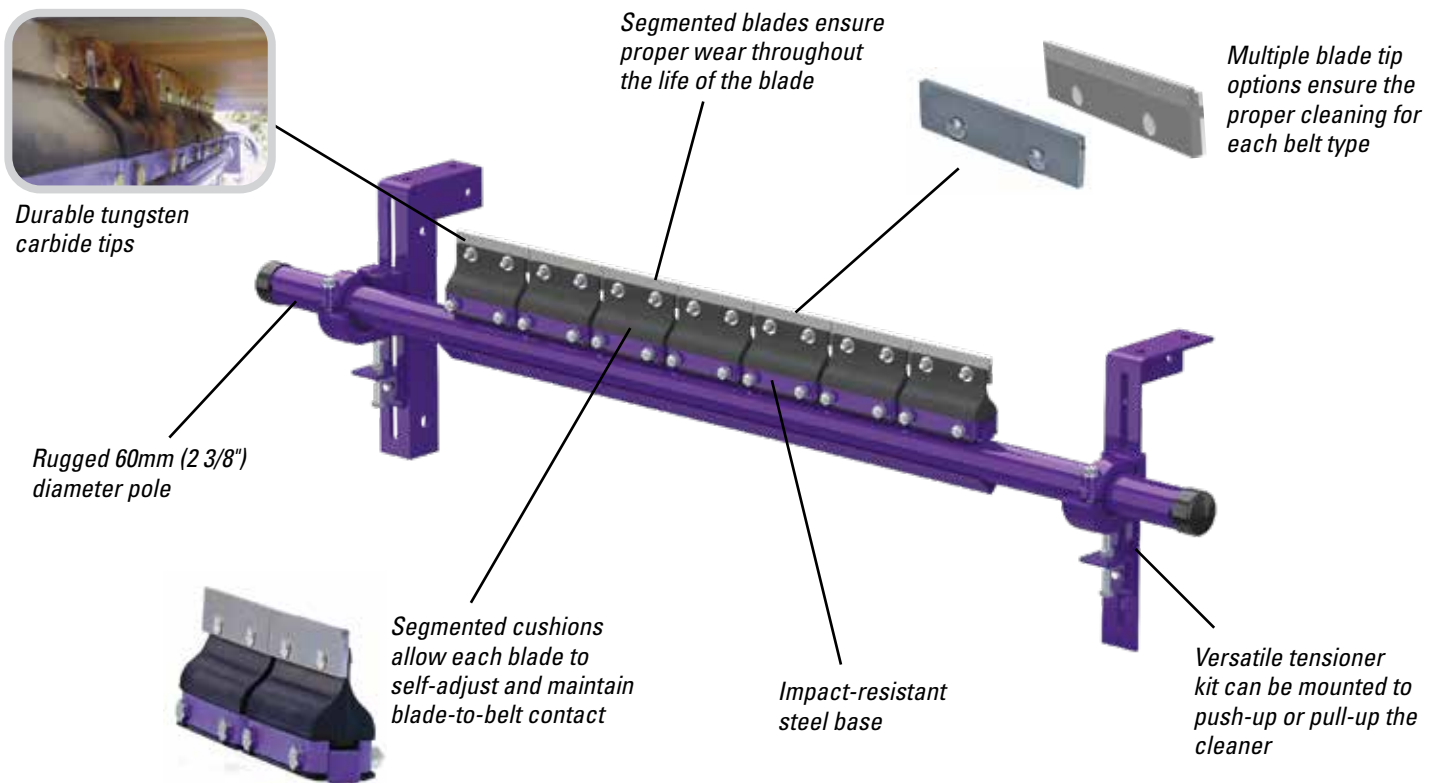


Features and Benefits

- **Cleaning efficiency of metal blades.** The thin, hard edges of the metal blades deliver high cleaning efficiency and long wear life.
- **Works with Flexco mechanical splices.** The C-Tip tungsten carbide blades are impact-resistant, and the spring cushion allows them to move away from a passing splice without damage and with minimal cleaning disruption. V-Tips can be used only on vulcanized belts.
- **A complete cleaning system.** When the R-Type is teamed with a precleaner the system provides maximum cleaning power for tough applications.
- **Fits most conveyor structures.** Available for belt widths from 450 to 1800mm (18 to 72").

R-TYPE® Secondary Belt Cleaner

Specifications and Guidelines

- **Maximum Belt Speed**
5 m/s (1000 FPM)
- **Temperature Rating**
-35°C to 82°C (-30°F to 180°F)
- **Usable Blade Wear Length**
9mm (3/8")
- **Blade Material**
Impact resistant, long-lasting tungsten carbide (C-Tips for mechanical fasteners, V-Tips for vulcanized belts)
- **Available for Belt Widths**
450 to 1800mm (18 to 72")
- **Horizontal Clearance Required**
100mm (4")
- **Vertical Clearance Required**
200mm (8")
- **Pole Length**
Cleaner size up to 1200mm + 750mm (48" + 30")
Cleaner size 1350mm (54") and up + 850mm (34")
- **Maximum Conveyor Span**
Cleaner size up to 1200mm + 625mm (48" + 25")
Cleaner size 1350mm (54") and up + 725mm (29")

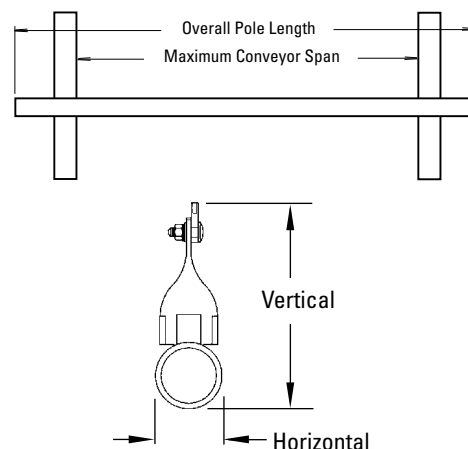

Ordering Information

R-Type® (Powder Coated) Reversing with V-Tips*			
Belt Width		Ordering Number	Item Code
mm	in.		
450	18	RV450	74633
600	24	RV600	74634
750	30	RV750	74635
900	36	RV900	74636
1050	42	RV1050	74637
1200	48	RV1200	74638
1350	54	RV1350	74639
1500	60	RV1500	74640
1800	72	RVHD1800	74642
2100	84	RVHD2100	74643
2400	96	RVHD2400	74644

*NOTE: V-Tips can be used ONLY on vulcanized belts.

R-Type (Stainless Steel) Reversing with V-Tips*			
Belt Width		Ordering Number	Item Code
mm	in.		
450	18	RV450-S/S	75341
600	24	RV600-S/S	75342
750	30	RV750-S/S	75343
900	36	RV900-S/S	75344
1050	42	RV1050-S/S	75345
1200	48	RV1200-S/S	75356
1350	54	RV1350-S/S	75347
1500	60	RV1500-S/S	75348
1800	72	RVHD1800-S/S	A1626
2100	84	RVHD2100-S/S	A1628

*NOTE: V-Tips can be used ONLY on vulcanized belts.

Replacement Tips	
Ordering Number	Item Code
RSA150	73628

Lead time: 1 working day

Tips Required per Cleaner Size												
mm	450	600	750	900	1050	1200	1350	1500	1800	2100	2400	
in.	18	24	30	36	42	48	54	60	72	84	96	
Tips Required	3	4	5	6	7	8	9	10	12	14	16	

R-Type® (Powder Coated) PU with V-Tips*			
Belt Width		Ordering Number	Item Code
mm	in.		
450	18	RV450-PU	90448
600	24	RV600-PU	90449
750	30	RV750-PU	90450
900	36	RV900-PU	90451
1050	42	RV1050-PU	90452
1200	48	RV1200-PU	90453
1350	54	RV1350-PU	90454
1500	60	RV1500-PU	90455
1800	72	RVHD1800-PU	90456
2100	84	RVHD2100-PU	90457
2400	96	RVHD2400-PU	90458

*NOTE: V-Tips can be used ONLY on vulcanized belts.

R-Type® (Powder Coated) Reversing with C-Tips*			
Belt Width		Ordering Number	Item Code
mm	in.		
450	18	RC18	74618
600	24	RC24	74619
750	30	RC30	74620
900	36	RC36	74621
1050	42	RC42	74622
1200	48	RC48	74623
1350	54	RC54	74624
1500	60	RC60	74625
1800	72	RC72	74626
2100	84	RCHD2100	74628
2400	96	RCHD2400	74629

*NOTE: C-Tips can be used on mechanically spliced and vulcanized belts.

Visit www.flexco.com for other Flexco locations and products, or to find an authorised distributor.

©2020 Flexible Steel Lacing Company. 07/11/23. For reorder: X4718

