
Far-Pul™ HD® Belt Clamp

Properly Secure Belts for Safer Conveyor Maintenance

Avoid the problems and potential dangers associated with homemade devices such as c-clamps, lumber and chains. Far-PulTM HD[®] Belt Clamps are specially designed to properly secure cement belts and clamp them for safe belt conveyor maintenance.



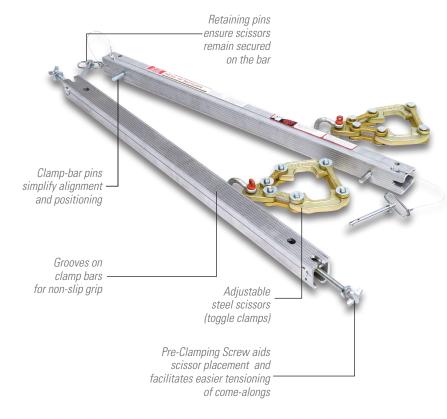


Unique design, easily adjustable

The unique design of the Far-Pul™ HD® Belt Clamp provides even tensioning across the entire belt width for a secure grip. And with a load capacity of up to three tons, when used with two 1-1/2-ton chain come-alongs, it is ideal for rubber covered and PVC heavy-duty belting from 6 mm to 25 mm thick.

The Far-Pul HD also accommodates a variety of belt widths. So the need to inventory different clamp bars for different belt widths is eliminated. Our pre-clamping screw allows you to slide the scissors on to the bars in a quick, efficient, and safe manner. Clamping scissors slide easily into place against both belt edges for easy adjustability. And clamp-bar pins simplify alignment and positioning.



FAR-PUL™ HD® Belt Clamp

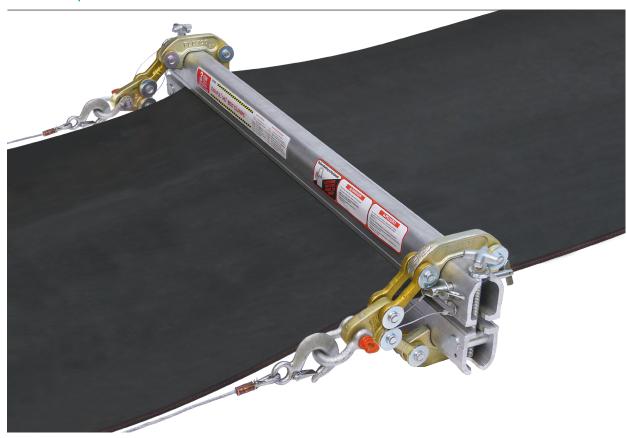

Far-Pul™ HD® clamp bars are constructed from heat-treated extruded aluminum so they resist corrosion and won't seize up in wet and corrosive environments. Clamps include adjustable steel scissors.

Engineered for heavy-duty applications

• Aggregate • Grain

• Steel • Foundry

• Coal • Salt

• Potash

Far-Pul [™] HD [®] Belt Clamps		
Belt Width	Ordering Number	Weight
mm		kgs.
Up to 30	LSHD30	42.2
Up to 36	LSHD36	44.9
Up to 42	LSHD42	48.1
Up to 48	LSHD48	50.8
Up to 54	LSHD54	54.0
Up to 60	LSHD60	57.6
Up to 72	LSHD72	63.0

Note: A complete set of Far-Pul $^{\mathsf{H}}\mathsf{HD}^{\mathfrak{D}}$ Belt Clamps includes four clamp bars and four steel clamp scissors with carry bag. Come-alongs not included.

Aluminum Content			
Aluminum Alloy Type	Percent		
	Mg Magnesium	Ti Titanium	
6061	1.00%	0%	

Authorised Distributor:

