


# Y-TYPE™

## Polyurethane and Carbide Secondary Cleaner

### Simple. Affordable. Effective.

The Y-Type™ Secondary Belt Cleaner improves belt cleaning efficiency and reduces routine maintenance tasks. With an easy, do-it-yourself installation and simple, serviceable blades, all at an affordable price, it makes for an ideal solution for your belt cleaning needs.

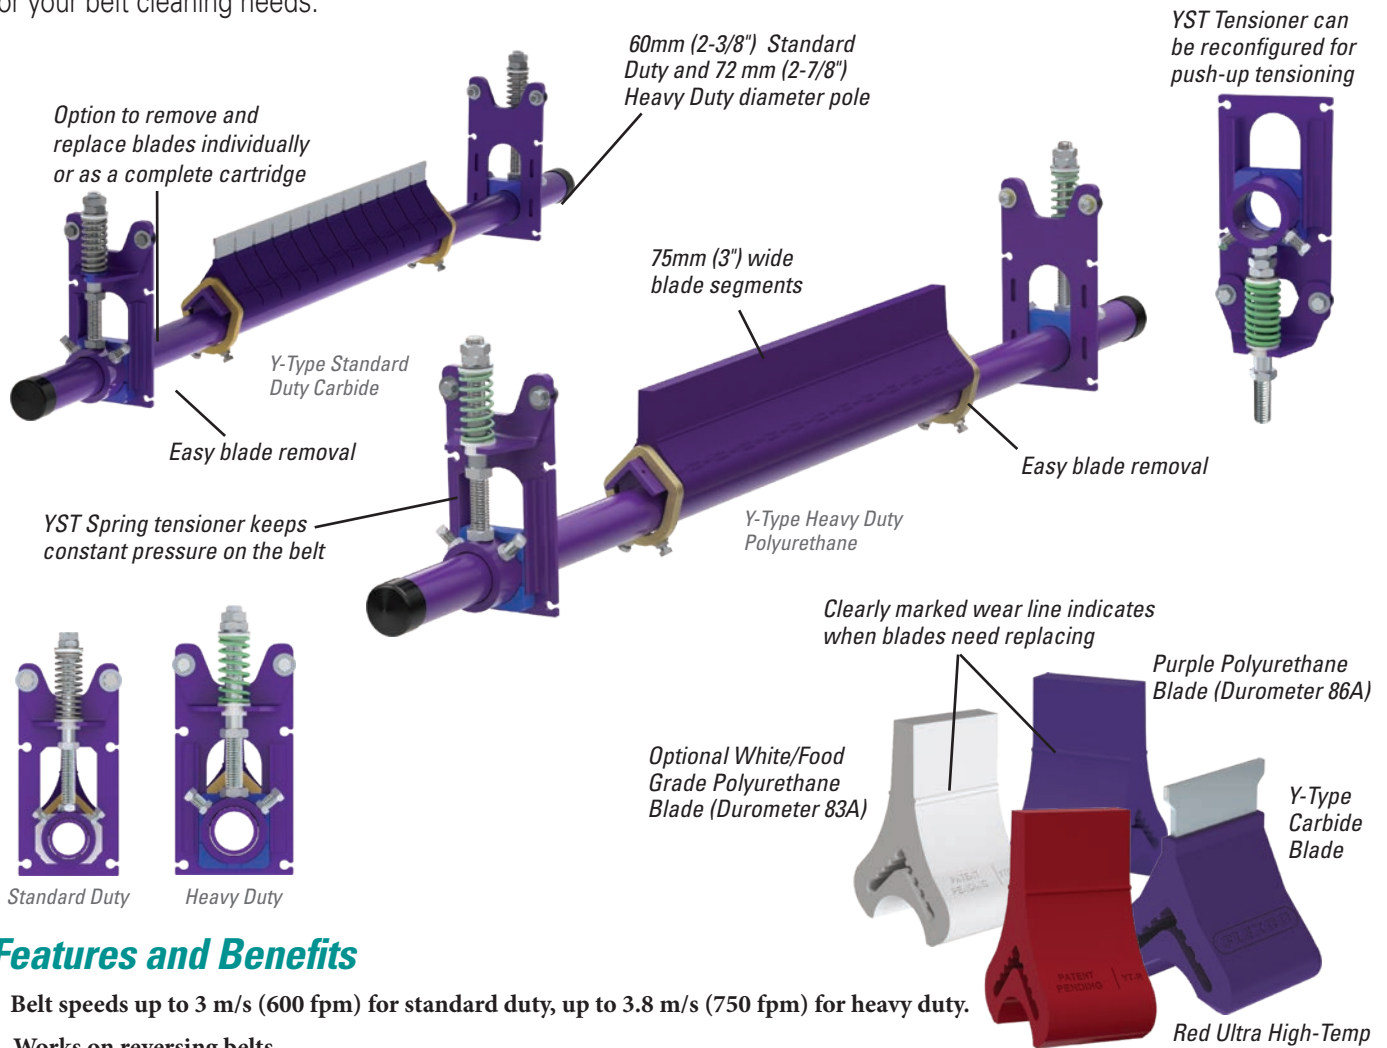

### Features and Benefits

- Belt speeds up to 3 m/s (600 fpm) for standard duty, up to 3.8 m/s (750 fpm) for heavy duty.
- Works on reversing belts.
- Available in 450 - 1200mm (18" - 48") for standard duty belts, 900 - 1800mm (36" - 72") for heavy duty belts.
- 75mm (3") wide blade segments. Conforms to worn or damaged belts.
- Blades available in carbide and purple or white/food grade polyurethane.
- **Easy maintenance.** Simple design makes changing the blades fast and easy. Blades can be removed and replaced individually, or all at once by replacing the cartridge.
- **Spring tensioner.** Utilizes the YST tensioner to maintain constant pressure on the belt. Standard duty YST for 60mm (2-3/8") poles, heavy duty YST for 73mm (2-7/8") poles.
- **White food-grade blade** is chemical resistant, and all ingredients used in polyurethane formulation comply with the relevant requirements of 21 CFR (FDA Code of Federal Regulations) for use in repeated bulk dry food applications.

# Y-Type™ Polyurethane and Carbide Secondary Cleaner

## Specifications and Guidelines

	Standard Duty	Heavy Duty
<b>Maximum Belt Speed</b>	3 m/s (600 FPM)	3.8 m/s (750 FPM)
<b>Temperature Rating</b>	Purple, White, Carbide: -35° C to 82° C (-30° F to 180° F) Red UHT: up to 200° C (400° F) with spikes to 232° C (450° F)	
<b>Usable Blade Wear Length</b>	Polyurethane: 50 mm (2")	Polyurethane: 75 mm (3")
	Carbide: 6 mm (1/4")	Carbide: 10 mm (3/8")
<b>Available for Belt Widths</b>	450 to 1200 mm (18" to 48")	900 to 1800 mm (36" to 72")

### Blade Material


Purple: Polyurethane (proprietary blend for abrasion resistance and long wear)

White: Polyurethane (chemical resistant/food grade)\*

Red: Polyurethane (ultra high-temp)

Carbide: Impact resistant tungsten carbide

\*All ingredients used in polyurethane formulation comply with the relevant requirements of 21 CFR (FDA Code of Federal Regulations) for use in repeated bulk dry food applications.



### Horizontal Clearance Required

**Standard Duty:** 110 mm (4-1/4")

**Heavy Duty:** 135 mm (5-1/4")

### Vertical Clearance Required

**Standard Duty:**


Polyurethane: 210 mm (8-1/4")

Carbide: 185 mm (7-3/4")

**Heavy Duty:**

Polyurethane: 240 mm (9-1/2")

Carbide: 250 mm (9-3/4")

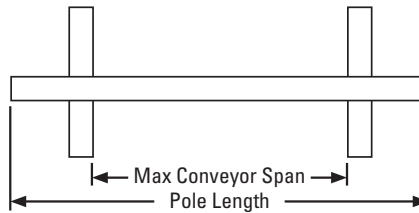

### Pole Length

SD Belt width + 762 mm (30")

HD Belt width + 1372 mm (54")

### Maximum Conveyor Span

SD Belt width + 559 mm (22")

HD Belt width + 1169 mm (46")

## Ordering Information

Y-Type Secondary Cleaners - Standard Duty									
Belt Width		Carbide Blades		Purple Polyurethane Blades		White/Food Grade Polyurethane Blades		Red/Ultra High-Temp Polyurethane Blades	
mm	in.	Ordering Number	Item Code	Ordering Number	Item Code	Ordering Number	Item Code	Ordering Number	Item Code
450	18	YT-TC-450S	83241	YT-450S	83229	YTW-450S	83235	YTR-18S	91798
600	24	YT-TC-600S	83242	YT-600S	83230	YTW-600S	83236	YTR-24S	91799
750	30	YT-TC-750S	83243	YT-750S	83231	YTW-750S	83237	YTR-30S	91800
900	36	YT-TC-900S	83244	YT-900S	83232	YTW-900S	83238	YTR-36S	91801
1050	42	YT-TC-1050S	83245	YT-1050S	83233	YTW-1050S	83239	YTR-42S	91802
1200	48	YT-TC-1200S	83246	YT-1200S	83234	YTW-1200S	83240	YTR-48S	91803

Lead time: 1 working day

Y-Type Secondary Cleaners - Heavy Duty									
Belt Width		Carbide Blades		Purple Polyurethane Blades		White/Food Grade Polyurethane Blades		Red/Ultra High-Temp Polyurethane Blades	
mm	in.	Ordering Number	Item Code	Ordering Number	Item Code	Ordering Number	Item Code	Ordering Number	Item Code
900	36	YTHD-TC-900	83134	YTHD-900 P	83120	YTHDW-36S	83127	YTHDR-36S	91816
1050	42	YTHD-TC-1050	83135	YTHD-1050 P	83121	YTHDW-42S	83128	YTHDR-42S	91817
1200	48	YTHD-TC-1200	83136	YTHD-1200 P	83122	YTHDW-48S	83129	YTHDR-48S	91818
1350	54	YTHD-TC-1350	83137	YTHD-1350 P	83123	YTHDW-54S	83130	YTHDR-54S	91819
1500	60	YTHD-TC-1500	83138	YTHD-1500 P	83124	YTHDW-60S	83131	YTHDR-60S	91820
1650	66	YTHD-TC-1650	83139	YTHD-1650 P	83125	YTHDW-66S	83132		
1800	72	YTHD-TC-1800	83140	YTHD-1800 P	83126	YTHDW-72S	83133	YTHDR-72S	91821

Lead time: 1 working day

Blades Required per Cleaner Size - Standard						
mm	450	600	750	900	1050	1200
in.	18	24	30	36	42	48
Blades Required	6	8	10	12	14	16

Blades Required per Cleaner Size - HD						
mm	900	1050	1200	1350	1500	1800
in.	36	42	48	54	60	72
Blades Required	12	14	16	18	20	24

Authorized Distributor:

240 Macpherson Road • #02-01 • Singapore 348574  
Tel: +65-6484-1533 • Fax: +65-6484-1531 • E-mail: [asiasales@flexco.com](mailto:asiasales@flexco.com)

Visit [www.flexco.com](http://www.flexco.com) for other Flexco locations and products.

©2021 Flexible Steel Lacing Company. 10/28/21. For reorder: X5023

