
## Far-Pul<sup>™</sup> HD<sup>®</sup> Belt Clamp

# **Properly Secure Belts for Safer Conveyor Maintenance**

Avoid the problems and potential dangers associated with homemade devices such as c-clamps, lumber and chains. Far-Pul<sup>™</sup> HD<sup>®</sup> Belt Clamps are specially designed to properly secure cement belts and clamp them for safe belt conveyor maintenance.

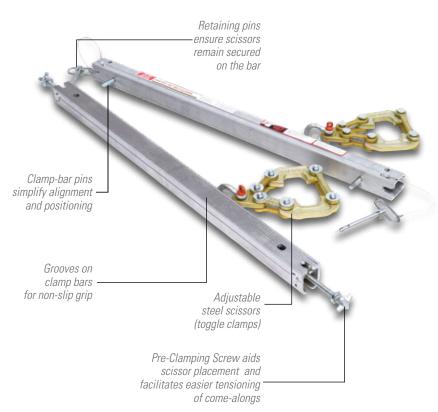


### Unique design, easily adjustable

The unique design of the Far-Pul<sup>™</sup> HD<sup>®</sup> Belt Clamp provides even tensioning across the entire belt width for a secure grip. And with a load capacity of up to three tons (2.7 metric tons), when used with two 1-1/2-ton chain come-alongs, it is ideal for rubber covered and PVC heavy-duty belting from 6 mm (7/32") to 25 mm (1") thick.

The Far-Pul HD also accommodates a variety of belt widths. So the need to inventory different clamp bars for different belt widths is eliminated. Our pre-clamping screw allows you to slide the scissors on to the bars in a quick, efficient, and safe manner. Clamping scissors slide easily into place against both belt edges for easy adjustability. And clamp-bar pins simplify alignment and positioning.



### FAR-PUL<sup>™</sup> HD<sup>®</sup> Belt Clamp

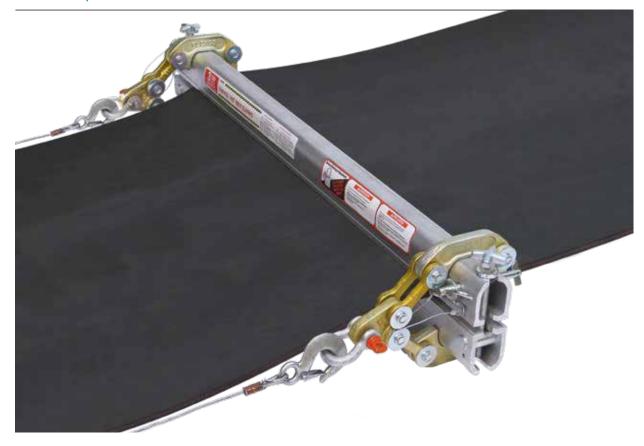

Far-Pul<sup>™</sup> HD<sup>°</sup> clamp bars are constructed from heat-treated extruded aluminum so they resist corrosion and won't seize up in wet and corrosive environments. Clamps include adjustable steel scissors.

#### Engineered for heavy-duty applications

- Aggregate Grain
- Steel Foundry
- Coal Salt
- Potash

| Far-Pul <sup>™</sup> HD <sup>®</sup> Belt Clamps |            |          |        |       |  |
|--------------------------------------------------|------------|----------|--------|-------|--|
| Belt Width                                       |            | Ordering | Weight |       |  |
| mm                                               | in.        | Number   | kgs.   | lbs.  |  |
| Up to 30                                         | Up to 750  | LSHD30   | 42.2   | 93.0  |  |
| Up to 36                                         | Up to 900  | LSHD36   | 44.9   | 99.0  |  |
| Up to 42                                         | Up to 1050 | LSHD42   | 48.1   | 106.0 |  |
| Up to 48                                         | Up to 1200 | LSHD48   | 50.8   | 112.0 |  |
| Up to 54                                         | Up to 1350 | LSHD54   | 54.0   | 119.0 |  |
| Up to 60                                         | Up to 1500 | LSHD60   | 57.6   | 127.0 |  |
| Up to 72                                         | Up to 1800 | LSHD72   | 63.0   | 139.0 |  |

Note: A complete set of Far-Pul<sup> $^{w}$ </sup> HD<sup> $^{\otimes}$ </sup> Belt Clamps includes four clamp bars and four steel clamp scissors with carry bag. Come-alongs not included.

| Aluminum Content       |                 |                |  |  |  |
|------------------------|-----------------|----------------|--|--|--|
| A                      | Percent         |                |  |  |  |
| Aluminum<br>Alloy Type | Mg<br>Magnesium | Ti<br>Titanium |  |  |  |
| 6061                   | 1.00%           | 0%             |  |  |  |

Authorised Distributor:

FLEXCO

.....

240 Macpherson Road • #02-01 • Singapore 348574 Tel: +65-6484-1533 • Fax: +65-6484-1531 • E-mail: asiasales@flexco.com Visit www.flexco.com for other Flexco locations and products. © 2017 Flexible Steel Lacing Company. HD® is a registered trademark. 05-14-20. For reorder: X5164