


**Approximately 42% of
conveyor-related accidents occur
during maintenance activities.***

*US MSHA Office of Injury and Employment Information



A complete system to
Work SAFER.
Work SMARTER.

Flexco offers a safer approach to
belt conveyor maintenance. Used together,
Flexco tools and fasteners
give your belt the long-lasting splice
you want and the safety you expect.

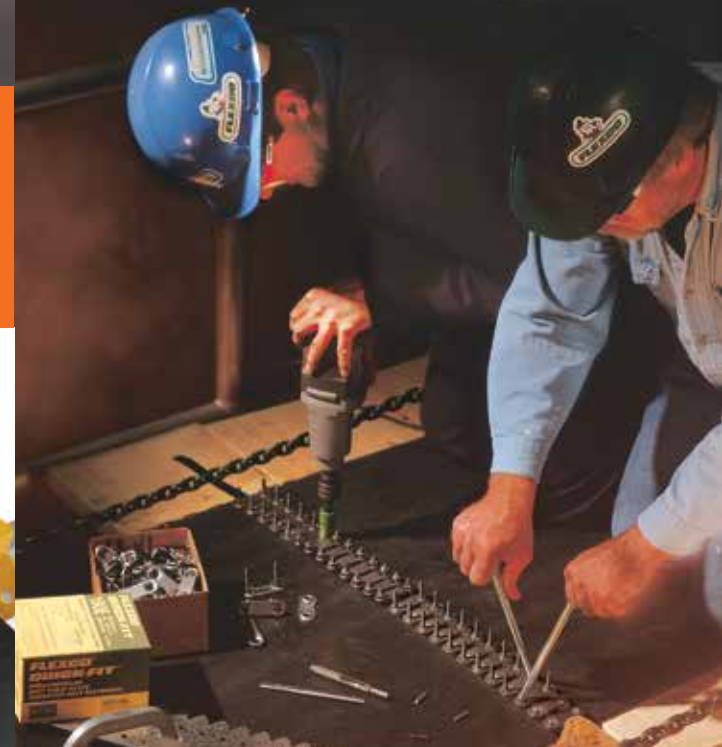

*When you compare the cost of using
Flexco Belt Maintenance tools with
the time and money lost to belt repair and
maintenance accidents, the choice is clear:*
YOU NEED TO GO WITH FLEXCO.

Flexco is committed to SAFETY and QUALITY.

Our hands-on industry experience gives us deep insight
into your productivity demands, maintenance challenges,
and safety requirements. And we won't settle for
anything less than the best, most durable products
around and the best services and support to match.

For more information visit Flexco.com

**High quality Flexco tools
provide a safer alternative to
Belt Conveyor Maintenance for your
operation and your workers.**

FLEXCO

FLEXCO

LIFT



A Safer Way to Lift a Belt

Eliminate pry bars and manual lifting to make a difficult and hazardous job easier and safer.

Flex-Lifter™ Belt Lifter safely lifts and holds tensioned conveyor belts.

- Highest safe lift rating available: 4000 lbs. (1810 kg).

CLAMP



TUG™ HD®
Belt Clamps



Far-Pul™ HD®
Belt Clamps

A Safer Way to Secure a Belt

Avoid problems and potential dangers associated with homemade devices like c-clamps, lumber, and chains.

Flexco Belt Clamps are specially designed to properly secure a belt and clamp it for safe belt conveyor maintenance.

- Safety factors of clamp ratings meet or exceed industry standards.
- TUG™ clamps are ideal for use with steel cord belts.
- Far-Pul™ clamps are ideal for use with thick fabric belts.

CUT



CEBC1

EBC1

A Safer Way to Cut a Belt

Utility knives simply can't provide the same level of safety, speed, and accuracy when cutting belts.

Flexco Belt Cutters minimize the danger of accidental injury during the belt cutting process.

- Operators are protected from cutting edge of blades during operation.

Flex-Lifter™ Conveyor Belt Lifter

Description	Belt Width	Ordering Number	Item Code
Medium Flex-Lifter	900 - 1500 mm (36" - 60")	FL-M-SP	76981
Large Flex-Lifter	1200 - 1800 mm (48" - 72")	FL-L-SP	76982
XL Flex-Lifter	1800 - 2400 mm (72" - 96")	FL-XL-SP	77386

Note: XL V-return lift bar sold separately.

TUG™ HD® Belt Clamps

Description	Belt Width	Ordering Number	Item Code
Belt Clamp Complete includes: • 4 Aluminum Belt Clamp Bars • 4 Steel Clamp Ends	6 TON	Up to 900 mm (36")	TUG6-36-AL 31700
		Up to 1050 mm (42")	TUG6-42-AL 31701
		Up to 1200 mm (48")	TUG6-48-AL 31702
		Up to 1400 mm (54")	TUG6-54-AL 31703
		Up to 1600 mm (60")	TUG6-60-AL 31704
		Up to 1800 mm (72")	TUG6-72-AL 31705
	8 TON	Up to 900 mm (36")	TUG8-36-AL 31706
		Up to 1050 mm (42")	TUG8-42-AL 31707
		Up to 1200 mm (48")	TUG8-48-AL 31708
		Up to 1400 mm (54")	TUG8-54-AL 31709
		Up to 1600 mm (60")	TUG8-60-AL 31710
		Up to 1800 mm (72")	TUG8-72-AL 31711
		Up to 2200 mm (84")	TUG8-84-AL 31712
		Up to 2400 mm (96")	TUG8-96-AL 31713

Far-Pul™ HD® Belt Clamps

Description	Belt Width	Ordering Number	Item Code
Belt Clamp Complete includes: • 4 Belt Clamp Bars • 4 Belt Clamp Scissors	Up to 750 mm (30")	LSHD30	30393
	Up to 900 mm (36")	LSHD36	30394
	Up to 1050 mm (42")	LSHD42	30395
	Up to 1200 mm (48")	LSHD48	30396
	Up to 1350 mm (54")	LSHD54	30397
	Up to 1500 mm (60")	LSHD60	30398
	Up to 1800 mm (72")	LSHD72	30399

Electric Belt Cutter

Description	Belt Thickness	Ordering Number	Item Code
Electric Cutter Complete	Up to 25 mm (1")	EBC1	30001
	Up to 50 mm (2")	EBC2	30002
Cordless Electric Cutter Complete	Up to 25 mm (1")	CEBC1	30018
	Up to 50 mm (2")	CEBC2	30019
Electric Cutter Complete 220V	Up to 25 mm (1")	EBC1-220	30011
	Up to 50 mm (2")	EBC2-220	30012
Cordless Electric Cutter Complete 220V	Up to 25 mm (1")	CEBC1-220	30021
	Up to 50 mm (2")	CEBC2-220	30022