

FLEXCO Enclosed Skirt System


Simple and Effective

Not all containment solutions should require complicated measuring and engineering. Standard skirting assemblies with adjustable mounting arrangements provide universal mounting and easy installation.

Ordering Information

Skirt Box - 4 Ft with RMC clamps and Skirt Rubber 600 mm
Skirt Box - 4 Ft with RMC clamps and Skirt Rubber 750 mm
Skirt Box - 4 Ft with RMC clamps and Skirt Rubber 900 mm
Skirt Box - 4 Ft with RMC clamps and Skirt Rubber 1050 mm
Skirt Box - 4 Ft with RMC clamps and Skirt Rubber 1200 mm
Skirt Box - 4 Ft with RMC clamps and Skirt Rubber 1350 mm
Skirt Box - 4 Ft with RMC clamps and Skirt Rubber 1500 mm
Skirt Box - 4 Ft with RMC clamps and Skirt Rubber 1650 mm
Skirt Box - 4 Ft with RMC clamps and Skirt Rubber 1800 mm
Skirt Box - 4 Ft with RMC clamps and Skirt Rubber 2100 mm
Skirt Box - 4 Ft with RMC clamps and Skirt Rubber 2400 mm

Sealed rear panel with lift access for easy washout

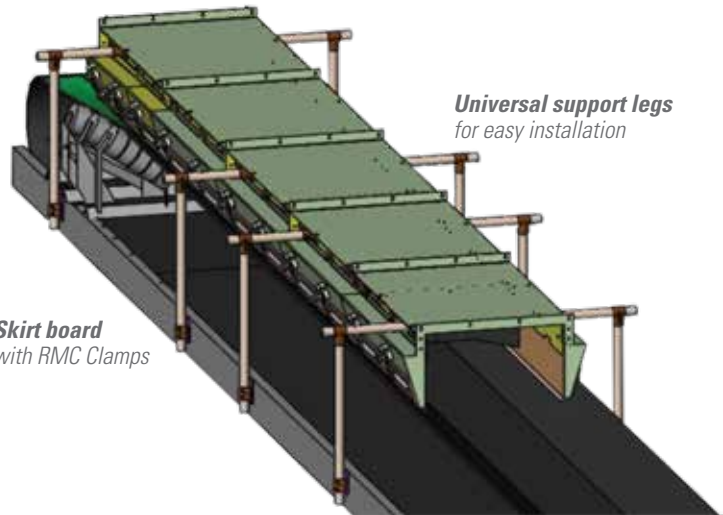

Universal support legs for easy installation

Skirt board with RMC Clamps

Adjustable Liners provide increased skirt liner life



Externally replaceable liners for easy maintenance

Features and Benefits:

- **Easy Installation.** Our skirt legs can be located anywhere along your stringer. With easy slip-on connectors, installing Standard Flexco Skirting Solutions is quick and easy.
- **Rubber Sealing Options.** Seal to your conveyor belt using one of two Flexco rubber sealing options: vertical or tangential.
- **Rear Door Seal.** Provides easy access for wash down, inspection, and repairs.
- **Dust Curtains.** Control air flow throughout the system to keep dust levels low.
- **Easy Maintenance.** Liners are externally replaceable and adjustable.
- **Customizable.** If the standard offering does not suit your application, it can be custom engineered to fit the job requirements.

Standard Urethane Skirting

Ordering Information

Standard Urethane Skirting									
HEIGHT		THICKNESS		LENGTH		CHAMFER	ORDERING NUMBER	ITEM CODE	WT. KG.
mm	in	mm	in	m	ft				
150	6	12	1/2	7.6	25	35°	SKPU-6X1/2 X25	90283	18.1
150	6	20	3/4				SKPU-6X3/4 X25	90284	27.2
200	8	12	1/2				SKPU-8X1/2 X25	90285	26.3
200	8	20	3/4				SKPU-8X3/4 X25	90286	39.0



240 Macpherson Road • #02-01 • Singapore 348574
Tel: +65-6484-1533 • Fax: +65-6484-1531 • E-mail: asiasales@flexco.com

Visit www.flexco.com for other Flexco locations and products.

©2022 Flexible Steel Lacing Company. 06/21/22. For reorder: X5776

