


STANDARD POLYURETHANE SKIRTING

Long Lasting Solution for Spillage and Dust Control

Standard Polyurethane Skirting provides a simple and effective solution to mitigate material spillage and dust control in the conveyor loading zone. When paired with one of Flexco's Skirting Systems the entire assembly reduces conveyor problems in or around the loading zone and saves on potential cleanup costs. The wear life is greatly extended versus conventional rubber products by using a proprietary polyurethane blend, meaning fewer adjustments and better sealing throughout the life of the skirting.

*Available in both 7.6 m (25')
and 15.2 m (50') roll sizes*

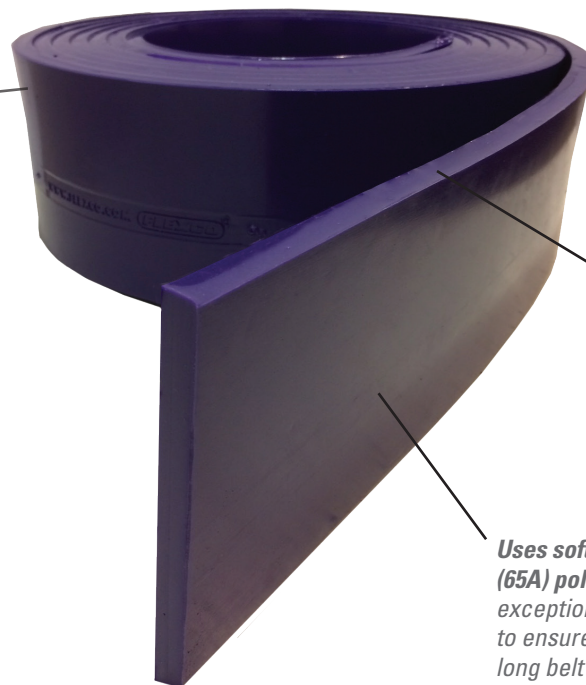

*35° chamfer eliminates the
typical skirting break-in period*

*Uses soft durometer
(65A) polyurethane with
exceptional tear resistance
to ensure a good seal and
long belt life*

Features and Benefits

- **Long service life.** Polyurethane skirting offers a more wear-resistant material than typical rubber, often providing as much as 3–4 times the wear life in similar applications. The lower coefficient of friction reduces strain on the system.
- **Compatible with all skirting systems.** Works with Flexco series of skirt clamps that offer simple serviceability: RMC1/PAL-Pak, Flex-Lok™, and Flex-Seal™.
- **Suitable for most applications.** Single direction or reversing belts, wet or dry conditions, old or new belts, vulcanized or mechanically-spliced systems.

Standard Polyurethane Skirting

Specifications and Guidelines

Temperature Rating
-30 to 82°C (-20 to 180°F)

Skirting Material
65A Polyurethane

Available Lengths
7.6 m (25')
15.2 m (50')

Available Thicknesses
10 mm (3/8")
12 mm (1/2")
16 mm (5/8")
19 mm (3/4")
25 mm (1")

Available Heights
100 mm (4")
150 mm (6")
200 mm (8")
250 mm (10")
300 mm (12")

Ordering Information

Standard Polyurethane Skirting with 35° Chamfer - 7.6 m (25')							
Height		Thickness		Length		Ordering Number	Item Code
mm	in.	mm	in.	m	ft.		
100	4	10	3/8	7.6	25	SKPU-4X3/8X25	91288
100	4	12	1/2	7.6	25	SKPU-4X1/2X25	91289
100	4	16	5/8	7.6	25	SKPU-4X5/8X25	91290
100	4	19	3/4	7.6	25	SKPU-4X3/4X25	91291
100	4	25	1	7.6	25	SKPU-4X1X25	91292
150	6	10	3/8	7.6	25	SKPU-6X3/8X25	91298
150	6	12	1/2	7.6	25	SKPU-6X1/2X25	90283
150	6	16	5/8	7.6	25	SKPU-6X5/8X25	91299
150	6	19	3/4	7.6	25	SKPU-6X3/4X25	90284
150	6	25	1	7.6	25	SKPU-6X1X25	91300
200	8	10	3/8	7.6	25	SKPU-8X3/8X25	91304
200	8	12	1/2	7.6	25	SKPU-8X1/2X25	90285
200	8	16	5/8	7.6	25	SKPU-8X5/8X25	91305
200	8	19	3/4	7.6	25	SKPU-8X3/4X25	90286
200	8	25	1	7.6	25	SKPU-8X1X25	91306
250	10	10	3/8	7.6	25	SKPU-10X3/8X25	91310
250	10	12	1/2	7.6	25	SKPU-10X1/2X25	91311
250	10	16	5/8	7.6	25	SKPU-10X5/8X25	91312
250	10	19	3/4	7.6	25	SKPU-10X3/4X25	91313
250	10	25	1	7.6	25	SKPU-10X1X25	91314
300	12	10	3/8	7.6	25	SKPU-12X3/8X25	91320
300	12	12	1/2	7.6	25	SKPU-12X1/2X25	91321
300	12	16	5/8	7.6	25	SKPU-12X5/8X25	91322
300	12	19	3/4	7.6	25	SKPU-12X3/4X25	91323
300	12	25	1	7.6	25	SKPU-12X1X25	91324

Lead time: 1 working day.
Shaded items are made to order; 1-2 week lead time

Standard Polyurethane Skirting with 35° Chamfer - 15.2 m (50')							
Height		Thickness		Length		Ordering Number	Item Code
mm	in.	mm	in.	m	ft.		
100	4	10	3/8	15.2	50	SKPU-4X3/8X50	91293
100	4	12	1/2	15.2	50	SKPU-4X1/2X50	91294
100	4	16	5/8	15.2	50	SKPU-4X5/8X50	91295
100	4	19	3/4	15.2	50	SKPU-4X3/4X50	91296
100	4	25	1	15.2	50	SKPU-4X1X50	91297
150	6	10	3/8	15.2	50	SKPU-6X3/8X50	91301
150	6	12	1/2	15.2	50	SKPU-6X1/2X50	91222
150	6	16	5/8	15.2	50	SKPU-6X5/8X50	91302
150	6	19	3/4	15.2	50	SKPU-6X3/4X50	91223
150	6	25	1	15.2	50	SKPU-6X1X50	91303
200	8	10	3/8	15.2	50	SKPU-8X3/8X50	91307
200	8	12	1/2	15.2	50	SKPU-8X1X50	91224
200	8	16	5/8	15.2	50	SKPU-8X5/8X50	91308
200	8	19	3/4	15.2	50	SKPU-8X3/4X50	91225
200	8	25	1	15.2	50	SKPU-8X1X50	91309
250	10	10	3/8	15.2	50	SKPU-10X3/8X50	91315
250	10	12	1/2	15.2	50	SKPU-10X1/2X50	91316
250	10	16	5/8	15.2	50	SKPU-10X5/8X50	91317
250	10	19	3/4	15.2	50	SKPU-10X3/4X50	91318
250	10	25	1	15.2	50	SKPU-10X1X50	91319
300	12	10	3/8	15.2	50	SKPU-12X3/8X50	91325
300	12	12	1/2	15.2	50	SKPU-12X1/2X50	91326
300	12	16	5/8	15.2	50	SKPUT-12X5/8X50	91327
300	12	19	3/4	15.2	50	SKPU-12X3/4/50	91328
300	12	25	1	15.2	50	SKPU-12X1X50	91329

Lead time: 1 working day.
Shaded items are made to order; 1-2 week lead time


Additional Information

Check out our other Skirting Systems, like the Flex-Seal™, Flex-Lok™ or RMC1.

Flex-Seal™



Flex-Lok™



RMC1



Visit www.flexco.com for other Flexco locations and products, or to find an authorised distributor.

©2019 Flexible Steel Lacing Company. 10-31-24. X5865

