
Long Lasting Solution for Spillage and Dust Control

Dual Seal Polyurethane Skirting provides two contact points on the belt for the entire length of the skirtboard to help prevent material spillage and manage dust emissions for any load zone. Designed to work with each one of Flexco's Skirting Systems our goal is to make sure skirting is simple and easy to adjust which leads to long-term savings on clean-up and enables a worker to safely adjust the sealing solution. Our proprietary polyurethane blend provides a softer material to prevent damage to the belt but maintains a high tear resistance to ensure a long functional life no matter the severity of the application.



Features and Benefits

- Long service life. Polyurethane skirting offers a more wear-resistant material than typical rubber, often providing as much as 3-4 times the wear life in similar applications. The lower coefficient of friction reduces strain on the system.
- Compatible with all skirting systems. Works with Flexco series of skirt clamps that offer simple serviceability: RMC1/PAL-Pak, Flex-Lok[™], and Flex-Seal[™].
- Suitable for most applications. Single direction or reversing belts, wet or dry conditions, old or new belts, vulcanized or mechanically-spliced systems.

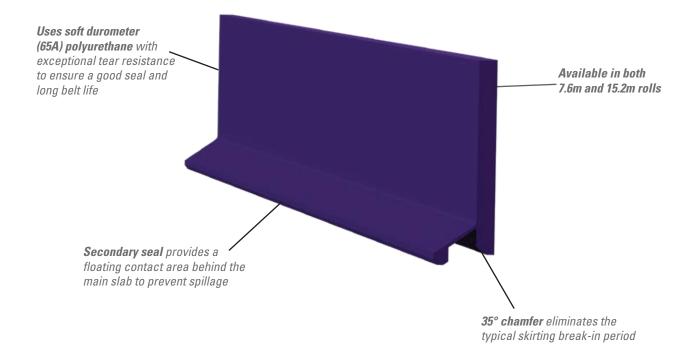

Specifications and Guidelines

Temperature Rating -30°C to 82°C

Skirting Material 65A Polyurethane

Available Lengths 7.6m 15.2m Available Thicknesses 12 mm 19 mm Available Heights 150 mm 200 mm

Ordering Information

Dual Seal Polyurethane Skirting with 35° Chamfer				
Height	Thickness	Length		ltem
mm	mm	m	Ordering Number	Code
150	12	7.6	SKPU-DUAL-6X1/2X25	91400
150	20		SKPU-DUAL-6X3/4X25	91401
200	12		SKPU-DUAL-8X1/2X25	91402
200	20		SKPU-DUAL-8X3/4X25	91403
150	12	15.2	SKPU-DUAL-6X1/2X50	91404
150	20		SKPU-DUAL-6X3/4X50	91405
200	12		SKPU-DUAL-8X1/2X50	91406
200	20		SKPU-DUAL-8X3/4X50	91407

Please contact Flexco for pricing and availability.

Additional Information

Check out our other Skirting Systems, like the Flex-Seal™, Flex-Lok™ or RMC1.







Authorized Distributor:

Flexco (Aust.) Pty. Ltd • 10 Solent Circuit, Norwest • NSW, Australia, 2153 • Australia Tel: 612-8818-2000 • Fax: 612-8824-6333 • E-mail: salesau@flexco.com

Visit **www.flexco.com** for other Flexco locations and products.

©2020 Flexible Steel Lacing Company. 01/22/22. For reorder: X5874

