


P-TYPE® Secondary Belt Cleaner

Reliable Secondary Belt Cleaner

The Flexco P-Type® Secondary Belt Cleaner is compact and designed to be positioned just off the head pulley to remove carryback from the belt. Stand alone, or when used in conjunction with a precleaner, the P-Type cleaner is a reliable choice for maintaining a highly efficient cleaning system.

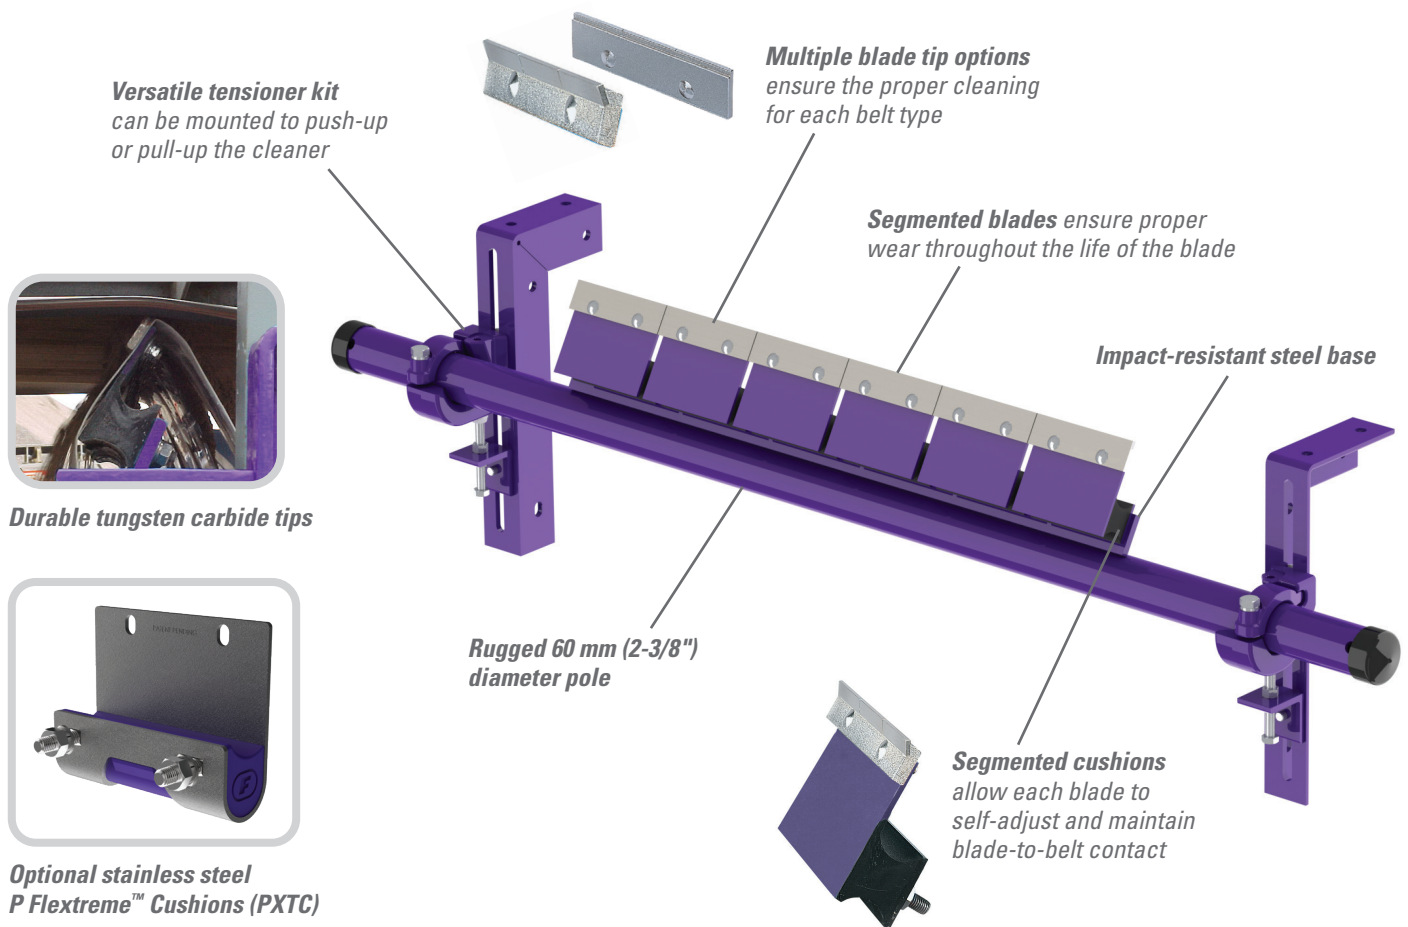

Features and Benefits

- **Cleaning efficiency of metal blades.** The thin, hard edges of the metal blades deliver high cleaning efficiency and long wear life.
- **Works with Flexco mechanical splices.** The C-Tip tungsten carbide blades are impact-resistant, and the spring cushion allows them to move away from a passing splice without damage and with minimal cleaning disruption. V-Tip can be used only on vulcanized belts.
- **A complete cleaning system.** When the P-Type is teamed with a primary cleaner the system provides maximum cleaning power for tough applications.
- **Fits most conveyor structures.** Available for belt widths from 450 to 1800 mm (18 to 72").

P-TYPE®

Secondary Belt Cleaner

Specifications and Guidelines

Maximum Belt Speed

Standard with C-Tips: 5 m/s (1000 FPM)
 Standard with V-Tips: 6 m/s (1200 FPM)
 PXTC with C-Tips: 6 m/s (1200 FPM)
 PXTC with V-Tips: 7.5 m/s (1450 FPM)

Temperature Rating

-35 to 82°C (-30 to 180°F)

Usable Blade Wear Length

9 mm (3/8")

Blade Material

Impact resistant, long-lasting tungsten carbide (C-Tips for mechanical fasteners, V-Tips for vulcanized belts)

CEMA Cleaner Rating

Class 4

Available for Belt Widths

450 to 1800 mm (18 to 72")

Pole Length

Cleaner size up to 1200 mm (48") + 750 mm (30")
 Cleaner size 1350 mm (54") and up + 850 mm (34")

Maximum Conveyor Span



Cleaner size up to 1200 mm (48") + 625 mm (25")
 Cleaner size 1350 mm (54") and up + 725 mm (29")

Horizontal Clearance Required

100 mm (4")

Vertical Clearance Required

200 mm (8")

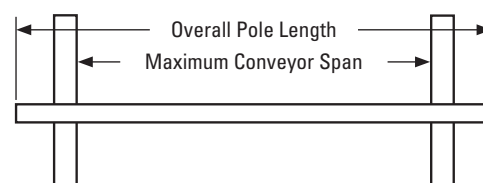

Ordering Information

P-Type® with C-Tips*			
Belt Width		Ordering Number	Item Code
mm	in.		
450	18	PC18	74566
600	24	PC24	74567
750	30	PC30	74568
900	36	PC36	74569
1050	42	PC42	74570
1200	48	PC48	74571
1350	54	PC54	74572
1500	60	PC60	74573
1800	72	PC72	74574

*C-Tips can be used on mechanically spliced and vulcanized belts. P-Type® cleaners come standard with Select Set™ Tensioners.

P-Type® with V-Tips*			
Belt Width		Ordering Number	Item Code
mm	in.		
450	18	PV-18	78453
600	24	PV-24	78415
750	30	PV-30	78417
900	36	PV-36	78419
1050	42	PV-42	78421
1200	48	PV-48	78423
1350	54	PV-54	78454
1500	60	PV-60	78455
1800	72	PV72	73438

*V-Tips can be used ONLY on vulcanized belts. P-Type® cleaners come standard with Select Set™ Tensioners.

P-Type® with PXTC and C-Tips*			
Belt Width		Ordering Number	Item Code
mm	in.		
450	18	PC-PXT-18-CCMK	121169
600	24	PC-PXT-24-CCMK	121170
750	30	PC-PXT-30-CCMK	121171
900	36	PC-PXT-36-CCMK	121172
1050	42	PC-PXT-42-CCMK	121173
1200	48	PC-PXT-48-CCMK	121174
1350	54	PC-PXT-54-CCMK	121175
1500	60	PC-PXT-60-CCMK	121176
1800	72	PC-PXT-72-CCMK	121177

*C-Tips can be used on mechanically spliced and vulcanized belts.

P-Type® with PXTC and V-Tips*			
Belt Width		Ordering Number	Item Code
mm	in.		
450	18	PV-PXT-18-CCMK	121178
600	24	PV-PXT-24-CCMK	121179
750	30	PV-PXT-30-CCMK	121180
900	36	PV-PXT-36-CCMK	121181
1050	42	PV-PXT-42-CCMK	121182
1200	48	PV-PXT-48-CCMK	121183
1350	54	PV-PXT-54-CCMK	121184
1500	60	PV-PXT-60-CCMK	121185
1800	72	PV-PXT-72-CCMK	121186

*V-Tips can be used ONLY on vulcanized belts

Replacement Tips & Cushions		
Description	Ordering Number	Item Code
C-Tip	ICT6	74535
V-Tip	PSA150	73156
P Flextrete™ Cushion*	PXTC	107137

*Includes hardware
 Lead time: 1 working day

Tips Required Per Cleaner Size									
mm	450	600	750	900	1050	1200	1350	1500	1800
in.	18	24	30	36	42	48	54	60	72
C-Tips or V-Tips Required	3	4	5	6	7	8	9	10	12