

FLEX-LOK™ Skirting System

Quickly and Easily Eliminate Load Point Spillage


The Flex-Lok™ Skirt Clamp is designed with versatility to meet the needs of any conveyor loading site—even severe, heavy loading applications. The exclusive design features a unique clamp pin with a captive wedge that can be locked in any position 360° around the pin. When properly installed, Flex-Lok ensures the skirting will not rub on the belt and cause premature wear or gouging marks.



Optional limited space Mini Flex-Lok clamps available



Anti-vibration pin ensures pin remains locked

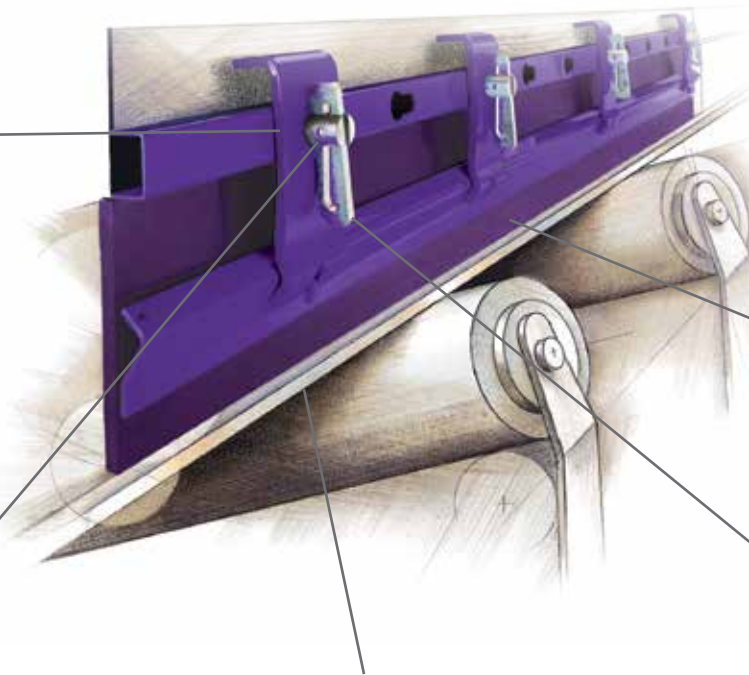

No hassle installation because skirting restraining bar is held in place by clamp plates

Quick adjustment using the locking wedges on the clamp pins

Skirting thickness can vary from 8 to 25mm on Standard and 8 to 16mm on Mini

Features and Benefits

- **No belt damage.** With correct installation, the skirting will not drag on the belt, causing premature wear or gouge marks in the belt cover. Such damage reduces belt cleaning efficiency and the life of the belt.
- **Safe surface access.** All installation and maintenance work can be done safely from the sides of the conveyor. Climbing into the chute to work on nuts and bolts is not required.
- **Long service life.** Flex-Lok Skirt Clamps are made of corrosion-protected components for tough duty. Replacement parts are available.


FLEX-LOK™ Skirting System

Ordering Information

| <i>Flex-Lok Skirt Clamp*</i> | | |
|------------------------------|-----------------|-----------|
| Description | Ordering Number | Item Code |
| Skirt Clamp | FLSC-M | 71053 |
| Replacement Parts | | |
| Clamp Runner - 2 M | FL-RPM | 71059 |
| Clamp Pin | FL-CP-I | 71141 |
| Restraining Bar - 2 M | FL-RBM | 71061 |

*Skirting Thickness Range: 8 to 25mm

Shaded items are made to order.




Standard

| <i>Mini Flex-Lok Skirt Clamp*</i> | | |
|-----------------------------------|-----------------|-----------|
| Description | Ordering Number | Item Code |
| Mini Skirt Clamp | FLSCM-I | 71055 |
| Replacement Parts | | |
| Clamp Runner - 1.8M | FL-RPI | 71058 |
| Mini Clamp Plate | FLM-PC | 71140 |
| Clamp Pin | FL-CP-I | 71141 |
| Restraining Bar - 1.8M | FL-RBI | 71060 |

*Skirting Thickness Range: 8 to 16mm


Shaded items are made to order.



Mini

| <i>Stainless Steel Flex-Lok Skirt Clamp</i> | | |
|---|-----------------|-----------|
| Description | Ordering Number | Item Code |
| SS Skirt Clamp | FLSC-ISS | 75778 |
| Replacement Parts | | |
| SS Clamp Plate | FL-PC-ISS | 71168 |
| Clamp Pin | FL-CP-ISS | 71164 |

316 Stainless on all parts

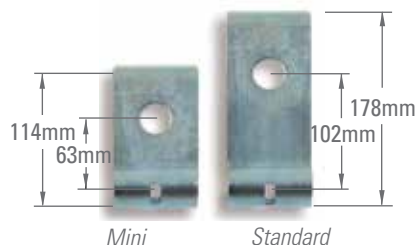

Mini

Standard

Additional Information

Check out our other Skirting Systems, like the RMC1 or Flex-Lok™, as well as Flexco's Standard or Dual Seal Polyurethane Skirting.

RMC1



Flex-Seal



Flexco Polyurethane Skirting



Authorized Distributor:

Flexco Europe GmbH • Maybachstrasse 9 • 72348 Rosenfeld • Germany
Tel: +49-7428-9406-0 • Fax: +49-7428-9406-260 • E-mail: europe@flexco.com

Visit www.flexco.com for other Flexco locations and products.

©2022 Flexible Steel Lacing Company. 12/20/22. For reorder: X6301

