


MHCP

Heavy-Duty Cartridge Primary Cleaner

Massive, Rugged, Ready to Work

The MHCP Heavy-Duty Cartridge Primary Cleaner features segmented SuperShear™ blades that are engineered to stand up to the most abusive beltline conditions, such as wet, sticky fire clay, and maintain constant cleaning force. The massive blades have an extended wear life and also a quick-change blade cartridge feature. This is an extreme-duty cleaner that gets the job done – and with minimal maintenance.

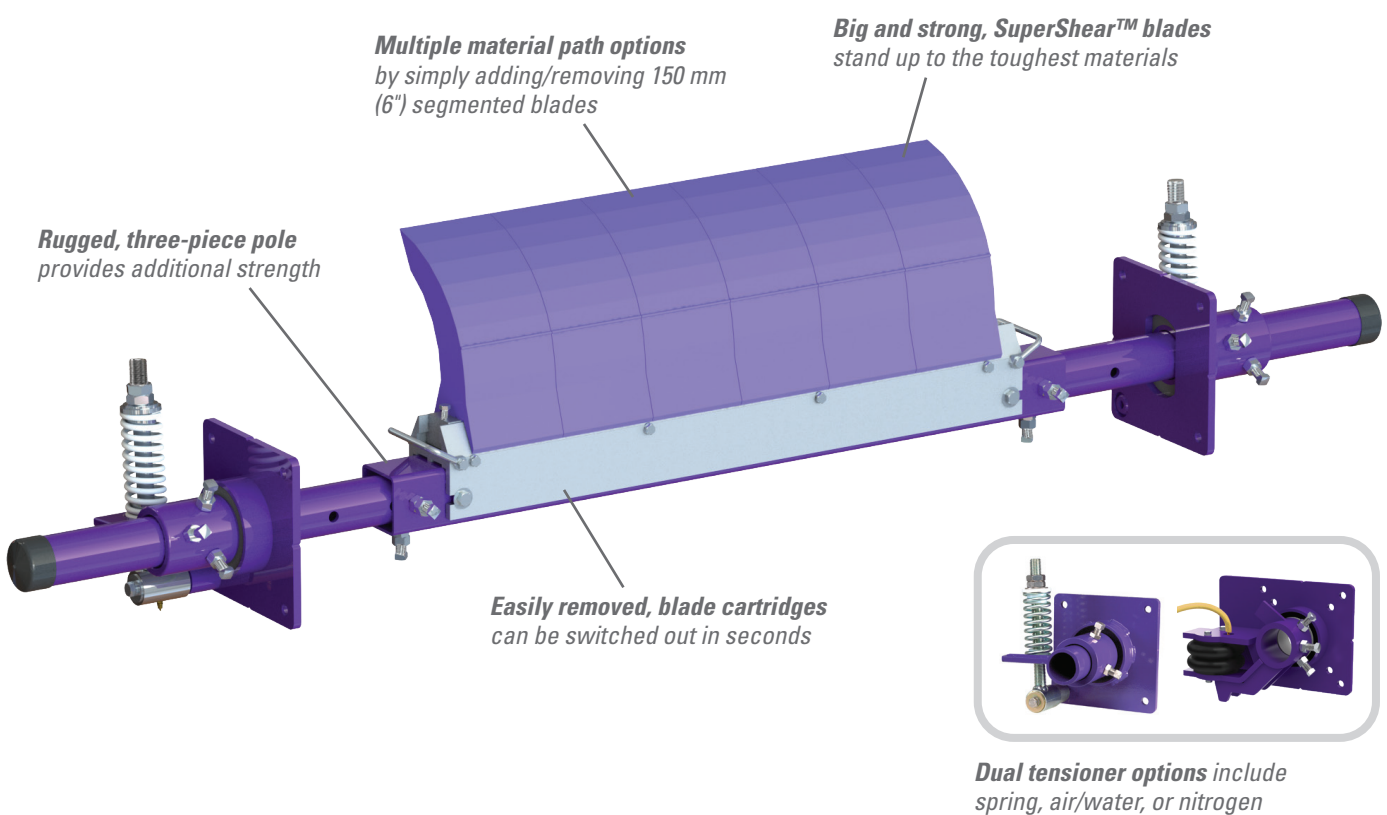

Features and Benefits

- **Works with mechanical fasteners.** The shock-absorbing tensioners allow mechanical splices, skived or unskived, to pass without damage to the splice or the cleaner and with minimal cleaning disruption.
- **Retrofits to other cleaners.** The MHCP blade cartridge will fit on the poles of other cleaner manufacturers. Now you can experience the benefits of the SuperShear™ blades without having to install a completely new cleaner.
- **Complete cleaning system.** When teamed with the MHS HD Secondary Cleaner, it makes up a system that delivers maximum cleaning power for the most abusive conveyor applications.
- **Made for mining conveyors.** Made from heavy-duty, corrosion-resistant steel, the MHCP is available in sizes for belt widths from 600 to 2100 mm (24 to 84"). Additional sizes are available upon request.

MHCP

Heavy-Duty Cartridge Primary Cleaner

Specifications and Guidelines

Maximum Belt Speed

6 m/s (1200 FPM)

Temperature Rating

-35° to 82°C (-30° to 180°F)

Minimum Pulley Diameter

500 mm (20")

Blade Height

350 mm (14")

CEMA Cleaner Rating

Class 5

Usable Blade Wear Length

200 mm (8")

Available for Belt Widths

600 to 2100 mm (24 to 84")

Blade Material

Polyurethane 90 durometer
(proprietary blend for abrasion
resistance and long wear)

Overall Pole Length

Cleaner size + 1450 mm (58")

Maximum Conveyor Span

Cleaner size + 1050 mm (42")



Horizontal Clearance Required

175 mm (7")

Vertical Clearance Required

475 mm (19")

Please Note: The mild steel version of this product features aluminum components, so it is not suitable for FRAS applications. Please contact our team to find out about the FRAS model.

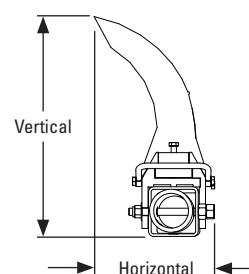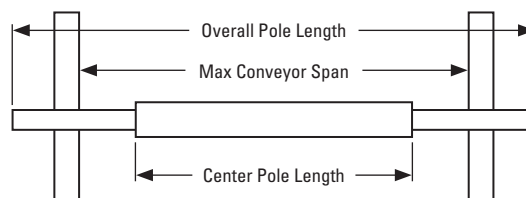

Ordering Information

MHCP with Spring Tensioner (PST)					
Belt Width		Blade Coverage		Ordering Number	Item Code
mm	in.	mm	in.		
600	24	450	18	MHCP-24S	75929
750	30	600	24	MHCP-30S	75930
900	36	750	30	MHCP-36S	75931
1050	42	900	36	MHCP-42S	75932
1200	48	1050	42	MHCP-48S	75933
1350	54	1200	48	MHCP-54S	75934
1500	60	1350	54	MHCP-60S	75935
1800	72	1650	66	MHCP-72S	75936
2100	84	1950	78	MHCP-84S	76800

MHCP with Air/Water Tensioner (AWT)					
Belt Width		Blade Coverage		Ordering Number	Item Code
mm	in.	mm	in.		
600	24	450	18	MHCP-24A	75937
750	30	600	24	MHCP-30A	75938
900	36	750	30	MHCP-36A	75939
1050	42	900	36	MHCP-42A	75940
1200	48	1050	42	MHCP-48A	75941
1350	54	1200	48	MHCP-54A	75942
1500	60	1350	54	MHCP-60A	75943
1800	72	1650	66	MHCP-72A	75944
2100	84	1950	78	MHCP-84A	76801

Blade Cartridge Kits*			
Belt Width		Ordering Number	Item Code
mm	in.		
600	24	MHCP-BCK24	75953
750	30	MHCP-BCK30	75954
900	36	MHCP-BCK36	75955
1050	42	MHCP-BCK42	75956
1200	48	MHCP-BCK48	75957
1350	54	MHCP-BCK54	75958
1500	60	MHCP-BCK60	75959
1800	72	MHCP-BCK72	75960
2100	84	MHCP-BCK84	76810

*Includes blades, cartridge, and mounting bolts.

NOTE: For easy blade changeout, remove cartridge with worn blades and replace with new blade cartridge kit. New blades can then be installed in the old cartridge for the next changeout.